



# MPQ4316

## 45V, 6A, Low I<sub>Q</sub>, Synchronous Step-Down Converter with Frequency Spread Spectrum, AEC-Q100 Qualified

### DESCRIPTION

The MPQ4316 is a frequency-configurable, synchronous, step-down switching converter with integrated internal high-side and low-side power MOSFETs. The device provides 6A (or less) of highly efficient output current with current mode control for fast loop response.

The wide 3.3V to 45V input range accommodates a variety of step-down applications in automotive input environments. A 1.7μA shutdown mode quiescent current allows the device to be used in battery-powered applications.

The device achieves high power conversion efficiency across the wide load range by scaling down the switching frequency under light-load conditions to reduce the switching and gate driving losses.

An open drain power good signal indicates when the output is within 95% to 105% of its nominal voltage.

Frequency foldback helps prevent inductor current runaway during start-up. Thermal shutdown provides reliable, fault-tolerant operation.

The device provides a high duty cycle and low-dropout mode for automotive cold-crank conditions.

The MPQ4316 is available in a QFN-20 (4mmx4mm) package.

### MPQ4316 FAMILY VERSIONS

| Part Number | Output Current | Package Options                       |
|-------------|----------------|---------------------------------------|
| MPQ4312     | 2A             | QFN-20 (4mmx4mm)<br>WF <sup>(1)</sup> |
| MPQ4313     | 3A             |                                       |
| MPQ4314     | 4A             |                                       |
| MPQ4315     | 5A             |                                       |
| MPQ4316     | 6A             |                                       |
| MPQ4317     | 7A             |                                       |

#### Note:

1) WF means wettable flank.

### FEATURES

- Wide 3.3V to 45V Operating Voltage Range
- 6A of Continuous Output Current
- 1.7μA Low Shutdown Supply Current
- 18μA Sleep Mode Quiescent Current
- Internal 48mΩ High-Side MOSFET and 20mΩ Low-Side MOSFET
- 350kHz to 1000kHz Configurable Switching Frequency for Car Battery Applications
- Can Be Synchronized to External Clock
- Out-of-Phase Synchronized Clock Output
- Fixed Output Options: 3.3V, 5V
- Frequency Spread Spectrum (FSS) for Low EMI
- Symmetric V<sub>IN</sub> for Low EMI
- Power Good Output
- External Soft Start
- 100ns Minimum On Time
- Selectable Advanced Asynchronous Mode (AAM) or Forced Continuous Conduction Mode (FCCM)
- Low-Dropout Mode
- Hiccup Over-Current Protection (OCP)
- Available in a QFN-20 (4mmx4mm) Package
- Available in a Wettable Flank Package
- Available in AEC-Q100 Grade 1

### APPLICATIONS

- Automotive Infotainment
- Automotive Clusters
- Advanced Driver Assistance Systems
- Industrial Power Systems

All MPS parts are lead-free, halogen-free, and adhere to the RoHS directive. For MPS green status, please visit the MPS website under Quality Assurance. "MPS", the MPS logo, and "Simple, Easy Solutions" are trademarks of Monolithic Power Systems, Inc. or its subsidiaries.

## TYPICAL APPLICATION

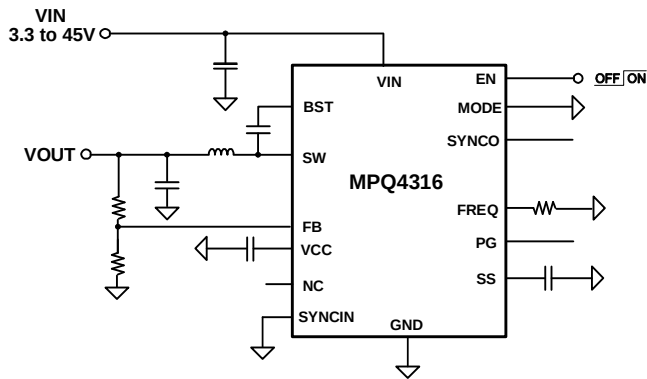


Figure 1: Output Adjustable Version

### Efficiency vs. Load Current

$V_{OUT} = 5V$ ,  $f_{SW} = 470kHz$ ,  $L = 4.7\mu H$  (DCR =  $15m\Omega$ ), AAM

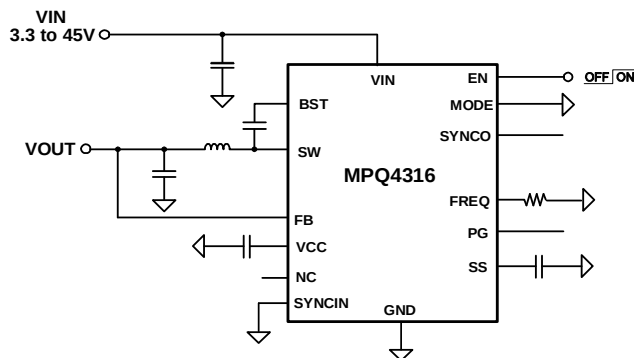
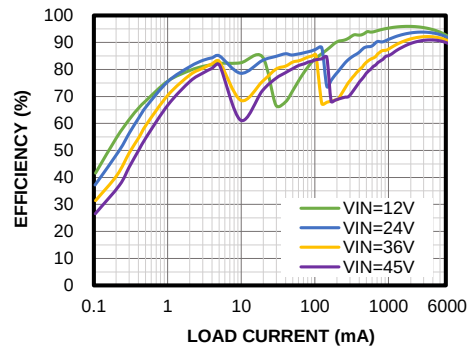


Figure 2: Output Fixed Version

## ORDERING INFORMATION

| Part Number*          | Package          | Top Marking | MSL Rating** |
|-----------------------|------------------|-------------|--------------|
| MPQ4316GRE-AEC1***    | QFN-20 (4mmx4mm) | See Below   | 1            |
| MPQ4316GRE-33-AEC1*** |                  |             |              |
| MPQ4316GRE-5-AEC1***  |                  |             |              |

\* For Tape & Reel, add suffix -Z (e.g. MPQ4316GRE-AEC1-Z).

\*\* Moisture Sensitivity Level Rating

\*\*\* Wettable Flank

## TOP MARKING

**MPSYWW**

**MP4316**

**LLLLLL**

**E**

MPS: MPS prefix

Y: Year code


WW: Week code

MP4316: Part number

LLLLLL: Lot number

E: Wettable flank

## PACKAGE REFERENCE

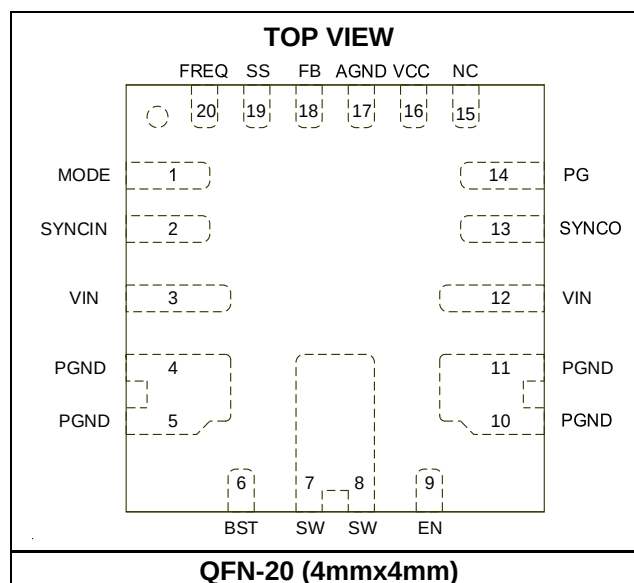

## PIN FUNCTIONS

| Pin #        | Name   | Description                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                    |
|--------------|--------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| 1            | MODE   | <b>AAM or FCCM selection pin.</b> Pull MODE high to force the device to operate in forced continuous conduction mode (FCCM), or pull MODE low to force the device to operate in advanced asynchronous mode (AAM) under light loads. Do not float the MODE pin.                                                                                                                                                                                                                                                                                 |
| 2            | SYNCIN | <b>SYNC input.</b> Apply a 350kHz to 1000kHz clock signal to the SYNCIN pin to synchronize the internal oscillator frequency to the external clock. This pin has an internal high impedance. Do not float this pin. If using the SYNCIN pin, ensure that the external sync clock has adequate pull-up and pull-down capability. It is recommended to place a $\leq 51\text{k}\Omega$ resistor between the SYNCIN pin and GND if the external sync clock's pull-down capability is not sufficient, or if the pin enters a high impedance state. |
| 3, 12        | VIN    | <b>Input supply.</b> VIN supplies power to all the internal control circuitry, as well as the power switch connected to SW. To minimize switching spikes, it is recommended to connect a decoupling capacitor from VIN to ground, and close to VIN.                                                                                                                                                                                                                                                                                            |
| 4, 5, 10, 11 | PGND   | <b>Power ground.</b>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                           |
| 6            | BST    | <b>Bootstrap.</b> BST is the positive power supply for the high-side MOSFET driver connected to SW. Connect a bypass capacitor between the BST and SW pins. To calculate the size of the capacitor, see the Selecting the External BST Diode and Resistor section on page 33.                                                                                                                                                                                                                                                                  |
| 7, 8         | SW     | <b>Switch node.</b> SW is the output of the internal power switch.                                                                                                                                                                                                                                                                                                                                                                                                                                                                             |
| 9            | EN     | <b>Enable.</b> Pull the EN pin below the specified threshold (0.85V) to shut down the chip. Pull the EN pin above the specified threshold (1V) to enable the chip.                                                                                                                                                                                                                                                                                                                                                                             |
| 13           | SYNCO  | <b>SYNC output.</b> The SYNCO pin outputs a clock signal that is 180° out of phase with the internal oscillator signal. It can also output a signal that is opposite to the clock signal applied at the SYNCIN pin. Float the SYNCO pin if it is not used.                                                                                                                                                                                                                                                                                     |
| 14           | PG     | <b>Power good indicator.</b> The output of PG is an open drain. Use a pull-up resistor when connecting PG to a power source. PG goes high if the output voltage is within 95% to 105% of the nominal voltage. PG goes low if the output voltage is above 106.5% or below 93% of the nominal voltage.                                                                                                                                                                                                                                           |
| 15           | NC     | <b>Not connected.</b> Float the NC pin if it is not used.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                      |
| 16           | VCC    | <b>Bias supply.</b> The VCC pin supplies 4.9V to power the internal control circuit and gate drivers. Connect a decoupling capacitor from VCC to ground, and place it close to VCC. To calculate the size of the capacitor, see the Selecting the VCC Capacitor section on page 34.                                                                                                                                                                                                                                                            |
| 17           | AGND   | <b>Analog ground.</b>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                          |
| 18           | FB     | <b>Feedback input.</b> For a fixed output, set V <sub>OUT</sub> by connecting FB to the center point between the external resistor divider from the output and AGND. The feedback threshold voltage is about 0.815V. Place the resistor divider as close to FB as possible. Avoid placing vias on the FB traces. For a fixed output, connect the FB pin directly to the output.                                                                                                                                                                |
| 19           | SS     | <b>Soft-start input.</b> Place a capacitor from SS to GND to set the soft-start period. The MPQ4316 sources 13 $\mu$ A from SS to the soft-start capacitor (C <sub>SS</sub> ) at start-up. As the SS voltage rises, the feedback threshold voltage increases to limit the inrush current during start-up.                                                                                                                                                                                                                                      |
| 20           | FREQ   | <b>Switching frequency configuration.</b> Connect a resistor from FREQ to ground to set the switching frequency (f <sub>SW</sub> ). See the f <sub>SW</sub> vs. R <sub>FREQ</sub> curve on page 15 to set the frequency.                                                                                                                                                                                                                                                                                                                       |

## ABSOLUTE MAXIMUM RATINGS <sup>(2)</sup>

|                                                                                    |                                      |
|------------------------------------------------------------------------------------|--------------------------------------|
| VIN, EN .....                                                                      | -0.3V to +50V                        |
| SW .....                                                                           | -0.3V to V <sub>IN(MAX)</sub> + 0.3V |
| BST .....                                                                          | V <sub>SW</sub> + 5.5V               |
| All other pins .....                                                               | -0.3V to +5.5V                       |
| Continuous power dissipation (T <sub>A</sub> = 25°C) <sup>(3)</sup> <sup>(5)</sup> |                                      |
| QFN-20 (4mmx4mm) .....                                                             | 5.4W                                 |
| Operating junction temperature .....                                               | +150°C                               |
| Lead temperature .....                                                             | +260°C                               |
| Storage temperature .....                                                          | -65°C to +150°C                      |

## Electrostatic Discharge (ESD) Ratings

|                                  |       |
|----------------------------------|-------|
| Human body model (HBM) .....     | ±2kV  |
| Charged device model (CDM) ..... | ±750V |

## Recommended Operating Conditions

|                                                |                                  |
|------------------------------------------------|----------------------------------|
| Supply voltage (V <sub>IN</sub> ) .....        | 3.3V to 45V                      |
| Output voltage (V <sub>OUT</sub> ) .....       | 0.815V to 0.95 x V <sub>IN</sub> |
| Operating junction temp (T <sub>J</sub> ) .... | -40°C to +150°C                  |

## Thermal Resistance

**θ<sub>JA</sub>    θ<sub>JC</sub>**

|                                    |         |           |
|------------------------------------|---------|-----------|
| QFN-20 (4mmx4mm)                   |         |           |
| JESD51-7 <sup>(4)</sup> .....      | 44..... | 9....°C/W |
| EVQ4316-R-00A <sup>(5)</sup> ..... | 23..... | 2.5..°C/W |

### Notes:

- 2) Exceeding these ratings may damage the device.
- 3) The maximum allowable power dissipation is a function of the maximum junction temperature, T<sub>J(MAX)</sub>, the junction-to-ambient thermal resistance, θ<sub>JA</sub>, and the ambient temperature, T<sub>A</sub>. The maximum allowable continuous power dissipation at any ambient temperature is calculated by P<sub>D</sub> (MAX) = (T<sub>J</sub> (MAX) - T<sub>A</sub>) / θ<sub>JA</sub>. Exceeding the maximum allowable power dissipation can cause excessive die temperature, and the regulator may go into thermal shutdown. Internal thermal shutdown circuitry protects the device from permanent damage.
- 4) Measured on JESD51-7, 4-layer PCB. The values given in this table are only valid for comparison with other packages and cannot be used for design purposes. These values were calculated in accordance with JESD51-7, and simulated on a specified JEDEC board. They do not represent the performance obtained in an actual application.
- 5) Measured on MPS standard EVB, 9cmx9cm, 4-layer PCB.

## ELECTRICAL CHARACTERISTICS

V<sub>IN</sub> = 12V, V<sub>EN</sub> = 2V, T<sub>J</sub> = -40°C to +125°C, typical values are at T<sub>J</sub> = 25°C, unless otherwise noted.

| Parameter                                        | Symbol                     | Condition                                                                                    | Min   | Typ   | Max   | Units |
|--------------------------------------------------|----------------------------|----------------------------------------------------------------------------------------------|-------|-------|-------|-------|
| V <sub>IN</sub> UVLO rising threshold            | IN <sub>UVLO_RISING</sub>  |                                                                                              | 2.8   | 3.0   | 3.2   | V     |
| V <sub>IN</sub> UVLO falling threshold           | IN <sub>UVLO_FALLING</sub> |                                                                                              | 2.5   | 2.7   | 2.9   | V     |
| V <sub>IN</sub> UVLO hysteresis                  | IN <sub>UVLO_HYS</sub>     |                                                                                              |       | 280   |       | mV    |
| VCC voltage                                      | V <sub>CC</sub>            | I <sub>VCC</sub> = 0A                                                                        | 4.6   | 4.9   | 5.2   | V     |
| VCC regulation                                   |                            | I <sub>VCC</sub> = 30mA                                                                      |       | 1     | 4     | %     |
| VCC current limit                                | I <sub>LIMIT_VCC</sub>     | V <sub>CC</sub> = 4V                                                                         | 100   |       |       | mA    |
| VIN quiescent current                            | I <sub>Q</sub>             | FB = 0.85V, no load, (sleep mode)                                                            |       | 18    | 26    | μA    |
| VIN quiescent current (switching) <sup>(6)</sup> | I <sub>Q_ACTIVE</sub>      | MODE = GND (AAM), switching, no load, R <sub>FB_UP</sub> = 1MΩ, R <sub>FB_DOWN</sub> = 324kΩ |       | 20    |       | μA    |
|                                                  |                            | MODE = high (FCCM), switching, f <sub>SW</sub> = 2MHz, no load                               |       | 40    |       | mA    |
|                                                  |                            | MODE = high (FCCM), switching, f <sub>SW</sub> = 470kHz, no load                             |       | 9.5   |       | mA    |
| VIN shutdown current                             | I <sub>SHDN</sub>          | EN=0V                                                                                        |       | 1.7   | 3.5   | μA    |
| FB reference voltage                             | V <sub>FB</sub>            | V <sub>IN</sub> = 3.3V to 45V, T <sub>J</sub> = 25°C                                         | 0.807 | 0.815 | 0.823 | V     |
|                                                  |                            | V <sub>IN</sub> = 3.3V to 45V                                                                | 0.799 | 0.815 | 0.831 | V     |
| Output voltage accuracy of MPQ4316-33            | V <sub>OUT</sub>           | T <sub>J</sub> = 25°C                                                                        | 3234  | 3300  | 3366  | mV    |
|                                                  |                            |                                                                                              | 3201  | 3300  | 3399  | mV    |
| Output voltage accuracy of MPQ4316-5             | V <sub>OUT</sub>           | T <sub>J</sub> = 25°C                                                                        | 4900  | 5000  | 5100  | mV    |
|                                                  |                            |                                                                                              | 4850  | 5000  | 5150  | mV    |
| FB current                                       | I <sub>FB</sub>            | V <sub>FB</sub> = 0.85V, adjustable output version                                           | -50   | 0     | +50   | nA    |
| Switching frequency                              | f <sub>SW</sub>            | R <sub>FREQ</sub> = 62kΩ                                                                     | 420   | 470   | 520   | kHz   |
|                                                  |                            | R <sub>FREQ</sub> = 26.1kΩ                                                                   | 820   | 1000  | 1180  |       |
| Minimum on time <sup>(6)</sup>                   | t <sub>ON_MIN</sub>        |                                                                                              |       | 100   |       | ns    |
| Minimum off time <sup>(6)</sup>                  | t <sub>OFF_MIN</sub>       |                                                                                              |       | 80    |       | ns    |
| SYNCIN voltage rising threshold                  | V <sub>SYNC_RISING</sub>   |                                                                                              | 1.8   |       |       | V     |
| SYNCIN voltage falling threshold                 | V <sub>SYNC_FALLING</sub>  |                                                                                              |       |       | 0.4   | V     |
| SYNCIN clock range                               | f <sub>SYNC</sub>          | External clock                                                                               | 350   |       | 1000  | kHz   |
| SYNCO high voltage                               | V <sub>SYNCO_HIGH</sub>    | I <sub>SYNCO</sub> = -1mA                                                                    | 3.3   | 4.5   |       | V     |
| SYNCO low voltage                                | V <sub>SYNCO_LOW</sub>     | I <sub>SYNCO</sub> = 1mA                                                                     |       |       | 0.4   | V     |
| SYNCO phase shift                                |                            | Tested under SYNCIN                                                                          |       | 180   |       | Deg   |
| HS current limit                                 | I <sub>LIMIT</sub>         | Duty cycle = 30%                                                                             | 10    | 13    | 16    | A     |
| LS valley current limit                          | I <sub>LIMIT_VALLEY</sub>  |                                                                                              | 8     | 10    | 12    | A     |

## ELECTRICAL CHARACTERISTICS (continued)

V<sub>IN</sub> = 12V, V<sub>EN</sub> = 2V, T<sub>J</sub> = -40°C to +125°C, typical values are at T<sub>J</sub> = 25°C, unless otherwise noted.

| Parameter                                                 | Symbol                            | Condition                               | Min    | Typ    | Max    | Units            |
|-----------------------------------------------------------|-----------------------------------|-----------------------------------------|--------|--------|--------|------------------|
| ZCD current                                               | I <sub>ZCD</sub>                  | AAM                                     | -0.15  | 0.1    | +0.35  | A                |
| LS reverse current limit                                  | I <sub>LIMIT_REVERSE</sub>        | FCCM                                    | 2      | 4.5    | 7      | A                |
| Switch leakage current                                    | I <sub>SW_LKG</sub>               |                                         |        | 0.01   | 1      | μA               |
| HS switch on resistance                                   | R <sub>ON(HS)</sub>               | V <sub>BST</sub> - V <sub>SW</sub> = 5V |        | 48     | 80     | mΩ               |
| LS switch on resistance                                   | R <sub>ON(LS)</sub>               | V <sub>CC</sub> = 5V                    |        | 20     | 40     | mΩ               |
| Soft-start current                                        | I <sub>SS</sub>                   | V <sub>SS</sub> = 0V                    | 8      | 13     | 19     | μA               |
| EN rising threshold                                       | V <sub>EN_RISING</sub>            |                                         | 0.8    | 1      | 1.2    | V                |
| EN falling threshold                                      | V <sub>EN_FALLING</sub>           |                                         | 0.65   | 0.85   | 1.05   | V                |
| EN hysteresis voltage                                     | V <sub>EN_HYS</sub>               |                                         |        | 190    |        | mV               |
| MODE rising threshold                                     | V <sub>MODE_RISING</sub>          |                                         | 1.8    |        |        | V                |
| MODE falling threshold                                    | V <sub>MODE_FALLING</sub>         |                                         |        |        | 0.4    | V                |
| PG rising threshold (V <sub>FB</sub> /V <sub>REF</sub> )  | P <sub>G</sub> <sub>RISING</sub>  | V <sub>FB</sub> rising                  | 92%    | 95%    | 98%    | V <sub>REF</sub> |
|                                                           |                                   | V <sub>FB</sub> falling                 | 102%   | 105%   | 108%   |                  |
| PG falling threshold (V <sub>FB</sub> /V <sub>REF</sub> ) | P <sub>G</sub> <sub>FALLING</sub> | V <sub>FB</sub> falling                 | 90.5%  | 93.5%  | 96.5%  |                  |
|                                                           |                                   | V <sub>FB</sub> rising                  | 103.5% | 106.5% | 109.5% |                  |
| PG output voltage low                                     | V <sub>PG_LOW</sub>               | I <sub>SINK</sub> = 1mA                 |        | 0.1    | 0.3    | V                |
| PG rising delay                                           | t <sub>PG_R_DELAY</sub>           |                                         |        | 35     |        | μs               |
| PG falling delay                                          | t <sub>PG_F_DELAY</sub>           |                                         |        | 35     |        | μs               |
| Thermal shutdown <sup>(6)</sup>                           | T <sub>SD</sub>                   |                                         |        | 170    |        | °C               |
| Thermal shutdown hysteresis <sup>(6)</sup>                | T <sub>SD_HYS</sub>               |                                         |        | 20     |        | °C               |


### Note:

6) Derived from bench characterization. Not tested in production


# TYPICAL CHARACTERISTICS

$V_{IN} = 12V$ ,  $T_J = -40^{\circ}C$  to  $+125^{\circ}C$ , unless otherwise noted.


$I_Q$  vs. Temperature

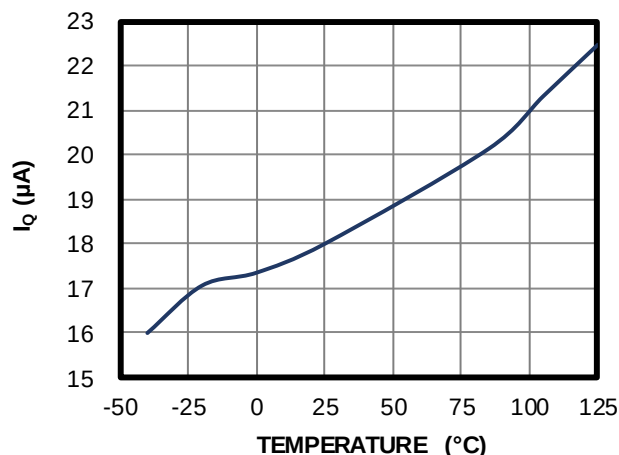


$V_{FB}$  vs. Temperature

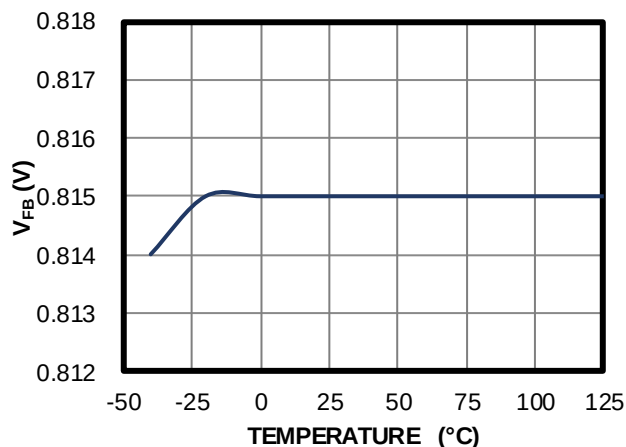


$I_{LIMIT}$  vs. Temperature

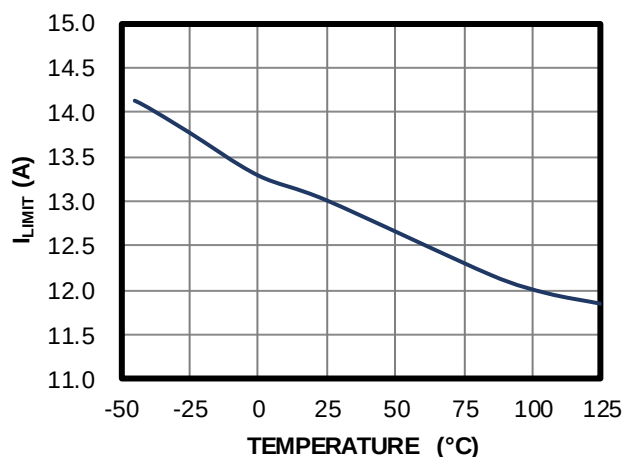


Valley Current Limit vs. Temperature

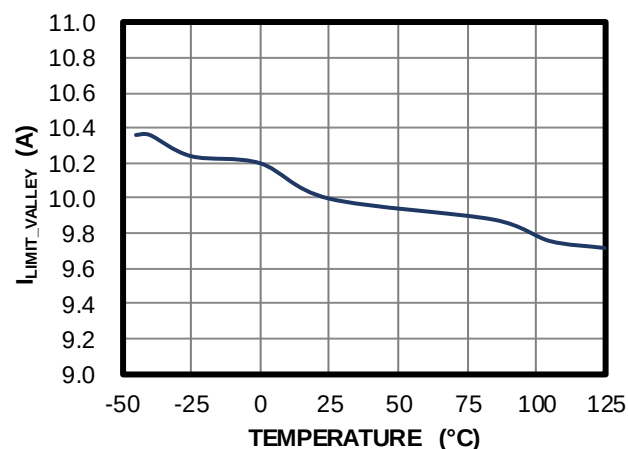

Reverse Current Limit vs. Temperature

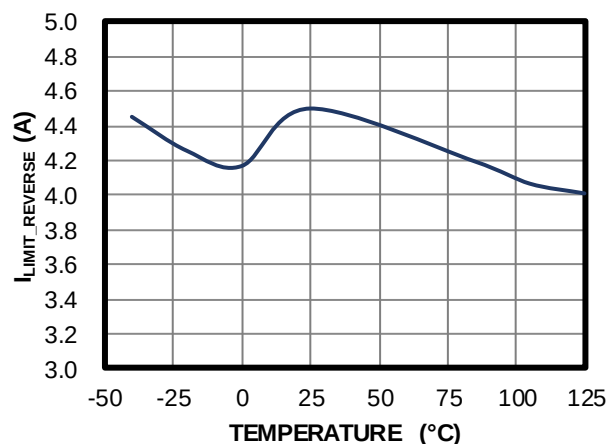

$V_{IN}$  UVLO Threshold vs. Temperature

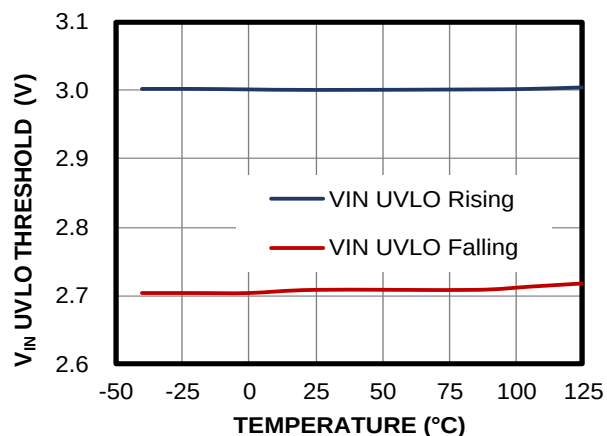





# TYPICAL CHARACTERISTICS (continued)

$V_{IN} = 12V$ ,  $T_J = -40^{\circ}C$  to  $+125^{\circ}C$ , unless otherwise noted.


## EN UVLO Threshold vs. Temperature

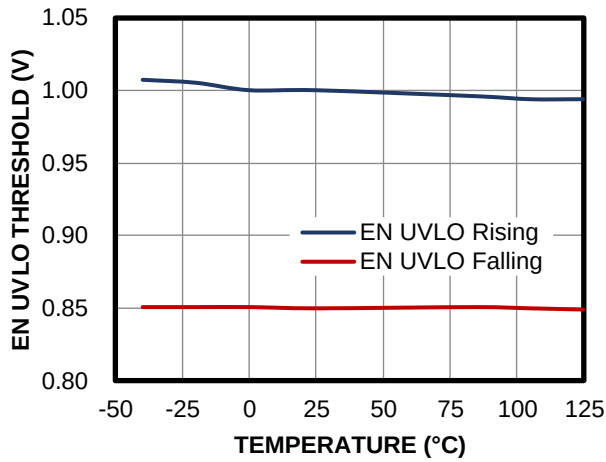


## PG Rising/Falling Threshold vs. Temperature

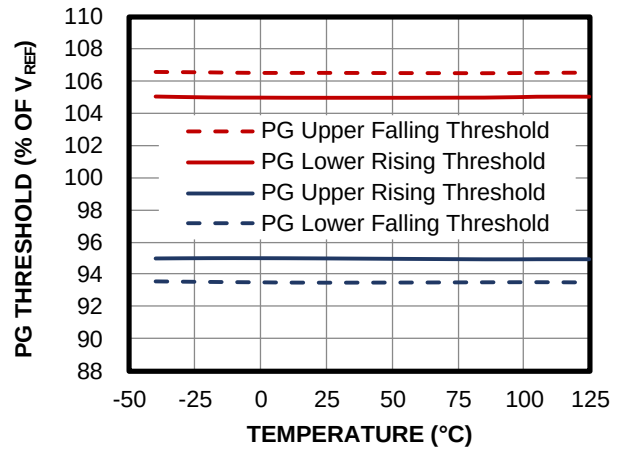


## VIN Shutdown Current vs. Temperature

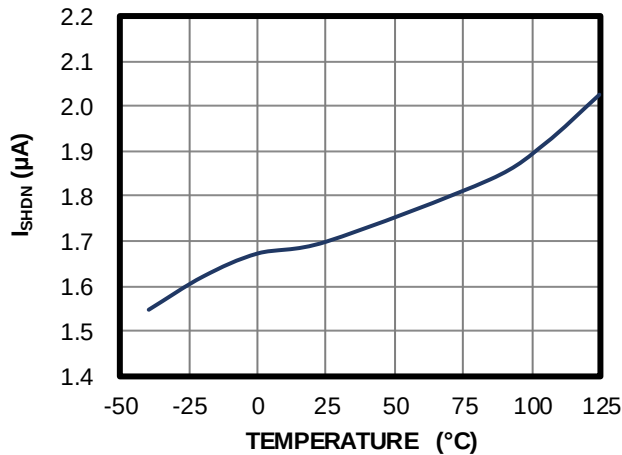


## $R_{HS(ON)}$ vs. Temperature

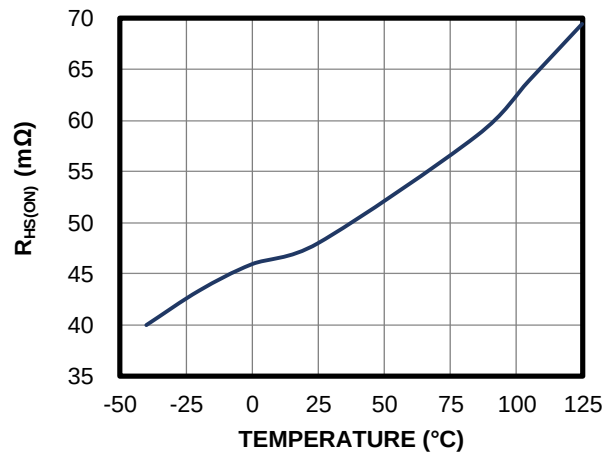

## $R_{LS(ON)}$ vs. Temperature

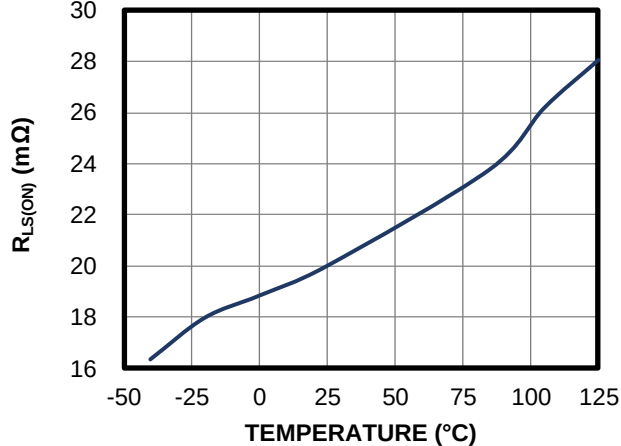


## $V_{CC}$ vs. Temperature

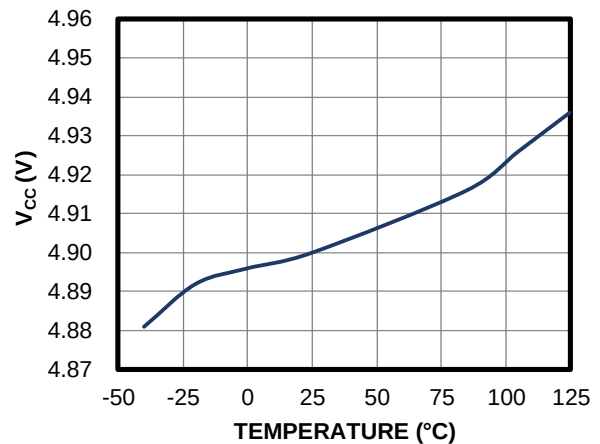


## TYPICAL CHARACTERISTICS (continued)

$V_{IN} = 12V$ ,  $T_J = -40^{\circ}C$  to  $+125^{\circ}C$ , unless otherwise noted.

Soft-Start Current vs. Temperature

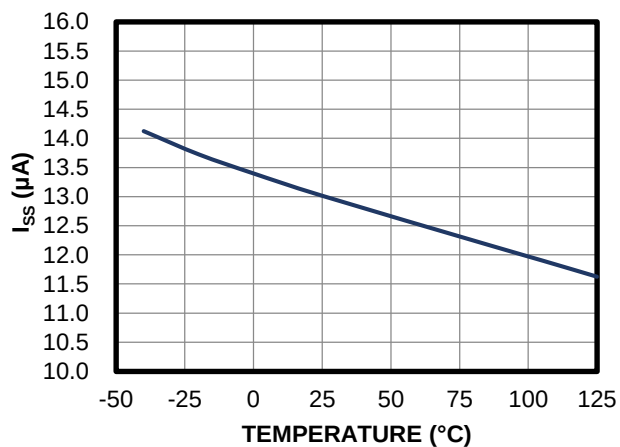


ZCD vs. Temperature

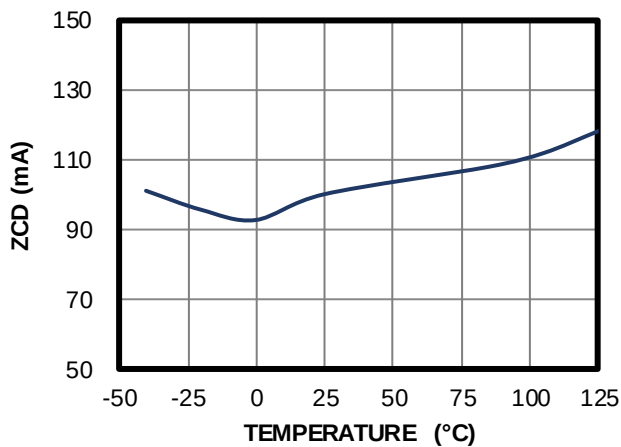







$f_{SW}$  vs. Temperature

$R_{FREQ} = 62k\Omega$

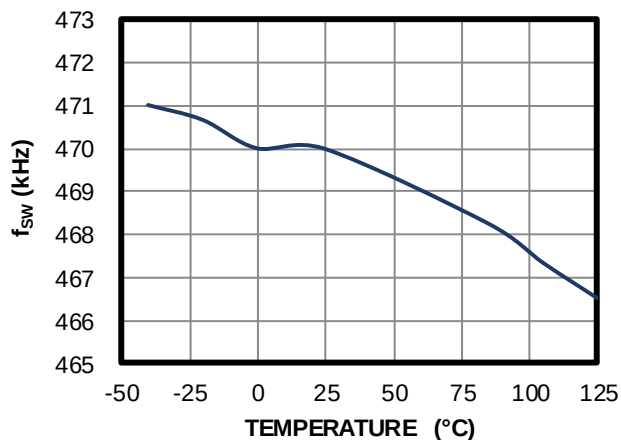







# TYPICAL PERFORMANCE CHARACTERISTICS

$V_{IN} = 12V$ ,  $V_{OUT} = 3.3V$ ,  $L = 4.7\mu H$  <sup>(7)</sup>,  $f_{SW} = 470kHz$ , AAM,  $T_A = 25^\circ C$ , unless otherwise noted.

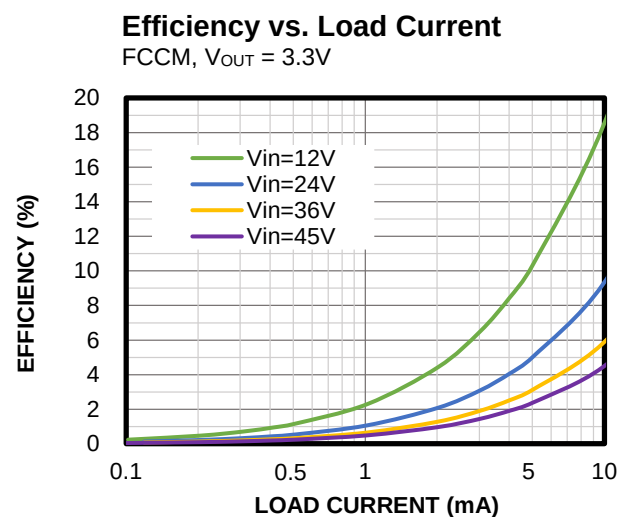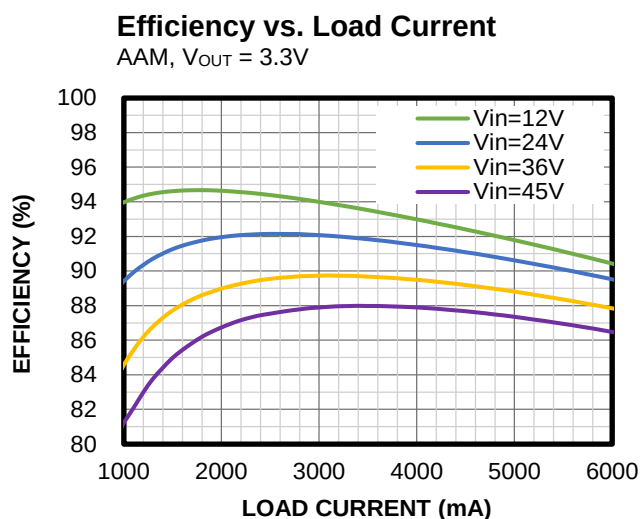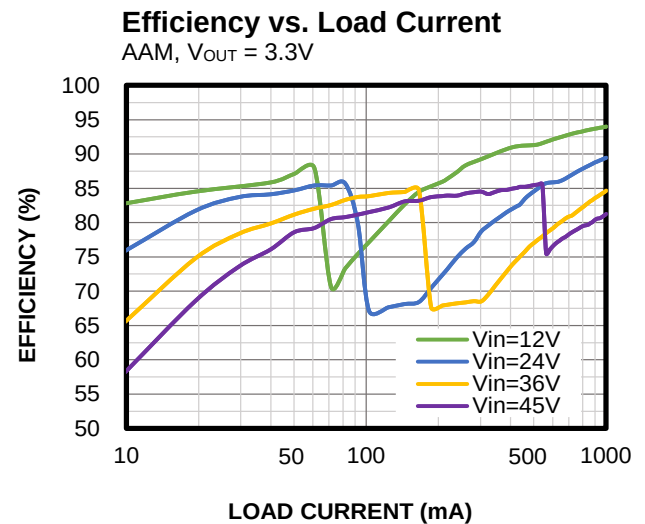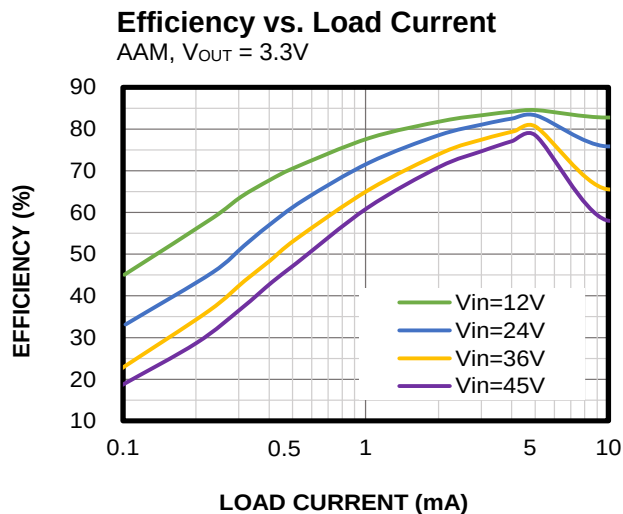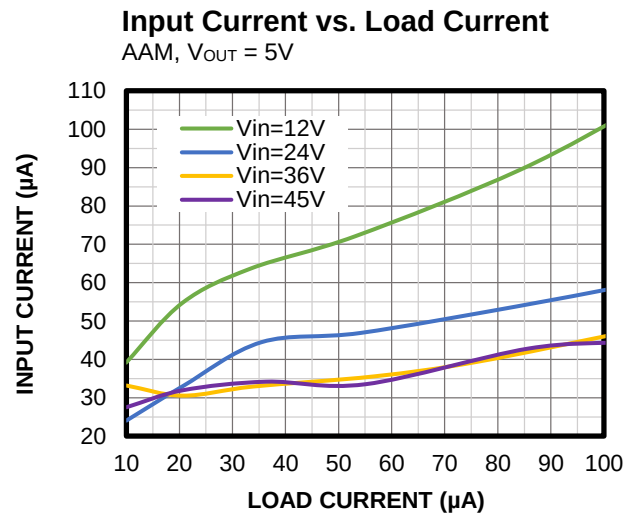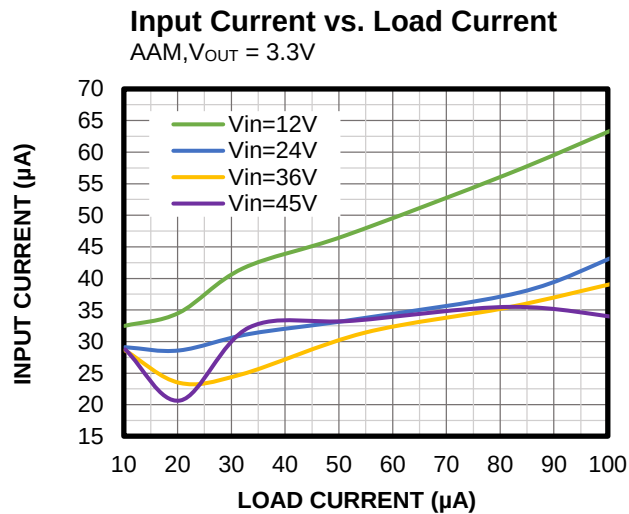







# TYPICAL PERFORMANCE CHARACTERISTICS

$V_{IN} = 12V$ ,  $V_{OUT} = 3.3V$ ,  $L = 4.7\mu H$  <sup>(7)</sup>,  $f_{SW} = 470kHz$ , AAM,  $T_A = 25^\circ C$ , unless otherwise noted.

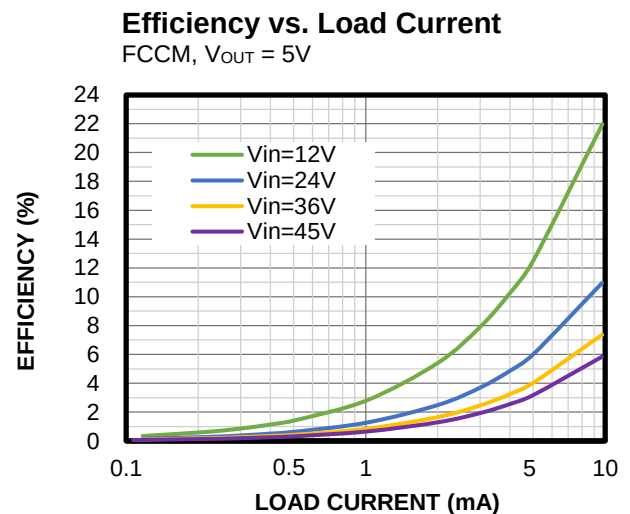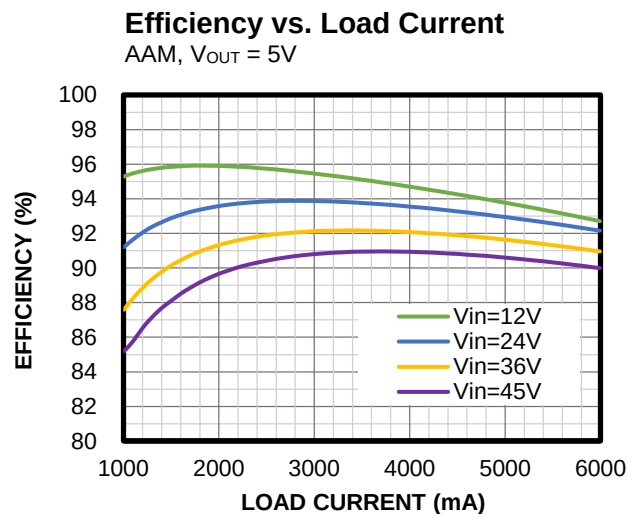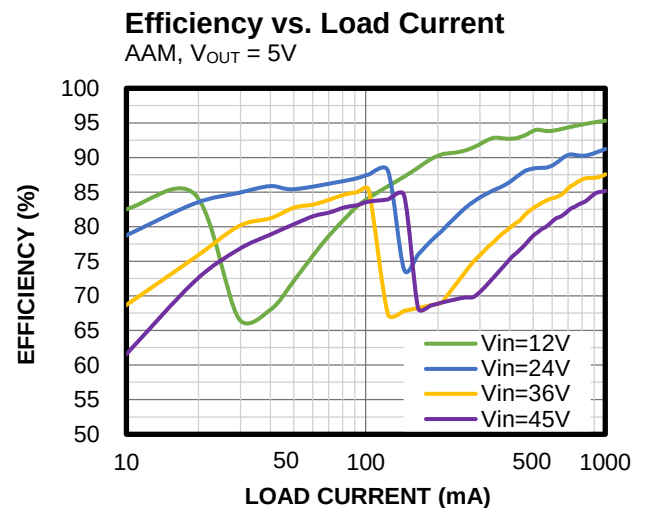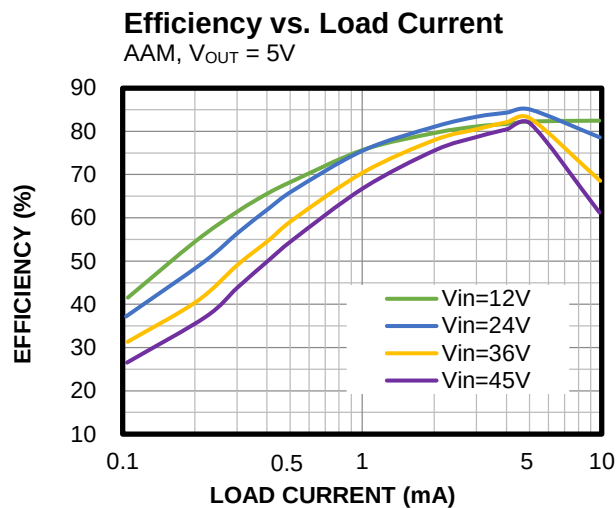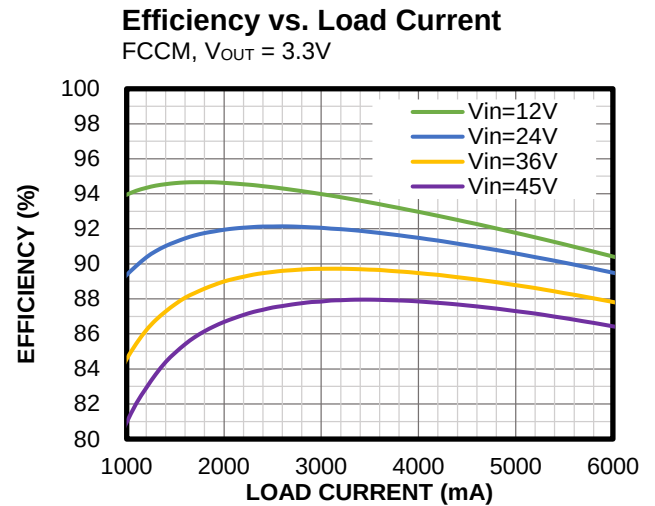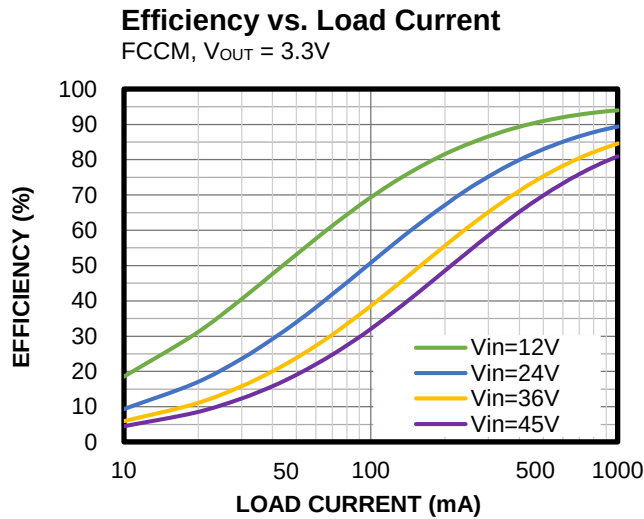

# TYPICAL PERFORMANCE CHARACTERISTICS

$V_{IN} = 12V$ ,  $V_{OUT} = 3.3V$ ,  $L = 4.7\mu H$  <sup>(7)</sup>,  $f_{SW} = 470kHz$ , AAM,  $T_A = 25^\circ C$ , unless otherwise noted.

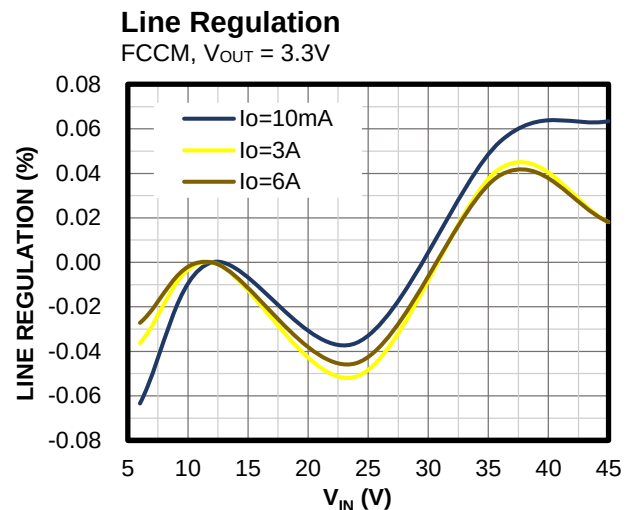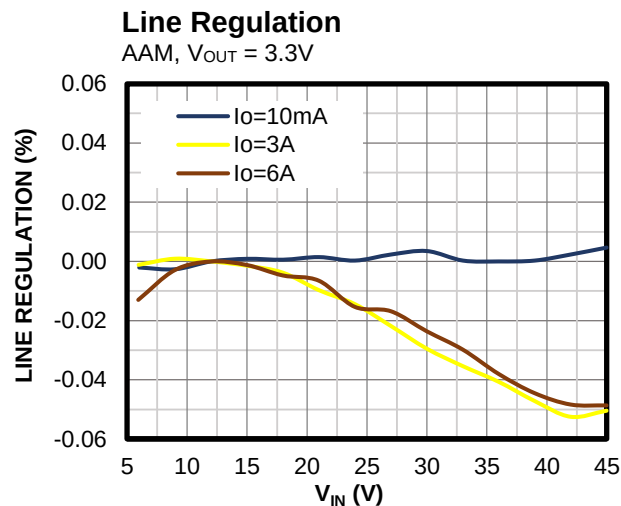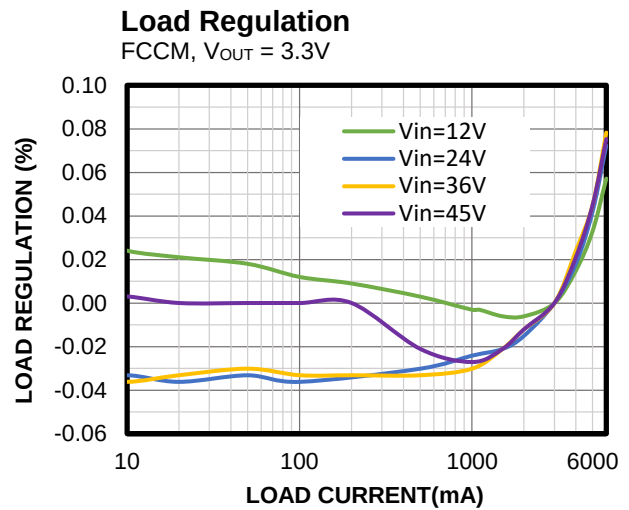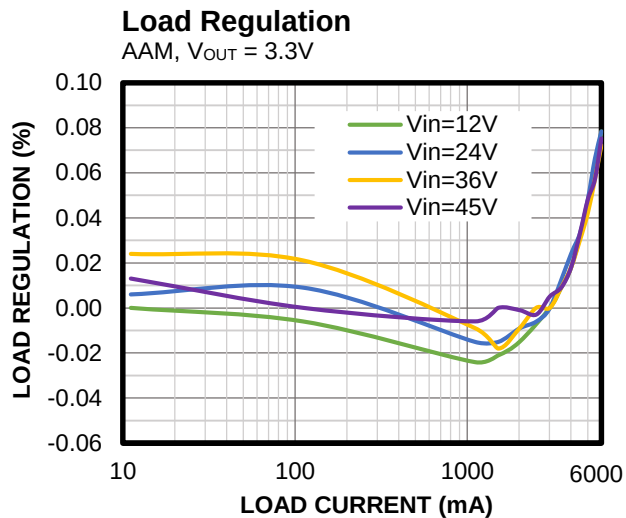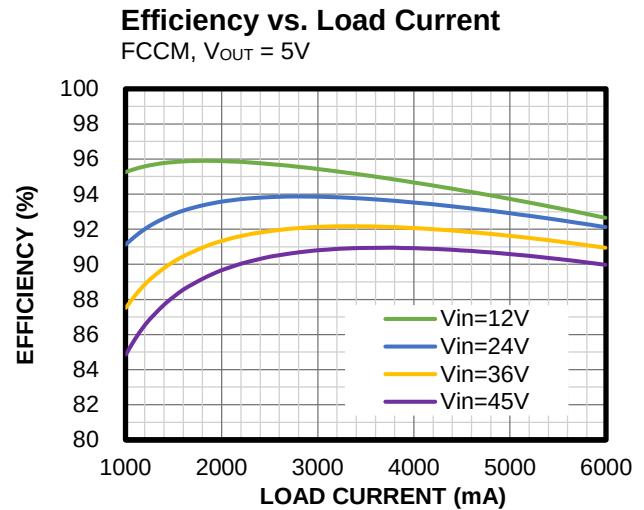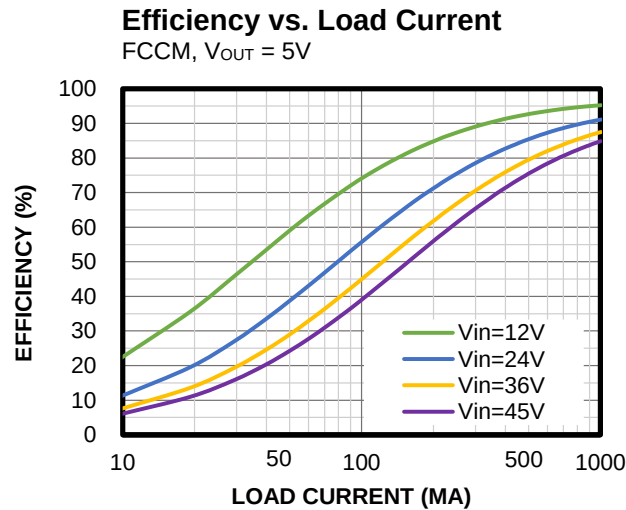


# TYPICAL PERFORMANCE CHARACTERISTICS (continued)

$V_{IN} = 12V$ ,  $V_{OUT} = 3.3V$ ,  $L = 4.7\mu H$  <sup>(7)</sup>,  $f_{SW} = 470kHz$ , AAM,  $T_A = 25^\circ C$ , unless otherwise noted.


## Load Regulation

AAM,  $V_{OUT} = 5V$

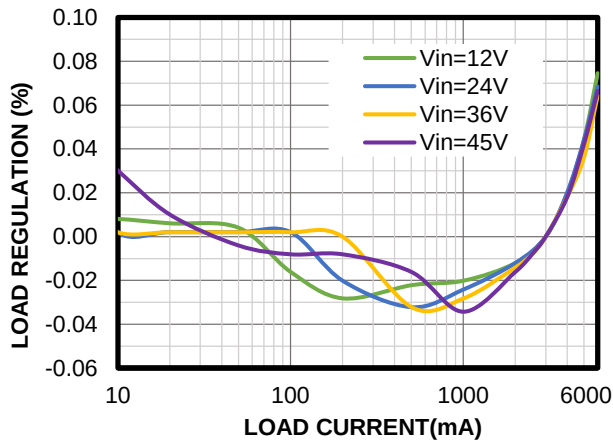


## Load Regulation

FCCM,  $V_{OUT} = 5V$

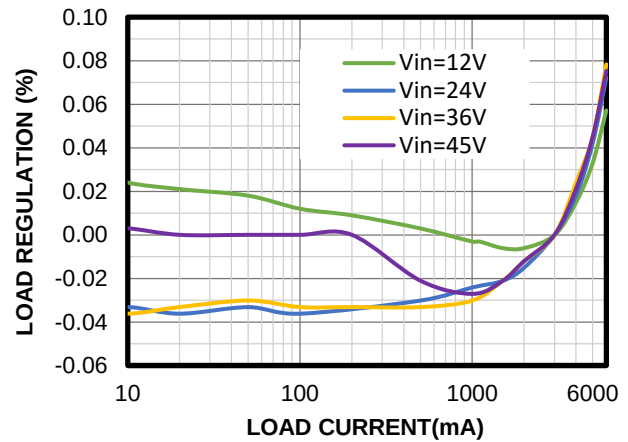


## Line Regulation

AAM,  $V_{OUT} = 5V$

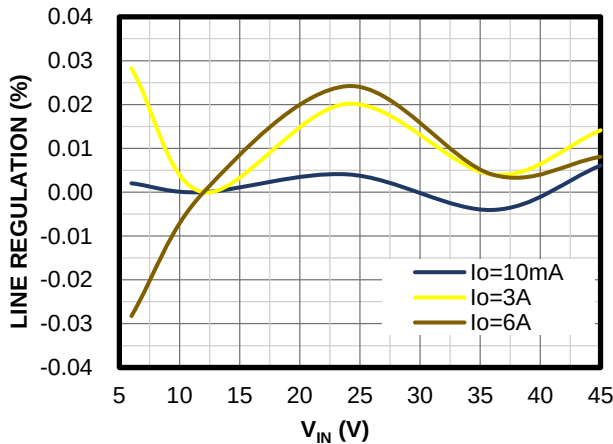


## Line Regulation

FCCM,  $V_{OUT} = 5V$

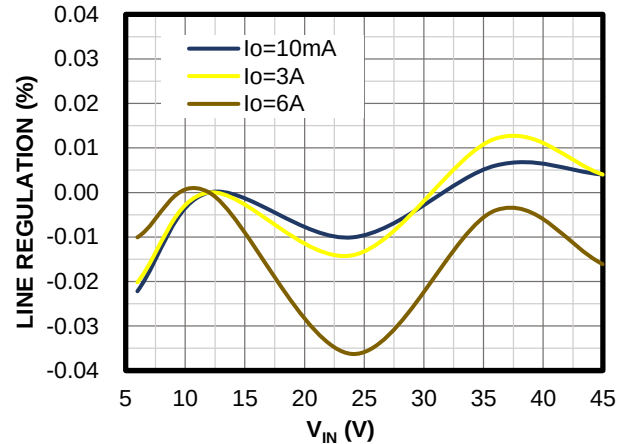


## Case Thermal Rise

$V_{OUT} = 3.3V$

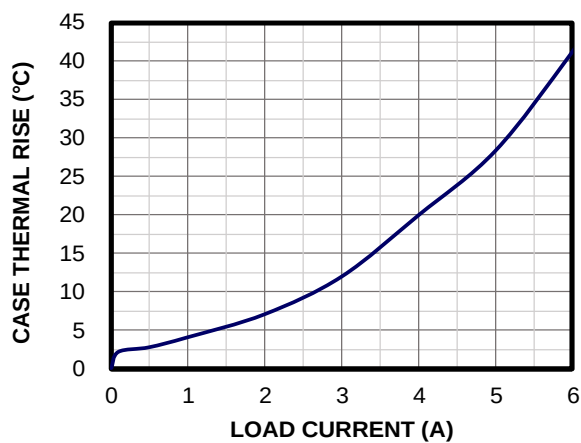





## Case Thermal Rise

$V_{OUT} = 5V$

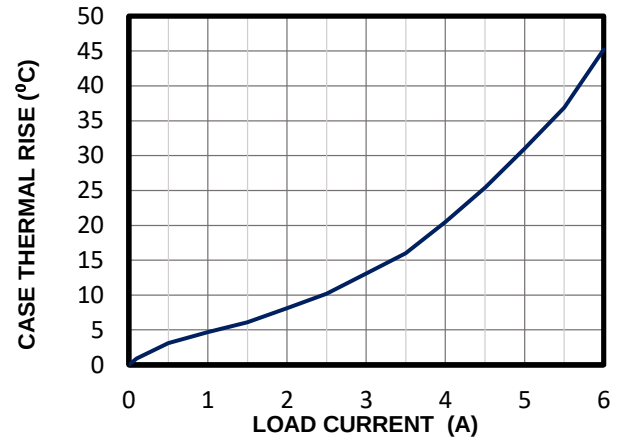

## TYPICAL PERFORMANCE CHARACTERISTICS *(continued)*

$V_{IN} = 12V$ ,  $V_{OUT} = 3.3V$ ,  $L = 4.7\mu H$  <sup>(7)</sup>,  $f_{SW} = 470kHz$ , AAM,  $T_A = 25^\circ C$ , unless otherwise noted.

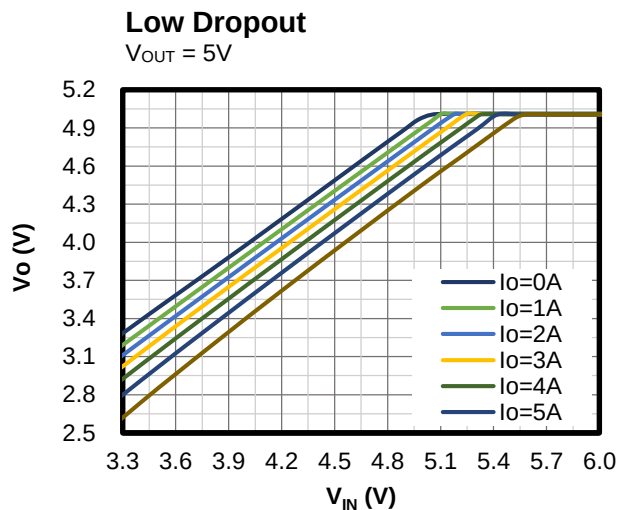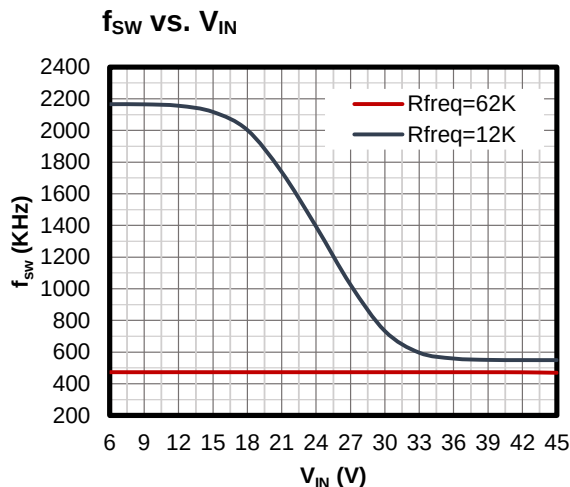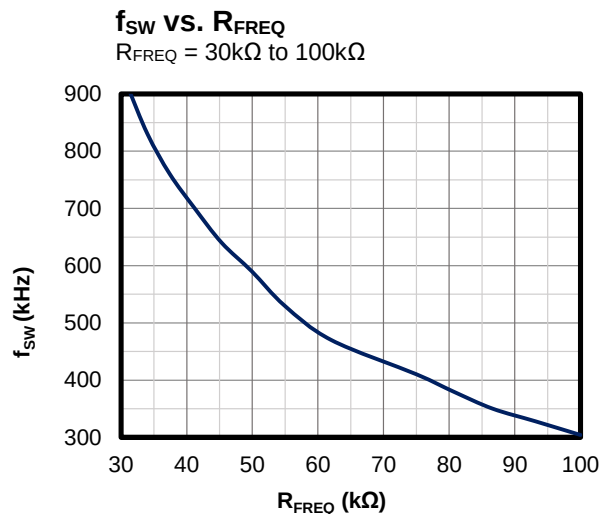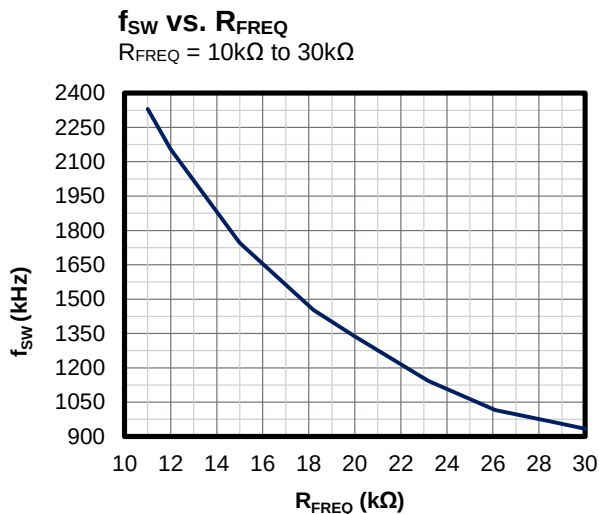


# TYPICAL PERFORMANCE CHARACTERISTICS (continued)

$V_{IN} = 12V$ ,  $V_{OUT} = 5V$ ,  $I_{OUT} = 6A$ ,  $L = 4.7\mu H$  <sup>(7)</sup>,  $f_{SW} = 410kHz$ ,  $T_A = 25^\circ C$ , unless otherwise noted. <sup>(8)</sup>


## CISPR25 Class 5 Peak Conducted Emissions

150kHz to 108MHz

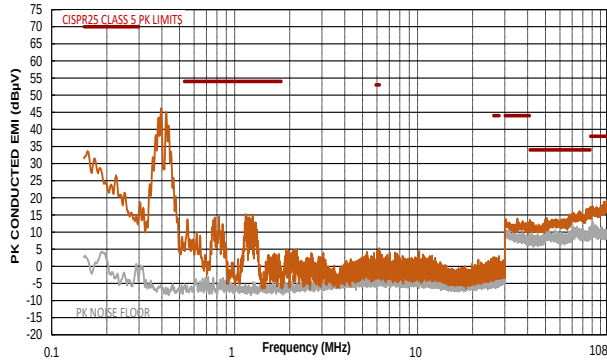


## CISPR25 Class 5 Average Conducted Emissions

150kHz to 108MHz

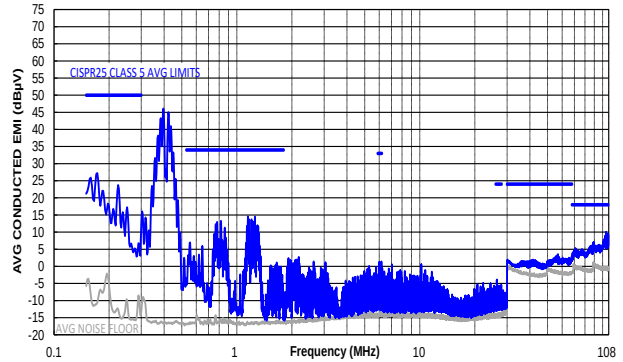


## CISPR25 Class 5 Peak Radiated Emissions

150kHz to 30MHz

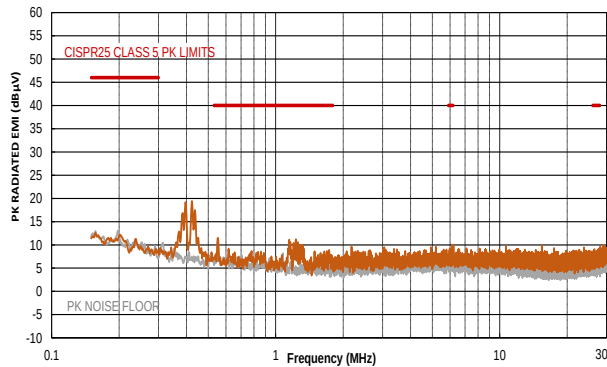


## CISPR25 Class 5 Average Radiated Emissions

150kHz to 30MHz

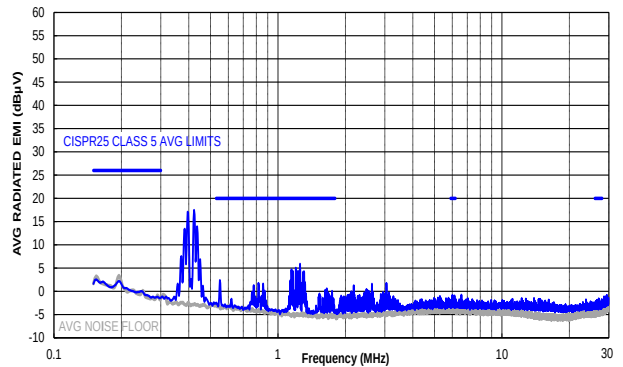


## CISPR25 Class 5 Peak Radiated Horizontal

30MHz to 1GHz

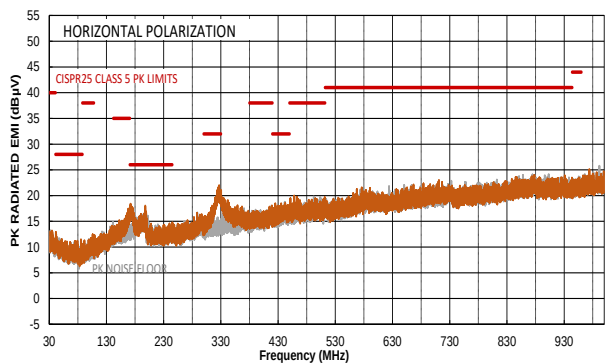

## CISPR25 Class 5 Average Radiated Horizontal

30MHz to 1GHz

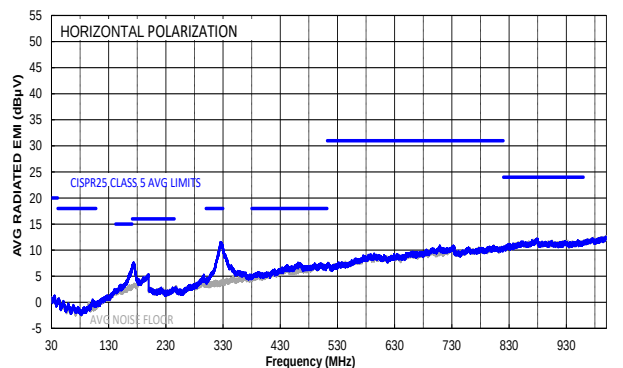




## TYPICAL PERFORMANCE CHARACTERISTICS (continued)

V<sub>IN</sub> = 12V, V<sub>OUT</sub> = 5V, I<sub>OUT</sub> = 6A, L = 4.7μH <sup>(7)</sup>, f<sub>SW</sub> = 410kHz, T<sub>A</sub> = 25°C, unless otherwise noted. <sup>(8)</sup>


### CISPR25 Class 5 Peak Radiated Emissions

Vertical, 30MHz to 1GHz

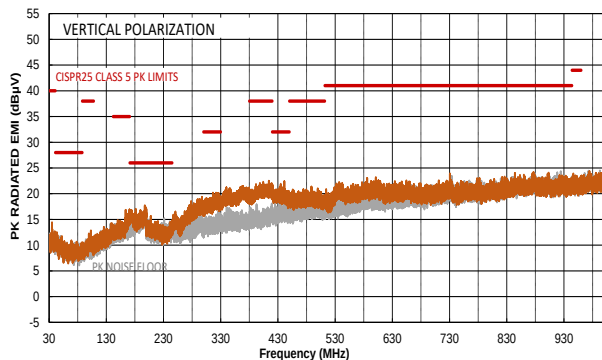

### CISPR25 Class 5 Average Radiated Emissions

Vertical, 30MHz to 1GHz

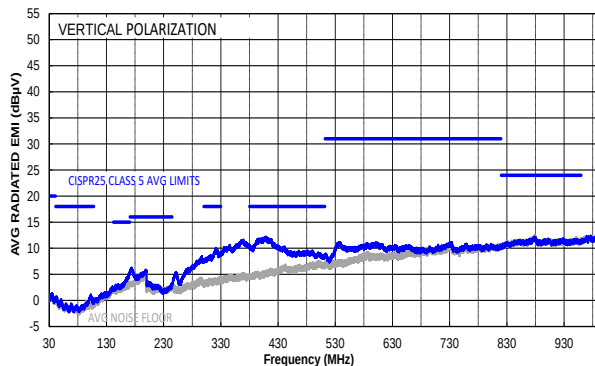

#### Note:


- 7) Inductor part number: XAL6060-472MEC. DCR = 15mΩ.
- 8) The EMC test results are based on the application circuit with EMI filters (see Figure 14 on page 35).

# TYPICAL PERFORMANCE CHARACTERISTICS (continued)

$V_{IN} = 12V$ ,  $V_{OUT} = 3.3V$ ,  $L = 4.7\mu H$ ,  $f_{SW} = 470kHz$ , AAM,  $T_A = 25^\circ C$ , unless otherwise noted.


## Steady State

$I_{OUT} = 0A$ , AAM

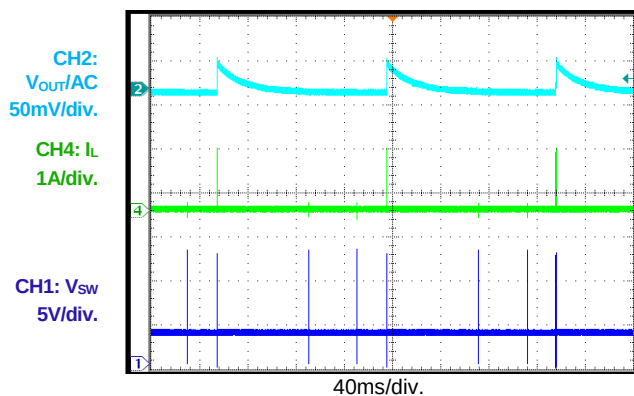


## Steady State

$I_{OUT} = 0A$ , FCCM

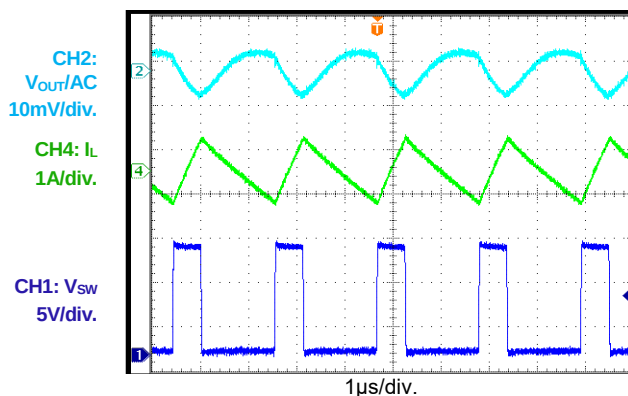


## Steady State

$I_{OUT} = 6A$

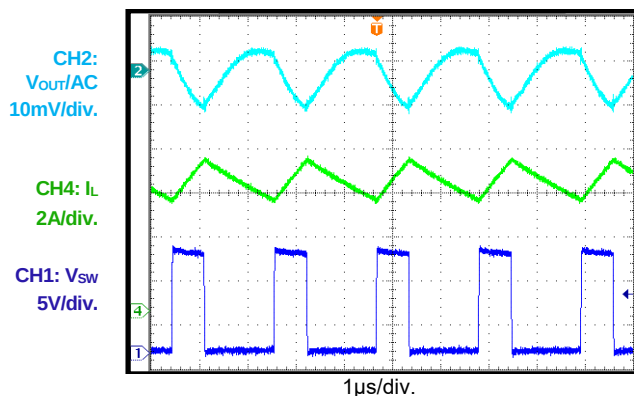


## Start-Up through VIN

$I_{OUT} = 0A$ , AAM

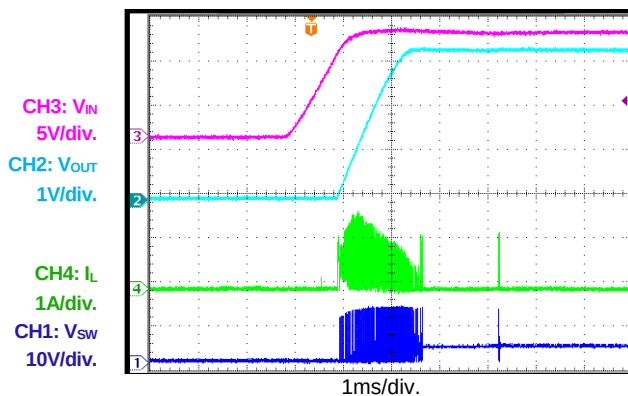


## Start-Up through VIN

$I_{OUT} = 0A$ , FCCM

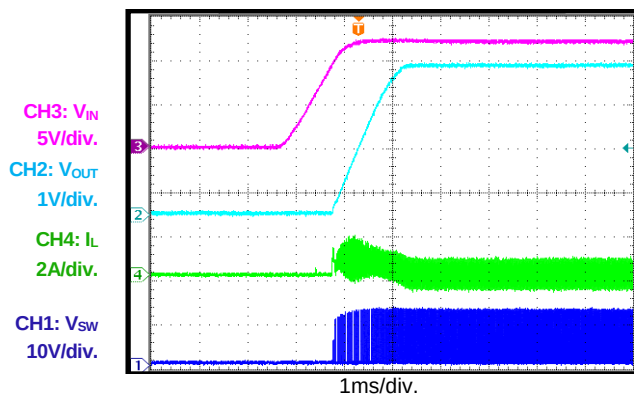

## Start-Up through VIN

$I_{OUT} = 6A$

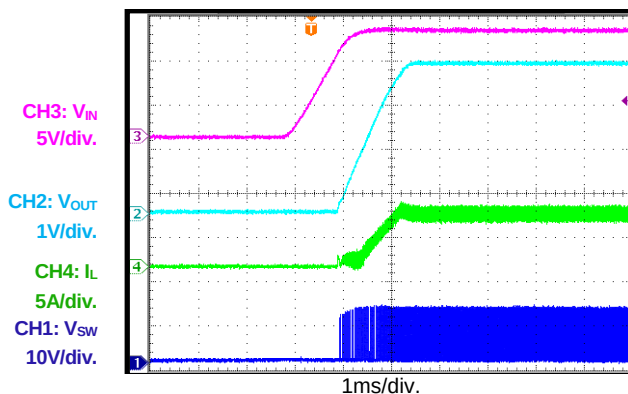


# TYPICAL PERFORMANCE CHARACTERISTICS (continued)

$V_{IN} = 12V$ ,  $V_{OUT} = 3.3V$ ,  $L = 4.7\mu H$ ,  $f_{SW} = 470kHz$ , AAM,  $T_A = 25^\circ C$ , unless otherwise noted.

## Shutdown through VIN

$I_{OUT} = 0A$ , AAM


CH3:  $V_{IN}$   
5V/div.  
CH2:  $V_{OUT}$   
1V/div.  
CH4:  $I_L$   
1A/div.  
CH1:  $V_{SW}$   
5V/div.

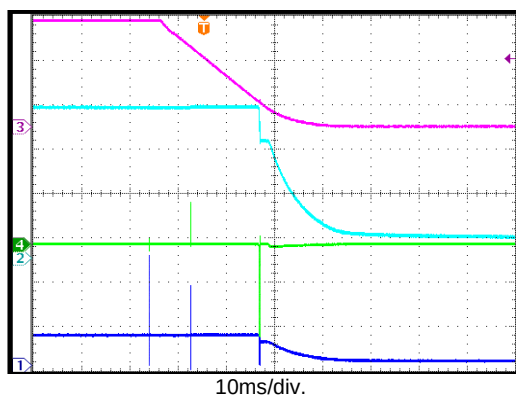

## Shutdown through VIN

$I_{OUT} = 0A$ , FCCM


CH3:  $V_{IN}$   
5V/div.  
CH2:  $V_{OUT}$   
1V/div.  
CH4:  $I_L$   
2A/div.  
CH1:  $V_{SW}$   
10V/div.

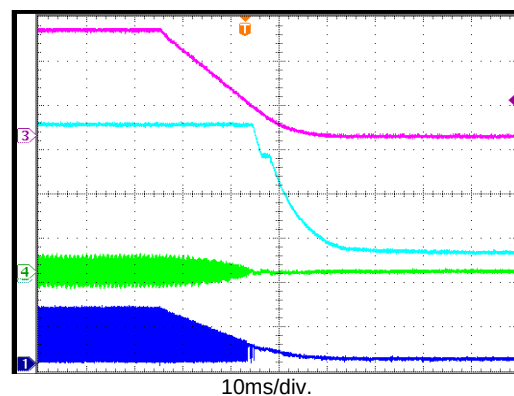

## Shutdown through VIN

$I_{OUT} = 6A$


CH3:  $V_{IN}$   
5V/div.  
CH2:  $V_{OUT}$   
1V/div.  
CH4:  $I_L$   
5A/div.  
CH1:  $V_{SW}$   
10V/div.

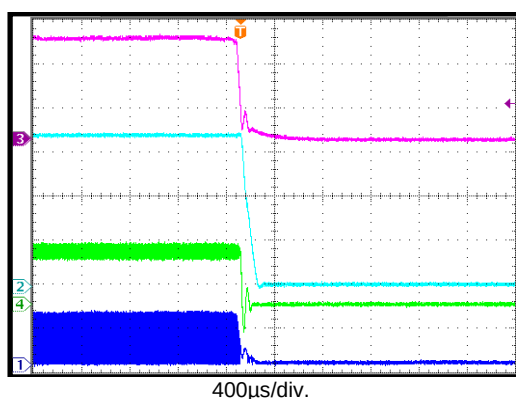

## Start-Up through EN

$I_{OUT} = 0A$ , AAM


CH3:  $V_{EN}$   
2V/div.  
CH2:  $V_{OUT}$   
1V/div.  
CH4:  $I_L$   
2A/div.  
CH1:  $V_{SW}$   
10V/div.

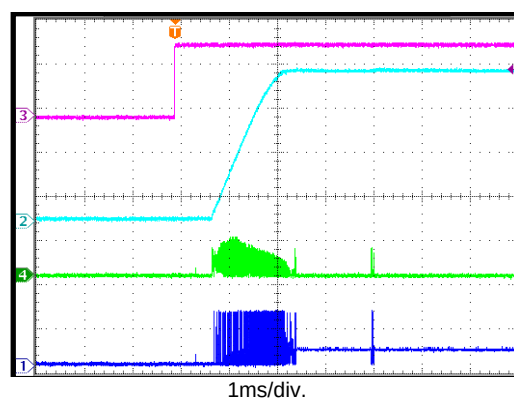

## Start-Up through EN

$I_{OUT} = 0A$ , FCCM


CH3:  $V_{EN}$   
2V/div.  
CH2:  $V_{OUT}$   
1V/div.  
CH4:  $I_L$   
2A/div.  
CH1:  $V_{SW}$   
10V/div.

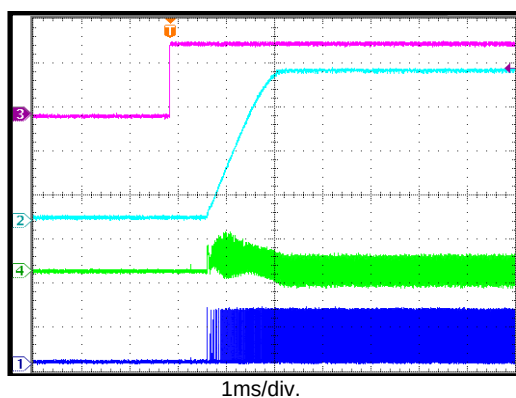

## Start-Up through EN

$I_{OUT} = 6A$

CH3:  $V_{EN}$   
2V/div.  
CH2:  $V_{OUT}$   
1V/div.  
CH4:  $I_L$   
5A/div.  
CH1:  $V_{SW}$   
10V/div.

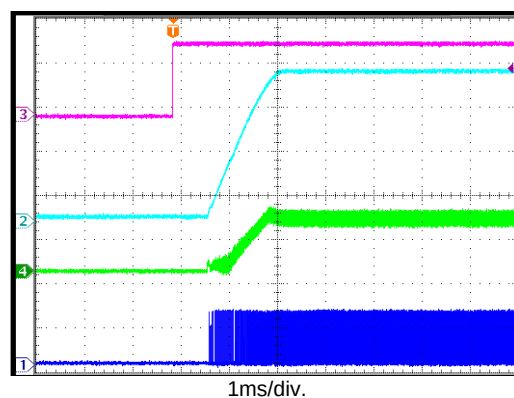


## TYPICAL PERFORMANCE CHARACTERISTICS (continued)

$V_{IN} = 12V$ ,  $V_{OUT} = 3.3V$ ,  $L = 4.7\mu H$ ,  $f_{SW} = 470kHz$ , AAM,  $T_A = 25^\circ C$ , unless otherwise noted.

### Shutdown through EN

$I_{OUT} = 0A$ , AAM


CH3:  $V_{EN}$   
2V/div.  
CH4:  $I_L$   
1A/div.  
CH2:  $V_{OUT}$   
1V/div.  
CH1:  $V_{SW}$   
5V/div.

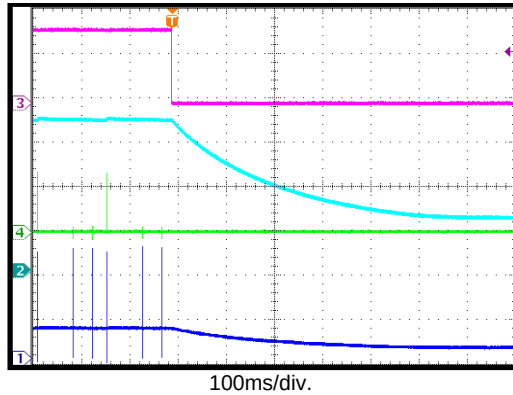

### Shutdown through EN

$I_{OUT} = 0A$ , FCCM


CH3:  $V_{EN}$   
2V/div.  
CH4:  $I_L$   
1A/div.  
CH2:  $V_{OUT}$   
1V/div.  
CH1:  $V_{SW}$   
10V/div.

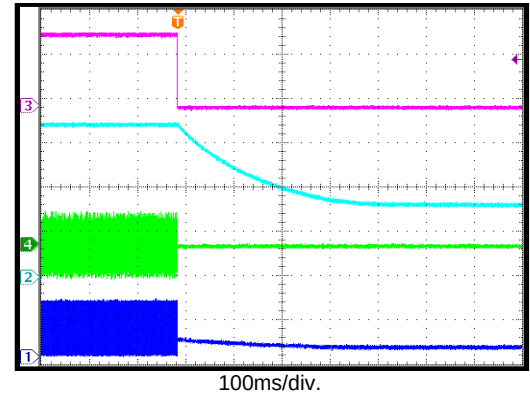

### Shutdown through EN

$I_{OUT} = 6A$


CH3:  $V_{EN}$   
2V/div.  
CH2:  $V_{OUT}$   
1V/div.  
CH4:  $I_L$   
5A/div.  
CH1:  $V_{SW}$   
10V/div.

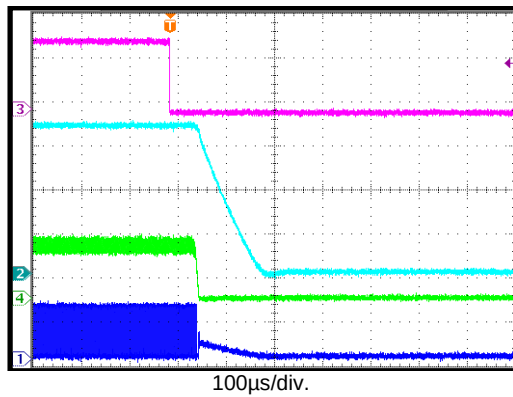

### SCP Entry

$I_{OUT} = 0A$ , AAM


CH2:  $V_{OUT}$   
2V/div.  
CH3:  $V_{PG}$   
5V/div.  
CH4:  $I_L$   
10A/div.  
CH1:  $V_{SW}$   
10V/div.

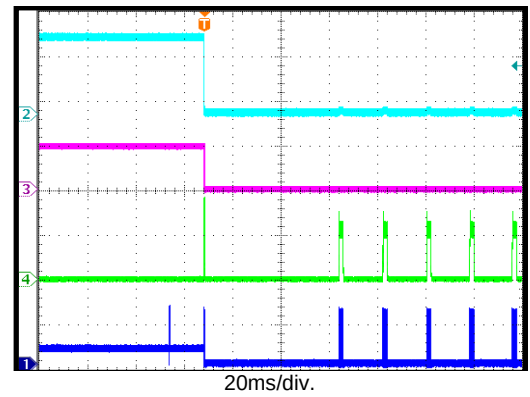

### SCP Entry

$I_{OUT} = 0A$ , FCCM


CH2:  $V_{OUT}$   
2V/div.  
CH3:  $V_{PG}$   
5V/div.  
CH4:  $I_L$   
10A/div.  
CH1:  $V_{SW}$   
10V/div.

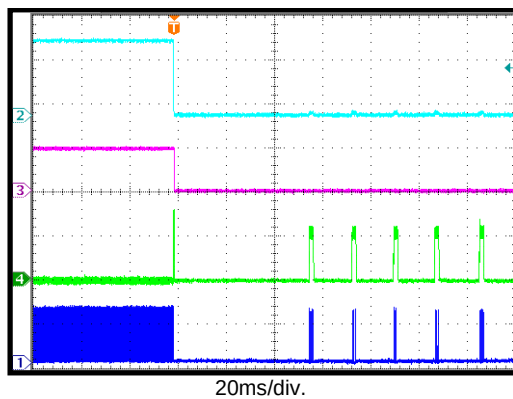

### SCP Entry

$I_{OUT} = 6A$

CH2:  $V_{OUT}$   
2V/div.  
CH3:  $V_{PG}$   
5V/div.  
CH4:  $I_L$   
10A/div.  
CH1:  $V_{SW}$   
10V/div.

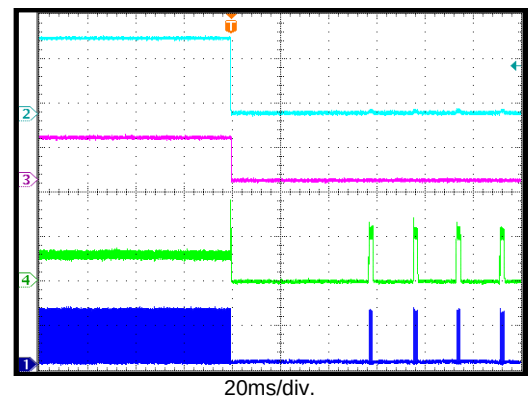


# TYPICAL PERFORMANCE CHARACTERISTICS (continued)

$V_{IN} = 12V$ ,  $V_{OUT} = 3.3V$ ,  $L = 4.7\mu H$ ,  $f_{SW} = 470kHz$ , AAM,  $T_A = 25^\circ C$ , unless otherwise noted.


## SCP Recovery

$I_{OUT} = 0A$ , AAM

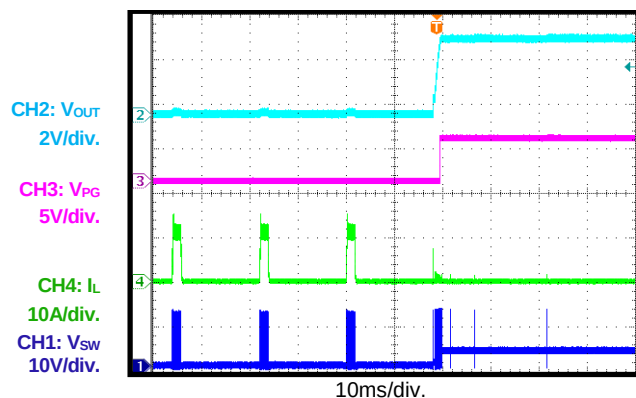


## SCP Recovery

$I_{OUT} = 0A$ , FCCM

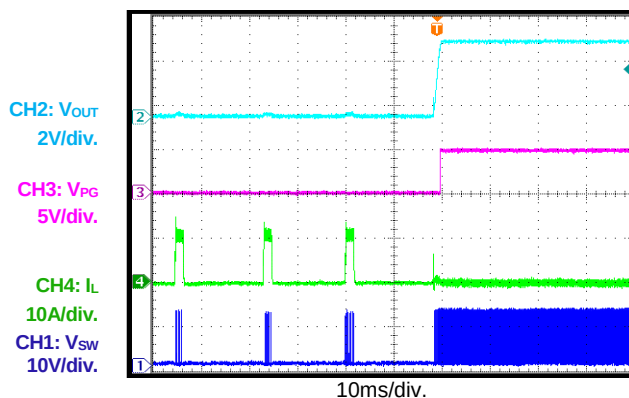


## SCP Recovery

$I_{OUT} = 6A$

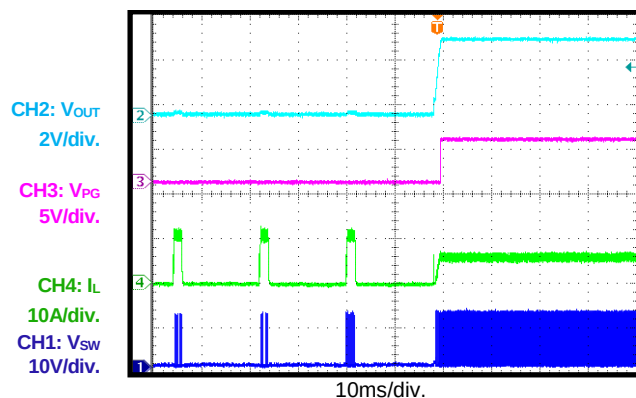


## SCP Steady State

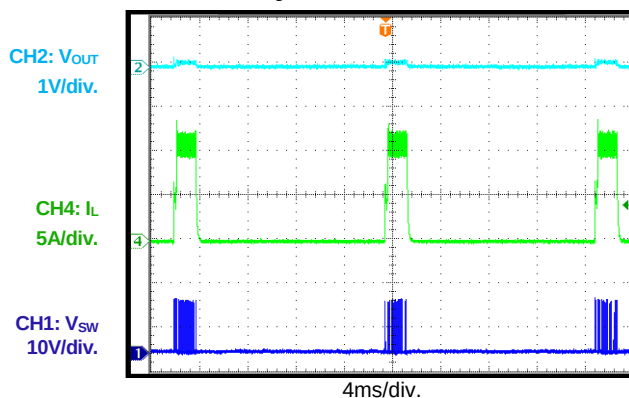


## Load Transient

$I_{OUT} = 3A$  to  $6A$ ,  $1.6A/\mu s$

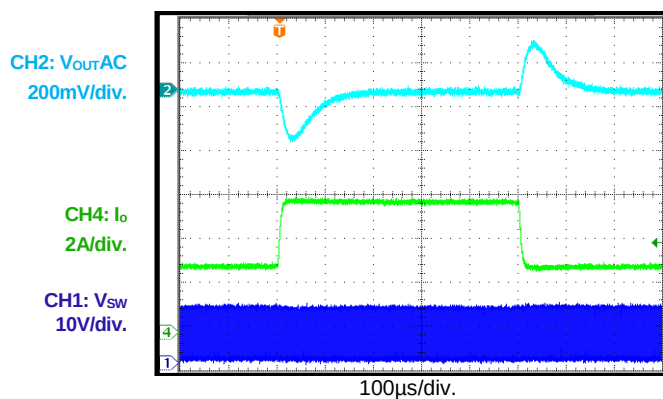

## SYNC Operation

$I_{OUT} = 6A$ , SYNC frequency = 350kHz

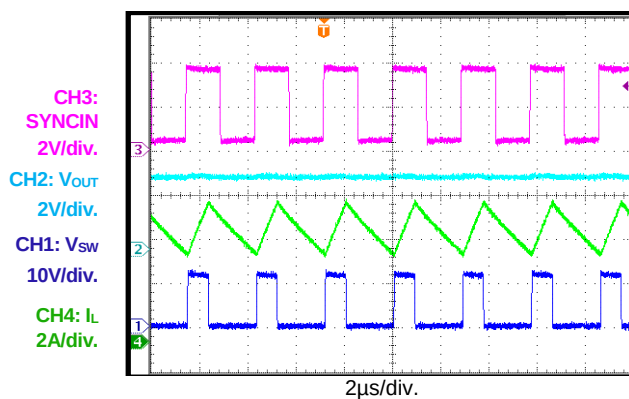


# TYPICAL PERFORMANCE CHARACTERISTICS (continued)

$V_{IN} = 12V$ ,  $V_{OUT} = 3.3V$ ,  $L = 4.7\mu H$ ,  $f_{SW} = 470kHz$ , AAM,  $T_A = 25^\circ C$ , unless otherwise noted.


## SYNC Operation

$I_{OUT} = 6A$ , SYNC frequency = 1000kHz

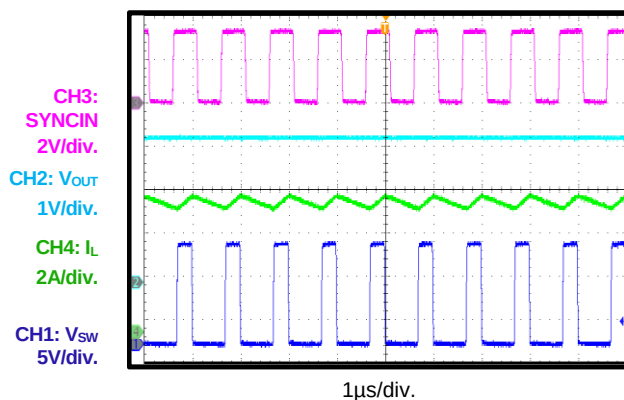


## SYNCO Operation

$I_{OUT} = 6A$ , SYNC frequency = 350kHz

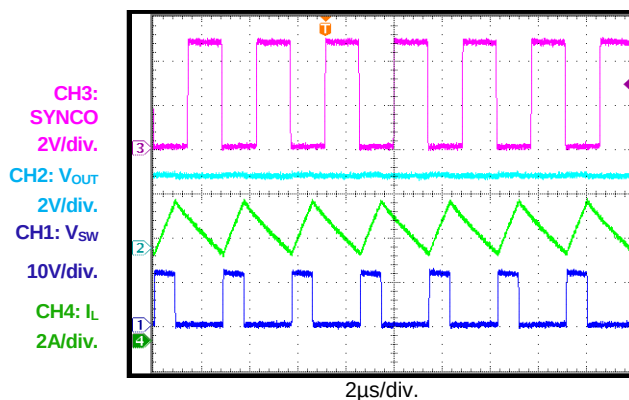


## SYNCO Operation

$I_{OUT} = 6A$ , SYNC frequency = 1000kHz

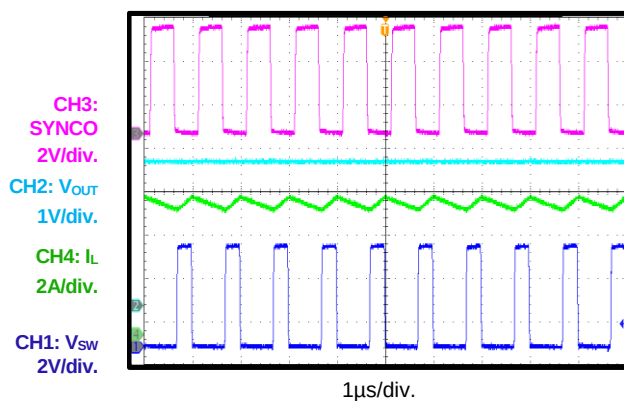


## PG in Start-Up through VIN

$I_{OUT} = 0A$

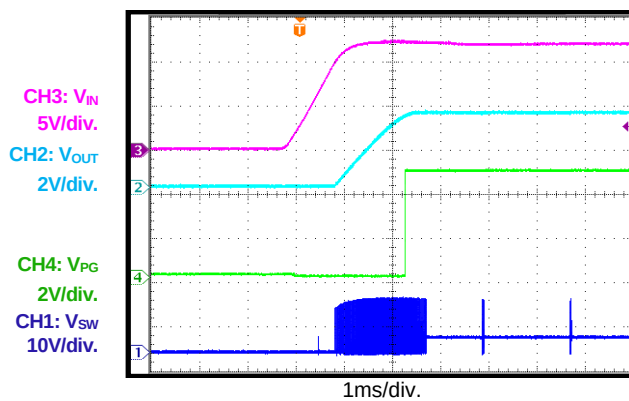


## PG in Start-Up through VIN

$I_{OUT} = 6A$

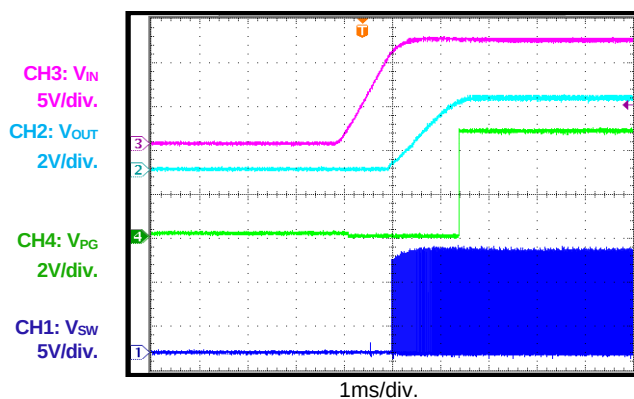

## PG in Shutdown through VIN

$I_{OUT} = 0A$

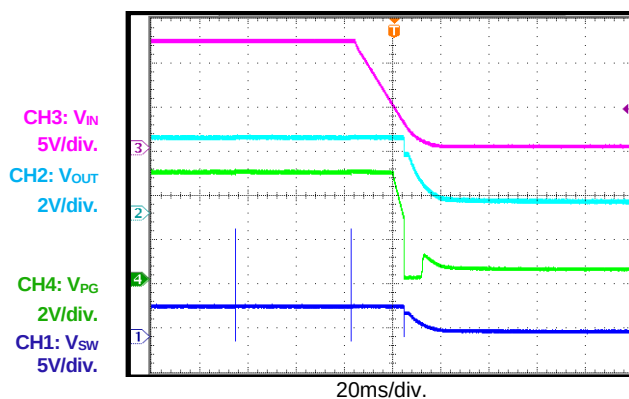


# TYPICAL PERFORMANCE CHARACTERISTICS (continued)

$V_{IN} = 12V$ ,  $V_{OUT} = 3.3V$ ,  $L = 4.7\mu H$ ,  $f_{SW} = 470kHz$ , AAM,  $T_A = 25^\circ C$ , unless otherwise noted.

**PG in Shutdown through VIN**

$I_{OUT} = 6A$


CH3:  $V_{IN}$   
5V/div.  
CH2:  $V_{OUT}$   
2V/div.  
CH4:  $V_{PG}$   
2V/div.  
CH1:  $V_{SW}$   
5V/div.

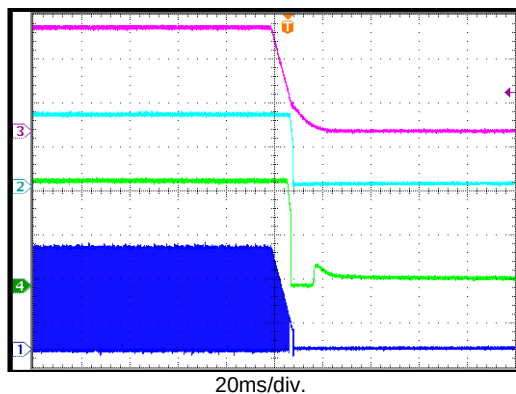

**PG in Start-Up through EN**

$I_{OUT} = 0A$


CH3:  $V_{EN}$   
2V/div.  
CH2:  $V_{OUT}$   
2V/div.  
CH4:  $V_{PG}$   
2V/div.  
CH1:  $V_{SW}$   
5V/div.

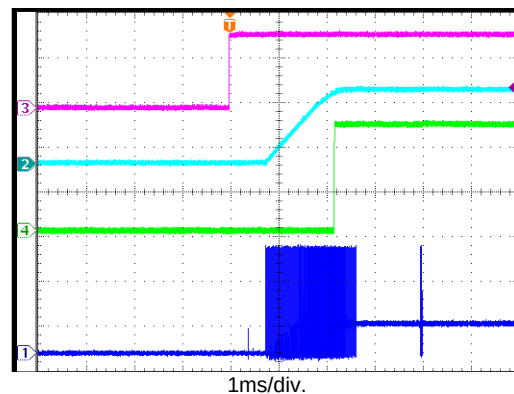

**PG in Start-Up through EN**

$I_{OUT} = 6A$


CH3:  $V_{EN}$   
2V/div.  
CH2:  $V_{OUT}$   
2V/div.  
CH4:  $V_{PG}$   
2V/div.  
CH1:  $V_{SW}$   
10V/div.

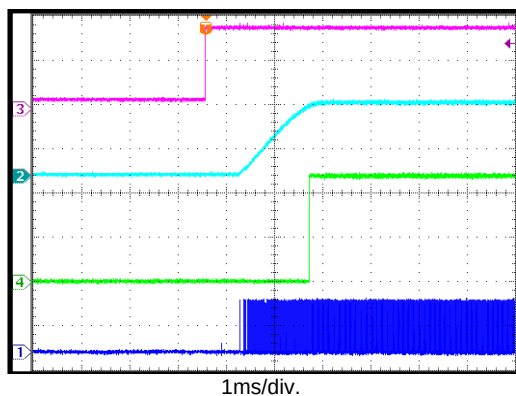

**PG in Shutdown through EN**

$I_{OUT} = 0A$


CH3:  $V_{EN}$   
2V/div.  
CH2:  $V_{OUT}$   
2V/div.  
CH4:  $V_{PG}$   
2V/div.  
CH1:  $V_{SW}$   
5V/div.

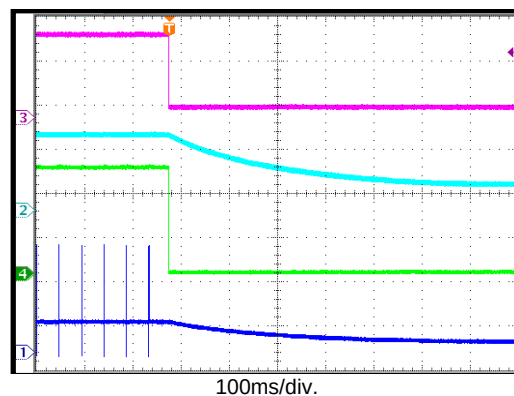

**PG in Shutdown through EN**

$I_{OUT} = 6A$


CH3:  $V_{EN}$   
2V/div.  
CH2:  $V_{OUT}$   
2V/div.  
CH4:  $V_{PG}$   
2V/div.  
CH1:  $V_{SW}$   
10V/div.

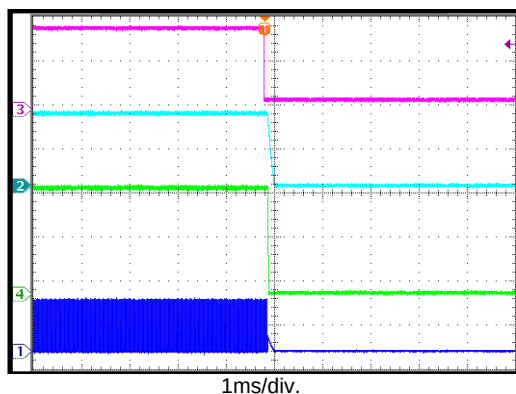

**Dropout Operation**

$V_{IN} = 3.3V$ ,  $V_{OUT}$  set to 3.3V,  $I_{OUT} = 0A$

CH3:  $V_{IN}$   
500mV/div.  
CH2:  $V_{OUT}$   
500mV/div.  
CH4:  $I_L$   
50mA/div.  
CH1:  $V_{SW}$   
1V/div.

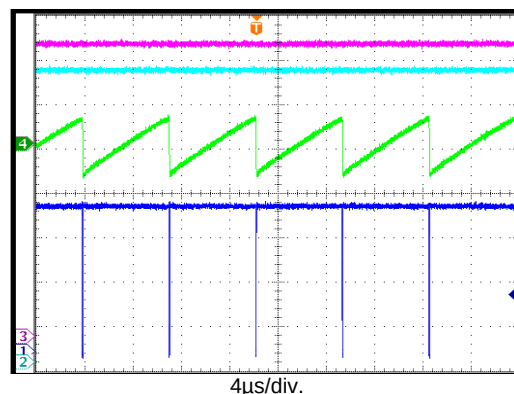





# TYPICAL PERFORMANCE CHARACTERISTICS (continued)

 $V_{IN} = 12V$ ,  $V_{OUT} = 3.3V$ ,  $L = 4.7\mu H$ ,  $f_{SW} = 470kHz$ , AAM,  $T_A = 25^\circ C$ , unless otherwise noted.


## Dropout Operation

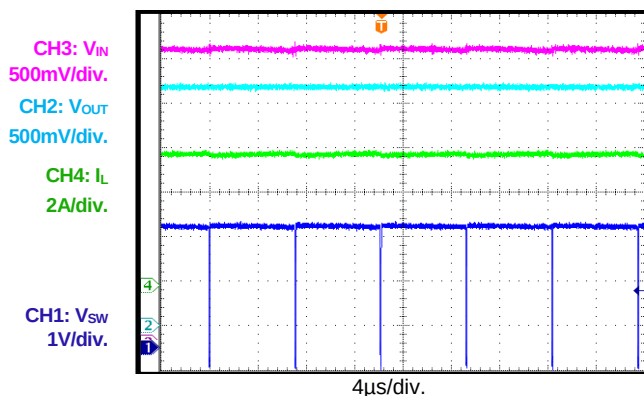 $V_{IN} = 3.3V$ ,  $V_{OUT}$  set to 3.3V,  $I_{OUT} = 6A$ 


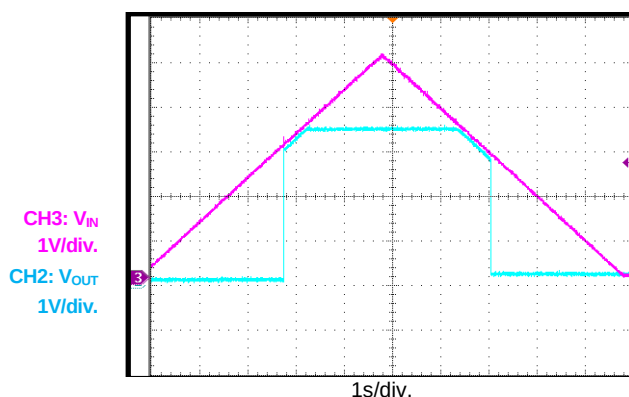
## Load Dump

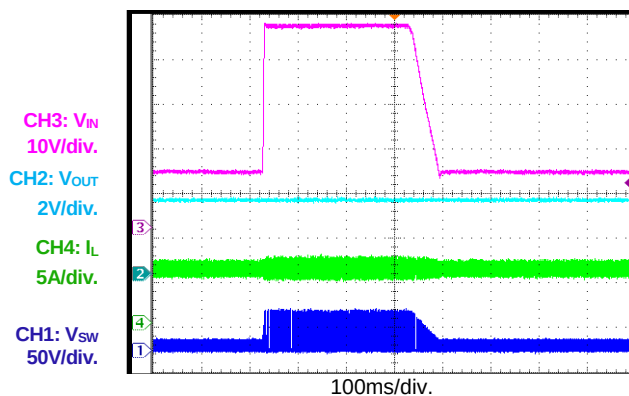 $V_{IN} = 12V$  to 36V,  $I_{OUT} = 6A$ 


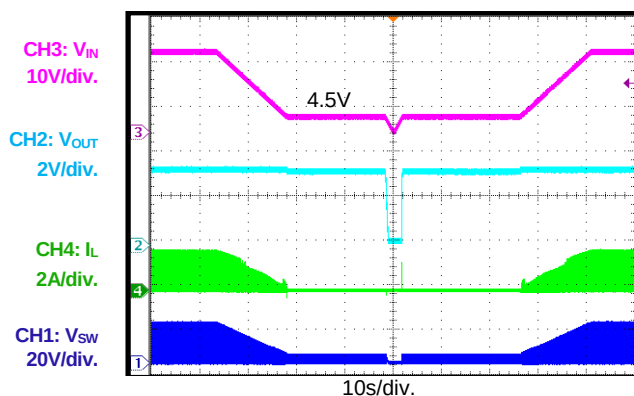
## Cold Crank Conditions

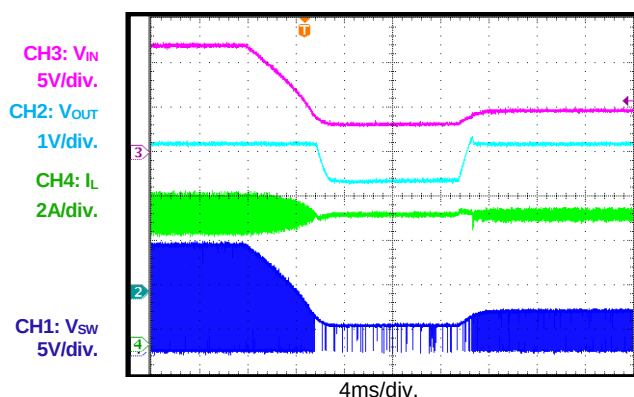 $V_{IN} = 12V$  to 3.3V to 5V,  $I_{OUT} = 6A$ 


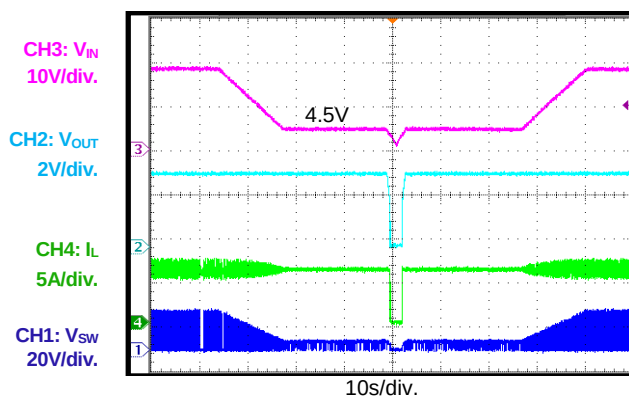
## VIN Ramp Up and Down

 $I_{OUT} = 0.1A$ 


## VIN Ramp Down and Up


 $I_{OUT} = 1mA$ 


## VIN Ramp Down and Up

 $I_{OUT} = 6A$ 


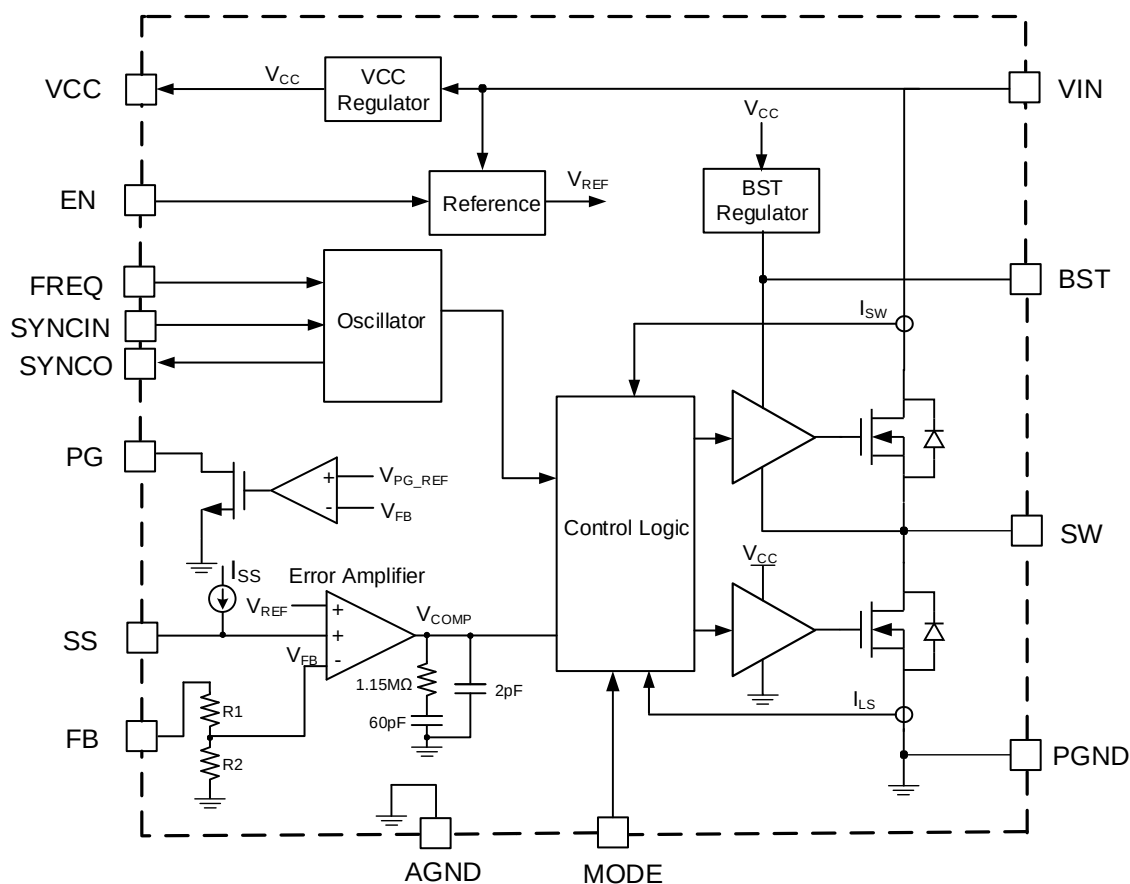


# FUNCTIONAL BLOCK DIAGRAMS

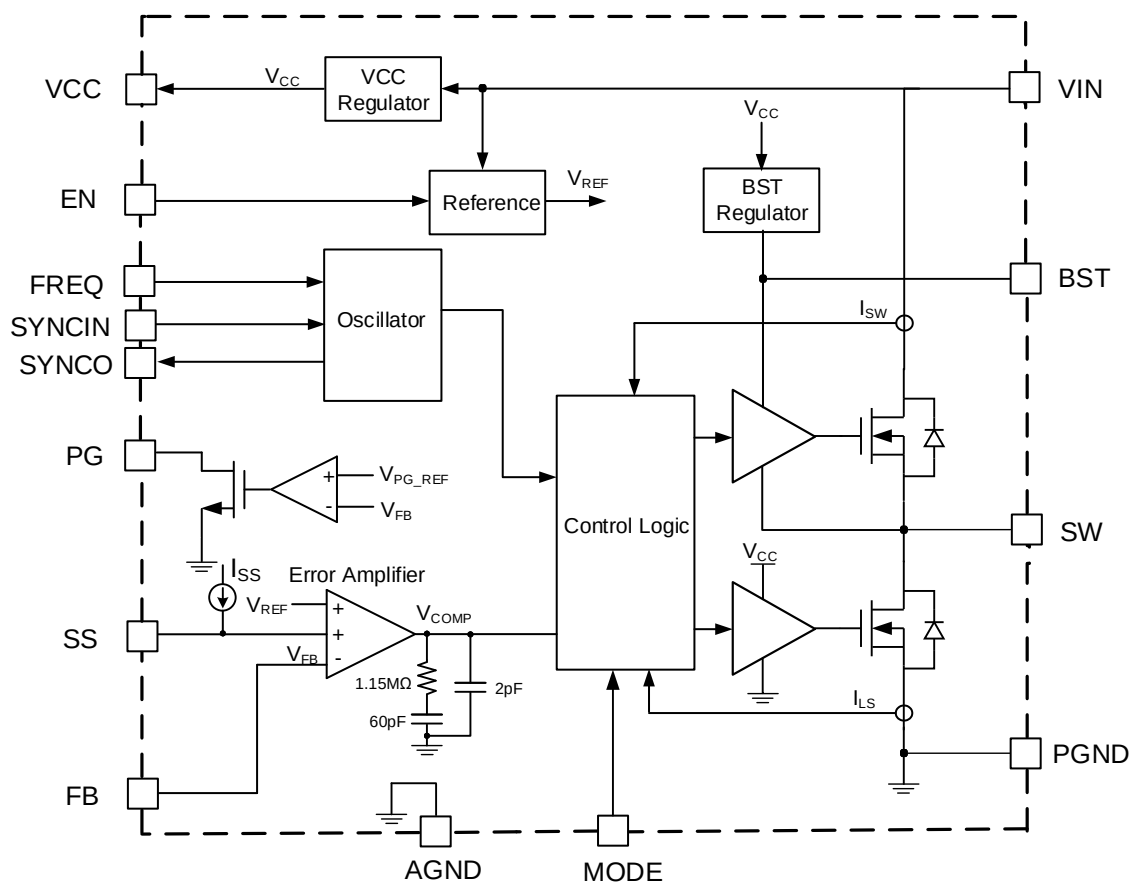

**Figure 3: Functional Block Diagram (Adjustable Output)**

## FUNCTIONAL BLOCK DIAGRAMS (continued)



**Figure 4: Functional Block Diagram (Fixed Output)**

## TIMING SEQUENCE

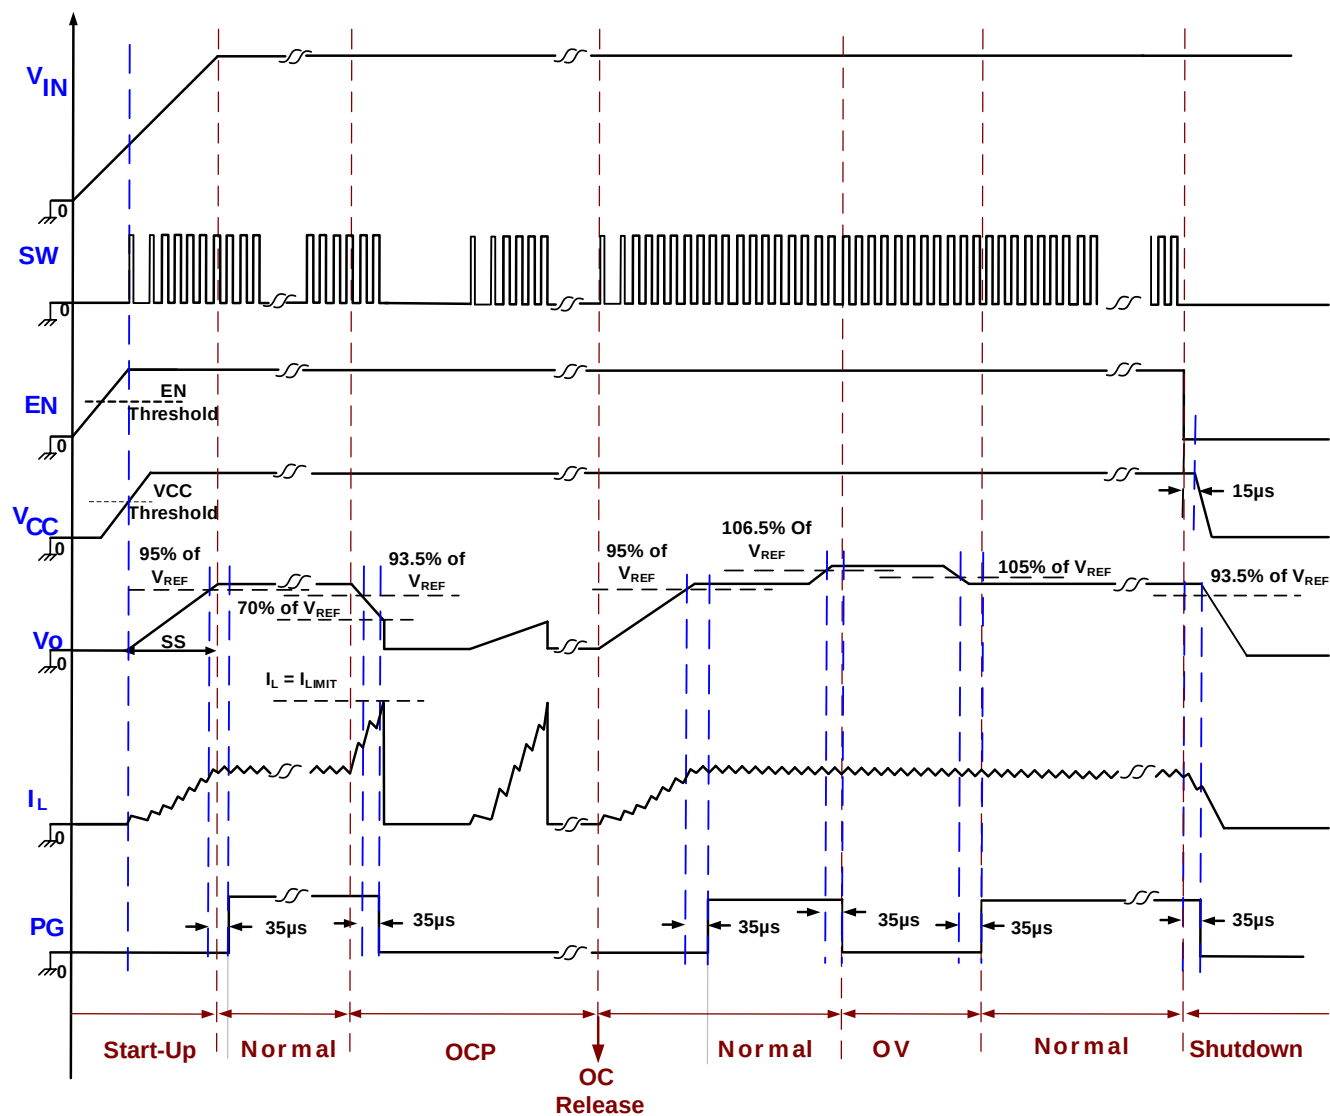


Figure 5: Timing Sequence

## OPERATION

The MPQ4316 is a synchronous, step-down switching converter with integrated internal high-side and low-side power MOSFETs. The device provides 6A of highly efficient output current with current mode control.

The MPQ4316 features a wide input voltage range, configurable switching frequency, external soft start, and a precise current limit. The device's low operational quiescent current makes it well-suited for battery-powered applications.

### PWM Control

At moderate to high output currents, the MPQ4316 operates with fixed-frequency, peak current control to regulate the output voltage. A PWM cycle is initiated by the internal clock. At the rising edge of the clock, the high-side power MOSFET (HS-FET) turns on. The HS-FET stays on until its current reaches the value set by the internal COMP voltage ( $V_{COMP}$ ). The HS-FET stays on for at least 100ns.

When the HS-FET is off, the low-side MOSFET (LS-FET) immediately turns on, and stays on until the next cycle starts. The LS-FET remains on for at least 80ns before the next cycle starts.

If the current in the HS-FET does not reach the value set by COMP within one PWM period, the HS-FET remains on, which saves a turn-off operation. The HS-FET is forced off if it stays on for about 10 $\mu$ s, even if it does not reach the value set by COMP.


### Light-Load Operation

Under light-load conditions, the MPQ4316 can work in two different operation modes based on the MODE pin.

The MPQ4316 works in forced continuous conduction mode (FCCM) when the MODE pin is pulled above 1.8V. In FCCM, the device works with a fixed frequency from no-load to full-load conditions. The advantage of FCCM is its controllable frequency and lower output ripple under light loads.

The MPQ4316 works in advanced asynchronous mode (AAM) when the MODE pin is pulled below 0.4V. AAM optimizes efficiency under light-load and no-load conditions.

When AAM is enabled, the MPQ4316 enters asynchronous operation while the inductor current approaches 0A under light loads (see Figure 6). If the load is further decreased or there is no load, the internal COMP voltage ( $V_{COMP}$ ) drops to the set value, and MPQ4316 enters AAM.

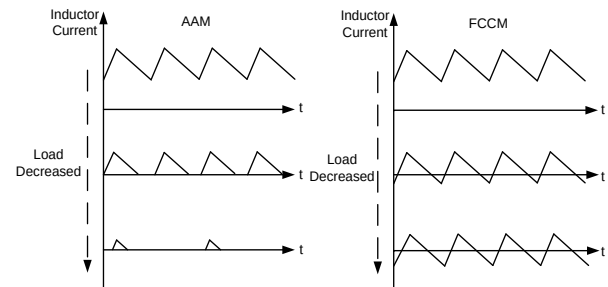

**Figure 6: AAM and FCCM**

In AAM, the internal clock resets when  $V_{COMP}$  crosses the set value. The crossover time is used as a benchmark for the next clock. When the load increases and  $V_{COMP}$  exceeds the set value, the device operates in discontinuous conduction mode (DCM) or CCM, which have a constant switching frequency.

### Error Amplifier (EA)

The error amplifier (EA) compares the FB pin voltage ( $V_{FB}$ ) to the internal reference voltage (0.815V), and outputs a current that is proportional to the difference between the voltages. This output current charges the compensation network to form  $V_{COMP}$ , which controls the power MOSFET current.

During normal operation, the minimum  $V_{COMP}$  is clamped to 0.9V, and its maximum is clamped to 2.0V. COMP is internally pulled down to GND when the device shuts down.

### Internal Regulator (VCC)

The internal 4.9V regulator (VCC) powers most of the internal circuitry. This regulator uses  $V_{IN}$  as the input and operates in the full  $V_{IN}$  range. When  $V_{IN}$  exceeds 4.9V, VCC is in full regulation. When  $V_{IN}$  is below 4.9V, the VCC output degrades.

### Bootstrap Charging

The bootstrap capacitor is charged and regulated to about 5V by the dedicated internal bootstrap regulator. When the voltage between

the BST and SW nodes drops below its regulated value, a P-channel MOSFET pass transistor connected from VCC to BST turns on to charge the bootstrap capacitor. The external circuit should provide enough voltage headroom to facilitate the charging. When the HS-FET is on, BST exceeds VCC, which means that the bootstrap capacitor cannot be charged.

Under higher duty cycles, there is less time for the bootstrap capacitor to charge, so the bootstrap capacitor may not be charged sufficiently. If the external circuit has an insufficient voltage (or not enough time) to charge the bootstrap capacitor, use additional external circuitry to ensure that the bootstrap voltage stays in the normal operation region.

### Low-Dropout Operation and Refreshing BST

To improve dropout, the MPQ4316 is designed to operate at close to 100% duty cycle when the difference between the voltages on the BST and SW pins exceeds 2.5V. When the voltage from BST to SW drops below 2.5V, the high side MOSFET turns off using an under-voltage lockout (UVLO) circuit. This allows the LS-FET to conduct and refresh the charge on the BST capacitor. In DCM or pulse-skip mode (PSM), the LS-FET is forced on to refresh the BST voltage.

Since the supply current sourced from the BST capacitor is low, the HS-FET can remain on for more switching cycles than are required to refresh the capacitor. As a result, the effective duty cycle of the switching regulator is high.

The regulator's effective duty cycle during dropout is mainly influenced by the voltage drops across the power MOSFET, inductor resistance, low-side diode, and PCB resistance.

### Enable (EN) Control

EN is a digital control pin that turns the regulator on and off.

### Enabled by an External Logic (High/Low) Signal

When EN is pulled below its falling threshold voltage (about 0.85V), the chip operates in the lowest shutdown current mode. Force EN above its rising threshold voltage (about 1V) to turn the part on.

### Configurable $V_{IN}$ Under-Voltage Lockout (UVLO)

When  $V_{IN}$  is sufficiently high, the chip can be enabled and disabled via the EN pin. With an internal current source, the circuit can generate a configurable  $V_{IN}$  UVLO threshold and hysteresis. Use resistor dividers to set the EN voltage (see Figure 7).




Figure 7: Enable Divider Circuit

### Configurable Frequency and Foldback

The MPQ4316's oscillating frequency can be configured via an external resistor ( $R_{FREQ}$ ) connected from the FREQ pin to ground, or by a logic level SYNC signal.

To set the switching frequency ( $f_{SW}$ ), select  $R_{FREQ}$  using the  $f_{SW}$  vs.  $R_{FREQ}$  curve on page 15. Note that when  $f_{SW}$  is set high, it may fold back at high input voltages to avoid triggering a minimum on time and forcing the output out of regulation.


The  $f_{SW}$  for car battery applications is between 350kHz and 1000kHz. Table 1 lists the recommended  $R_{FREQ}$  values for common frequencies. Higher frequencies can be used in applications that do not have a critical switching frequency limit, as well as applications with a low and stable input voltage.

Table 1:  $R_{FREQ}$  vs.  $f_{SW}$

| $R_{FREQ}$ (k $\Omega$ ) | $f_{SW}$ (kHz) |
|--------------------------|----------------|
| 86.6                     | 350            |
| 80.6                     | 380            |
| 75                       | 410            |
| 62                       | 470            |
| 59                       | 500            |
| 54.9                     | 530            |
| 49.9                     | 590            |
| 45.3                     | 640            |
| 41.2                     | 700            |
| 37.4                     | 760            |
| 34                       | 830            |
| 30.9                     | 910            |
| 28.7                     | 960            |
| 26.1                     | 1000           |

## Frequency Spread Spectrum (FSS)

The MPQ4316 uses a 12kHz modulation frequency with a fixed 128-step triangular profile to spread the internal oscillator frequency across a 20% (±10%) window (see Figure 8). The steps are fixed and independent of the set oscillator frequency, which optimizes the frequency spread spectrum (FSS) performance.

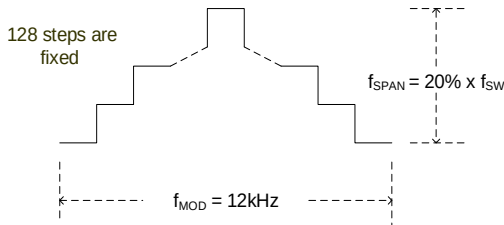

**Figure 8: Spread Spectrum Scheme**

Side bands are created by modulating the switching frequency with the triangle modulation waveform. This reduces the emission power of the fundamental switching frequency, as well as its harmonics, which then reduces peak EMI noise.

## Soft Start

Soft start is implemented to prevent the converter's output voltage from overshooting during start-up.

When soft start begins, an internal current source begins charging the external soft-start capacitor. When the soft-start voltage ( $V_{SS}$ ) is below the internal reference voltage ( $V_{REF}$ ),  $V_{SS}$  overrides  $V_{REF}$ , so the error amplifier uses  $V_{SS}$  as the reference. When  $V_{SS}$  exceeds  $V_{REF}$ , the error amplifier uses  $V_{REF}$  as the reference.

$C_{SS}$  can be calculated with Equation (1):

$$C_{SS}(\text{nF}) = \frac{t_{SS}(\text{ms}) \times I_{SS}(\mu\text{A})}{V_{REF}(\text{V})} = 13.5 \times t_{SS}(\text{ms}) \quad (1)$$

The SS pin can be used for tracking and sequencing.

## Pre-Biased Start-Up

If  $V_{FB}$  exceeds  $V_{SS} - 150\text{mV}$  during start-up, this means that the output has a pre-biased voltage. In the scenario, the HS-FET and LS-FET do not turn on until  $V_{SS}$  rises above  $V_{FB}$ .

## Thermal Shutdown

Thermal shutdown is implemented to protect the chip from thermal runaway. If the silicon die temperature rises above its upper threshold, the

device shuts down the power MOSFETs. When the temperature falls below the lower threshold, the chip is re-enabled.

## Current Comparator and Current Limit

The power MOSFET's current is accurately sensed via a current-sense MOSFET. Then this current is fed to the high speed current comparator for current mode control. The current comparator uses this sensed current as one of its inputs.

When the HS-FET turns on, the comparator is blanked until the end of the turn-on transition to mitigate noise. The comparator compares the power switch's current to the value set by the COMP voltage. When the sensed current exceeds the value set by COMP, the comparator outputs low to turn off the HS-FET. The maximum current of the internal power MOSFET is internally limited cycle by cycle.

## Hiccup Protection

If the output is shorted to ground, the output voltage may drop below 70% of its nominal output. If this occurs, the MPQ4316 shuts down momentarily and begins discharging the soft-start capacitor. The device restarts with a full soft start when the soft-start capacitor is fully discharged. This process is repeated until the fault is removed.

## Start-Up and Shutdown

If both  $V_{IN}$  and EN exceed their appropriate thresholds, the chip starts. The reference block starts first, generating a stable reference voltage and currents, and then the internal regulator is enabled. The regulator provides a stable supply for the remaining circuitries.

While the internal supply rail is up, an internal timer holds the power MOSFET off for about 50μs to blank the start-up glitches. When the soft-start block is enabled, the SS output stays low to ensure that the remaining circuitries are ready before slowly ramping up.

Three events can shut down the chip: EN going low,  $V_{IN}$  going low, and thermal shutdown. When shutdown is initiated, the signaling path is first blocked to avoid any fault triggering. Next, the COMP voltage and the internal supply rail

are pulled down. The floating driver is not subject to this shutdown command, but its charging path is disabled.

### **Power Good (PG) Output**

The MPQ4316 includes an open-drain power good (PG) output. If using the PG pin, connect it to a power source using a pull-up resistor. PG goes high if the output voltage is within 95% to 105% of the nominal voltage. PG goes low if the output voltage is above 106.5% or below 93.5% of the nominal voltage.

### **SYNCIN and SYNCO**

The switching frequency can be synchronized to the rising edge of the clock signal applied at SYNCIN. The recommended SYNCIN frequency range is between 350kHz and 1000kHz. Ensure that SYNCIN's off time is shorter than the internal oscillator period. Otherwise, the internal clock may turn on the HS-FET before the rising edge of SYNCIN.

There is no limit for the SYNCIN pulse width, but there is always parasitic capacitance on the pad. If the pulse width is too short, a clear rising and falling edge may not be achieved due to the parasitic capacitance. It is recommended to make the pulse longer than 100ns.

When using SYNCIN in AAM, drive SYNCIN below its specified threshold (about 0.4V), or float the SYNCIN pin before starting up the MPQ4316. Then add the external SYNCIN clock. Connect a resistor from SYNCIN to GND to avoid floating SYNCIN when using this function. It recommended to use a 10kΩ to 51kΩ resistor.


The SYNCO pin provides a default 180° phase-shifted clock for the internal oscillator. If there is no external SYNCIN clock, SYNCO can provide a 180° phase-shift clock that is compared to the internal clock.



## APPLICATION INFORMATION

### Setting the Output Voltage

The external resistor divider connected to FB sets the output voltage (see Figure 9).

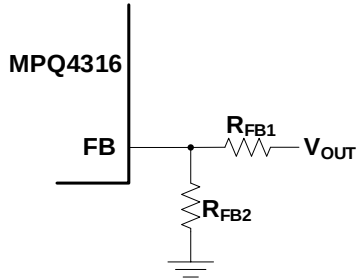

**Figure 9: Feedback Network**

Calculate R<sub>FB2</sub> with Equation (2):

$$R_{FB2} = \frac{R_{FB1}}{\frac{V_{OUT}}{0.815V} - 1} \quad (2)$$

Table 2 lists the recommended feedback resistor values for common output voltages.

**Table 2: Resistor Selection for Output Voltages**

| V <sub>OUT</sub> (V) | R <sub>FB1</sub> (kΩ) | R <sub>FB2</sub> (kΩ) |
|----------------------|-----------------------|-----------------------|
| 3.3                  | 100 (1%)              | 32.4 (1%)             |
| 5                    | 100 (1%)              | 19.6 (1%)             |

### Selecting the Input Capacitor

The step-down converter has a discontinuous input current, and requires a capacitor to supply AC current to the converter while maintaining the DC input voltage. For the best performance, use low-ESR capacitors. Ceramic capacitors with X5R or X7R dielectrics are highly recommended due to their low ESR and small temperature coefficients.

For most applications, use a 4.7μF to 10μF capacitor. It is strongly recommended to use another lower-value capacitor (e.g. 0.1μF) with a small package size (0603) to absorb high-frequency switching noise. Place the smaller capacitor as close to V<sub>IN</sub> and GND as possible.

Since the input capacitor (C<sub>IN</sub>) absorbs the input switching current, it requires an adequate ripple current rating. The RMS current in the input capacitor can be estimated with Equation (3):

$$I_{CIN} = I_{LOAD} \times \sqrt{\frac{V_{OUT}}{V_{IN}} \times (1 - \frac{V_{OUT}}{V_{IN}})} \quad (3)$$

The worst-case condition occurs at V<sub>IN</sub> = 2V<sub>OUT</sub>, calculated with Equation (4):

$$I_{CIN} = \frac{I_{LOAD}}{2} \quad (4)$$

For simplification, choose an input capacitor with an RMS current rating greater than half of the maximum load current.

The input capacitor can be electrolytic, tantalum, or ceramic. When using electrolytic or tantalum capacitors, place a small, high-quality ceramic capacitor (e.g. 0.1μF) as close to the device as possible.

When using ceramic capacitors, ensure that they have enough capacitance to provide a sufficient charge to prevent an excessive voltage ripple at the input. The input voltage ripple caused by the capacitance can be estimated with Equation (5):

$$\Delta V_{IN} = \frac{I_{LOAD}}{f_{SW} \times C_{IN}} \times \frac{V_{OUT}}{V_{IN}} \times (1 - \frac{V_{OUT}}{V_{IN}}) \quad (5)$$

### Selecting the Output Capacitor

The output capacitor maintains the DC output voltage. Use ceramic, tantalum, or low-ESR electrolytic capacitors. For the best results, use low-ESR capacitors to keep the output voltage ripple low. The output voltage ripple can be calculated with Equation (6):

$$\Delta V_{OUT} = \frac{V_{OUT}}{f_{SW} \times L} \times (1 - \frac{V_{OUT}}{V_{IN}}) \times (R_{ESR} + \frac{1}{8 \times f_{SW} \times C_{OUT}}) \quad (6)$$

Where L is the inductor value, and R<sub>ESR</sub> is the equivalent series resistance (ESR) value of the output capacitor.

For ceramic capacitors, the capacitance dominates the impedance at the switching frequency and causes most of the output voltage ripple. For simplification, the output voltage ripple can be estimated with Equation (7):

$$\Delta V_{OUT} = \frac{V_{OUT}}{8 \times f_{SW}^2 \times L \times C_{OUT}} \times (1 - \frac{V_{OUT}}{V_{IN}}) \quad (7)$$



For tantalum or electrolytic capacitors, the ESR dominates the impedance at the switching frequency. For simplification, the output ripple can be calculated with Equation (8):

$$\Delta V_{OUT} = \frac{V_{OUT}}{f_{SW} \times L} \times \left(1 - \frac{V_{OUT}}{V_{IN}}\right) \times R_{ESR} \quad (8)$$

The characteristics of the output capacitor also affect the stability of the regulation system. The MPQ4316 can be optimized for a wide range of capacitance and ESR values.

### Selecting the Inductor

A 1μH to 10μH inductor with a DC current rating at least 25% higher than the maximum load current is recommended for most applications. For higher efficiency, choose an inductor with a lower DC resistance. A larger-value inductor results in less ripple current and a lower output ripple voltage, but also has a larger physical size, higher series resistance, and lower saturation current. A good rule to determine the inductor value is to allow the inductor ripple current to be approximately 30% of the maximum load current. The inductance can be estimated with Equation (9):

$$L = \frac{V_{OUT}}{f_{SW} \times \Delta I_L} \times \left(1 - \frac{V_{OUT}}{V_{IN}}\right) \quad (9)$$


Where  $\Delta I_L$  is the peak-to-peak inductor ripple current.

Choose the inductor ripple current to be approximately 30% of the maximum load current. The maximum inductor peak current can be calculated with Equation (10):

$$I_{LP} = I_{LOAD} + \frac{V_{OUT}}{2 \times f_{SW} \times L} \times \left(1 - \frac{V_{OUT}}{V_{IN}}\right) \quad (10)$$

### V<sub>IN</sub> Under-Voltage Lockout (UVLO) Setting

The MPQ4316 has an internal fixed under-voltage lockout (UVLO) threshold. The rising threshold is 3V, while the falling threshold is about 2.7V. For applications that require a higher UVLO point, place an external resistor divider between VIN and EN to raise the equivalent UVLO threshold (see Figure 10).

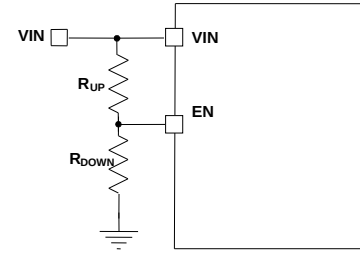

**Figure 10: Adjustable UVLO Using EN Divider**

The UVLO rising and falling thresholds can be calculated with Equation (11) and Equation (12), respectively:


$$INUV_{RISING} = \left(1 + \frac{R_{UP}}{R_{DOWN}}\right) \times V_{EN\_RISING} \quad (11)$$

$$INUV_{FALLING} = \left(1 + \frac{R_{UP}}{R_{DOWN}}\right) \times V_{EN\_FALLING} \quad (12)$$

Where  $V_{EN\_RISING}$  is 1V, and  $V_{EN\_FALLING}$  is 0.85V.

### Selecting the External BST Diode and Resistor

An external BST diode can enhance the regulator's efficiency when the duty cycle is high. A power supply between 2.5V and 5V can be used to power the external bootstrap diode. It is recommended to make V<sub>CC</sub> or V<sub>OUT</sub> the power supply in the circuit (see Figure 11).

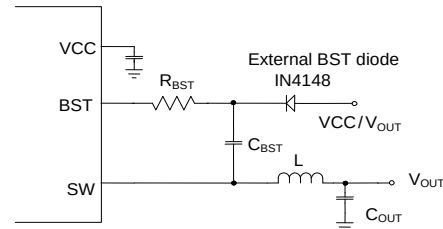

**Figure 11: Optional External Bootstrap Diode to Enhance Efficiency**

The recommended external BST diode is IN4148, and the recommended BST capacitor value is between 0.1μF and 1μF. Connect a resistor (R<sub>BST</sub>) in series with the BST capacitor to reduce the SW rising rate and voltage spikes. This enhances EMI performance and reduces voltage stress at higher input voltages. A higher resistance reduces SW spikes but compromises efficiency. It is recommended for R<sub>BST</sub> to be ≤20Ω.

## Selecting the VCC Capacitor

The VCC capacitor should have a capacitance that is 10 times larger than the boost capacitor's capacitance. It is not recommended for the VCC capacitor to exceed 68μF.


## PCB Layout Guidelines <sup>(9)</sup>

Efficient PCB layout, especially for the input capacitor placement, is critical for stable operation. A four-layer layout is strongly recommended to improve thermal performance. For the best results, refer to Figure 12 and follow the guidelines below:


1. Place symmetric input capacitors as close to VIN and GND as possible.
2. Connect a large copper plane directly to PGND.
3. Add vias near PGND if the bottom layer is a ground plane.
4. Ensure that the high-current paths at GND and VIN have short, direct, and wide traces.
5. Place the ceramic input capacitor, especially the small package size (0603) input bypass capacitor, as close to VIN and PGND as possible to minimize high-frequency noise.
6. Keep the connection between the input capacitor and VIN as short and wide as possible.
7. Place the VCC capacitor as close to VCC and GND as possible.
8. Route SW and BST away from sensitive analog areas, such as FB.
9. Place the feedback resistors close to the chip to ensure that the trace connecting to FB is as short as possible.
10. Use multiple vias to connect the power planes to the internal layers.

### Note:


9) The recommended PCB layout is based on Figure 13.

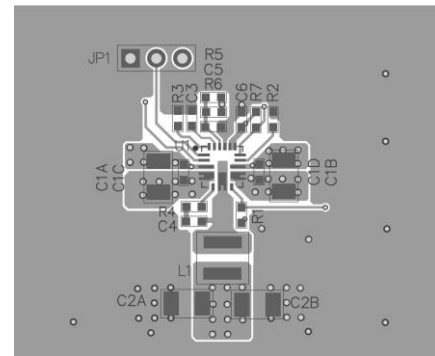


Top Layer

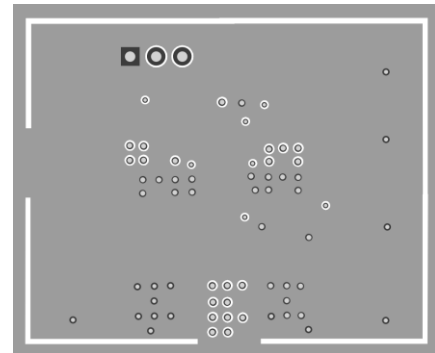

Inner Layer 1

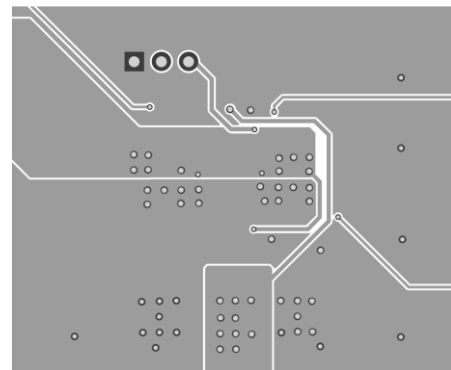


Inner Layer 2

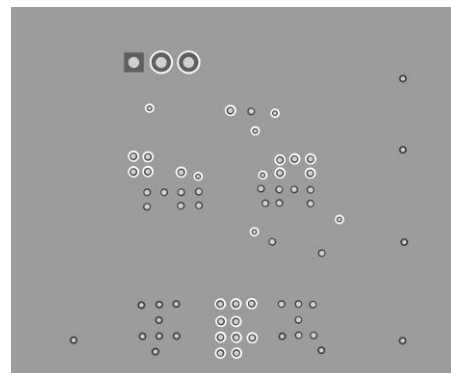


Bottom Layer

Figure 12: Recommended PCB Layout

## TYPICAL APPLICATION CIRCUITS

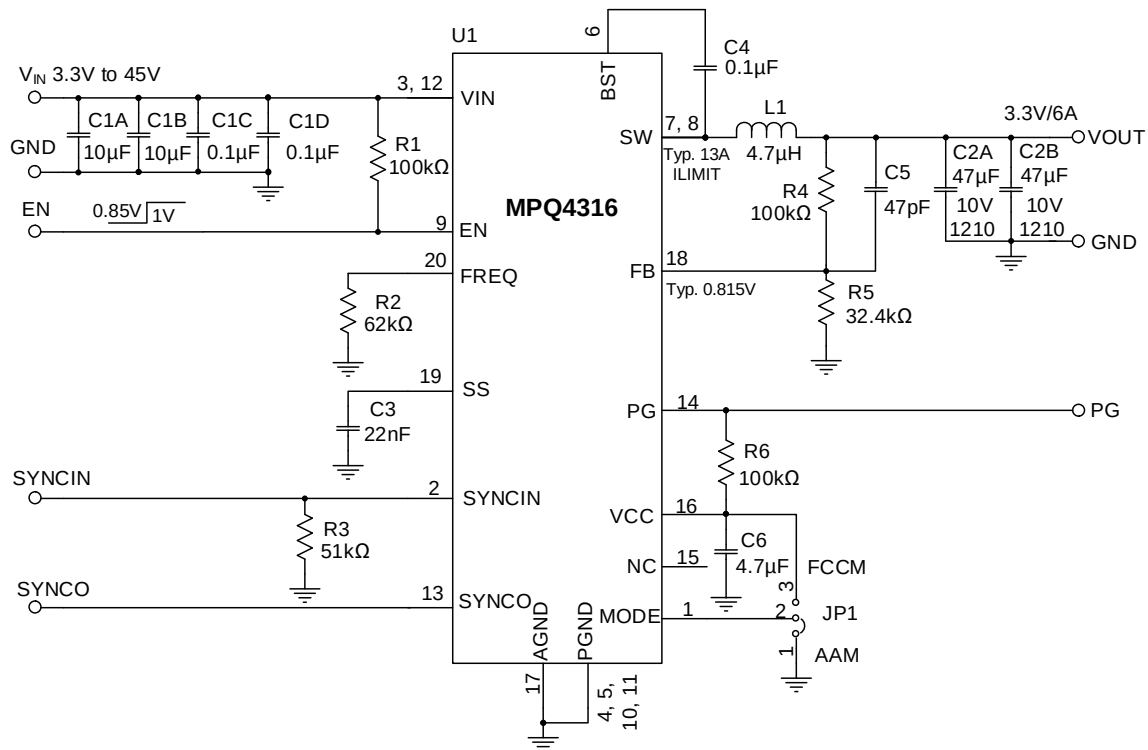


**Figure 13:  $V_{OUT} = 3.3V$ ,  $f_{SW} = 470kHz$**

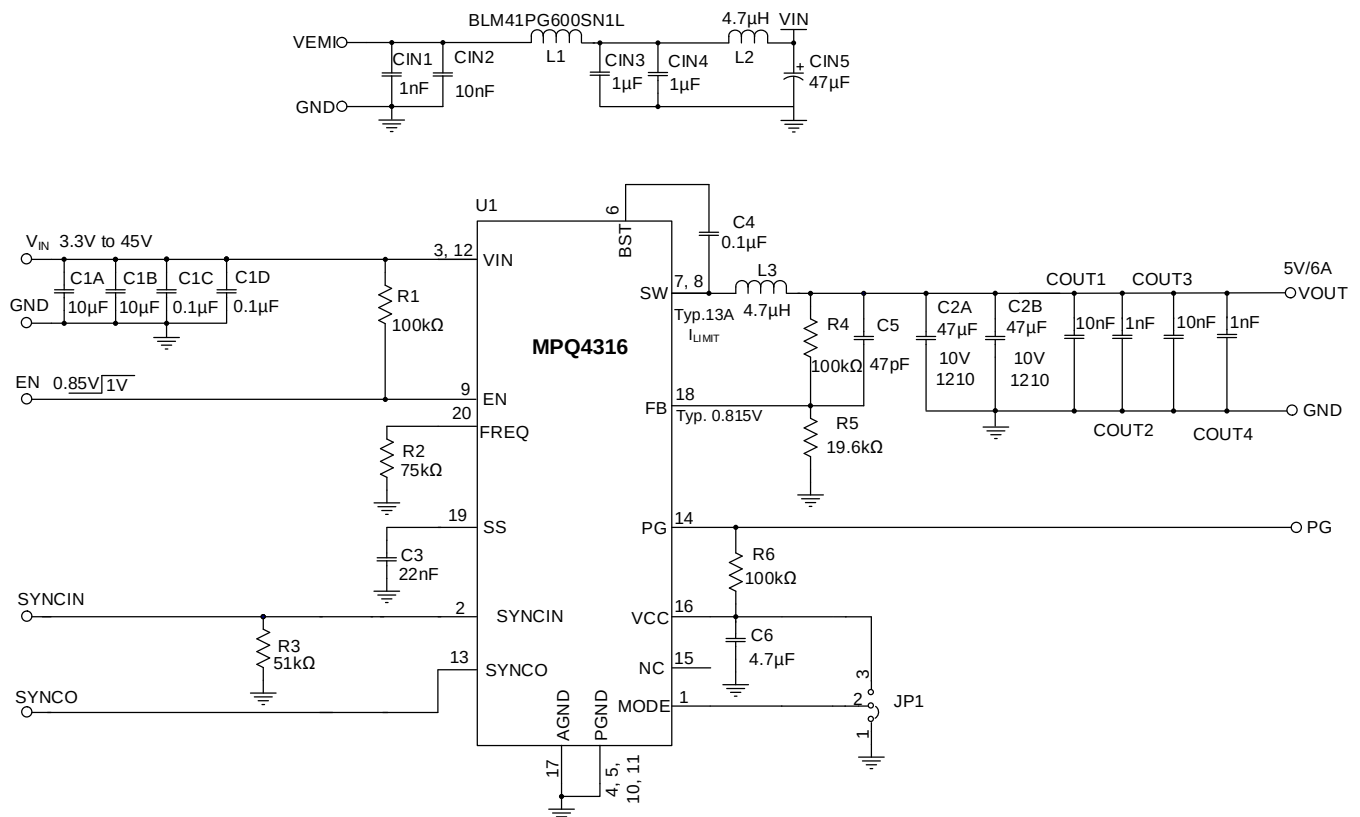

**Figure 14:  $V_{OUT} = 5V$ ,  $f_{SW} = 410kHz$  with EMI Filters**


## TYPICAL APPLICATION CIRCUITS *(continued)*

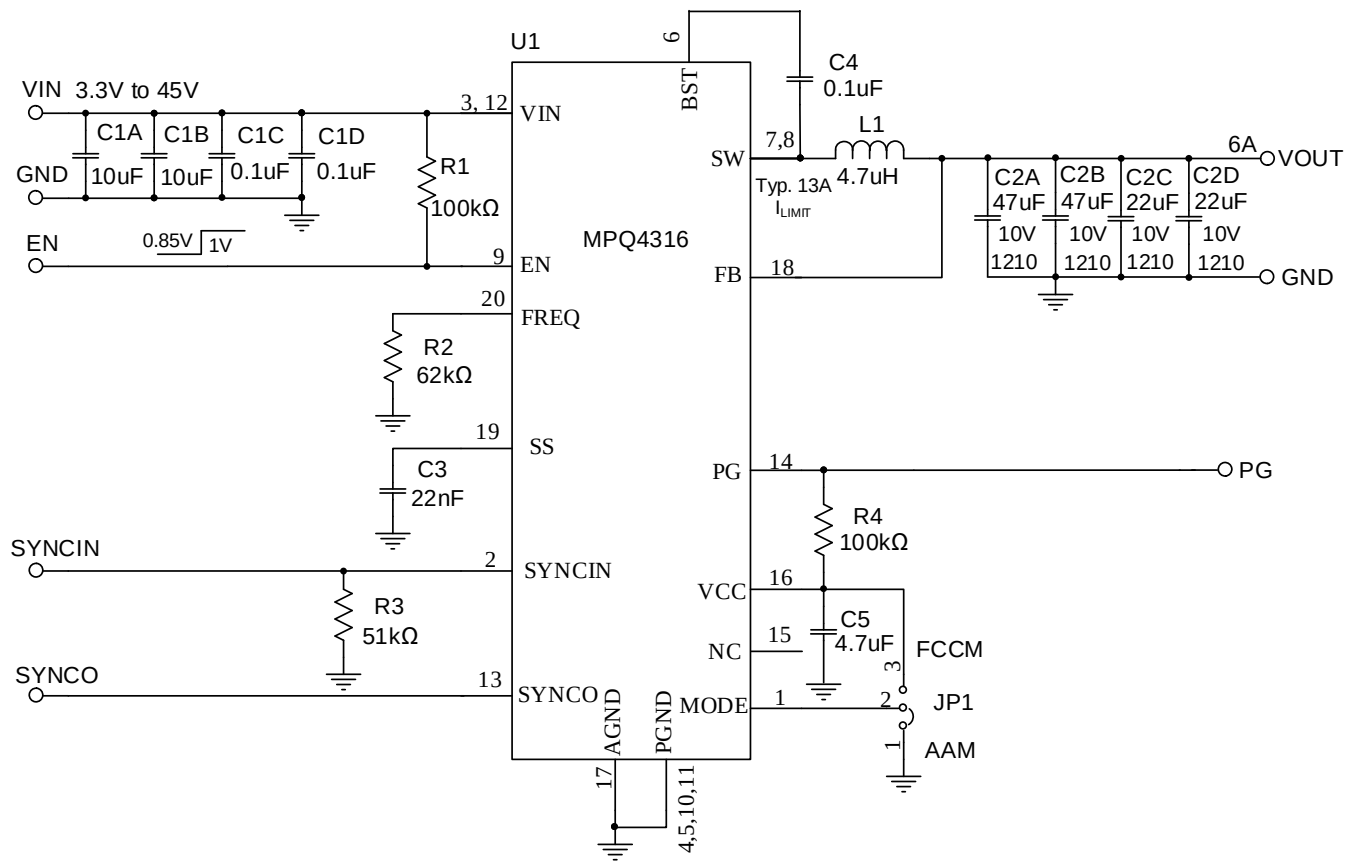


**Figure 15:  $f_{sw} = 470\text{kHz}$ , Fixed Output**

## PACKAGE INFORMATION


**QFN-20 (4mmx4mm)**  
**Wettable Flank**

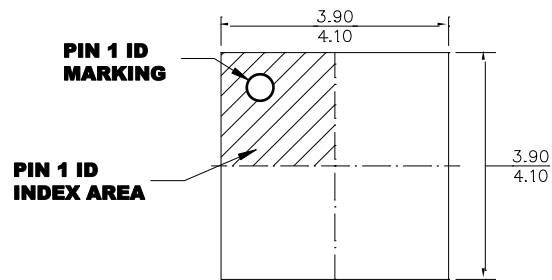


**TOP VIEW**

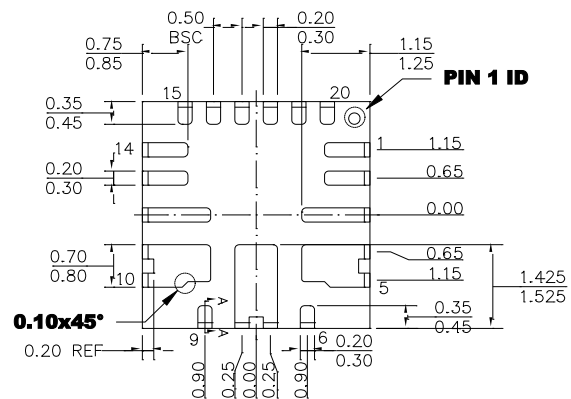


### BOTTOM VIEW



### SIDE VIEW



**SECTION A-A**

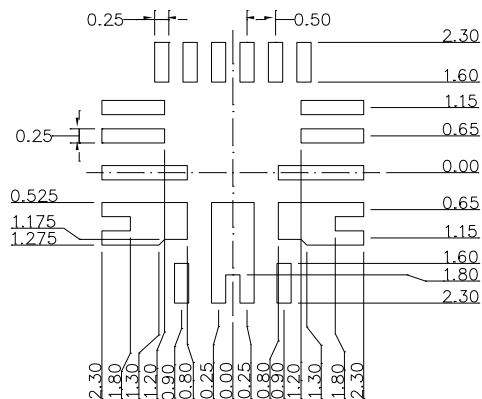


### **RECOMMENDED LAND PATTERN**

**NOTE:**

- 1) THE LEAD SIDE IS WETTABLE.
- 2) ALL DIMENSIONS ARE IN MILLIMETERS.
- 3) LEAD COPLANARITY SHALL BE 0.08 MILLIMETERS MAX.
- 4) JEDEC REFERENCE IS MO-220.
- 5) DRAWING IS NOT TO SCALE.

## CARRIER INFORMATION

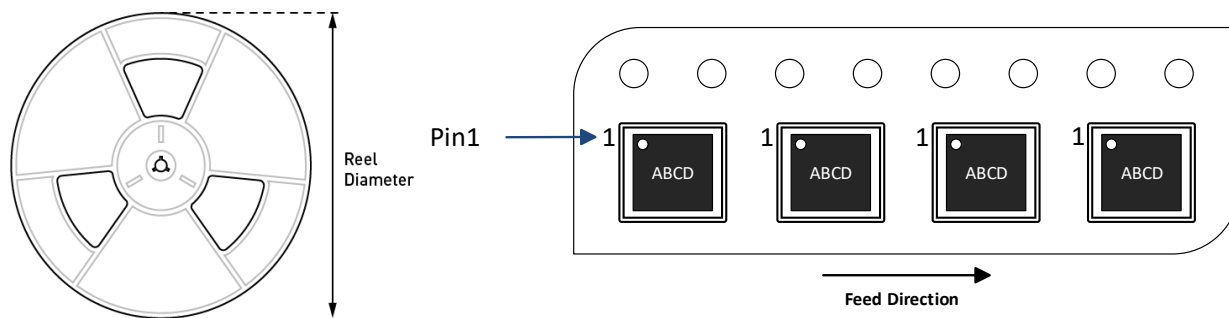

| Part Number          | Package Description | Quantity/ Reel | Quantity/ Tube <sup>(10)</sup> | Reel Diameter | Carrier Tape Width | Carrier Tape Pitch |
|----------------------|---------------------|----------------|--------------------------------|---------------|--------------------|--------------------|
| MPQ4316GRE-AEC1-Z    | QFN-20<br>(4mmx4mm) | 5000           | N/A                            | 13in          | 12mm               | 8mm                |
| MPQ4316GRE-33-AEC1-Z |                     |                |                                |               |                    |                    |
| MPQ4316GRE-5-AEC1-Z  |                     |                |                                |               |                    |                    |

**Note:**

10) N/A means “not available.” For 500 pieces tape and reel prototype quantities, see the factory. (The order code for 500 pieces partial reel is “-P”, while the tape and reel dimensions are the same as the full reel.)

## REVISION HISTORY

| Revision # | Revision Date | Description     | Pages Updated |
|------------|---------------|-----------------|---------------|
| 1.0        | 4/30/2021     | Initial Release | -             |

**Notice:** The information in this document is subject to change without notice. Please contact MPS for current specifications. Users should warrant and guarantee that third-party Intellectual Property rights are not infringed upon when integrating MPS products into any application. MPS will not assume any legal responsibility for any said applications.

# Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[Monolithic Power Systems \(MPS\):](#)

[MPQ4316GRE-5-AEC1-Z](#) [MPQ4316GRE-AEC1-P](#) [MPQ4316GRE-AEC1-Z](#) [MPQ4316GRE-33-AEC1-P](#)  
[MPQ4316GRE-33-AEC1-Z](#) [MPQ4316GRE-5-AEC1-P](#)