



VOLTAGE RANGE: 4000 - 5000V
CURRENT: 200mA

Features

- High voltage
- High current capability
- Low leakage current
- High surge capability
- Low cost

Mechanical Data

- Case: DO-15, Molded Plastic
- Terminals: Plated Leads Solderable per
- MIL-STD-202, Method 208
- Polarity: Cathode Band
- Weight: 0.40 grams (approx.)
- Mounting Position: Any
- Marking: Type Number

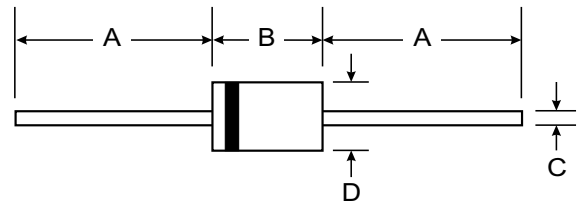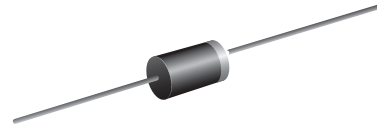

DO-15		
Dim	Min	Max
A	25.40	—
B	5.50	7.62
C	0.686	0.889
D	2.60	3.60
All Dimensions in mm		

Maximum Ratings and Electrical Characteristics @ T_A = 25°C unless otherwise specified

Single phase, half wave, 60Hz, resistive or inductive load. For capacitive load, derate current by 20%.

Characteristic	Symbol	R4000	R5000	Unit
Peak Repetitive Reverse Voltage	V _{RRM}	4000	5000	V
Working Peak Reverse Voltage	V _{RWM}			
DC Blocking Voltage	V _R			
RMS Reverse Voltage	V _{R(RMS)}	2800	3500	V
Average Rectified Output Current (Note 1) @ T _L = 55	I _O	200		mA
Non-Repetitive Peak Forward Surge Current 8.3ms single half sine-wave superimposed on rated load (JEDEC Method)	I _{FSM}	30		A
Forward Voltage @ I _F = 200mA	V _{FM}	5.0		V
Peak Reverse Leakage Current at Rated DC Blocking Voltage	I _{RM}	5.0		μA
Typical Junction Capacitance (Note 2)	C _j	15		pF
Typical Thermal Resistance Junction to Ambient	R _{θJA}	50		K/W
Operating and Storage Temperature Range	T _j , T _{STG}	-65 to +125		°C

Notes: 1. Valid provided that leads are kept at ambient temperature at a distance of 9.5mm from the case.
2. Measured at 1.0MHz and applied reverse voltage of 4.0V DC.



FIG. 1 - TYPICAL FORWARD CURRENT DERATING CURVE

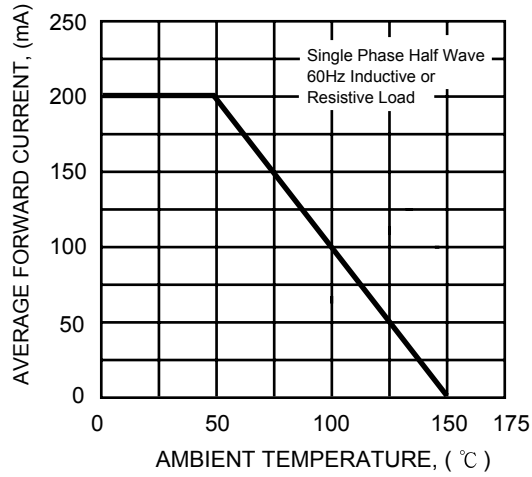


FIG. 2 - MAXIMUM NON-REPETITIVE FORWARD SURGE CURRENT


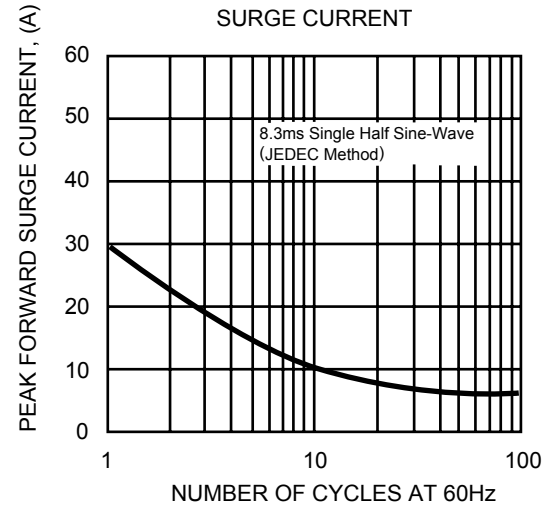


FIG. 3 - TYPICAL REVERSE CHARACTERISTICS

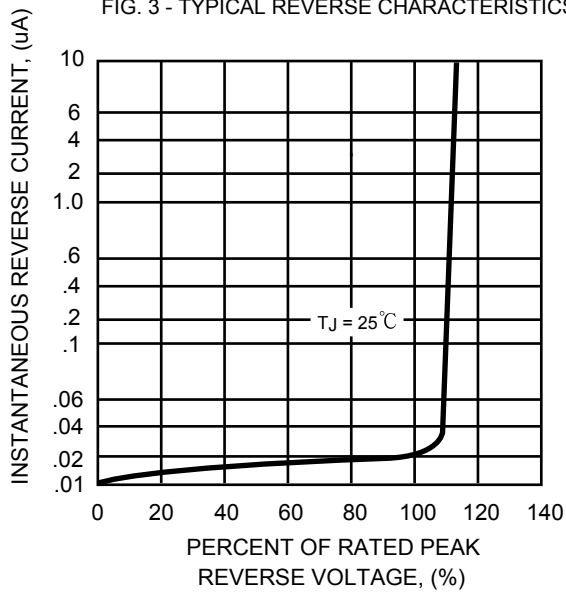

单击下面可查看定价，库存，交付和生命周期等信息

[>>SUNMATE\(森美特\)](#)