



MS1V-T1K

Tuning Fork Crystal 30 kHz – 200 kHz

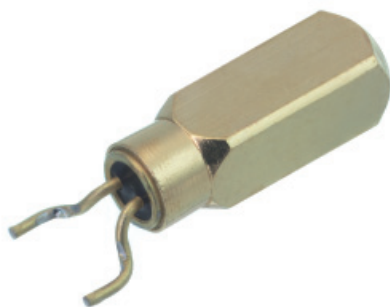


RoHS - compliant

DIMENSIONS

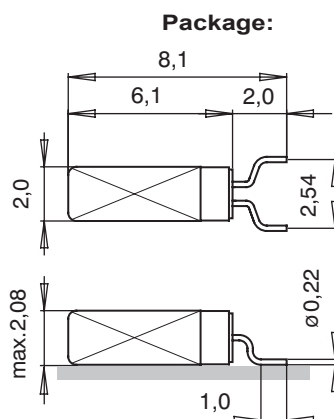

Recommended Solder Pad:

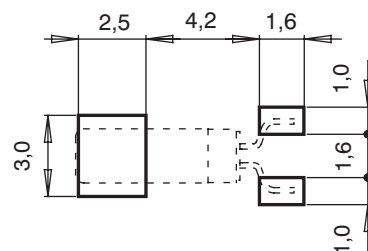

All dimensions in mm typical

Small SMT package
Package height 2.08 mm max.
Formed leads for SMD mounting
Industrial temp. range
Very price competitive
High stability
Low aging
Low power consumption
High shock and vibration resistance

DESCRIPTION:

The MS1V-T1K is a square-bodied 2.0 x 8.1 x 2.0 mm metal-can package with formed leads, intended for surface mounting and reflow soldering. Within the package is a high-quality tuning fork quartz crystal resonator, manufactured with a precision high-volume photolithographic process and operating in the fundamental mode.

Due to highly automated, large-volume production, the MS1V-T1K is very price competitive and ideal for any consumer and industrial applications.

For pick-and-place equipment, the crystals are supplied in 16 mm tape:

7" (178 mm) reel with 2'000 crystals

13" (330 mm) reel with 8'000 crystals

ELECTRICAL CHARACTERISTICS AT 25°C:

Frequency Range	F_L	30–200	kHz
Load capacitance ¹⁾	C_L	7.0 / 9.0 / 12.5	pF
Frequency tolerance ²⁾	$\Delta F/F$	+/-20	ppm
	$\Delta F/F$	+/-100	ppm
Drive level max.	P	1.0	μW
Insulation resistance min.	R_i	500	MΩ
Aging first year max.	$\Delta F/F_0$	+/-3	ppm

Frequency Example ³⁾	F_L	32.000	32.768	76.800	kHz
Series resistance typ./max.	R_s	45 / 60	45 / 60	18 / 30	kΩ
Motional capacitance typ.	C_1	2.3	2.1	1.35	fF
Static capacitance typ.	C_0	0.9	0.9	0.9	pF
Turnover temperature	T_0	25 +/-5	25 +/-5	22 +/-5	°C
Frequency vs. temperature	$\Delta F/F_0$	$-0.035 \text{ ppm}/^\circ\text{C}^2 (T - T_0)^2 \text{ +/-10\%}$			ppm

1) For standard and other load capacitances consult factory.

2) Tighter and wider frequency tolerances on request.

3) Values for other frequencies consult factory.

STANDARD FREQUENCIES:

Frequency kHz				
32.000	32.768	38.400	40.000	60.000
75.000	76.800	77.500		
Other frequencies on request				

ENVIRONMENTAL CHARACTERISTICS:

		Conditions	Max. Dev.
Storage temperature range		-55 to +85°C	
TA Operating temperature range		-40 to +85°C	
Shock resistance	$\Delta F/F$	5000 g, 0.3 ms, 1/2 sine	+/-5 ppm
Vibration resistance	$\Delta F/F$	20 g / 10–2000 Hz	+/-5 ppm

TERMINATIONS AND PROCESSING:

Type	Termination	Processing
MS1V-T1N	Can: Au flashed Leads: Straight leads Au flashed	For trough-hole mounting 260°C / 20 sec. max
MS1V-T1K	Can: Au flashed Leads: Formed leads Au flashed	For SMD mounting Reflow soldering 260°C / 20 sec. max

PRODUCT DESCRIPTION AND ORDERING INFORMATION:

MS1V-T1K
32.768kHz
12.5pF
+/-20ppm
TA
QC

Frequency F_0
 C_L Load Capacitance
7.0 pF
9.0 pF
12.5 pF
Frequency tolerance
+/- 20 ppm
+/- 100 ppm

Temperature Range
TA = -40 to 85°C (Standard)

Optional:
if not defined,
'Standard' will apply

Qualification
QC = Commercial (Standard)

A unique part number will be generated for each product specification, i.e:

20xxxx-ML02	2'000 pcs (in 16mm tape on 7" reel)
20xxxx-PL08	8'000 pcs (in 16mm tape on 13" reel)

Please contact us.

All specifications subject to change without notice.



Micro Crystal AG
Mühlestrasse 14
CH-2540 Grenchen
Switzerland

Tel. +41 32 655 82 82
Fax +41 32 655 82 83
sales@microcrystal.com
www.microcrystal.com

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

Micro Crystal:

[200116-ML02](#) [200118-ML02](#) [200120-ML02](#) [201658-ML02](#) [200123-ML02](#) [200125-ML02](#) [200126-ML02](#) [200128-ML02](#) [201095-ML02](#) [200125-PL08](#)