
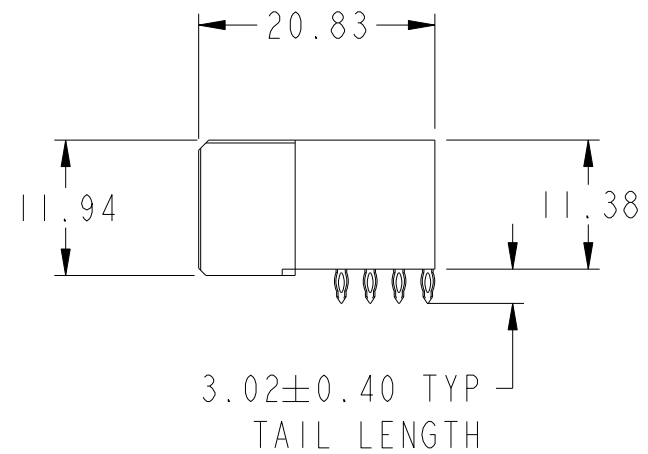

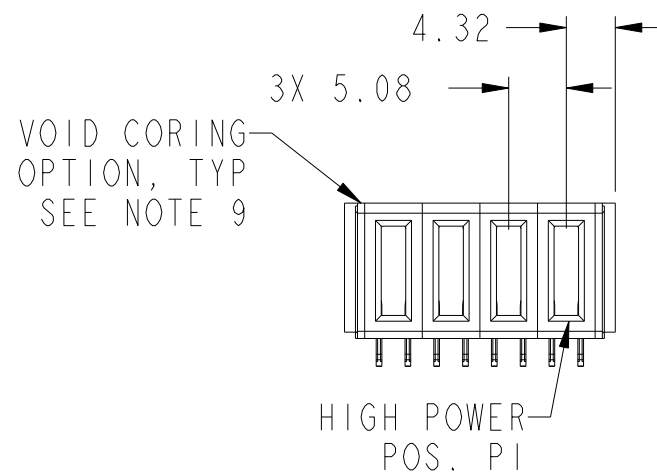


PRODUCT NUMBER SEE SHEET 2



spec ref				dr	Sunny2 Liu	2017/02/28	projection	MM	size	A3	scale	3:2		
tolerance std	TOLERANCES UNLESS OTHERWISE SPECIFIED			eng	Sunny2 Liu	2017/07/17			ecn no				-	
				chr	Fancy Zhang	2017/07/17			rel level				Released	
				appr	Pei-Ming Zheng	2017/07/17			product family				PwrBlade+	
ISO 406 ISO 1101	linear	0.X	±0.5	Amphenol FCi	title				4HDP	dwg no	10106135-4000001		rev	A
		0.XX	±0.25											
		0.XXX	±0.10											
	ISO 1302	angular	0°	±2°	cat. no.	Product - Customer Drw				sheet 1 of 3				

A

B

C

D

A


B

C

D

PRODUCT NO.	ROWS	HIGH POWER					
		E1	P4	P3	P2	P1	E2
10106135-4000001LF	D C B A	H7H7H7H7					



CODE	DESCRIPTION
H7	STD HIGH POWER CONTACT(3.02)

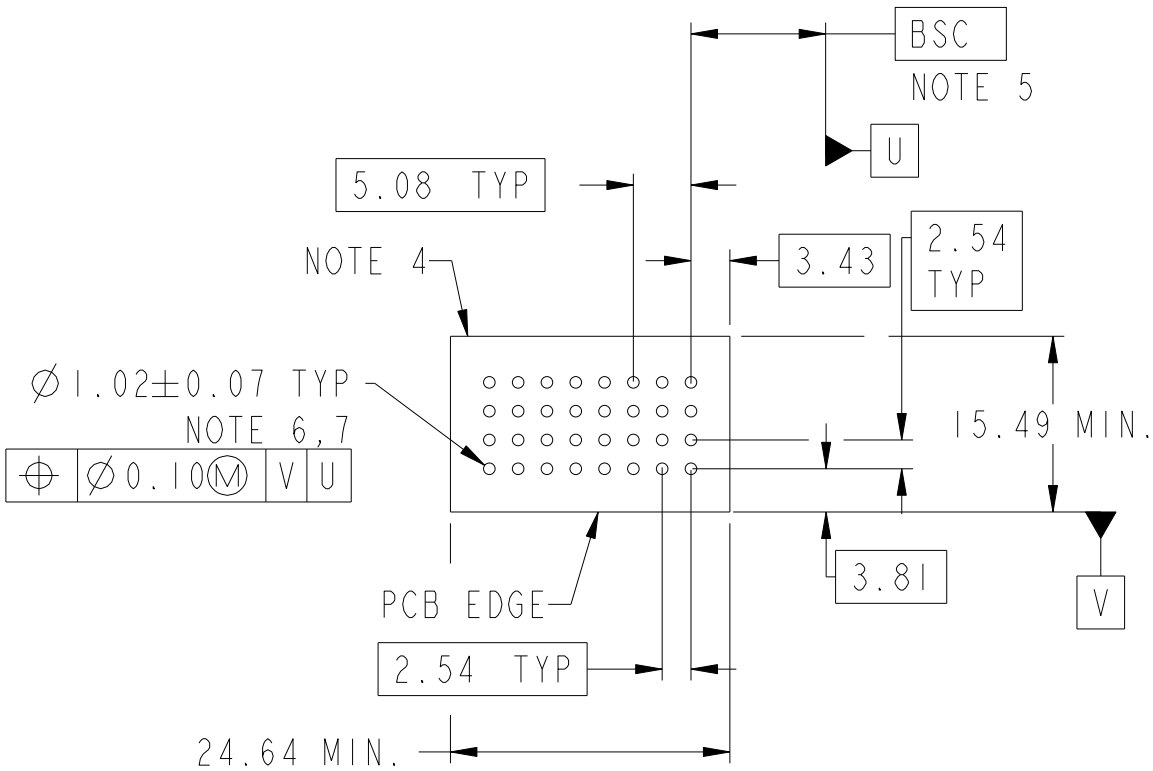

spec ref				dr		Sunny2 Liu		2017/02/28		projection		MM		size		A3		scale		3:2					
tolerance std		TOLERANCES UNLESS OTHERWISE SPECIFIED				eng		Sunny2 Liu						2017/07/17		ecn no						-			
ISO 406						chr		Fancy Zhang						2017/07/17		rel level						Released			
ISO 1101						appr		Pei-Ming Zheng		2017/07/17		product family						PwrBlade+							
surface ISO 1302		linear		0.X		±0.5		Amphenol FCi		title		4HDP		dwg no		10106135-4000001		rev		A					
				0.XX		±0.25																			
				0.XXX		±0.10																			
		angular		0°		±2°																cat. no.		Product - Customer Drw	

NOTES:

- 1) PRODUCT MARK:
PART NUMBER AND DATE CODE TO BE MARKED ON THIS SURFACE .
THE MARK CAN BE OMITTED IF THERE IS NOT ENOUGH SPACE ON THIS SURFACE.
- 2) MATERIALS:
-HOUSING : HIGH TEMP THERMOPLASTIC WITH GLASS FIBER, UL94V-0, BLACK.
-POWER CONTACT : HIGH CONDUCTIVITY COPPER ALLOY.
-SIGNAL CONTACT : COPPER ALLOY.
- 3) PLATING SPECIFICATION : 10116351
- 4) DENOTES CONNECTOR KEEP OUT ZONE.
- 5) DATUM AND BASIC DIMENIONS ARE ESTABLISHED BY CUSTOMER.
- 6) ALL HOLE DIAMETERS ARE FINISHED HOLE SIZES.
- 7) 1.15+/-0.025MM DRILLED HOLE PLATED WITH 0.00762MM MIN SN
OVER 0.0254-0.0762MM CU PLATING TO ACHIEVE A 1.02+/-0.07MM HOLE.
- 8) THE PRODUCT IS NOT INTENDED TO BE EXPOSED TO A MANUFACTURING SOLDER PROCESS.
- 9) THE VOID CORING IN BETWEEN POWER MODULES, SIGNAL MODULES AND
END MODULES ARE OPTIONAL AND THE SHAPE MAY BE DIFFERENT FOR
OPTIMIZE THE MOLDING PROCESS. THE VOID CORING WILL NOT EFFECT
TO PRODUCT FUNCTION.
- 10) THIS PRODUCT MEETS EUROPEN UNION DIRECTIVES AND OTHER COUNTRY
REGULATIONS AS DESCRIBED IN GS-47-0004.
- 11) PRODUCT SPECIFICATION : GS-12-658.
APPLICATION SPECIFICATION : GS-20-141.
PRODUCT PACKAGE SPECIFICATION: GS-14-1502.

spec ref				dr	Sunny2 Liu	2017/02/28	projection 	MM 	size	A3	scale	3:2
tolerance std ISO 406 ISO 1101	TOLERANCES UNLESS OTHERWISE SPECIFIED			eng	Sunny2 Liu	2017/07/17			ecn no -			
				chr	Fancy Zhang	2017/07/17			rel level Released			
				appr	Pei-Ming Zheng	2017/07/17	product family PwrBlade+					
surface  ISO 1302	linear	0.X	±0.5	Amphenol FCi	title 4HDP RA PF RECEPTACLE	dwg no 10106135-4000001	rev A	sheet 3 of 3				
		0.XX	±0.25									
		0.XXX	±0.10									
	angular		0°	±2°	cat. no.		Product - Customer Drw					