



Power Schottky Rectifier with common cathode

$$\begin{aligned} I_{FAV} &= 2 \times 15 \text{ A} \\ V_{RRM} &= 45 \text{ V} \\ V_F &= 0.54 \text{ V} \end{aligned}$$

V_{RSM}	V_{RRM}	Type
V	V	
45	45	DSSK 30-0045A



TO-247 AD

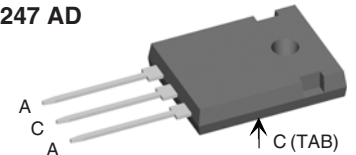

A = Anode, C = Cathode, TAB = Cathode

Symbol	Conditions	Maximum Ratings		Features
I_{FRMS}		50	A	• International standard package • Very low V_F • Extremely low switching losses • Low I_{RM}-values • Epoxy meets UL 94V-0
I_{FAV}	$T_C = 160^\circ\text{C}$; rectangular, $d = 0.5$	15	A	
I_{FAV}	$T_C = 160^\circ\text{C}$; rectangular, $d = 0.5$; per device	30	A	
I_{FSM}	$T_{VJ} = 45^\circ\text{C}$; $t_p = 10 \text{ ms}$ (50 Hz), sine	280	A	
E_{AS}	$I_{AS} = 15 \text{ A}$; $L = 180 \mu\text{H}$; $T_{VJ} = 25^\circ\text{C}$; non repetitive	32	mJ	
I_{AR}	$V_A = 1.5 \cdot V_{RRM}$ typ.; $f = 10 \text{ kHz}$; repetitive	1.5	A	Applications • Rectifiers in switch mode power supplies (SMPS) • Free wheeling diode in low voltage converters
$(dv/dt)_{cr}$		1000	V/ μs	
T_{VJ}		-55...+175	$^\circ\text{C}$	
T_{VJM}		175	$^\circ\text{C}$	
T_{stg}		-55...+150	$^\circ\text{C}$	
P_{tot}	$T_C = 25^\circ\text{C}$	105	W	Advantages • High reliability circuit operation • Low voltage peaks for reduced protection circuits • Low noise switching • Low losses
M_d	mounting torque	0.8...1.2	Nm	
Weight	typical	6	g	

Symbol	Conditions	Characteristic Values	
		typ.	max.
I_R ①	$V_R = V_{RRM}$; $T_{VJ} = 25^\circ\text{C}$	0.5	mA
	$V_R = V_{RRM}$; $T_{VJ} = 125^\circ\text{C}$	5	mA
V_F	$I_F = 15 \text{ A}$; $T_{VJ} = 125^\circ\text{C}$	0.54	V
	$I_F = 15 \text{ A}$; $T_{VJ} = 25^\circ\text{C}$	0.66	V
	$I_F = 30 \text{ A}$; $T_{VJ} = 125^\circ\text{C}$	0.66	V
R_{thJC}		1.4	K/W
R_{thCH}	0.25		K/W

Pulse test: ① Pulse Width = 5 ms, Duty Cycle < 2.0%

Data according to IEC 60747 and per diode unless otherwise specified:

Dimensions see Outlines.pdf

Recommended replacement:
DSA30C45HB/DSA60C45HB

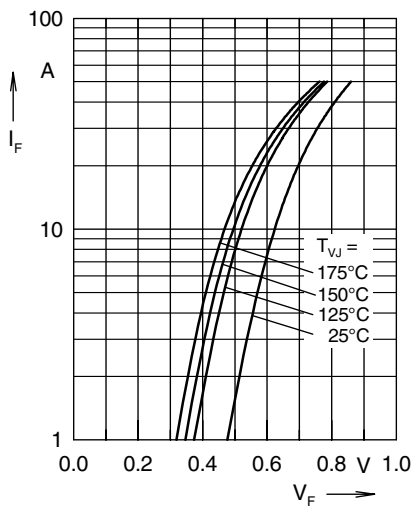


Fig. 1 Maximum forward voltage drop characteristics

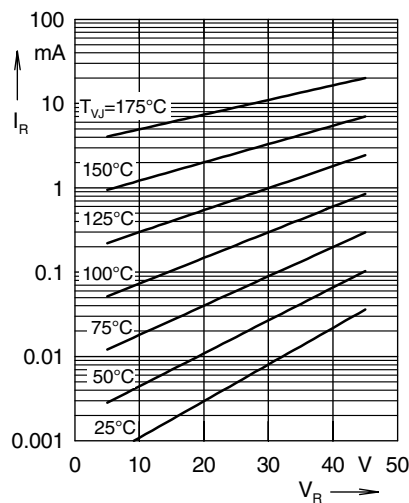


Fig. 2 Typ. value of reverse current I_R versus reverse voltage V_R

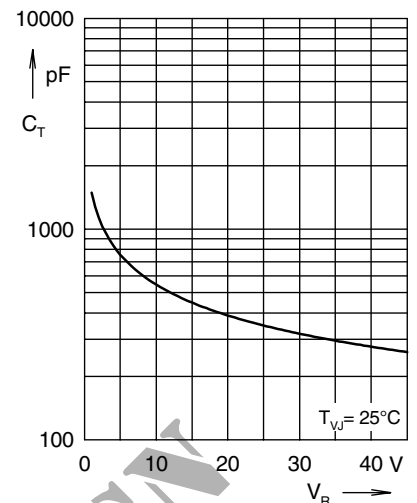


Fig. 3 Typ. junction capacitance C_T versus reverse voltage V_R

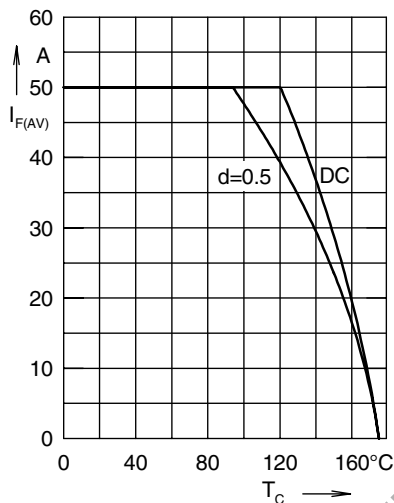


Fig. 4 Average forward current $I_{F(AV)}$ versus case temperature T_C

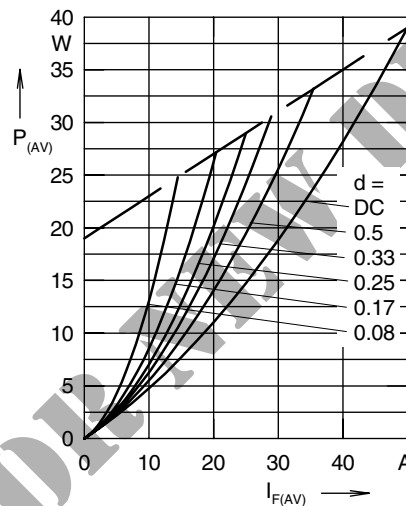


Fig. 5 Forward power loss characteristics

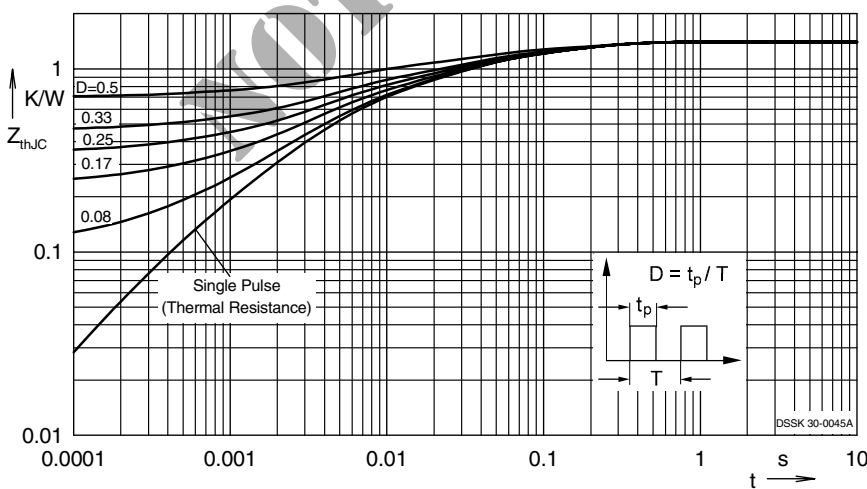


Fig. 6 Transient thermal impedance junction to case at various duty cycles

Note: All curves are per diode

IXYS reserves the right to change limits, Conditions and dimensions.

© 2006 IXYS All rights reserved