


STYLE SJL

MIL-S-21604/3

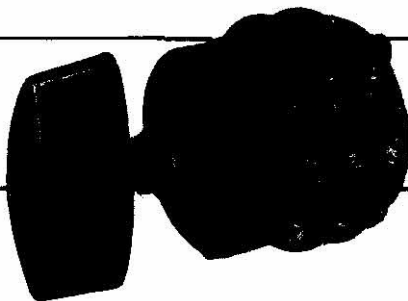

General Specifications

Interrupt Ratings: 5 amps @ 125 volts a.c. 60-400 cps
5 amps @ 28 volts d.c. resistive

Continuous Rating: 10 amps @ 125 volts a.c.

Dielectric Strength: 1200 volts rms minimum

Insulation Resistance: 200 megohms

Contact Resistance: .01 ohms maximum

Electrical Life: 40,000 operations make and break

Available Sections: 1 to 10

Available Poles: 1 to 20

Positions: 8; adjustable stops for 2-8 positions

Contact Type: shorting and non-shortng

Indexing Angle: 45 degrees positive detent

Mounting Type: bushing mount, single hole to .19 inch

Panel Thickness: Silver overlay, phosphor bronze

Rotor (Moveable Contact): Silver overlay copper with screw type terminals

Terminal (Stationary Contact): Glass filled alkyd

Spacers:

How to Order

33 2 02 A

Handle

No. of Decks

Assemblage

Style SJL

Option Codes:


77 Style SJL with Spring Return

Type S2JL Assemblage 2	H O-I-I-O A A O-I-I-O B B O-I-I-O C C O-I-I-O D D O-I-I-O E E O-I-I-O F F O-I-I-O G G O-I-I-O H		Two poles per section, double break switching. Available in shorting or non-shortng.
Type S3JL Assemblage 3	H O-I-I-O A A O-I-I-O B B O-I-I-O C C O-I-I-O D D O-I-I-O E E O-I-I-O F F O-I-I-O G		One pole per section: Off and 7 tap positions Available in shorting or non-shortng.



All assemblies are shown with handle in 0° position (12 o'clock)									
No. Navy Sec. Type	Catalog Number	No. Navy Sec. Type	Catalog Number	No. Navy Sec. Type	Catalog Number	Weight oz.	Torque lb-in.	Dim. X in.	
1 S2JL1	33201A	1 S3JL1	33301A	1 S4JL1	33401A	6	6	1 1/2	
2 S2JL2	33202A	2 S3JL2	33302A	2 S4JL2	33402A	7	7	1 1/2	
*3 S2JL3	33203A	*3 S3JL3	33303A	*3 S4JL3	33403A	8	8	1 7/8	
4 S2JL4	33204A	4 S3JL4	33304A	4 S4JL4	33404A	9	9	2 1/2	
*5 S2JL5	33205A	*5 S3JL5	33305A	*5 S4JL5	33405A	10	10	2 1/2	
6 S2JL6	33206A	6 S3JL6	33306A	6 S4JL6	33406A	12	13	3 1/4	
7 S2JL7	33207A	7 S3JL7	33307A	7 S4JL7	33407A	13	14	4 1/8	
8 S2JL8	33208A	8 S3JL8	33308A	8 S4JL8	33408A	14	15	4 1/2	
9 S2JL9	33209A	9 S3JL9	33309A	9 S4JL9	33409A	15	16	4 7/8	
*10 S2JL10	33210A	*10 S3JL10	33310A	*10 S4JL10	33410A	16	17	5 1/2	

* Standard switches are shown on MIL-S-21604/3

Assemblage 4 not shown

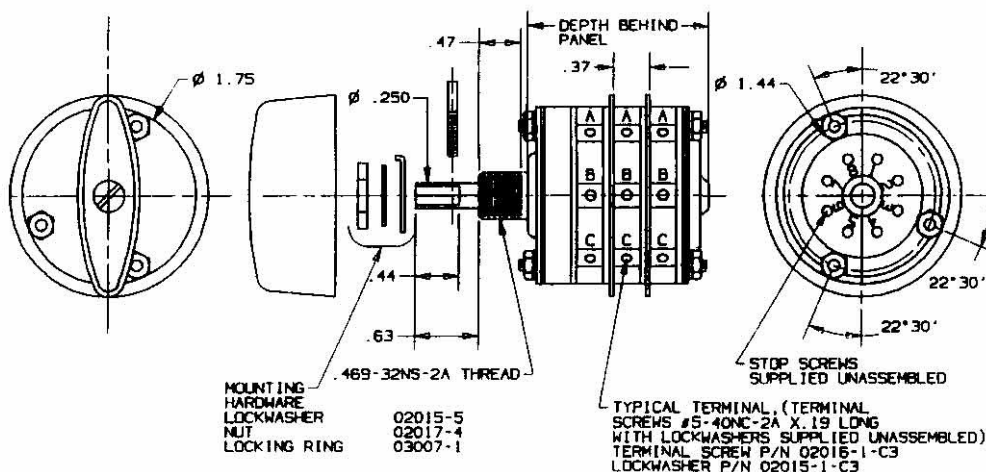

PANEL DRILLING DIMENSIONS

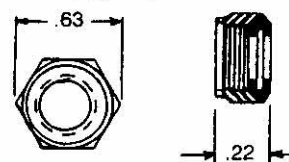

**HEX SEAL NUT
SUPPLIED FOR ALL
DRIP PROOF MOUNTS
PART # 02017-8**