


## Smart Highside Power Switch

### Features

- Overload protection
- Current limitation
- Short-circuit protection
- Thermal shutdown
- Overvoltage protection (including load dump)
- Fast demagnetization of inductive loads
- Reverse battery protection<sup>1)</sup>
- Undervoltage and overvoltage shutdown with auto-restart and hysteresis
- Open drain diagnostic output
- Open load detection in ON-state
- CMOS compatible input
- Loss of ground and loss of  $V_{bb}$  protection<sup>2)</sup>
- **Electrostatic discharge (ESD)** protection

### Product Summary

|                        |              |            |            |
|------------------------|--------------|------------|------------|
| Overvoltage protection | $V_{bb(AZ)}$ | 63         | V          |
| Operating voltage      | $V_{bb(on)}$ | 4.5 ... 42 | V          |
| On-state resistance    | $R_{ON}$     | 18         | m $\Omega$ |
| Load current (ISO)     | $I_L(ISO)$   | 21         | A          |
| Current limitation     | $I_L(SCr)$   | 70         | A          |

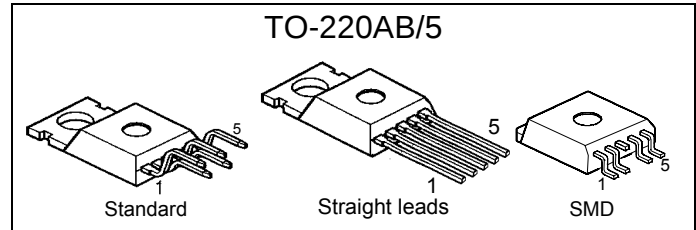


### Application

- $\mu$ C compatible power switch with diagnostic feedback for 12 V and 24 V DC grounded loads
- All types of resistive, inductive and capacitive loads
- Replaces electromechanical relays and discrete circuits

### General Description

N channel vertical power FET with charge pump, ground referenced CMOS compatible input and diagnostic feedback, integrated in Smart SiPMOS® chip on chip technology. Providing embedded protective functions.

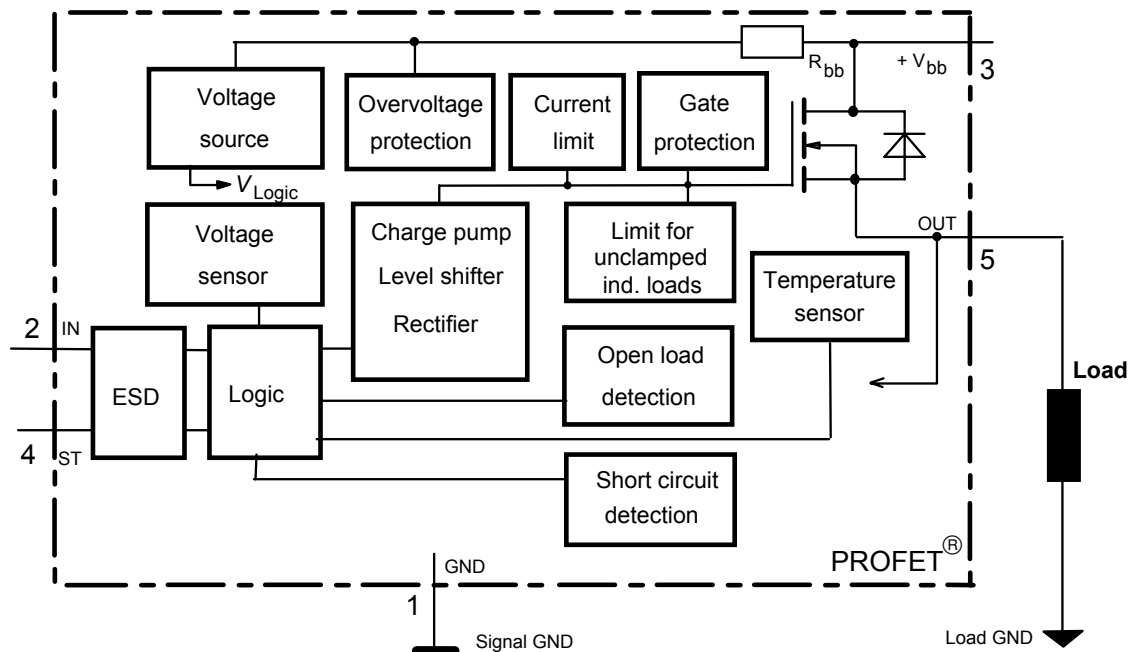

1) No external components required, reverse load current limited by connected load.

2) Additional external diode required for charged inductive loads

| Pin | Symbol           |   | Function                                                         |
|-----|------------------|---|------------------------------------------------------------------|
| 1   | GND              | - | Logic ground                                                     |
| 2   | IN               | I | Input, activates the power switch in case of logical high signal |
| 3   | V <sub>bb</sub>  | + | Positive power supply voltage, the tab is shorted to this pin    |
| 4   | ST               | S | Diagnostic feedback, low on failure                              |
| 5   | OUT<br>(Load, L) | O | Output to the load                                               |

**Maximum Ratings** at  $T_j = 25\text{ °C}$  unless otherwise specified

| Parameter                                                                                                                                                                | Symbol                                                                                       | Values                   | Unit                                   |     |
|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------|----------------------------------------------------------------------------------------------|--------------------------|----------------------------------------|-----|
| Supply voltage (overvoltage protection see page 3)                                                                                                                       | $V_{bb}$                                                                                     | 63                       | V                                      |     |
| Load dump protection $V_{LoadDump} = U_A + V_S$ , $U_A = 13.5\text{ V}$<br>$R_I = 2\text{ }\Omega$ , $R_L = 1.1\text{ }\Omega$ , $t_d = 200\text{ ms}$ , IN= low or high | $V_{Load\ dump}^{3)}$                                                                        | 80                       | V                                      |     |
| Load current (Short-circuit current, see page 4)                                                                                                                         | $I_L$                                                                                        | self-limited             | A                                      |     |
| Operating temperature range                                                                                                                                              | $T_j$                                                                                        | -40 ...+150              | °C                                     |     |
| Storage temperature range                                                                                                                                                | $T_{stg}$                                                                                    | -55 ...+150              |                                        |     |
| Power dissipation (DC)                                                                                                                                                   | $P_{tot}$                                                                                    | 167                      | W                                      |     |
| Inductive load switch-off energy dissipation,<br>single pulse<br>$T_j=150\text{ }^{\circ}\text{C}$ :                                                                     | $E_{AS}$                                                                                     | 2.1                      | J                                      |     |
| Electrostatic discharge capability (ESD)<br>(Human Body Model)                                                                                                           | $V_{ESD}$                                                                                    | 2.0                      | kV                                     |     |
| Input voltage (DC)                                                                                                                                                       | $V_{IN}$                                                                                     | -0.5 ... +6              | V                                      |     |
| Current through input pin (DC)                                                                                                                                           | $I_{IN}$                                                                                     | $\pm 5.0$                | mA                                     |     |
| Current through status pin (DC)                                                                                                                                          | $I_{ST}$                                                                                     | $\pm 5.0$                |                                        |     |
| see internal circuit diagrams page 6...                                                                                                                                  |                                                                                              |                          |                                        |     |
|                                                                                                                                                                          |                                                                                              |                          |                                        |     |
| Thermal resistance                                                                                                                                                       | chip - case:<br>junction - ambient (free air):<br>SMD version, device on pcb <sup>4)</sup> : | $R_{thJC}$<br>$R_{thJA}$ | $\leq 0.75$<br>$\leq 75$<br>$\leq tbd$ | K/W |

<sup>3)</sup>  $V_{Load\ dump}$  is setup without the DUT connected to the generator per ISO 7637-1 and DIN 40839

<sup>4)</sup> Device on 50mm\*50mm\*1.5mm epoxy PCB FR4 with 6cm<sup>2</sup> (one layer, 70µm thick) copper area for  $V_{bb}$  connection. PCB is vertical without blown air.

## Electrical Characteristics

| Parameter and Conditions<br>at $T_j = 25^\circ\text{C}$ , $V_{bb} = 12\text{ V}$ unless otherwise specified | Symbol | Values |     |     | Unit |
|-------------------------------------------------------------------------------------------------------------|--------|--------|-----|-----|------|
|                                                                                                             |        | min    | typ | max |      |

### Load Switching Capabilities and Characteristics

|                                                                                                                                             |                  |     |          |          |                        |
|---------------------------------------------------------------------------------------------------------------------------------------------|------------------|-----|----------|----------|------------------------|
| On-state resistance (pin 3 to 5)<br>$I_L = 5\text{ A}$<br>$T_j = 25^\circ\text{C}$ :<br>$T_j = 150^\circ\text{C}$ :                         | $R_{ON}$         | --  | 15<br>28 | 18<br>35 | $\text{m}\Omega$       |
| Nominal load current (pin 3 to 5)<br>ISO Proposal: $V_{ON} = 0.5\text{ V}$ , $T_C = 85^\circ\text{C}$                                       | $I_{L(ISO)}$     | 17  | 21       | --       | A                      |
| Output current (pin 5) while GND disconnected or<br>GND pulled up, $V_{IN} = 0$ , see diagram page 7,<br>$T_j = -40\dots+150^\circ\text{C}$ | $I_{L(GNDhigh)}$ | --  | --       | 1        | mA                     |
| Turn-on time to 90% $V_{OUT}$ :                                                                                                             | $t_{on}$         | 100 | --       | 350      | $\mu\text{s}$          |
| Turn-off time to 10% $V_{OUT}$ :                                                                                                            | $t_{off}$        | 10  | --       | 130      | $\mu\text{s}$          |
| $R_L = 12\ \Omega$ , $T_j = -40\dots+150^\circ\text{C}$                                                                                     |                  |     |          |          |                        |
| Slew rate on<br>10 to 30% $V_{OUT}$ , $R_L = 12\ \Omega$ , $T_j = -40\dots+150^\circ\text{C}$                                               | $dV/dt_{on}$     | 0.2 | --       | 2        | $\text{V}/\mu\text{s}$ |
| Slew rate off<br>70 to 40% $V_{OUT}$ , $R_L = 12\ \Omega$ , $T_j = -40\dots+150^\circ\text{C}$                                              | $-dV/dt_{off}$   | 0.4 | --       | 5        | $\text{V}/\mu\text{s}$ |

### Operating Parameters

|                                                                                                                                       |                        |          |          |          |               |
|---------------------------------------------------------------------------------------------------------------------------------------|------------------------|----------|----------|----------|---------------|
| Operating voltage <sup>5)</sup><br>$T_j = -40\dots+150^\circ\text{C}$ :                                                               | $V_{bb(on)}$           | 4.5      | --       | 42       | V             |
| Undervoltage shutdown<br>$T_j = -40\dots+150^\circ\text{C}$ :                                                                         | $V_{bb(under)}$        | 2.4      | --       | 4.5      | V             |
| Undervoltage restart<br>$T_j = -40\dots+150^\circ\text{C}$ :                                                                          | $V_{bb(u\ rst)}$       | --       | --       | 4.5      | V             |
| Undervoltage restart of charge pump<br>see diagram page 12<br>$T_j = -40\dots+150^\circ\text{C}$ :                                    | $V_{bb(ucp)}$          | --       | 6.5      | 7.5      | V             |
| Undervoltage hysteresis<br>$\Delta V_{bb(under)} = V_{bb(u\ rst)} - V_{bb(under)}$                                                    | $\Delta V_{bb(under)}$ | --       | 0.2      | --       | V             |
| Overvoltage shutdown<br>$T_j = -40\dots+150^\circ\text{C}$ :                                                                          | $V_{bb(over)}$         | 42       | --       | 52       | V             |
| Overvoltage restart<br>$T_j = -40\dots+150^\circ\text{C}$ :                                                                           | $V_{bb(o\ rst)}$       | 42       | --       | --       | V             |
| Overvoltage hysteresis<br>$T_j = -40\dots+150^\circ\text{C}$ :                                                                        | $\Delta V_{bb(over)}$  | --       | 0.2      | --       | V             |
| Overvoltage protection <sup>6)</sup><br>$I_{bb} = 40\text{ mA}$<br>$T_j = -40^\circ\text{C}$ :<br>$T_j = 25\dots+150^\circ\text{C}$ : | $V_{bb(AZ)}$           | 60<br>63 | --<br>67 | --       | V             |
| Standby current (pin 3)<br>$V_{IN} = 0$<br>$T_j = -40\dots+25^\circ\text{C}$ :<br>$T_j = 150^\circ\text{C}$ :                         | $I_{bb(off)}$          | --<br>-- | 12<br>18 | 25<br>60 | $\mu\text{A}$ |
| Leakage output current (included in $I_{bb(off)}$ )<br>$V_{IN} = 0$                                                                   | $I_{L(off)}$           | --       | 6        | --       | $\mu\text{A}$ |
| Operating current (Pin 1) <sup>7)</sup> , $V_{IN} = 5\text{ V}$                                                                       | $I_{GND}$              | --       | 1.1      | --       | mA            |

<sup>5)</sup> At supply voltage increase up to  $V_{bb} = 6.5\text{ V}$  typ without charge pump,  $V_{OUT} \approx V_{bb} - 2\text{ V}$

<sup>6)</sup> see also  $V_{ON(CL)}$  in table of protection functions and circuit diagram page 7. Measured without load.

<sup>7)</sup> Add  $I_{ST}$ , if  $I_{ST} > 0$ , add  $I_{IN}$ , if  $V_{IN} > 5.5\text{ V}$

| Parameter and Conditions<br>at $T_j = 25\text{ }^{\circ}\text{C}$ , $V_{bb} = 12\text{ V}$ unless otherwise specified                                                                                                              | Symbol                                   | Values         |                |                   | Unit               |
|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|------------------------------------------|----------------|----------------|-------------------|--------------------|
|                                                                                                                                                                                                                                    |                                          | min            | typ            | max               |                    |
| Protection Functions <sup>8)</sup>                                                                                                                                                                                                 |                                          |                |                |                   |                    |
| Initial peak short circuit current limit (pin 3 to 5) <sup>9)</sup> ,<br>( max 400 $\mu\text{s}$ if $V_{ON} > V_{ON(SC)}$ )<br><br>$T_j = -40^{\circ}\text{C}$ :<br>$T_j = 25^{\circ}\text{C}$ :<br>$T_j = +150^{\circ}\text{C}$ : | $I_{L(SCp)}$                             | --<br>--<br>45 | --<br>95<br>-- | 140<br>--<br>--   | A                  |
| Repetitive short circuit current limit<br>$T_j = T_{jt}$ (see timing diagrams, page 10)                                                                                                                                            | $I_{L(SCr)}$                             | 30             | 70             | --                | A                  |
| Short circuit shutdown delay after input pos. slope<br>$V_{ON} > V_{ON(SC)}$ ,<br>$T_j = -40..+150^{\circ}\text{C}$ :<br>min value valid only, if input "low" time exceeds 30 $\mu\text{s}$                                        | $t_{d(SC)}$                              | 80             | --             | 400               | $\mu\text{s}$      |
| Output clamp (inductive load switch off)<br>at $V_{OUT} = V_{bb} - V_{ON(CL)}$ , $I_L = 30\text{ mA}$                                                                                                                              | $V_{ON(CL)}$                             | --             | 58             | --                | V                  |
| Short circuit shutdown detection voltage<br>(pin 3 to 5)                                                                                                                                                                           | $V_{ON(SC)}$                             | --             | 8.3            | --                | V                  |
| Thermal overload trip temperature                                                                                                                                                                                                  | $T_{jt}$                                 | 150            | --             | --                | $^{\circ}\text{C}$ |
| Thermal hysteresis                                                                                                                                                                                                                 | $\Delta T_{jt}$                          | --             | 10             | --                | K                  |
| Inductive load switch-off energy dissipation <sup>10)</sup> ,<br>$T_{j\text{ Start}} = 150\text{ }^{\circ}\text{C}$ , single pulse<br>$V_{bb} = 12\text{ V}$ :<br>$V_{bb} = 24\text{ V}$ :                                         | $E_{AS}$<br>$E_{Load12}$<br>$E_{Load24}$ | --             | --             | 2.1<br>1.7<br>1.2 | J                  |
| Reverse battery (pin 3 to 1) <sup>11)</sup>                                                                                                                                                                                        | $-V_{bb}$                                | --             | --             | 32                | V                  |
| Integrated resistor in $V_{bb}$ line                                                                                                                                                                                               | $R_{bb}$                                 | --             | 120            | --                | $\Omega$           |

### Diagnostic Characteristics

|                                                                                                                       |           |        |          |              |    |
|-----------------------------------------------------------------------------------------------------------------------|-----------|--------|----------|--------------|----|
| Open load detection current<br>(on-condition)<br><br>$T_j = -40\text{ °C}$ :<br>$T_j = 25\text{ °C}..150\text{ °C}$ : | $I_L(OL)$ | 2<br>2 | --<br>-- | 1900<br>1500 | mA |
|-----------------------------------------------------------------------------------------------------------------------|-----------|--------|----------|--------------|----|

<sup>8)</sup> Integrated protection functions are designed to prevent IC destruction under fault conditions described in the data sheet. Fault conditions are considered as "outside" normal operating range. Protection functions are not designed for continuous repetitive operation.

<sup>9)</sup> Short circuit current limit for max. duration of  $t_{d(SC)} \text{ max} = 400\text{ }\mu\text{s}$ , prior to shutdown

<sup>10)</sup> While demagnetizing load inductance, dissipated energy in PROFET is  $E_{AS} = V_{ON(CL)} * i_L(t) \text{ dt}$ , approx.

$$E_{AS} = \frac{1}{2} * L * i_L^2 * \left( \frac{V_{ON(CL)}}{V_{ON(CL)} - V_{bb}} \right), \text{ see diagram page 8}$$

<sup>11)</sup> Reverse load current (through intrinsic drain-source diode) is normally limited by the connected load. Reverse current  $I_{GND}$  of  $\approx 0.3\text{ A}$  at  $V_{bb} = -32\text{ V}$  through the logic heats up the device. Time allowed under these condition is dependent on the size of the heatsink. Reverse  $I_{GND}$  can be reduced by an additional external GND-resistor (150  $\Omega$ ). Input and Status currents have to be limited (see max. ratings page 2 and circuit page 7).

| Parameter and Conditions<br>at $T_j = 25\text{ }^{\circ}\text{C}$ , $V_{bb} = 12\text{ V}$ unless otherwise specified                                                                                               | Symbol                                        | Values    |           |           | Unit          |  |
|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-----------------------------------------------|-----------|-----------|-----------|---------------|--|
|                                                                                                                                                                                                                     |                                               | min       | typ       | max       |               |  |
| <b>Input and Status Feedback<sup>12)</sup></b>                                                                                                                                                                      |                                               |           |           |           |               |  |
| Input turn-on threshold voltage<br><br>$T_j = -40..+150^{\circ}\text{C}$ :                                                         | $V_{\text{IN(T+)}}$                           | 1.5       | --        | 2.4       | V             |  |
| Input turn-off threshold voltage<br><br>$T_j = -40..+150^{\circ}\text{C}$ :                                                        | $V_{\text{IN(T-)}}$                           | 1.0       | --        | --        | V             |  |
| Input threshold hysteresis                                                                                                                                                                                          | $\Delta V_{\text{IN(T)}}$                     | --        | 0.5       | --        | V             |  |
| Off state input current (pin 2), $V_{\text{IN}} = 0.4\text{ V}$                                                                                                                                                     | $I_{\text{IN(off)}}$                          | 1         | --        | 30        | $\mu\text{A}$ |  |
| On state input current (pin 2), $V_{\text{IN}} = 3.5\text{ V}$                                                                                                                                                      | $I_{\text{IN(on)}}$                           | 10        | 25        | 50        | $\mu\text{A}$ |  |
| Status invalid after positive input slope<br>(short circuit)<br>$T_j = -40 \dots +150^{\circ}\text{C}$ :                                                                                                            | $t_{\text{d(ST SC)}}$                         | 80        | 200       | 400       | $\mu\text{s}$ |  |
| Status invalid after positive input slope<br>(open load)<br>$T_j = -40 \dots +150^{\circ}\text{C}$ :                                                                                                                | $t_{\text{d(ST)}}$                            | 350       | --        | 1600      | $\mu\text{s}$ |  |
| Status output (open drain)<br>Zener limit voltage $T_j = -40...+150^{\circ}\text{C}$ , $I_{\text{ST}} = +1.6\text{ mA}$ :<br>ST low voltage $T_j = -40...+150^{\circ}\text{C}$ , $I_{\text{ST}} = +1.6\text{ mA}$ : | $V_{\text{ST(high)}}$<br>$V_{\text{ST(low)}}$ | 5.4<br>-- | 6.1<br>-- | --<br>0.4 | V             |  |

<sup>12)</sup> If a ground resistor  $R_{GND}$  is used, add the voltage drop across this resistor.


## Truth Table

|                                  | Input-level | Output level     | Status                |                       |
|----------------------------------|-------------|------------------|-----------------------|-----------------------|
|                                  |             |                  | 442 D2                | 442 E2                |
| Normal operation                 | L           | L                | H                     | H                     |
|                                  | H           | H                | H                     | H                     |
| Open load                        | L           | L <sup>13)</sup> | H                     | H                     |
|                                  | H           | H                | L                     | L                     |
| Short circuit to GND             | L           | L                | H                     | H                     |
|                                  | H           | L                | L                     | L                     |
| Short circuit to V <sub>bb</sub> | L           | H                | H                     | H                     |
|                                  | H           | H                | H (L <sup>14)</sup> ) | H (L <sup>14)</sup> ) |
| Overtemperature                  | L           | L                | L                     | L                     |
|                                  | H           | L                | L                     | L                     |
| Under-voltage                    | L           | L                | L <sup>15)</sup>      | H                     |
|                                  | H           | L                | L <sup>15)</sup>      | H                     |
| Overvoltage                      | L           | L                | L                     | H                     |
|                                  | H           | L                | L                     | H                     |


L = "Low" Level

H = "High" Level

## Terms

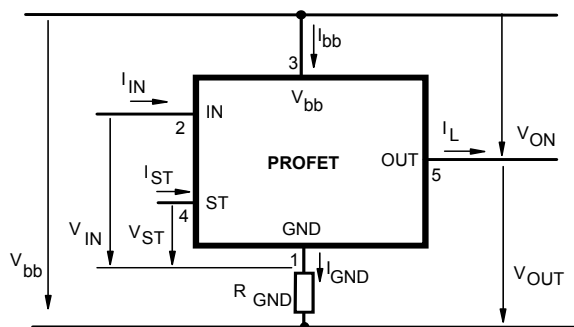

## Input circuit (ESD protection)

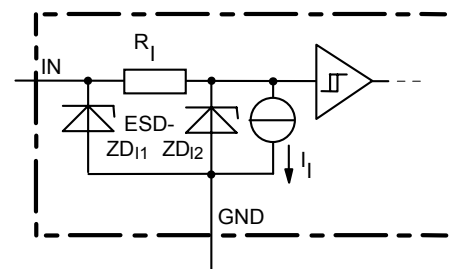


ZD11 6.1 V typ., ESD zener diodes are not to be used as voltage clamp at DC conditions. Operation in this mode may result in a drift of the zener voltage (increase of up to 1 V).

<sup>13)</sup> Power Transistor off, high impedance

<sup>14)</sup> Low resistance short V<sub>bb</sub> to output may be detected by no-load-detection

<sup>15)</sup> No current sink capability during undervoltage shutdown


## Status output

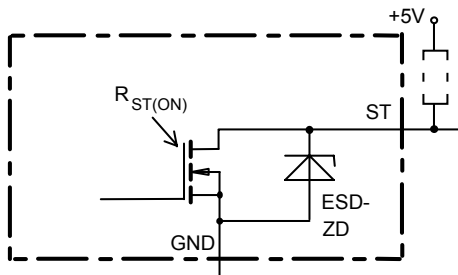


ESD-Zener diode: 6.1 V typ., max 5 mA;  
 $R_{ST(ON)} < 250 \Omega$  at 1.6 mA, ESD zener diodes are not to be used as voltage clamp at DC conditions.  
 Operation in this mode may result in a drift of the zener voltage (increase of up to 1 V).

## Short Circuit detection

Fault Condition:  $V_{ON} > 8.3 \text{ V typ.};$  IN high

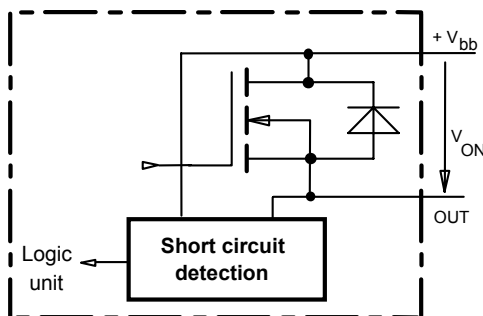


## Inductive and overvoltage output clamp

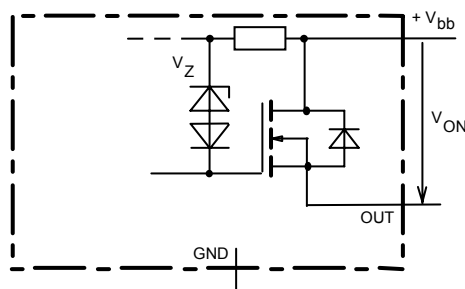

$V_{ON}$  clamped to 58 V typ.


## Overvolt. and reverse batt. protection

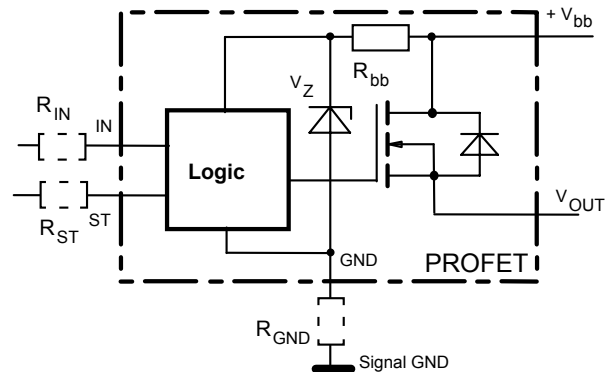


$R_{bb} = 120 \Omega$  typ.,  $V_Z + R_{bb} \cdot 40 \text{ mA} = 67 \text{ V typ.}$ , add  $R_{GND}$ ,  $R_{IN}$ ,  $R_{ST}$  for extended protection

## Open-load detection


ON-state diagnostic condition:  $V_{ON} < R_{ON} \cdot I_{L(OL)};$  IN high

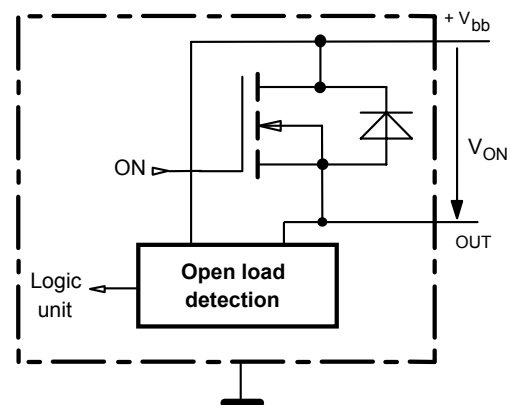




## GND disconnect

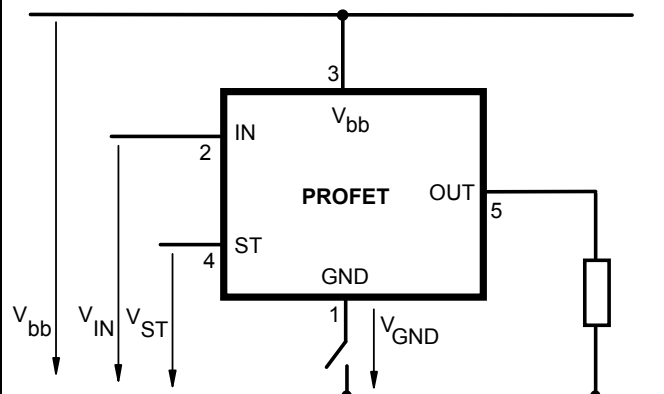

Any kind of load. In case of Input=high is  $V_{OUT} \approx V_{IN} - V_{IN(T+)}.$   
 Due to  $V_{GND} > 0$ , no  $V_{ST} = \text{low signal}$  available.

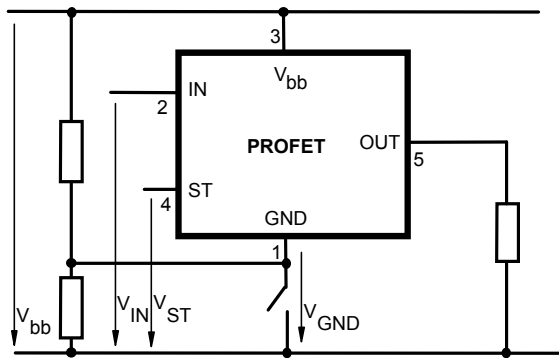**GND disconnect with GND pull up**


Any kind of load. If  $V_{GND} > V_{IN} - V_{IN(T+)}$  device stays off  
Due to  $V_{GND} > 0$ , no  $V_{ST}$  = low signal available.

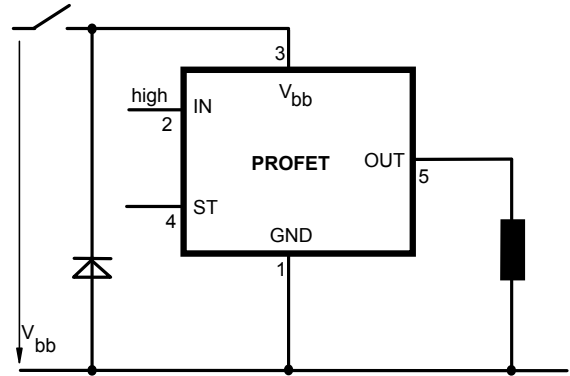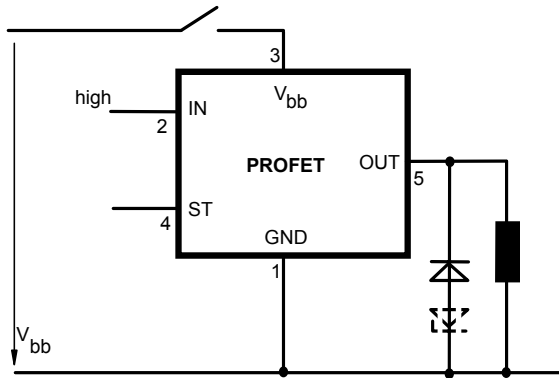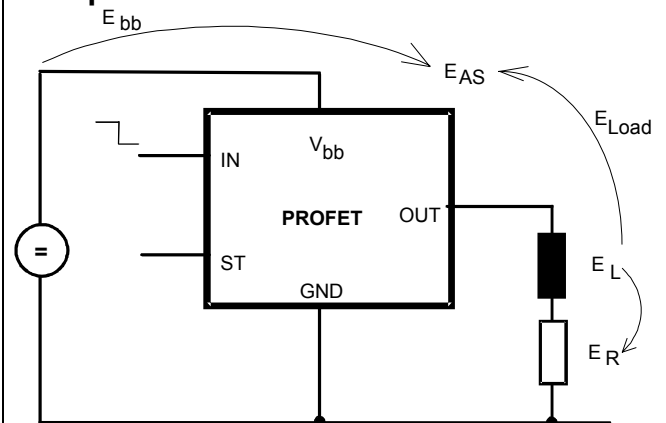**Vbb disconnect with charged inductive load**

**Inductive Load switch-off energy dissipation**


Energy dissipated in PROFET  $E_{AS} = E_{bb} + E_L - E_R$ .

$E_{Load} < E_L$ ,  $E_L = \frac{1}{2} * L * I_L^2$

## Options Overview

**all versions: High-side switch, Input protection, ESD protection, load dump and reverse battery protection , protection against loss of ground**

| Type                                                                                                                                               | BTS | 442D2          | <b>442E2</b>   |
|----------------------------------------------------------------------------------------------------------------------------------------------------|-----|----------------|----------------|
| Logic version                                                                                                                                      |     | <b>D</b>       | <b>E</b>       |
| Overtemperature protection<br>$T_j > 150\text{ °C}$ , latch function <sup>16)17)</sup><br>$T_j > 150\text{ °C}$ , with auto-restart on cooling     |     | X              | X              |
| Short-circuit to GND protection<br>switches off when $V_{ON} > 8.3\text{ V typ.}^{16)}$<br>(when first turned on after approx. 200 $\mu\text{s}$ ) |     | X              | X              |
| Open load detection<br>in OFF-state with sensing current 30 $\mu\text{A typ.}$<br>in ON-state with sensing voltage drop across power transistor    |     | X              | X              |
| Undervoltage shutdown with auto restart                                                                                                            |     | X              | X              |
| Overvoltage shutdown with auto restart                                                                                                             |     | X              | X              |
| Status feedback for                                                                                                                                |     |                |                |
| overtemperature                                                                                                                                    |     | X              | X              |
| short circuit to GND                                                                                                                               |     | X              | X              |
| short to $V_{bb}$                                                                                                                                  |     | <sup>18)</sup> | <sup>18)</sup> |
| open load                                                                                                                                          |     | X              | X              |
| undervoltage                                                                                                                                       |     | X              | -              |
| overvoltage                                                                                                                                        |     | X              | -              |
| Status output type                                                                                                                                 |     |                |                |
| CMOS                                                                                                                                               |     | X              |                |
| Open drain                                                                                                                                         |     |                | X              |
| Output negative voltage transient limit<br>(fast inductive load switch off)                                                                        |     |                |                |
| to $V_{bb} - V_{ON(CL)}$                                                                                                                           |     | X              | X              |
| Load current limit                                                                                                                                 |     |                |                |
| high level (can handle loads with high inrush currents)                                                                                            |     | X              | X              |
| medium level                                                                                                                                       |     |                |                |
| low level (better protection of application)                                                                                                       |     |                |                |


<sup>16)</sup> Latch except when  $V_{bb} - V_{OUT} < V_{ON(SC)}$  after shutdown. In most cases  $V_{OUT} = 0\text{ V}$  after shutdown ( $V_{OUT} \neq 0\text{ V}$  only if forced externally). So the device remains latched unless  $V_{bb} < V_{ON(SC)}$  (see page 4). No latch between turn on and  $t_{d(SC)}$ .

<sup>17)</sup> With latch function. Reseted by a) Input low, b) Undervoltage, c) Overvoltage


<sup>18)</sup> Low resistance short  $V_{bb}$  to output may be detected by no-load-detection

## Timing diagrams


**Figure 1a:**  $V_{bb}$  turn on:

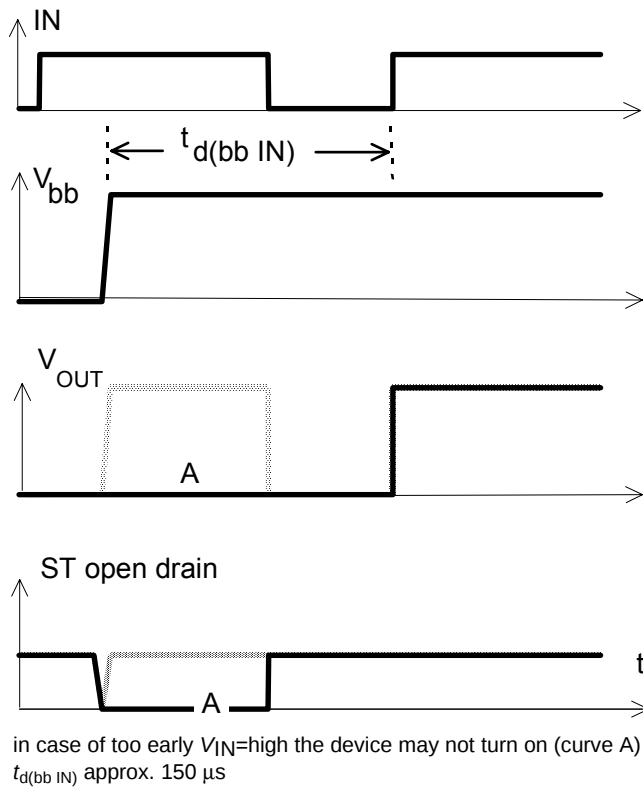

**Figure 2a:** Switching a lamp,

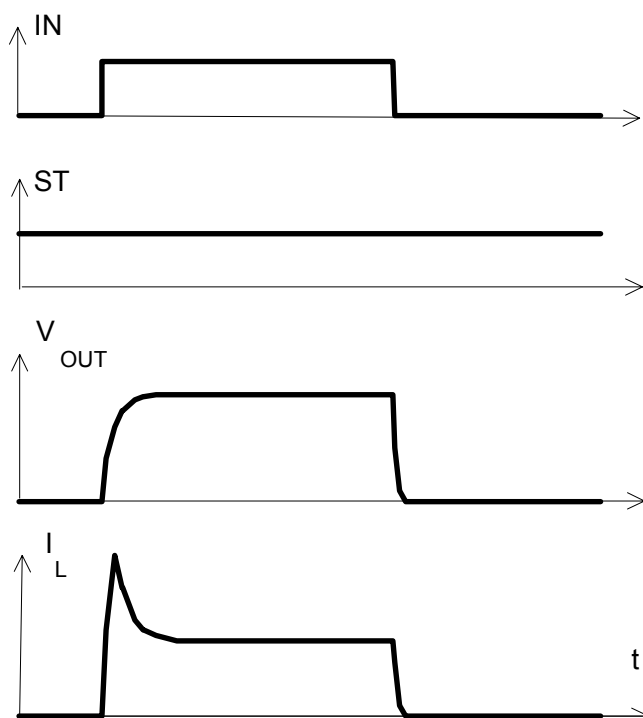



**Figure 2b:** Switching an inductive load

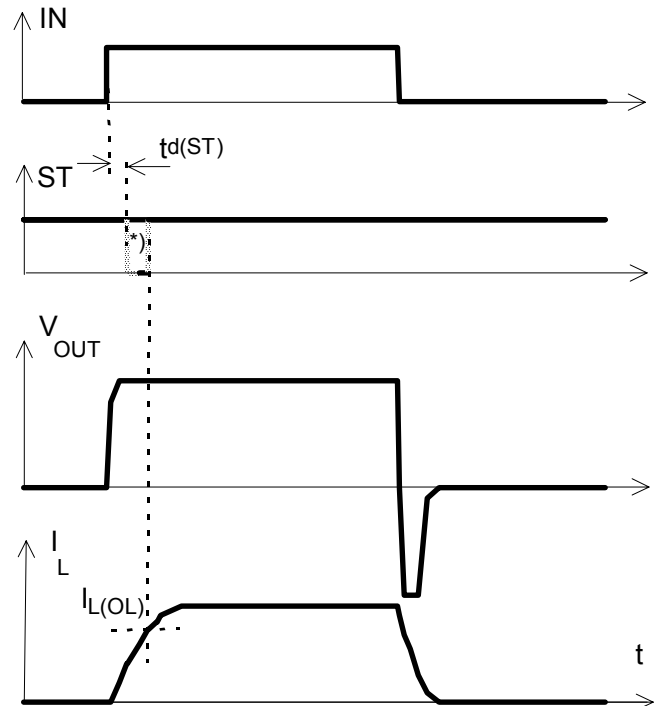


\*) if the time constant of load is too large, open-load-status may occur

**Figure 3a:** Turn on into short circuit,


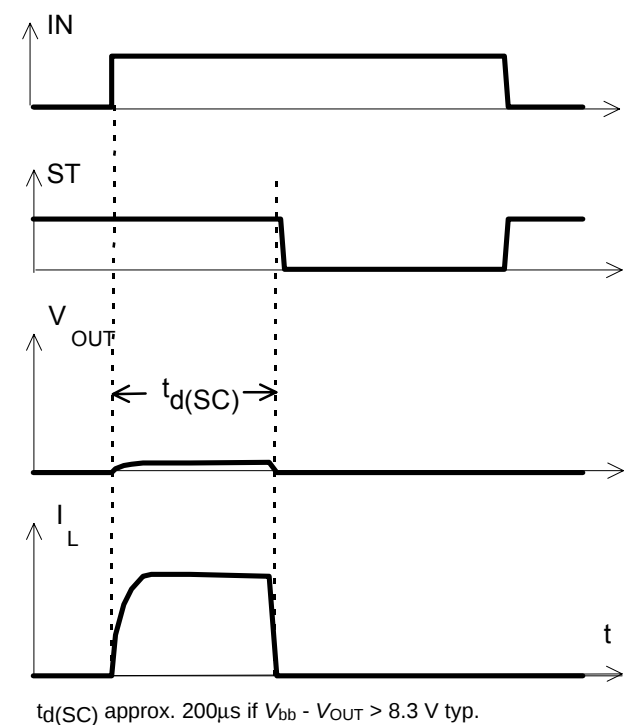


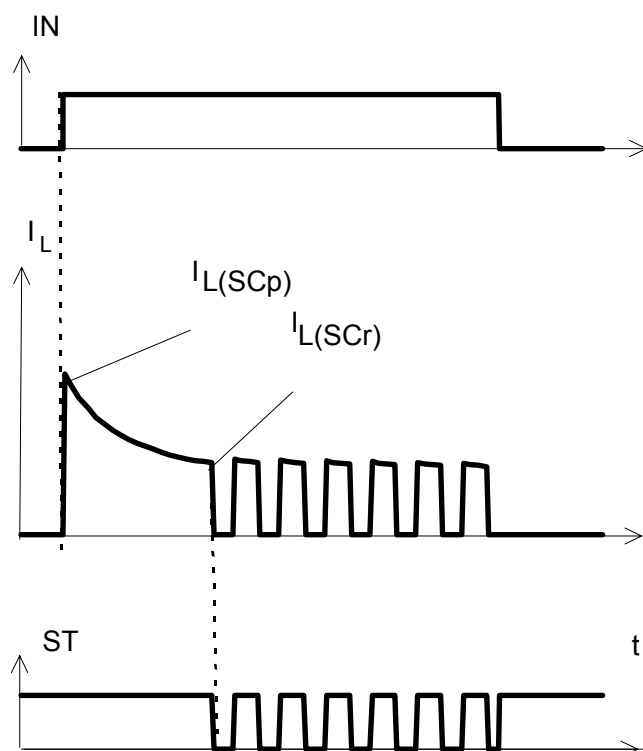**Figure 3b: Turn on into overload,**


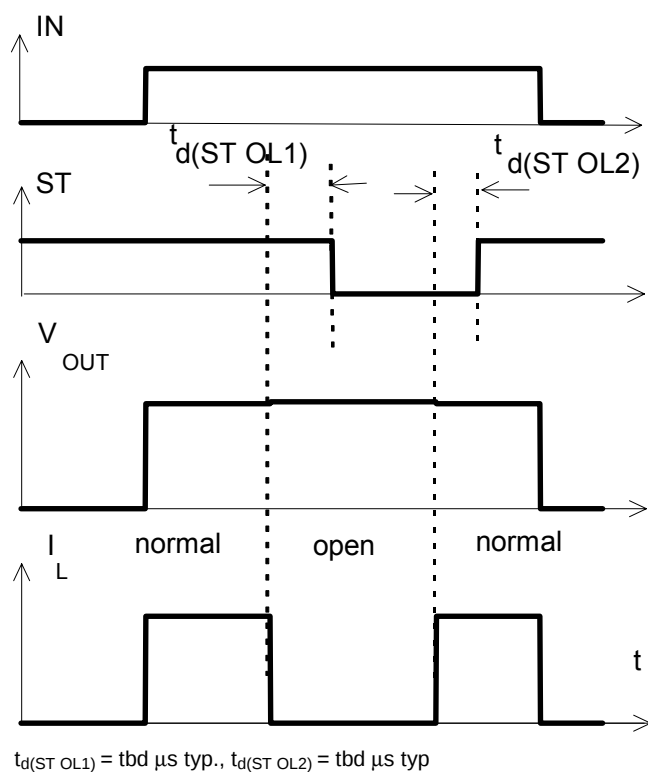
Heating up may require several milliseconds,  
 $V_{bb} - V_{OUT} < 8.3 \text{ V typ.}$

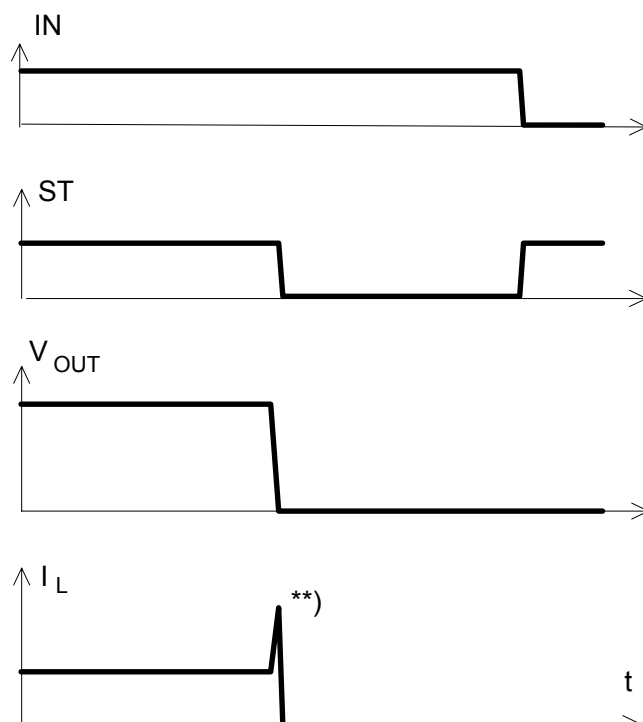**Figure 3c: Short circuit while on:**


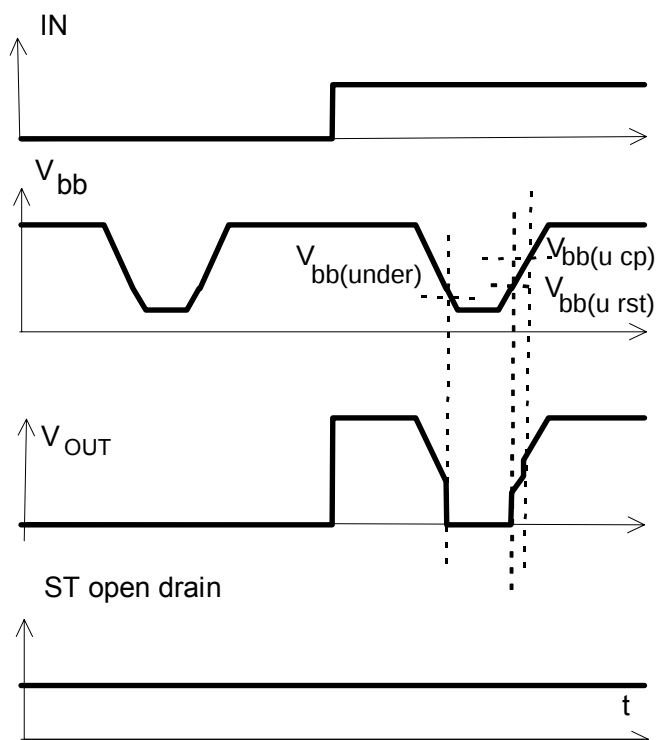
$**)$  current peak approx.  $20 \mu\text{s}$

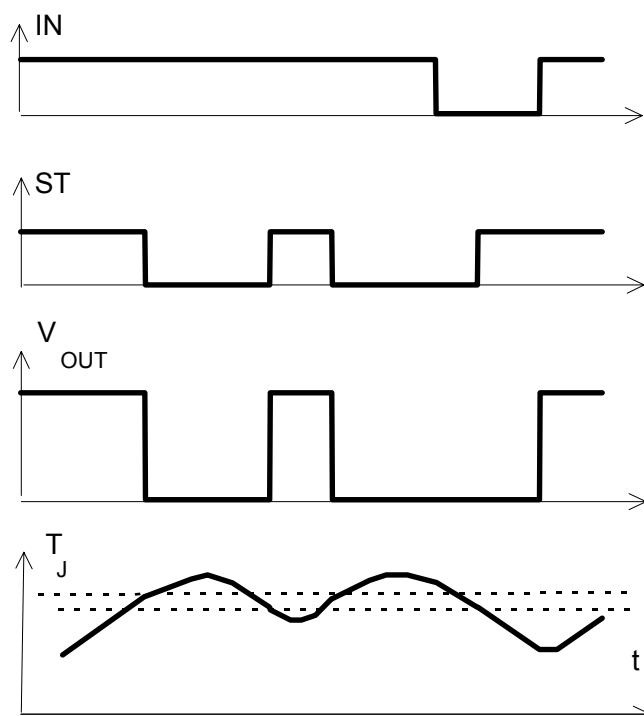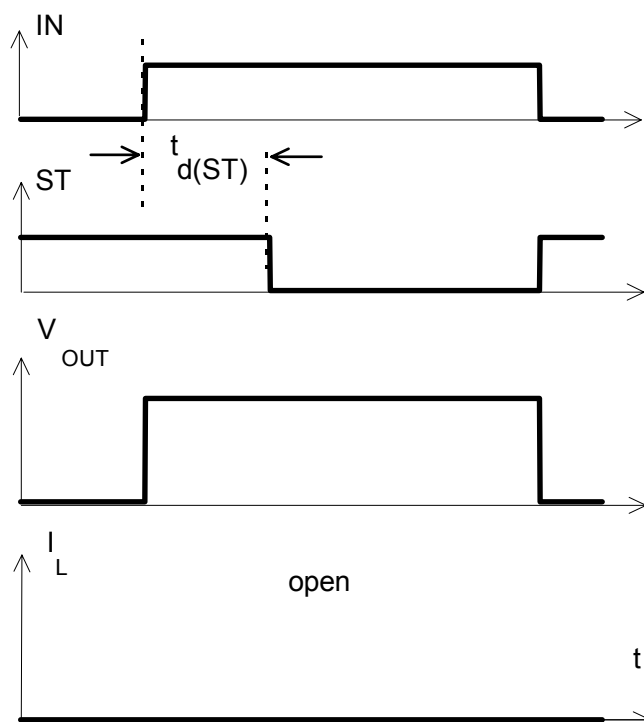**Figure 4a: Overtemperature:**  
 Reset if  $T_j < T_{jt}$ 

**Figure 5a: Open load: detection in ON-state, turn on/off to open load**


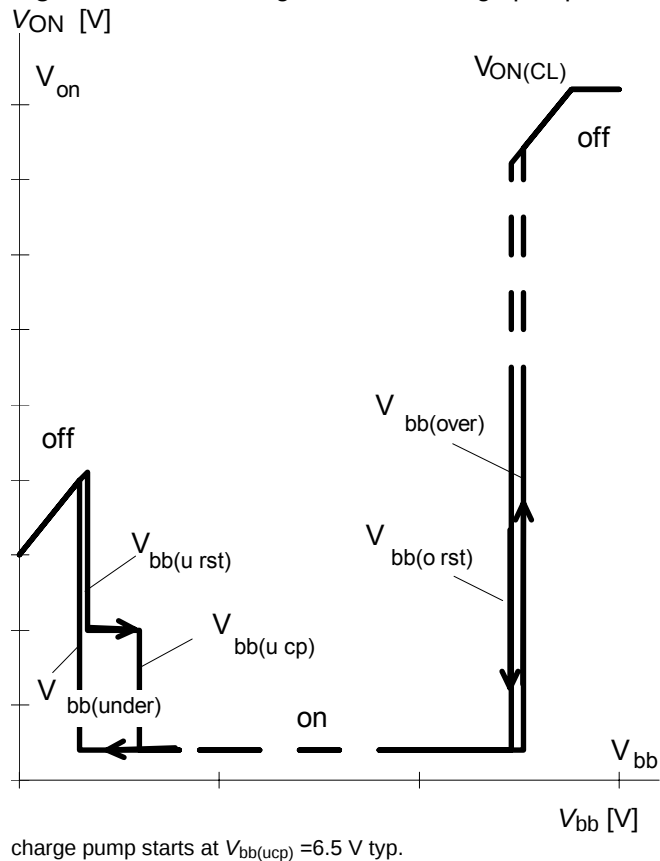
**Figure 5b:** Open load: detection in ON-state, open load occurs in on-state




**Figure 6a:** Undervoltage:



**Figure 6b:** Undervoltage restart of charge pump



**Figure 7a:** Overvoltage:

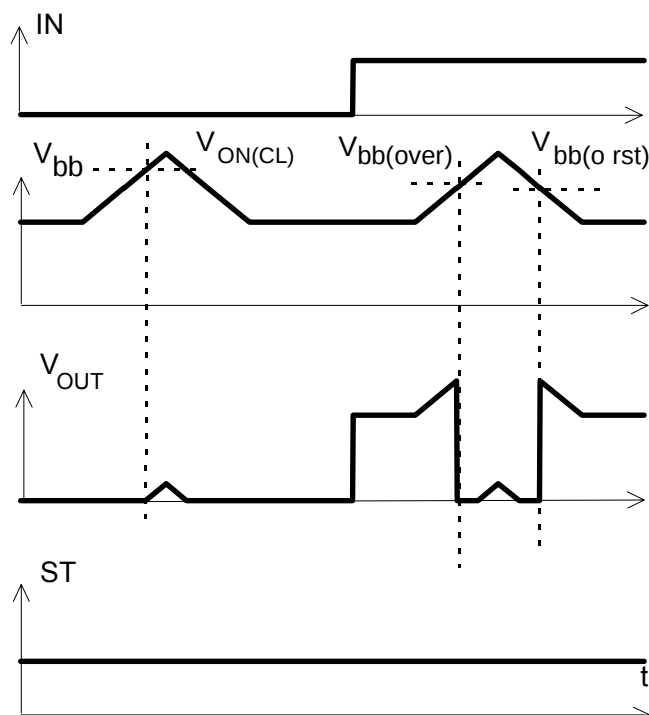


## Package and Ordering Code

All dimensions in mm

### Standard TO-220AB/5

Ordering code


|            |                 |
|------------|-----------------|
| BTS 442 E2 | Q67060-S6206-A2 |
|------------|-----------------|

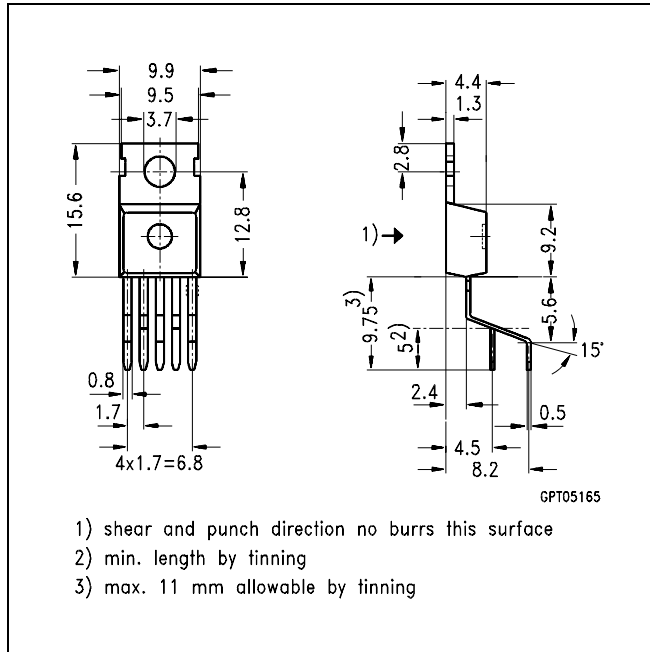

### TO-220AB/5, Option E3043

Ordering code


|                  |                 |
|------------------|-----------------|
| BTS 442 E2 E3043 | Q67060-S6206-A3 |
|------------------|-----------------|

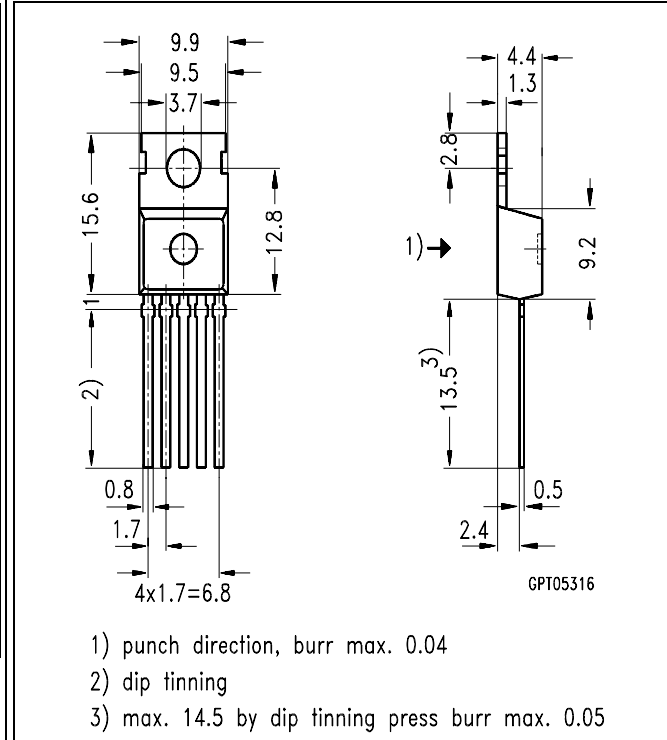

### SMD TO-220AB/5, Opt. E3062

Ordering code

|                 |                      |
|-----------------|----------------------|
| BTS442E2 E3062A | T&R: Q67060-S6206-A4 |
|-----------------|----------------------|

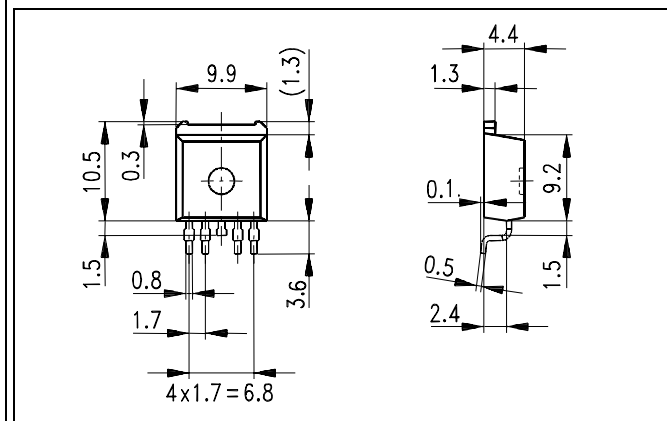

**Published by**  
**Infineon Technologies AG,**  
**St.-Martin-Strasse 53,**  
**D-81669 München**  
**© Infineon Technologies AG 2001**  
**All Rights Reserved.**

**Attention please!**

The information herein is given to describe certain components and shall not be considered as a guarantee of characteristics.

Terms of delivery and rights to technical change reserved.

We hereby disclaim any and all warranties, including but not limited to warranties of non-infringement, regarding circuits, descriptions and charts stated herein.

Infineon Technologies is an approved CECC manufacturer.

**Information**

For further information on technology, delivery terms and conditions and prices please contact your nearest Infineon Technologies Office in Germany or our Infineon Technologies Representatives worldwide (see address list).

**Warnings**

Due to technical requirements components may contain dangerous substances. For information on the types in question please contact your nearest Infineon Technologies Office.

Infineon Technologies Components may only be used in life-support devices or systems with the express written approval of Infineon Technologies, if a failure of such components can reasonably be expected to cause the failure of that life-support device or system, or to affect the safety or effectiveness of that device or system. Life support devices or systems are intended to be implanted in the human body, or to support and/or maintain and sustain and/or protect human life. If they fail, it is reasonable to assume that the health of the user or other persons may be endangered.