

High performance video signal Switcher

Triple Circuits

Video Signal Switchers

BA7602F, 03F, 06F/FS, 07F, 09F, 27FV

•Description

These video switching ICs, which contain two or three 2-input circuits, were developed for switching TV, DVD, and other video signals. Input pin formats can be selected from bias mode ($R=20\text{ k}\Omega$), sync-tip mode, and pedestal clamp mode. Having a large dynamic range and broad frequency characteristics, these switches are suited to a wide range of applications from audio signals to video signals.

•Features

- 1) Contain three 2-input, 1-output switch circuits (BA7602F,03F,06F/06FS,07F,09F,27FV)
- 2) Power supply voltage (4.5~5.5 V)
- 3) Low power consumption
- 4) Good frequency characteristics
- 5) Large dynamic range
- 6) Bias input (BA7602F)
Sync-tip clamp input (BA7603F)
Pedestal clamp input (BA7606F/06FS)
Bias input + sync-tip clamp input (BA7607F,09F, 27FV)
- 7) Large input impedance (Typ.20k Ω)
- 8) Fast switching speed (Typ. 50ns)

•Use

For switching TV, DVD, and Other video signals

•Lineup

Part No.	Circuit current (mA)	Built-in circuit	Input type	Distortion (%)	Maximum output level (V_{P-P})	Package
BA7602F	14.0	2 in 3 circuits	Bias	—	3.1	SOP16
BA7603F	13.0	2 in 3 circuits	Clamp	—	2.9	SOP16
BA7606F/FS	15.0	2 in 3 circuits	Pedestal Clamp	—	2.6	SOP16/ SSOP-A16
BA7607F	12.5	2 in 3 circuits	Clamp 2 Bias1	0.007	3.0	SOP16
BA7609F	12.5	2 in 3 circuits	Clamp 1 Bias 2	0.007	3.0	SOP16
BA7627FV	12.5	2 in 3 circuits	Clamp 2 Bias1	0.007	3.0	SSOP-B16

●Absolute Maximum Ratings (Ta=25°C)

Parameter		Symbol	Limits	Unit
Supply voltage		Vcc	9	V
Power dissipation	BA7602F BA7603F BA7606F BA7607F BA7609F	Pd	500 *1	mW
	BA7606FS		650 *2	
	BA7627FV		450 *1	
Operating temperature		Topr	-40~+85	°C
Storage temperature		Tstg	-55~+125	°C

*1 Deratings is done at 5.0mW/°C above Ta=25°C. (BA7604N, 05N, 02F, 03F, 06F, 07F, 09F, 27FV)

*2 Deratings is done at 6.5mW/°C above Ta=25°C. (BA7606FS)

●Operating Range (Ta=25°C)

Parameter	Symbol	Min.	Typ.	Max.	Unit
Supply voltage	Vcc	4.5	5.0	5.5	V

●Electrical characteristics (Unless otherwise noted, Ta=25°C and Vcc=5.0V)

Parameter		Symbol	Typical value					Unit	Conditions	
			02F	03F	06F/FS	07F	09F			27FV
Circuit current		I _{cc}	14.0	13.0	15.0	12.5			mA	—
Maximum output level1	Clamp	V _{om1}	—	2.9	—	2.9			V _{P-P}	f=1kHz, THD=0.5%, with clamp
Maximum output level2	Bias	V _{om2}	3.1	—	—	3.0			V _{P-P}	f=1kHz, THD=0.5%, without clamp
Maximum output level U	Pedestal clamp	V _{omU}	—		1.65	—			V _{P-P}	Dynamic range on positive side of clamp level
Maximum output level D	Pedestal clamp	V _{omD}	—		0.95	—			V _{P-P}	Dynamic range on negative side of clamp level
Voltage gain		G _v	0						dB	f =1MHz, V _{IN} =1 V _{P-P}
Interchannel crosstalk		C _T	-65						dB	f =4.43MHz, V _{IN} =1 V _{P-P}
Frequency characteristic		G _f	0		-1	0			dB	10MHz/1MHz, V _{IN} = V _{P-P}
Total harmonic distortion		THD	—			0.007			%	f =1kHz, 1V _{p-p} , Bias type
CTL pin switching level		V _{TH}	2.5						V	H: IN1 L: IN2
Clamp input level		V _{ct}	L≤0.75			H≥2.2			V	Only BA7606F/FS

●Cautions on use

- Numbers and data in entries are representative design values and are not guaranteed values of the items.
- Although we are confident in recommending the sample application circuits, carefully check their characteristics further when using them. When modifying externally attached component constants before use, determine them so that they have sufficient margins by taking into account variations in externally attached components and the Rohm LSI, not only for static characteristics but also including transient characteristics.
- Absolute maximum ratings
If applied voltage, operating temperature range, or other absolute maximum ratings are exceeded, the LSI may be damaged. Do not apply voltages or temperatures that exceed the absolute maximum ratings. If you think of a case in which absolute maximum ratings are exceeded, enforce fuses or other physical safety measures and investigate how not to apply the conditions under which absolute maximum ratings are exceeded to the LSI.
- GND potential
Make the GND pin voltage such that it is the lowest voltage even when operating below it. Actually confirm that the voltage of each pin does not become a lower voltage than the GND pin, including transient phenomena.
- Thermal design
Perform thermal design in which there are adequate margins by taking into account the allowable power dissipation in actual states of use.
- Shorts between pins and misinstallation
When mounting the LSI on a board, pay adequate attention to orientation and placement discrepancies of the LSI. If it is misinstalled and the power is turned on, the LSI may be damaged. It also may be damaged if it is shorted by a foreign substance coming between pins of the LSI or between a pin and a power supply or a pin and a GND.
- Operation in strong magnetic fields
Adequately evaluate use in a strong magnetic field, since there is a possibility of malfunction.
- A bias input coupling capacitor on the order of 10 μF~33 μF is appropriate.
- A clamp input coupling capacitor on the order of 0.1 μF~1 μF is appropriate.
- Make the clamp pulse width of the BA7606F/FS at least 1 μs.

●Block diagram

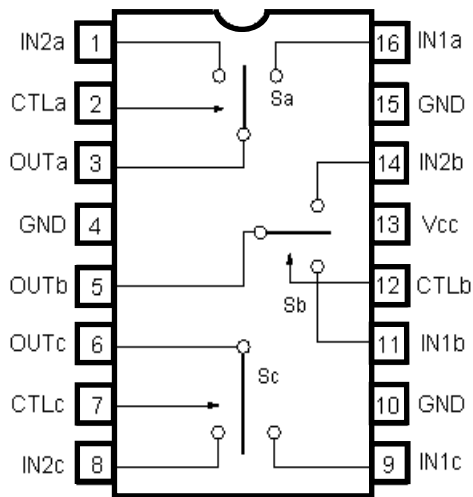


Fig.1 BA7602F

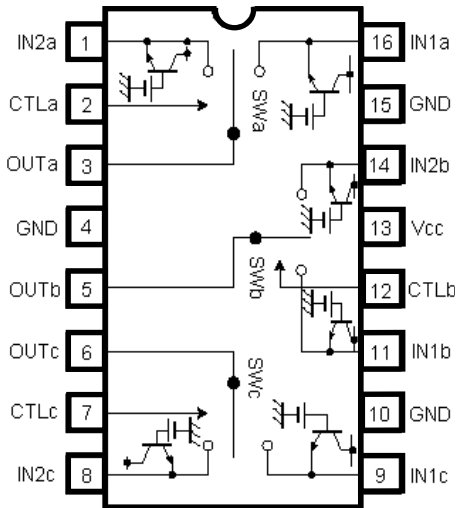


Fig.2 BA7603F

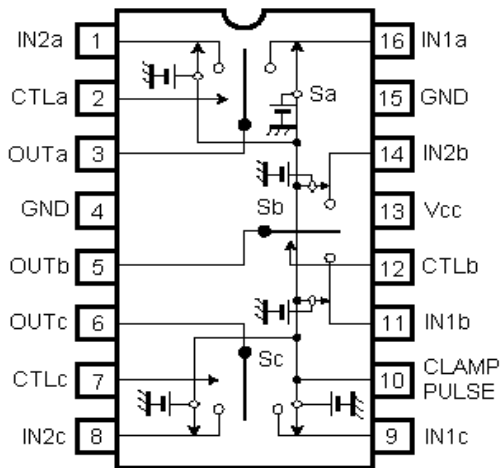


Fig.3 BA7606F/FS

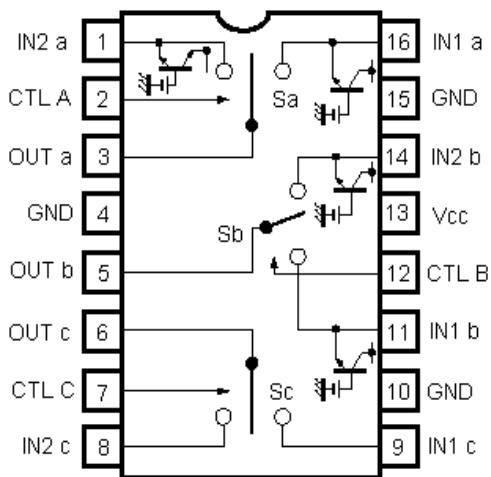


Fig.4 BA7607F, BA7627FV

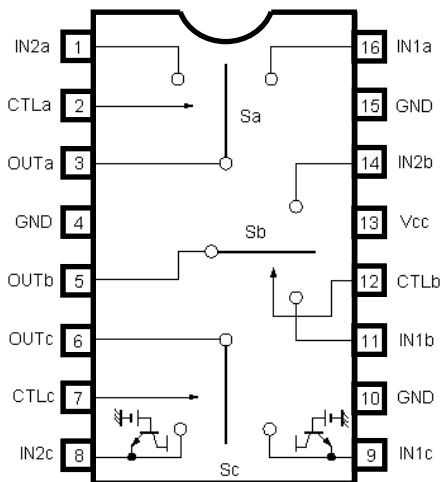


Fig.5 BA7609F

CTL pin settings

CTL	OUTPUT
L	IN2
H	IN1

●Reference data

Pin DC voltage (VCC=5V, Ta=25°C)

Pin No.	Pin DC voltage (V)				
	BA7602F	BA7603F	BA7606F/FS	BA7607F BA7627FV	BA7609F
1	3.27	2.05	2.96	2.05	2.48
2	4.91	4.91	4.91	4.91	4.91
3	1.84	0.65	1.54	0.65	1.76
4	0	0	0	0	0
5	1.84	0.65	1.54	0.65	1.76
6	1.84	0.65	1.54	1.76	0.65
7	4.91	4.91	4.91	4.91	4.91
8	3.27	2.05	2.96	2.48	2.05
9	3.27	2.05	2.96	2.48	2.05
10	0	0	4.97	0	0
11	3.27	2.05	2.96	2.05	2.48
12	4.91	4.91	4.91	4.91	4.91
13	5.00	5.00	5.00	5.00	5.00
14	3.27	2.05	2.96	2.05	2.48
15	0	0	0	0	0
16	3.27	2.05	2.96	2.05	2.48

Input/Output impedance

Parameter		Limits (Typical)					Unit
		02F	03F	06F/FS	07F/27FV	09F	
Input impedance	Bias	20k	—	—	20k		Ω
Input impedance	Clamp	—	1.7M				Ω
Output impedance		30		30※	30		Ω

※The 6pin output impedance in the BA7606F/FS is 130Ω.

●Measurement circuit 1/2 (BA7602F,BA7603F,BA7607F, BA7609F)

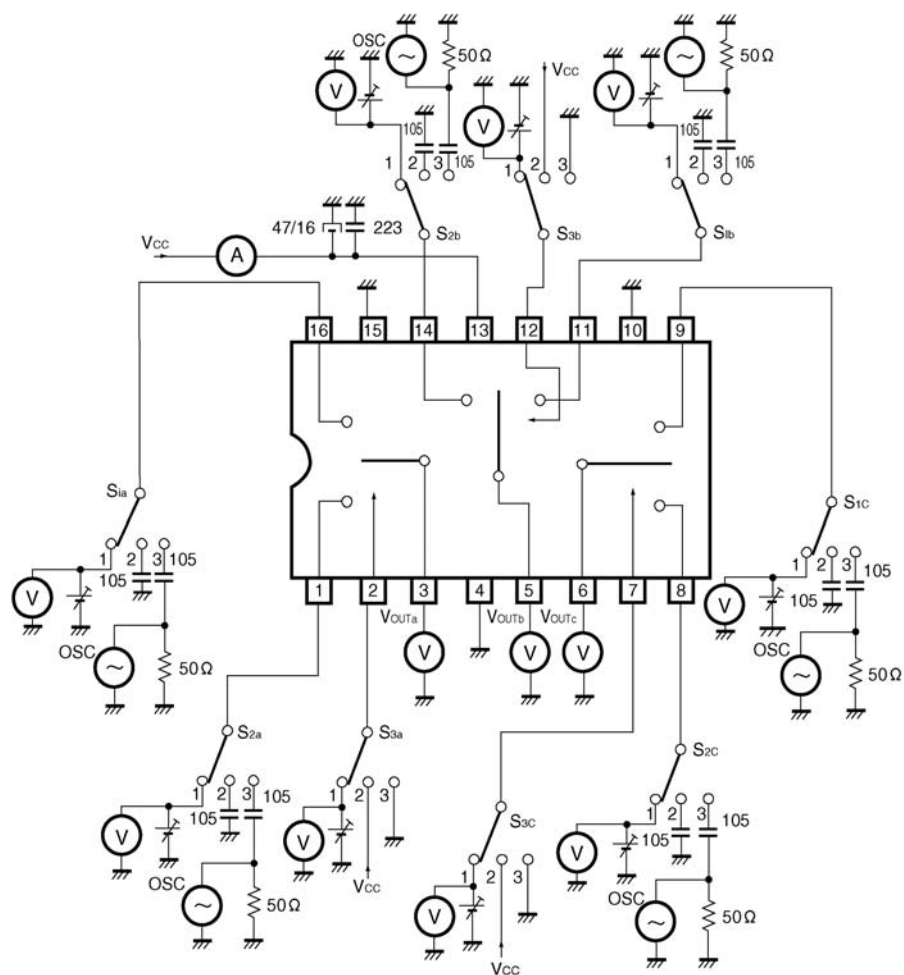


Fig.6 BA7602F, BA7603F, BA7607F, BA7609F, BA7627FV

●Measurement circuit 2/2 (BA7606F/FS)

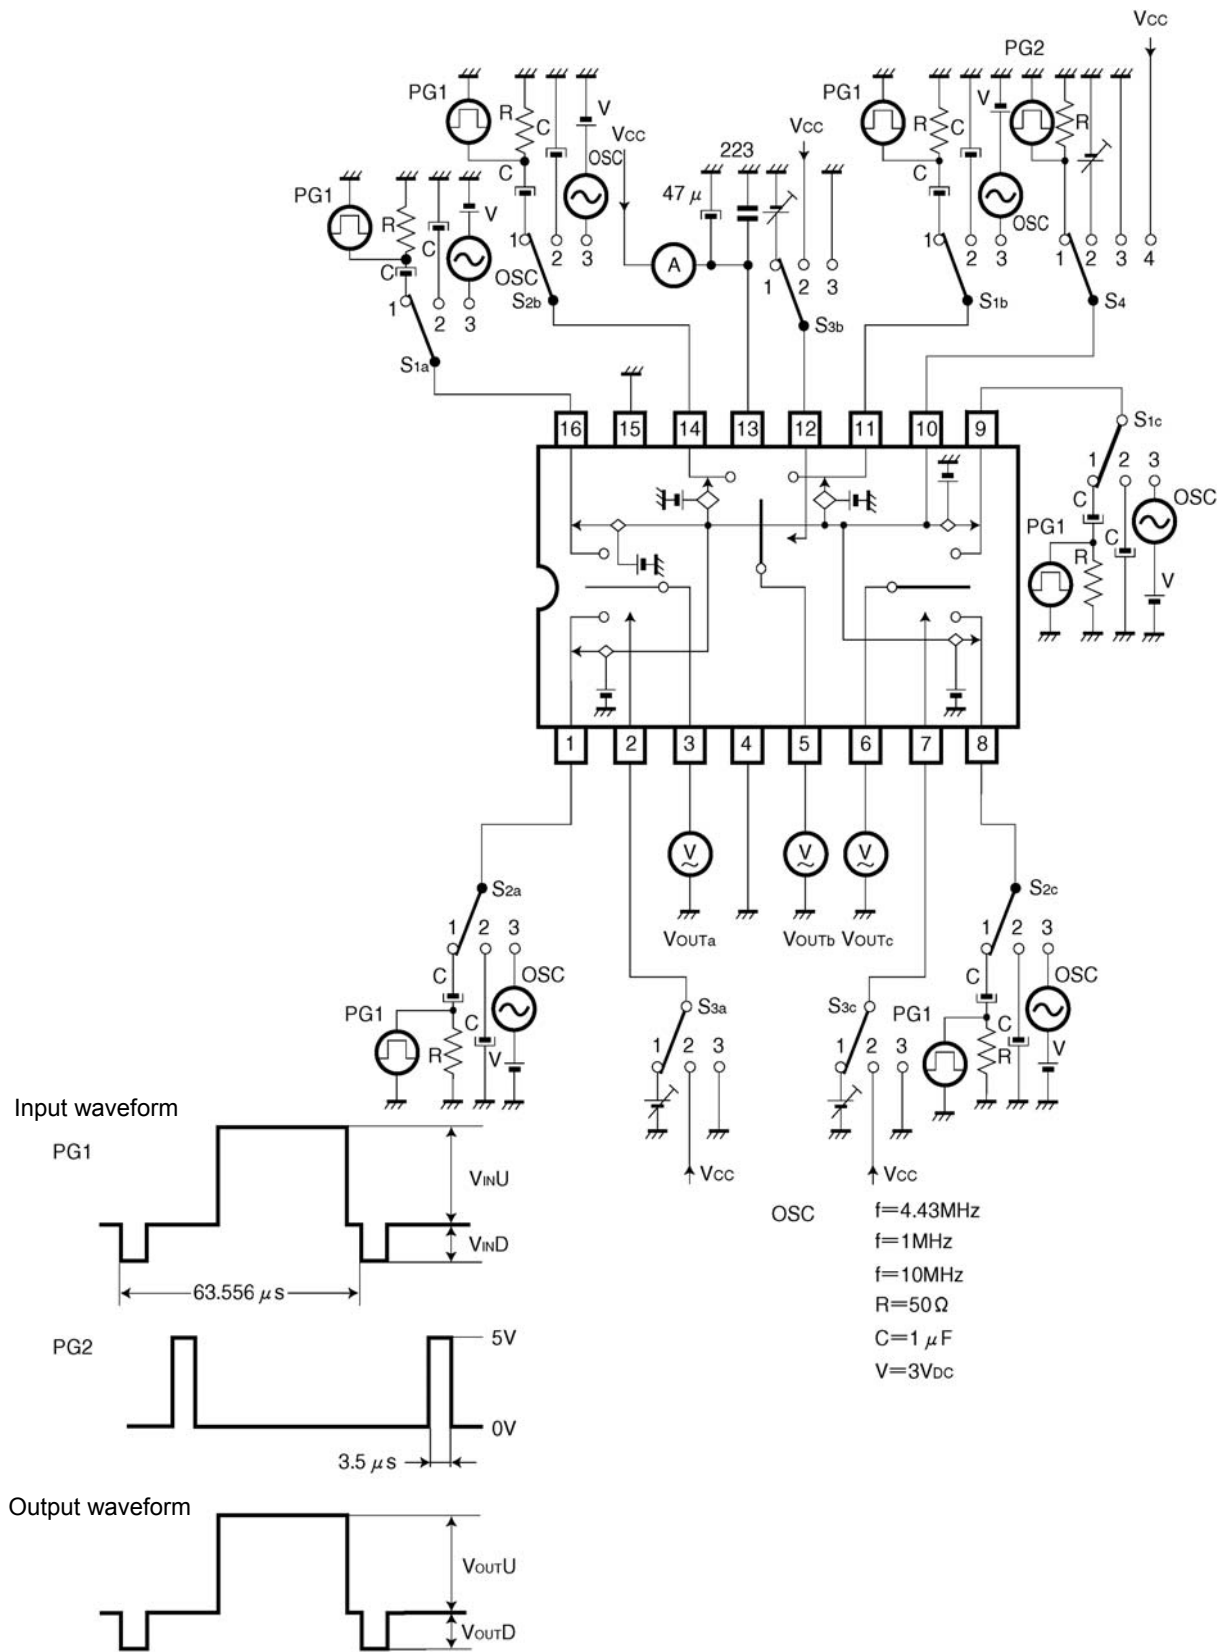


Fig.7 BA7606F/FS

●Reference data

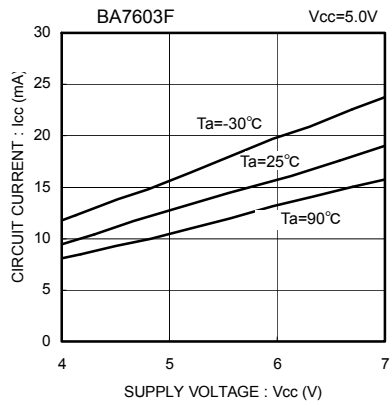


Fig.8 Circuit current vs. Supply voltage

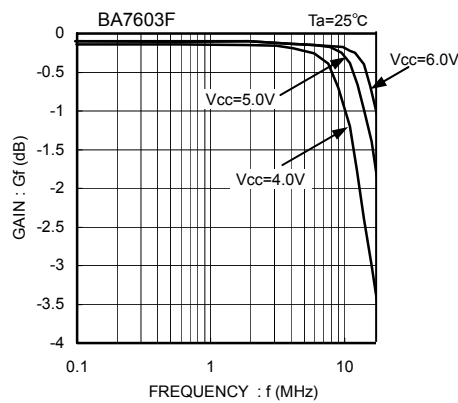


Fig.9 Frequency characteristics vs. Supply voltage

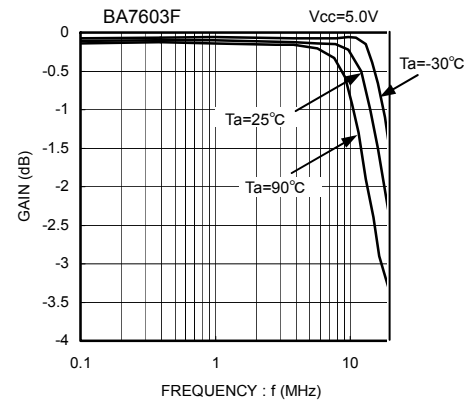


Fig.10 Frequency characteristics vs. temperature

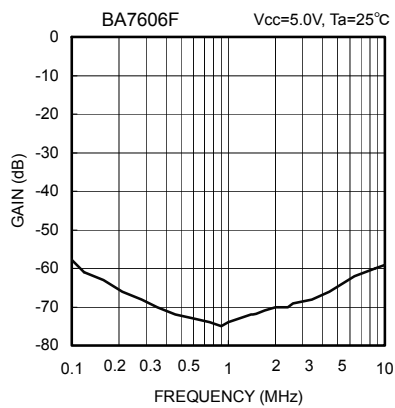


Fig.11 Interchannel crosstalk

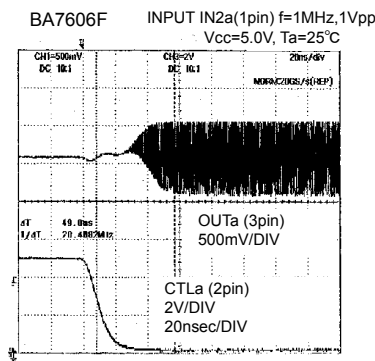


Fig.12 Switching characteristics1
OFF→ON

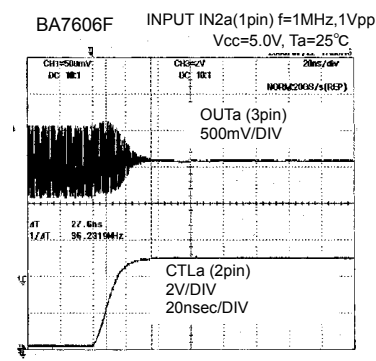


Fig.13 Switching characteristics2
ON→OFF

●Selection of order type

B	A	7	6	0	2	F	—	E	2
Part. No							Tape and Reel information		
BA7602F							BA7602F	E2	
BA7603F							BA7603F	E2	
BA7606F/FS							BA7606F/FS	E2	
BA7607F							BA7607F	E2	
BA7609F							BA7609F	E2	
BA7627FV							BA7627FV	E2	

SOP16

<Dimension>

(Unit:mm)


<Tape and Reel information>

Tape	Embossed carrier tape
Quantity	2500pcs
Direction of feed	E2 (The direction is the 1pin of product is at the upper left when you hold reel on the left hand and you pull out the tape on the right hand)

※When you order , please order in times the amount of package quantity.

SSOP-A16


<Dimension>



(Unit:mm)

<Tape and Reel information>


Tape	Embossed carrier tape
Quantity	2500pcs
Direction of feed	E2 (The direction is the 1pin of product is at the upper left when you hold reel on the left hand and you pull out the tape on the right hand)

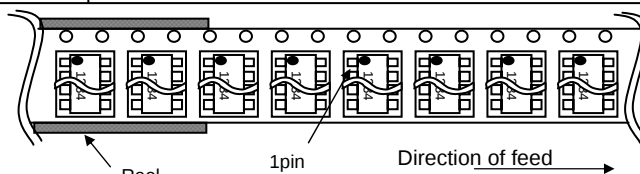

※When you order , please order in times the amount of package quantity.

SSOP-B16


<Dimension>



(Unit:mm)

<Tape and Reel information>

Tape	Embossed carrier tape
Quantity	2500pcs
Direction of feed	E2 (The direction is the 1pin of product is at the upper left when you hold reel on the left hand and you pull out the tape on the right hand)

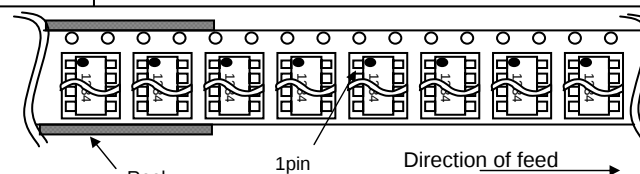

※When you order , please order in times the amount of package quantity.

- The contents described herein are correct as of August, 2008
- The contents described herein are subject to change without notice. For updates of the latest information, please contact and confirm with ROHM CO.,LTD.
- Any part of this application note must not be duplicated or copied without our permission.
- Application circuit diagrams and circuit constants contained herein are shown as examples of standard use and operation. Please pay careful attention to the peripheral conditions when designing circuits and deciding upon circuit constants in the set.
- Any data, including, but not limited to application circuit diagrams and information, described herein are intended only as illustrations of such devices and not as the specifications for such devices. ROHM CO.,LTD. disclaims any warranty that any use of such devices shall be free from infringement of any third party's intellectual property rights or other proprietary rights, and further, assumes no liability of whatsoever nature in the event of any such infringement, or arising from or connected with or related to the use of such devices.
- Upon the sale of any such devices, other than for buyer's right to use such devices itself, resell or otherwise dispose of the same, implied right or license to practice or commercially exploit any intellectual property rights or other proprietary rights owned or controlled by ROHM CO., LTD. is granted to any such buyer.
- The products described herein utilize silicon as the main material.
- The products described herein are not designed to be X ray proof.

The products listed in this catalog are designed to be used with ordinary electronic equipment or devices (such as audio visual equipment, office-automation equipment, communications devices, electrical appliances and electronic toys). Should you intend to use these products with equipment or devices which require an extremely high level of reliability and the malfunction of which would directly endanger human life (such as medical instruments, transportation equipment, aerospace machinery, nuclear-reactor controllers, fuel controllers and other safety devices), please be sure to consult with our sales representative in advance.

Contact us for further information about the products.

San Diego
Atlanta
Boston
Chicago
Dallas
Denver
Detroit
Nashville
Mexico
Düsseldorf
Munich
Stuttgart
France
United Kingdom
Denmark
Espoo
Salto
Oulu
Barcelona
Hungary
Poland
Russia
Seoul
Masan
Dalian
Beijing

TEL: +1-858-625-3630 FAX: +1-858-625-3670
 TEL: +1-770-754-5972 FAX: +1-770-754-0691
 TEL: +1-978-371-0382 FAX: +1-928-438-7164
 TEL: +1-847-368-1006 FAX: +1-847-368-1008
 TEL: +1-469-287-5366 FAX: +1-469-362-7973
 TEL: +1-303-708-0908 FAX: +1-303-708-0858
 TEL: +1-248-348-9920 FAX: +1-248-348-9942
 TEL: +1-615-620-6700 FAX: +1-615-620-6702
 TEL: +52-33-3123-2001 FAX: +52-33-3123-2002
 TEL: +49-2154-9210 FAX: +49-2154-921400
 TEL: +49-8999-216168 FAX: +49-8999-216176
 TEL: +49-711-7272-370 FAX: +49-711-7272-3720
 TEL: +33-1-5697-3060 FAX: +33-1-5697-3080
 TEL: +44-1-908-306700 FAX: +44-1-908-235788
 TEL: +45-3694-4739 FAX: +45-3694-4789
 TEL: +358-9725-54491 FAX: +358-9-7255-4499
 TEL: +358-2-7332234 FAX: +358-2-7332237
 TEL: +358-8-5372930 FAX: +358-8-5372931
 TEL: +34-9375-24320 FAX: +34-9375-24410
 TEL: +36-1-4719338 FAX: +36-1-4719339
 TEL: +48-22-5757213 FAX: +48-22-5757001
 TEL: +7-495-739-41-74 FAX: +7-495-739-41-74
 TEL: +82-2-8182-700 FAX: +82-2-8182-715
 TEL: +82-55-240-6234 FAX: +82-55-240-6236
 TEL: +86-411-8230-8549 FAX: +86-411-8230-8537
 TEL: +86-10-8525-2483 FAX: +86-10-8525-2489

Tianjin
Shanghai
Hangzhou
Nanjing
Ningbo
Qingdao
Suzhou
Wuxi
Shenzhen
Dongguan
Fuzhou
Guangzhou
Huizhou
Xiamen
Zhuhai
Hong Kong
Taipei
Kaohsiung
Singapore
Philippines
Thailand
Kuala Lumpur
Penang
Kyoto
Yokohama

TEL: +86-22-23029181 FAX: +86-22-23029183
 TEL: +86-21-6279-2727 FAX: +86-21-6247-2066
 TEL: +86-571-87658072 FAX: +86-571-87658071
 TEL: +86-25-8689-0015 FAX: +86-25-8689-0393
 TEL: +86-574-87654201 FAX: +86-574-87654208
 TEL: +86-532-5779-312 FAX: +86-532-5779-653
 TEL: +86-512-6807-1300 FAX: +86-512-6807-2300
 TEL: +86-510-82702693 FAX: +86-510-82702992
 TEL: +86-755-8307-3008 FAX: +86-755-8307-3003
 TEL: +86-769-8393-3320 FAX: +86-769-8398-4140
 TEL: +86-591-8801-8698 FAX: +86-591-8801-8690
 TEL: +86-20-3878-8100 FAX: +86-20-3825-5965
 TEL: +86-752-205-1054 FAX: +86-752-205-1059
 TEL: +86-592-238-5705 FAX: +86-592-239-8380
 TEL: +86-756-3232-480 FAX: +86-756-3232-460
 TEL: +852-2-740-6262 FAX: +852-2-375-8971
 TEL: +886-2-2500-6956 FAX: +886-2-2503-2869
 TEL: +886-7-237-0881 FAX: +886-7-238-7332
 TEL: +65-6332-2322 FAX: +65-6332-5662
 TEL: +63-2-807-6872 FAX: +63-2-809-1422
 TEL: +66-2-254-4890 FAX: +66-2-256-6334
 TEL: +60-3-7958-8355 FAX: +60-3-7958-8377
 TEL: +60-4-2286453 FAX: +60-4-2286452
 TEL: +81-75-365-1218 FAX: +81-75-365-1228
 TEL: +81-45-476-2290 FAX: +81-45-476-2295

Excellence in Electronics

ROHM

ROHM CO., LTD.

21 Saiin Mizosaki-cho, Ukyo-ku, Kyoto
 615-8585, Japan
 TEL: +81-75-311-2121 FAX: +81-75-315-0172
 URL: <http://www.rohm.com>

Published by
 KTC LSI Development Headquarters
 LSI Business Promotion Group

Notes

- No technical content pages of this document may be reproduced in any form or transmitted by any means without prior permission of ROHM CO.,LTD.
- The contents described herein are subject to change without notice. The specifications for the product described in this document are for reference only. Upon actual use, therefore, please request that specifications to be separately delivered.
- Application circuit diagrams and circuit constants contained herein are shown as examples of standard use and operation. Please pay careful attention to the peripheral conditions when designing circuits and deciding upon circuit constants in the set.
- Any data, including, but not limited to application circuit diagrams information, described herein are intended only as illustrations of such devices and not as the specifications for such devices. ROHM CO.,LTD. disclaims any warranty that any use of such devices shall be free from infringement of any third party's intellectual property rights or other proprietary rights, and further, assumes no liability of whatsoever nature in the event of any such infringement, or arising from or connected with or related to the use of such devices.
- Upon the sale of any such devices, other than for buyer's right to use such devices itself, resell or otherwise dispose of the same, no express or implied right or license to practice or commercially exploit any intellectual property rights or other proprietary rights owned or controlled by
- ROHM CO., LTD. is granted to any such buyer.
- Products listed in this document are no antiradiation design.

The products listed in this document are designed to be used with ordinary electronic equipment or devices (such as audio visual equipment, office-automation equipment, communications devices, electrical appliances and electronic toys).

Should you intend to use these products with equipment or devices which require an extremely high level of reliability and the malfunction of which would directly endanger human life (such as medical instruments, transportation equipment, aerospace machinery, nuclear-reactor controllers, fuel controllers and other safety devices), please be sure to consult with our sales representative in advance.

It is our top priority to supply products with the utmost quality and reliability. However, there is always a chance of failure due to unexpected factors. Therefore, please take into account the derating characteristics and allow for sufficient safety features, such as extra margin, anti-flammability, and fail-safe measures when designing in order to prevent possible accidents that may result in bodily harm or fire caused by component failure. ROHM cannot be held responsible for any damages arising from the use of the products under conditions out of the range of the specifications or due to non-compliance with the NOTES specified in this catalog.

Thank you for your accessing to ROHM product informations.

More detail product informations and catalogs are available, please contact your nearest sales office.

ROHM Customer Support System

THE AMERICAS / EUROPE / ASIA / JAPAN

www.rohm.com

Contact us : webmaster@rohm.co.jp