
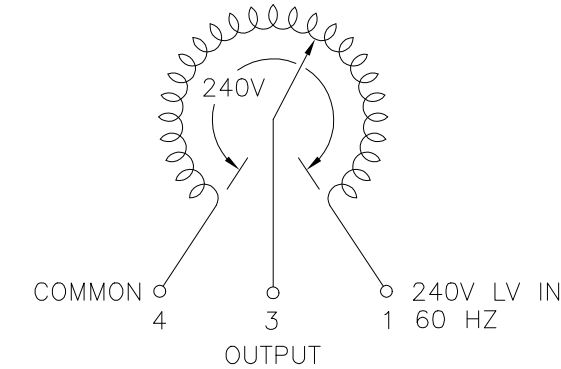
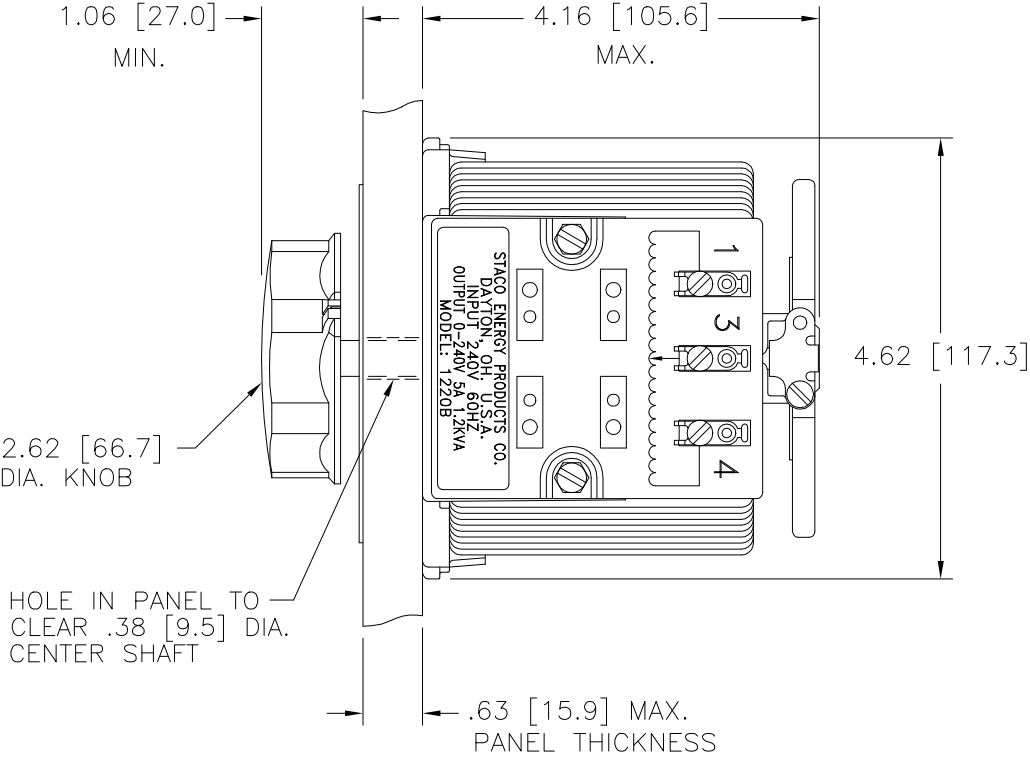


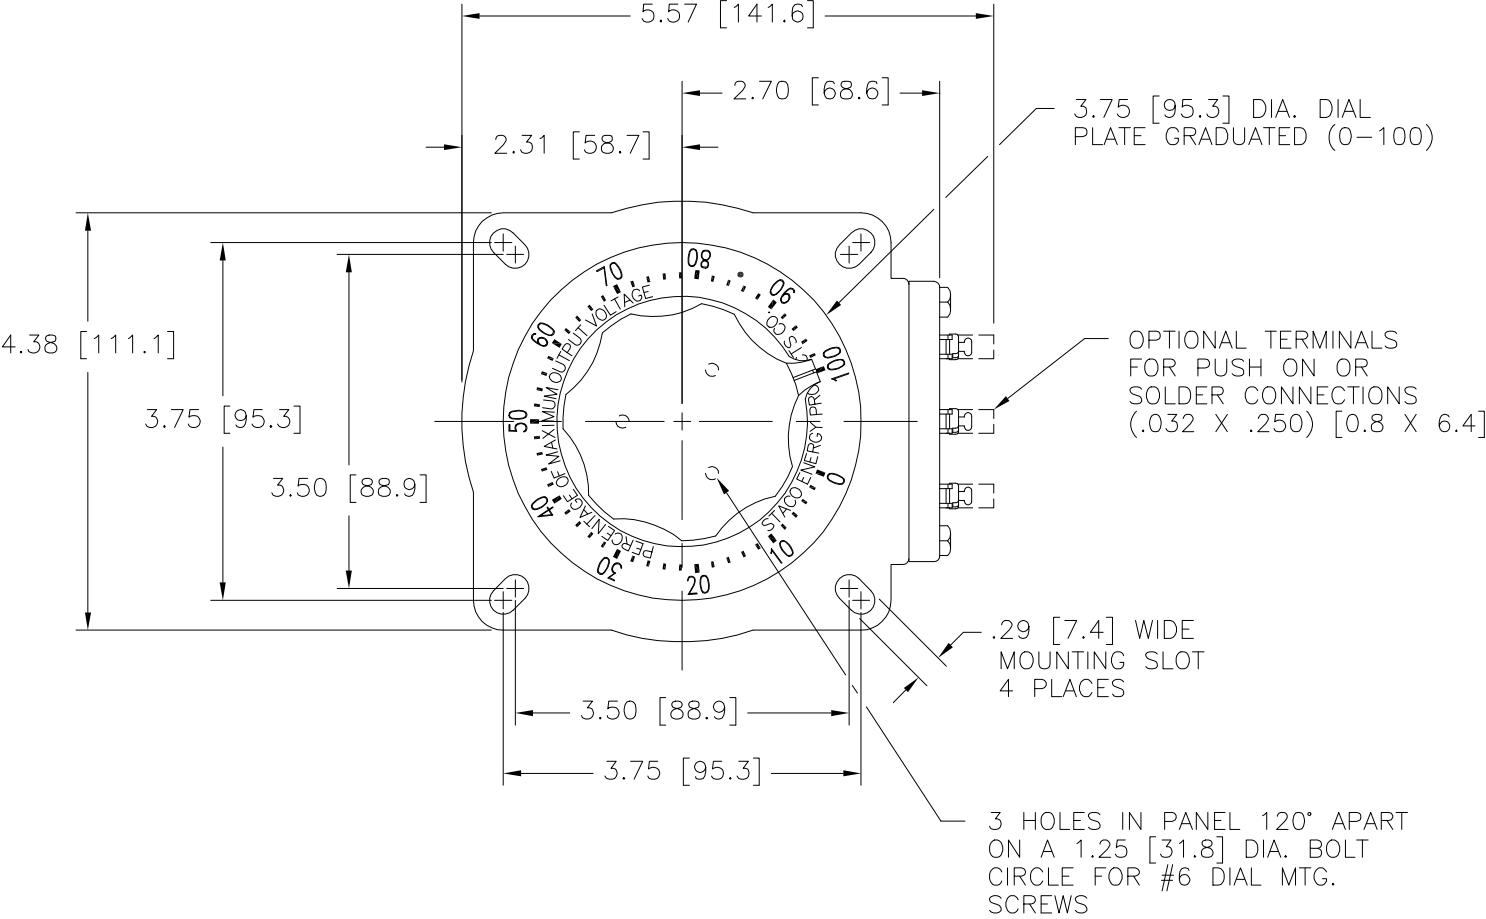

SCHEMATIC
VIEW FROM BASE END
FUSE RECOMMENDED BUT NOT SUPPLIED

SPECIFICATIONS												
WIRING	INPUT		OUTPUT						SHAFT ROTATION TO INCREASE VOLTAGE	TERMINAL CONNECTIONS		
	VOLTS	HERTZ	VOLTS	CONSTANT CURRENT LOAD		CONSTANT IMPEDANCE LOAD		FOR INCREASING VOLTAGE AS VIEWED FROM BASE END				
				MAX. AMPS	MAX. KVA	MAX. AMPS	MAX. KVA	INPUT		JUMPER	OUTPUT	
SINGLE PHASE	240	60	0-240	5.0	1.20	7.0	1.68	CW	1-4	—	4-3	
								CCW	1-4	—	1-3	
UNLESS OTHERWISE SPECIFIED, TOLERANCE IS ±				TITLE: SPEC. CONTROL DRAWING VARIABLE TRANSFORMER MODEL: 1220B								
DECIMALS HOLES ANGLES DRAFT												
.XX .0005 .03 .002 1° 1-1/2°												
MATERIAL:				ALL DIMENSIONS APPLY AFTER PLATING				 A Components Corporation of Ametec Company 301 Glendale Boulevard Dayton, Ohio 45403 USA				
The information and design disclosed herein was originated by and is the property of STACO ENERGY PRODUCTS CO., which reserves all patent, proprietary, design, manufacturing, reproduction, use and sale rights thereto, and to any article disclosed therein except to the extent rights are expressly granted to others. The foregoing does not apply to vendor proprietary parts.				DRAWN BY		DATE		FIRST USED ON		DO NOT SCALE DWG.		
				S.A. SMITH		9/25/97						
				CHECKER		DATE		WEIGHT APPROX.		CAGE CODE		
								9 LBS		83008		
				ENGINEER		DATE		SCALE		SHEET 1 OF 1		
								1 = 1				
										DWG. NO.	031-3260	
										DWG. SIZE		
										D		