VN5E050AJ-E

Single channel high side driver with analog current sense for automotive applications

Features

Max supply voltage	V_{CC}	41 V
Operating voltage range	V_{CC}	4.5 to 28V
Max On-State resistance	R_{ON}	50 mΩ
Current limitation (typ)	I_{LIMH}	27 A
Off state supply current	I_S	2 µA(1)

1. Typical value with all loads connected.

- General
  - Inrush current active management by power limitation
  - Very low stand-by current
  - 3.0V CMOS compatible inputs
  - Optimized electromagnetic emissions
  - Very low electromagnetic susceptibility
  - In compliance with the 2002/95/EC european directive
  - Very low current sense leakage
- Diagnostic functions
  - Proportional load current sense
  - High current sense precision for wide currents range
  - Current sense disable
  - Off state open load detection
  - Output short to V_{CC} detection
  - Overload and short to ground (power limitation) indication
  - Thermal shutdown indication
- Protections
  - Undervoltage shutdown
  - Overvoltage clamp
  - Load current limitation
  - Self limiting of fast thermal transients
  - Protection against loss of ground and loss of V_{CC}
  - Over-temperature shutdown with autorestart (thermal shutdown)

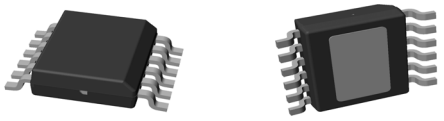

PowerSSO-12

  - Reverse battery protected (see *Figure 32.*)
  - Electrostatic discharge protection

Application

- All types of resistive, inductive and capacitive loads
- Suitable as LED driver

Description

The VN5E050AJ-E is a single channel high-side driver manufactured in the ST proprietary VIPower M0-5 technology and housed in the tiny PowerSSO-12 package. The VN5E050AJ-E is designed to drive 12V automotive grounded loads delivering protection, diagnostics and easy 3V and 5V CMOS compatible interface with any microcontroller.

The device integrates advanced protective functions such as load current limitation, inrush and overload active management by power limitation, over-temperature shut-off with auto-restart and over-voltage active clamp. A dedicated analog current sense pin is associated with every output channel in order to provide *Ehnanced* diagnostic functions including fast detection of overload and short-circuit to ground through power limitation indication, over-temperature indication, short-circuit to Vcc diagnosis and ON & OFF state open load detection.

The current sensing and diagnostic feedback of the whole device can be disabled by pulling the CS_DIS pin high to allow sharing of the external sense resistor with other similar devices.

Contents

1 Block diagram and pin description 5

2 Electrical specifications 7

2.1 Absolute maximum ratings 7

2.2 Thermal data 8

2.3 Electrical characteristics 9

2.4 Waveforms 18

2.5 Electrical characteristics curves 21

3 Application information 24

3.1 GND protection network against reverse battery 24

3.1.1 Solution 1: resistor in the ground line (RGND only) 24

3.1.2 Solution 2: diode (D_{GND}) in the ground line 25

3.2 Load dump protection 25

3.3 MCU I/O protection 25

3.4 Current sense and diagnostic 26

3.4.1 Short to V_{CC} and OFF state open load detection 27

3.5 Maximum demagnetization energy (V_{CC} = 13.5V) 28

4 Package and PCB thermal data 29

4.1 PowerSSO-12 thermal data 29

5 Package information 32

5.1 ECOPACK® packages 32

5.2 Package mechanical data 32

5.3 Packing information 34

6 Order codes 35

7 Revision history 36

List of tables

Table 1. Pin function . . . 5
Table 2. Suggested connections for unused and not connected pins . . . 6
Table 3. Absolute maximum ratings . . . 7
Table 4. Thermal data . . . 8
Table 5. Power section . . . 9
Table 6. Switching (V_{CC}= 13V; T_j= 25°C) . . . 9
Table 7. Logic inputs . . . 10
Table 8. Protections and diagnostics . . . 10
Table 9. Current sense (8V<VCC<18V) . . . 11
Table 10. Open load detection (8V<VCC<18V) . . . 12
Table 11. Truth table . . . 16
Table 12. Electrical transient requirements . . . 17
Table 13. Thermal parameter . . . 31
Table 14. PowerSSO-12 mechanical data . . . 33
Table 15. Device summary . . . 35
Table 16. Document revision history . . . 36

List of figures

Figure 1. Block diagram . . . 5
Figure 2. Configuration diagram (top view) . . . 6
Figure 3. Current and voltage conventions . . . 7
Figure 4. Current sense delay characteristics . . . 13
Figure 5. Open load Off-state delay timing . . . 13
Figure 6. Switching characteristics . . . 13
Figure 7. Delay response time between rising edge of ouput current and rising edge of current sense (CS enabled) . . . 14
Figure 8. Output voltage drop limitation . . . 14
Figure 9. I_{OUT}/I_{SENSE} vs. I_{OUT} . . . 15
Figure 10. Maximum current sense ratio drift vs. load current . . . 15
Figure 11. Normal operation . . . 18
Figure 12. Overload or Short to GND . . . 18
Figure 13. Intermittent Overload . . . 19
Figure 14. OFF-State Open Load with external circuitry . . . 19
Figure 15. Short to V_{CC} . . . 20
Figure 16. T_J evolution in Overload or Short to GND . . . 20
Figure 17. Off state output current . . . 21
Figure 18. High level input current . . . 21
Figure 19. Input clamp level . . . 21
Figure 20. Input low level . . . 21
Figure 21. Input high level . . . 21
Figure 22. Input hysteresis voltage . . . 21
Figure 23. On state resistance vs. Tcase . . . 22
Figure 24. On state resistance vs. VCC . . . 22
Figure 25. Undervoltage shutdown . . . 22
Figure 26. Turn-On voltage slope . . . 22
Figure 27. ILIMH Vs. Tcase . . . 22
Figure 28. Turn-Off voltage slope . . . 22
Figure 29. CS_DIS high level voltage . . . 23
Figure 30. CS_DIS clamp voltage . . . 23
Figure 31. CS_DIS low level voltage . . . 23
Figure 32. Application schematic . . . 24
Figure 33. Current sense and diagnostic . . . 26
Figure 34. Maximum turn-Off current versus inductance . . . 28
Figure 35. PowerSSO-12 PC board . . . 29
Figure 36. Rthj-amb Vs. PCB copper area in open box free air condition . . . 29
Figure 37. PowerSSO-12 thermal impedance junction ambient single pulse . . . 30
Figure 38. Thermal fitting model of a single channel HSD in PowerSSO-12 . . . 30
Figure 39. PowerSSO-12 package dimensions . . . 32
Figure 40. PowerSSO-12 tube shipment (no suffix) . . . 34
Figure 41. PowerSSO-12 tape and reel shipment (suffix “TR”) . . . 34

1 Block diagram and pin description

Figure 1. Block diagram

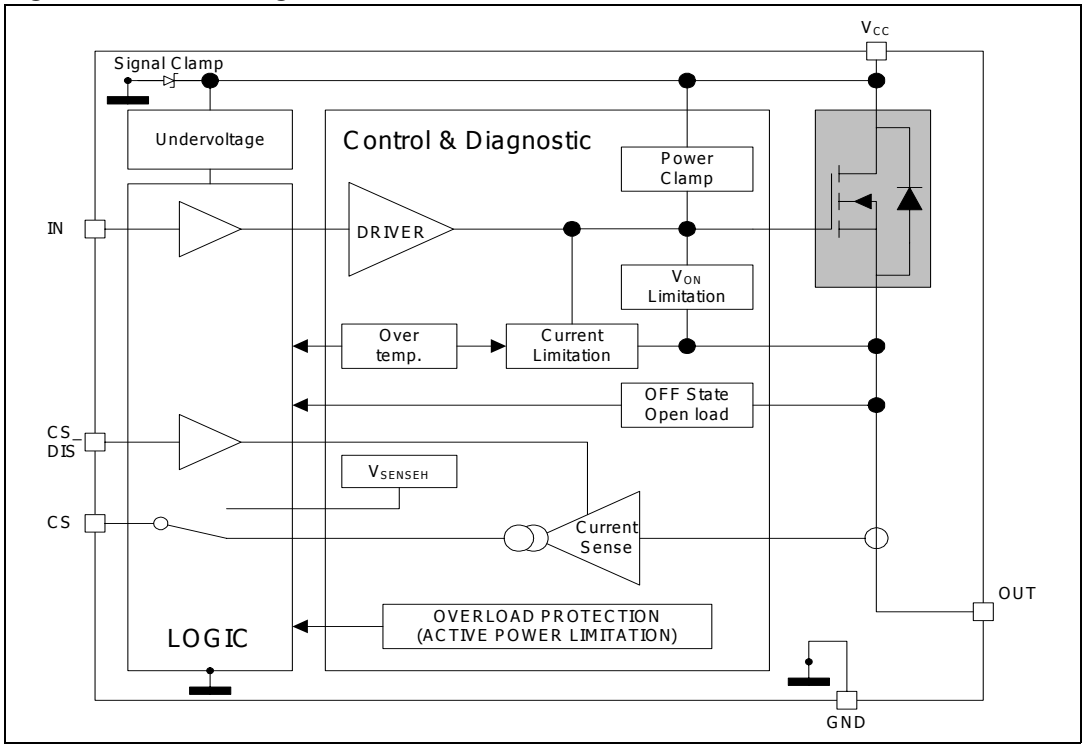

Table 1. Pin function

Name	Function
V_{CC}	Battery connection.
OUTPUT	Power output.
GND	Ground connection. Must be reverse battery protected by an external diode/resistor network.
INPUT	Voltage controlled input pin with hysteresis, CMOS compatible. Controls output switch state.
CURRENT SENSE	Analog current sense pin, delivers a current proportional to the load current.
CS_DIS	Active high CMOS compatible pin, to disable the current sense pin.

Figure 2. Configuration diagram (top view)

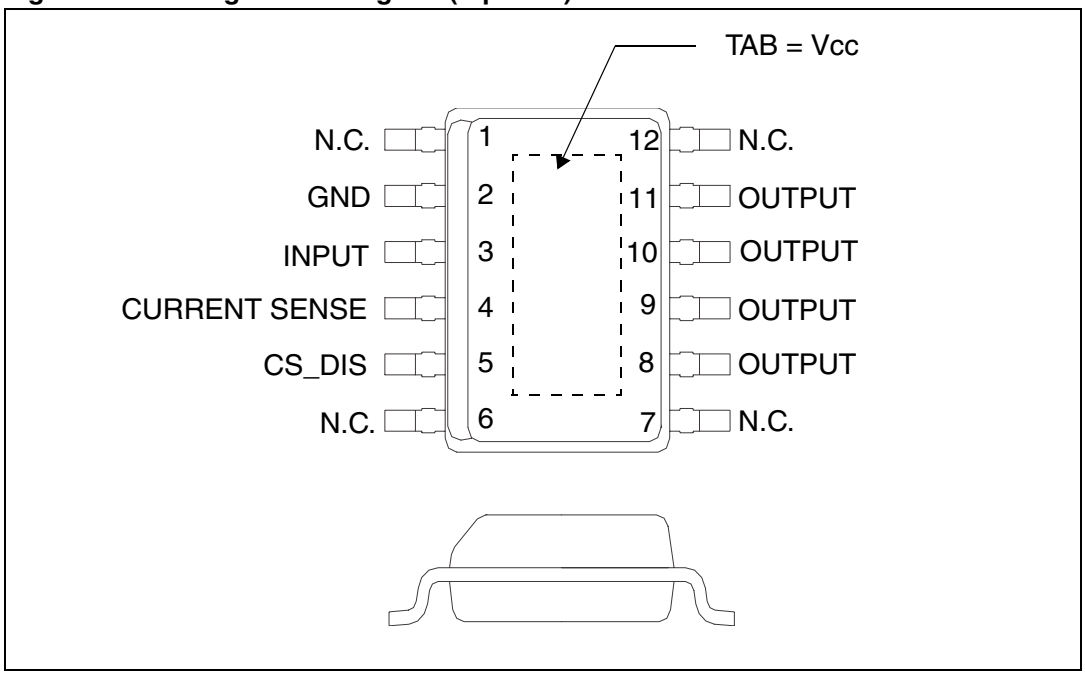

Table 2. Suggested connections for unused and not connected pins

Connection / pin	Current sense	N.C.	Output	Input	CS_DIS
Floating	Not allowed	X	X	X	X
To ground	Through 1 KΩ resistor	X	Through 22 KΩ resistor	Through 10 KΩ resistor	Through 10 KΩ resistor

2 Electrical specifications

Figure 3. Current and voltage conventions

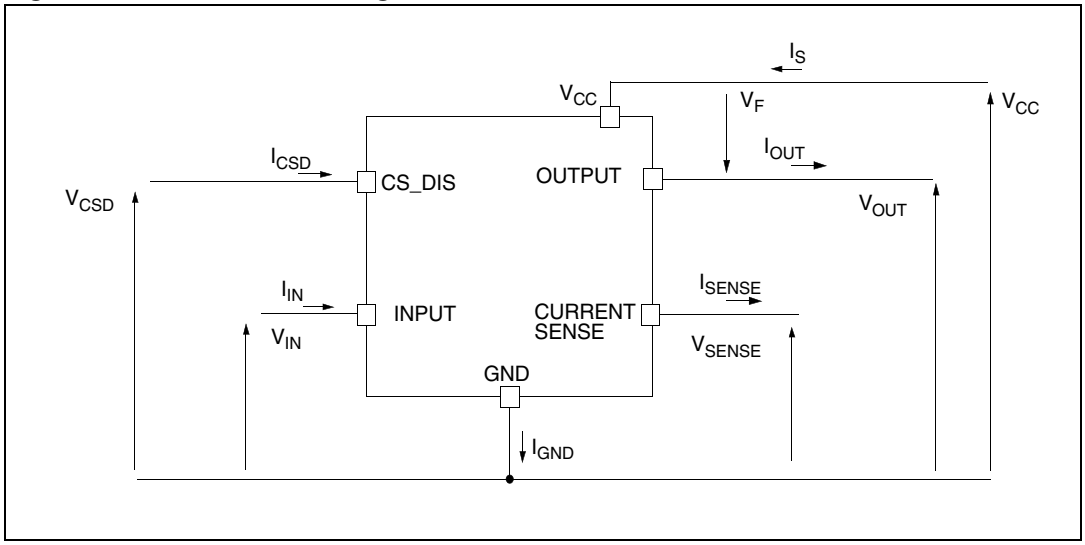

Note: $V_F = V_{OUT} - V_{CC}$ during reverse battery condition.

2.1 Absolute maximum ratings

Stressing the device above the rating listed in the “Absolute maximum ratings” table may cause permanent damage to the device. These are stress ratings only and operation of the device at these or any other conditions above those indicated in the Operating sections of this specification is not implied. Exposure to Absolute Maximum Rating conditions for extended periods may affect device reliability. Refer also to the STMicroelectronics SURE Program and other relevant quality document.

Table 3. Absolute maximum ratings

Symbol	Parameter	Value	Unit
V_{CC}	DC supply voltage	41	V
$-V_{CC}$	Reverse DC supply voltage	0.3	V
$- I_{GND}$	DC reverse ground pin current	200	mA
I_{OUT}	DC output current	Internally limited	A
$- I_{OUT}$	Reverse DC output current	20	A
I_{IN}	DC input current	-1 to 10	mA
I_{CSD}	DC current sense disable input current	-1 to 10	mA
$-I_{CSENSE}$	DC reverse CS pin current	200	mA
V_{CSENSE}	Current sense maximum voltage	V_{CC} - 41 to $+V_{CC}$	V
E_{MAX}	Maximum switching energy (single pulse) (L= 3mH; R_L=0Ω; V_{bat}=13.5V; T_{jstart}=150ºC; $I_{OUT} = I_{limL}$*(Typ.)*)	104	mJ

Table 3. Absolute maximum ratings (continued)

Symbol	Parameter	Value	Unit
V_{ESD}	Electrostatic discharge (Human Body Model: R=1.5KΩ; C=100pF) - INPUT - CURRENT SENSE - CS_DIS - OUTPUT - V_{CC}	 4000 2000 4000 5000 5000	 V V V V V
V_{ESD}	Charge device model (CDM-AEC-Q100-011)	750	V
T_j	Junction operating temperature	-40 to 150	°C
T_{stg}	Storage temperature	-55 to 150	°C

2.2 Thermal data

Table 4. Thermal data

Symbol	Parameter	Max. value	Unit
$R_{thj\text{-}case}$	Thermal resistance junction-case (with one channel ON)	2.7	°C/W
$R_{thj\text{-}amb}$	Thermal resistance junction-ambient	See *Figure 36.*	°C/W

2.3 Electrical characteristics

Values specified in this section are for 8V <V_{CC}< 28V; -40°C< T_j <150°C, unless otherwise stated.

Table 5. Power section

Symbol	Parameter	Test conditions	Min.	Typ.	Max.	Unit
V_{CC}	Operating supply voltage		4.5	13	28	V
V_{USD}	Undervoltage shutdown			3.5	4.5	V
$V_{USDhyst}$	Undervoltage shutdown hysteresis			0.5		V
R_{ON}	On state resistance	I_{OUT}= 2 A; T_j= 25°C I_{OUT}= 2 A; T_j= 150°C I_{OUT}= 2 A; V_{CC}= 5V; T_j= 25°C			50 100 65	mΩ mΩ mΩ
V_{clamp}	Clamp voltage	I_S= 20 mA	41	46	52	V
I_S	Supply current	Off state; V_{CC}=13V; T_j=25°C; V_{IN}=V_{OUT}=V_{SENSE}=V_{CSD}=0V On State; V_{CC}=13V; V_{IN}=5V; I_{OUT}=0A		2(1) 1.5	5(1) 3	µA mA
$I_{L(off1)}$	Off state output current	V_{IN}=V_{OUT}=0V; V_{CC}=13V; T_j=25°C V_{IN}=V_{OUT}=0V; V_{CC}=13V; T_j=125°C	0 0	0.01	3 5	µA
V_F	Output - V_{CC} diode voltage	-I_{OUT}= 2A; T_j= 150°C			0.7	V

1. PowerMOS leakage included.

Table 6. Switching (V_{CC}= 13V; T_j= 25°C)

Symbol	Parameter	Test conditions	Min.	Typ.	Max.	Unit
$t_{d(on)}$	Turn- On delay time	R_L= 6.5Ω (see *Figure 6.*)		20		µs
$t_{d(off)}$	Turn- Off delay time	R_L= 6.5Ω (see *Figure 6.*)		40		µs
$(dV_{OUT}/dt)_{on}$	Turn- On voltage slope	R_L= 6.5Ω		See *Figure 26.*		V/ µs
$(dV_{OUT}/dt)_{off}$	Turn- Off voltage slope	R_L= 6.5Ω		See *Figure 28.*		V/ µs
W_{ON}	Switching energy losses during t_{on}	R_L= 6.5Ω (see *Figure 6.*)		0.20		mJ
W_{OFF}	Switching energy losses during t_{off}	R_L= 6.5Ω (see *Figure 6.*)		0.3		mJ

Table 7. Logic inputs

Symbol	Parameter	Test conditions	Min.	Typ.	Max.	Unit
V_{IL}	Input low level voltage				0.9	V
I_{IL}	Low level input current	V_{IN}=0.9V	1			µA
V_{IH}	Input high level voltage		2.1			V
I_{IH}	High level input current	V_{IN}=2.1V			10	µA
$V_{I(hyst)}$	Input hysteresis voltage		0.25			V
V_{ICL}	Input clamp voltage	I_{IN}=1mA I_{IN}=-1mA	5.5	 -0.7	7	V V
V_{CSDL}	CS_DIS low level voltage				0.9	V
I_{CSDL}	Low level CS_DIS current	V_{CSD}=0.9V	1			µA
V_{CSDH}	CS_DIS high level voltage		2.1			V
I_{CSDH}	High level CS_DIS current	V_{CSD}=2.1V			10	µA
$V_{CSD(hyst)}$	CS_DIS hysteresis voltage		0.25			V
V_{CSCL}	CS_DIS clamp voltage	I_{CSD}=1mA I_{CSD}=-1mA	5.5	 -0.7	7	V V

Table 8. Protections and diagnostics (1)

Symbol	Parameter	Test conditions	Min.	Typ.	Max.	Unit
I_{limH}	DC short circuit current	V_{CC}= 13V 5V < V_{CC} < 28V	19	27	38 38	A A
I_{limL}	Short circuit current during thermal cycling	V_{CC}= 13V; T_R<T_j<T_{TSD}		7		A
T_{TSD}	Shutdown temperature		150	175	200	°C
T_R	Reset temperature		T_{RS} + 1	T_{RS} + 5		°C
T_{RS}	Thermal reset of status		135			°C
T_{HYST}	Thermal hysteresis (T_{TSD}-T_R)			7		°C
V_{DEMAG}	Turn- Off output voltage clamp	I_{OUT}= 2A; V_{IN}=0; L= 6mH	V_{CC}-41	V_{CC}-46	V_{CC}-52	V
V_{ON}	Output voltage drop limitation	I_{OUT}=0.1A; T_j=-40°C...150°C (see *Figure 8.*)		25		mV

1. To ensure long term reliability under heavy overload or short circuit conditions, protection and related diagnostic signals must be used together with a proper software strategy. If the device is subjected to abnormal conditions, this software must limit the duration and number of activation cycles.

Table 9. Current sense (8V<V_{CC}<18V)

Symbol	Parameter	Test conditions	Min.	Typ.	Max.	Unit
K_0	I_{OUT}/I_{SENSE}	I_{OUT}=0.05A; V_{SENSE}=0.5V;V_{CSD}=0V; T_j= -40°C...150°C	1170	2000	3090	
K_1	I_{OUT}/I_{SENSE}	I_{OUT}= 1A; V_{SENSE}=4 V; V_{CSD}=0V T_j= -40°C...150°C T_j=25°C...150°C	1575 1575	2000 2000	2750 2465	
dK_1/K_1(1)	Current sense ratio drift	I_{OUT}= 1A; V_{SENSE}= 4 V; V_{CSD}=0V; T_J= -40 °C to 150 °C	-10		10	%
K_2	I_{OUT}/I_{SENSE}	I_{OUT} = 2A; V_{SENSE}= 4V; V_{CSD}=0V; T_j= -40°C...150°C T_j=25°C...150°C	1765 1765	2000 2000	2315 2155	
dK_2/K_2(1)	Current sense ratio drift	I_{OUT}= 2A; V_{SENSE}= 4V; V_{CSD}=0V; T_J=-40 °C to 150 °C	-7		7	%
K_3	I_{OUT}/I_{SENSE}	I_{OUT}= 4A; V_{SENSE}=4V; V_{CSD}=0V; T_j= -40°C...150°C T_j= 25°C...150°C	1840 1840	2000 2000	2135 2080	
dK_3/K_3(1)	Current sense ratio drift	I_{OUT}= 4A; V_{SENSE}= 4 V; V_{CSD}=0V; T_J= -40 °C to 150 °C	-4		4	%
I_{SENSE0}	Analog sense leakage current	I_{OUT}=0A; V_{SENSE}=0V; V_{CSD}=5V; V_{IN}=0V; T_j=-40°C to 150°C V_{CSD}=0V; V_{IN}=5V; T_j=-40°C to 150°C I_{OUT}=2A; V_{SENSE}=0V; V_{CSD}=5V; V_{IN}=5V; T_j=-40°C to 150°C	0 0 0		1 2 1	µA µA µA
I_{OL}	Open load ON state current detection threshold	V_{IN} = 5V, 8V<V_{CC}<18V I_{SENSE}= 5 µA	4		20	mA
V_{SENSE}	Max analog sense output voltage	I_{OUT}=4A; V_{CSD}=0V	5			V
V_{SENSEH}	Analog sense output voltage in fault condition(2)	V_{CC}= 13V; R_{SENSE}= 3.9 KΩ		8		V
I_{SENSEH}	Analog sense output current in fault condition(2)	V_{CC}= 13V; V_{SENSE}= 5V		9		mA
$t_{DSENSE1H}$	Delay response time from falling edge of CS_DIS pin	V_{SENSE}<4V, 0.5A<Iout<4A I_{SENSE}= 90% of $I_{SENSE\ max}$ (see *Figure 4.*)		50	100	µs
$t_{DSENSE1L}$	Delay response time from rising edge of CS_DIS pin	V_{SENSE} < 4V, 0.5A<Iout<4A I_{SENSE}= 10% of $I_{SENSE\ max}$ (see *Figure 4.*)		5	20	µs

Table 9. Current sense (8V<V_{CC}<18V) (continued)

Symbol	Parameter	Test conditions	Min.	Typ.	Max.	Unit
$t_{DSENSE2H}$	Delay response time from rising edge of INPUT pin	V_{SENSE} < 4V, 0.5A<Iout<4A I_{SENSE}= 90% of $I_{SENSE\ max}$ (see *Figure 4.*)		80	250	µs
$\Delta t_{DSENSE2H}$	Delay response time between rising edge of output current and rising edge of current sense	V_{SENSE} < 4V, I_{SENSE} = 90% of $I_{SENSEMAX}$, I_{OUT} = 90% of I_{OUTMAX} I_{OUTMAX}=2A (see *Figure 7*)			40	µs
$t_{DSENSE2L}$	Delay response time from falling edge of INPUT pin	V_{SENSE} < 4V, 0.5A<Iout<4A I_{SENSE}= 10% of $I_{SENSE\ max}$ (see *Figure 4.*)		100	250	µs

1. Parameter guaranteed by design; it is not tested.
2. Fault condition includes: power limitation, overtemperature and open load OFF state detection.

Table 10. Open load detection (8V<V_{CC}<18V)

Symbol	Parameter	Test conditions	Min.	Typ.	Max.	Unit
V_{OL}	Open load OFF state voltage detection threshold	V_{IN} = 0V	2	See *Figure 5.*	4	V
t_{DSTKON}	Output short circuit to V_{CC} detection delay at turn Off	See *Figure 5.*	180		1200	µs
$I_{L(off2)r}$	Off state output current at V_{OUT} = 4V	V_{IN}=0V; V_{SENSE}=0V V_{OUT} rising from 0V to 4V	-120		0	µA
$I_{L(off2)f}$	Off state output current at V_{OUT} = 2V	V_{IN}=0V; V_{SENSE}=V_{SENSEH}; V_{OUT} falling from V_{CC} to 2V	-50		90	µA
td_vol	Delay response from output rising edge to V_{SENSE} rising edge in open load	V_{OUT}= 4 V; V_{IN}= 0V V_{SENSE}= 90% of V_{SENSEH}			20	µs

Figure 4. Current sense delay characteristics

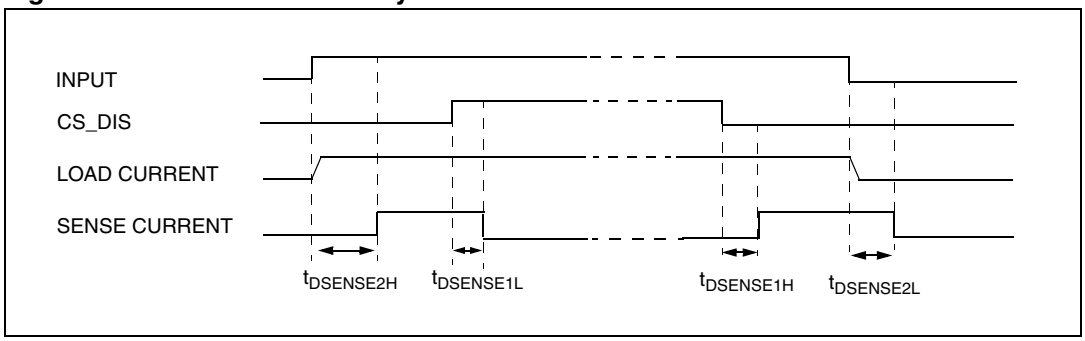

Figure 5. Open load Off-state delay timing

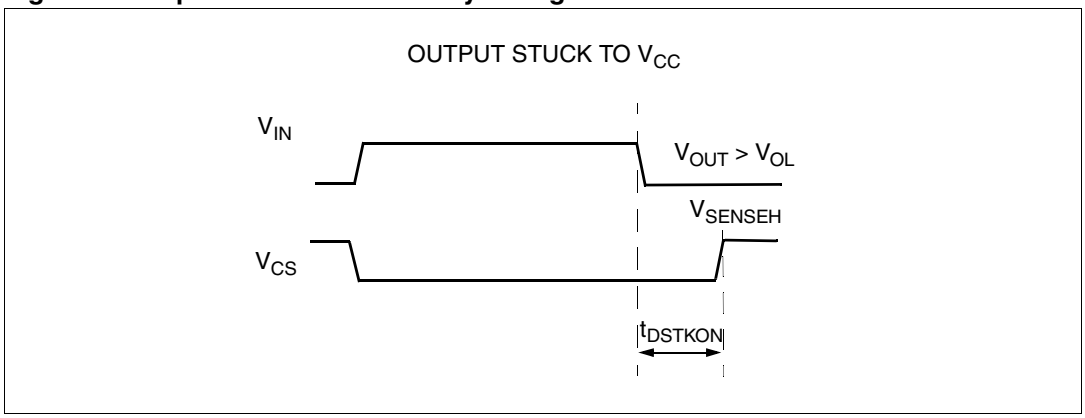

Figure 6. Switching characteristics

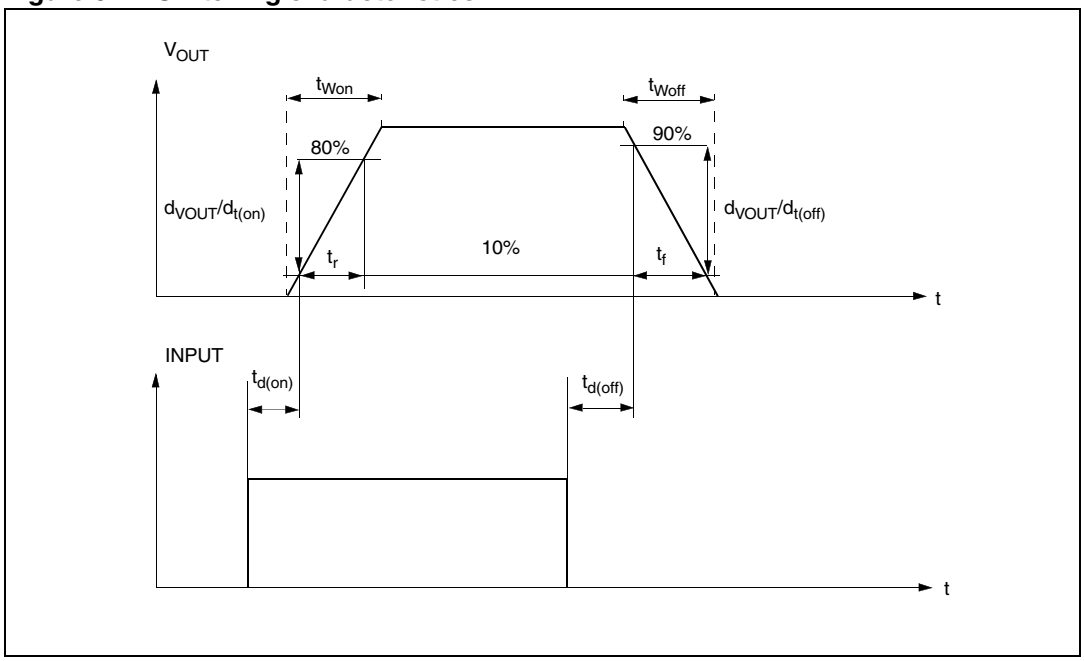

Figure 7. Delay response time between rising edge of ouput current and rising edge of current sense (CS enabled)

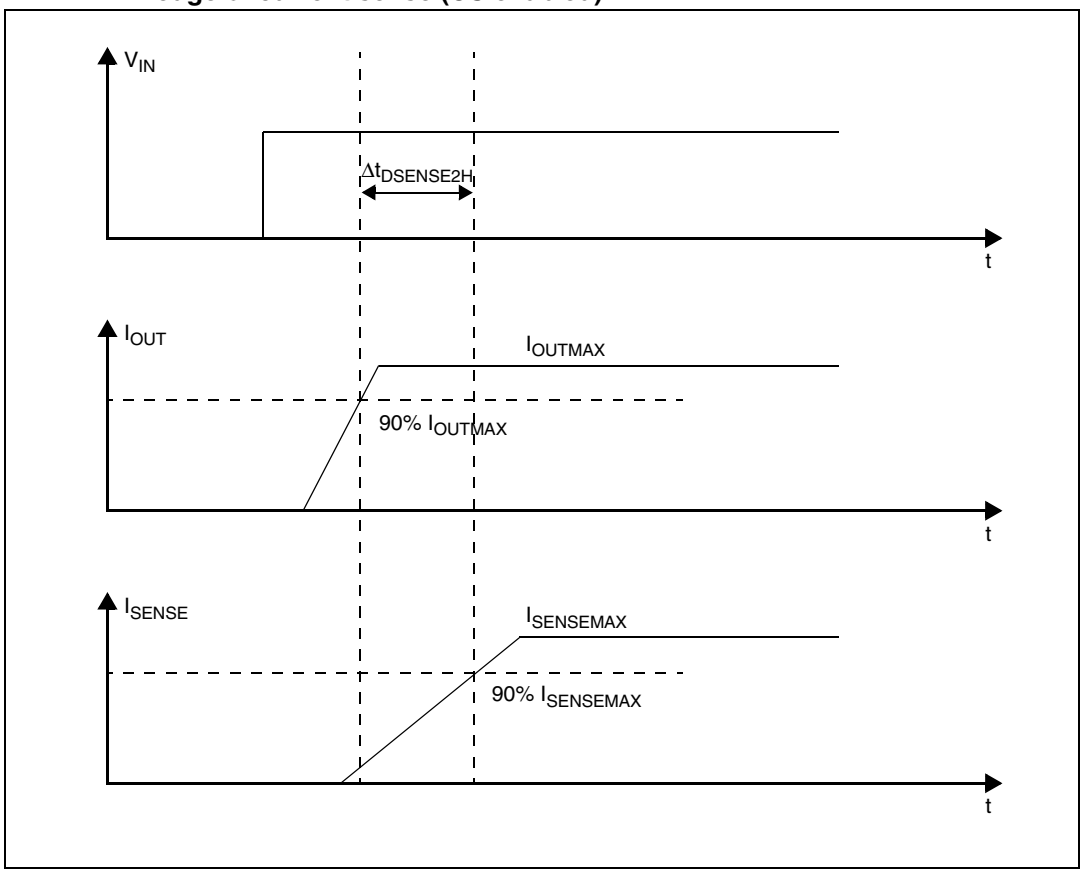

Figure 8. Output voltage drop limitation

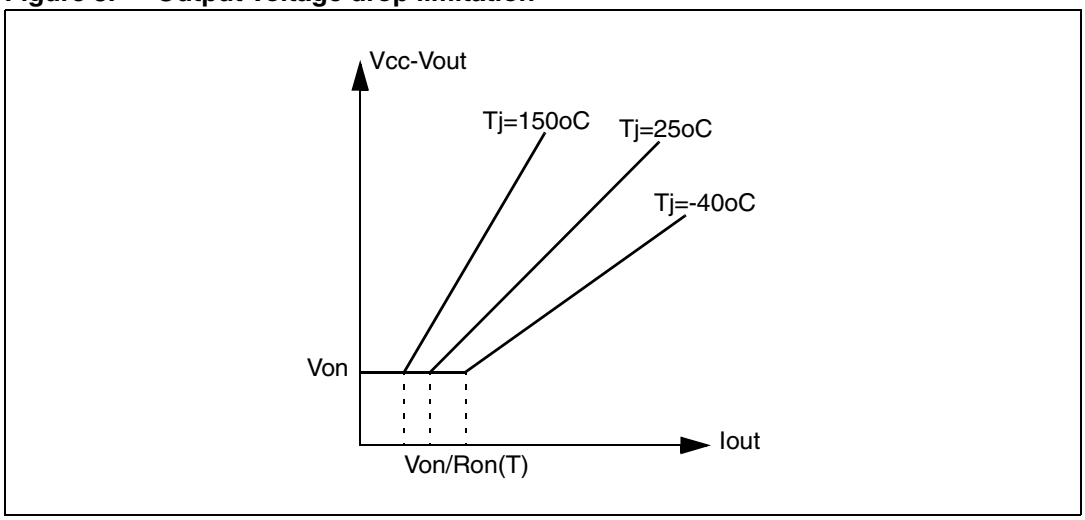

Figure 9. I_{OUT}/I_{SENSE} vs. I_{OUT}

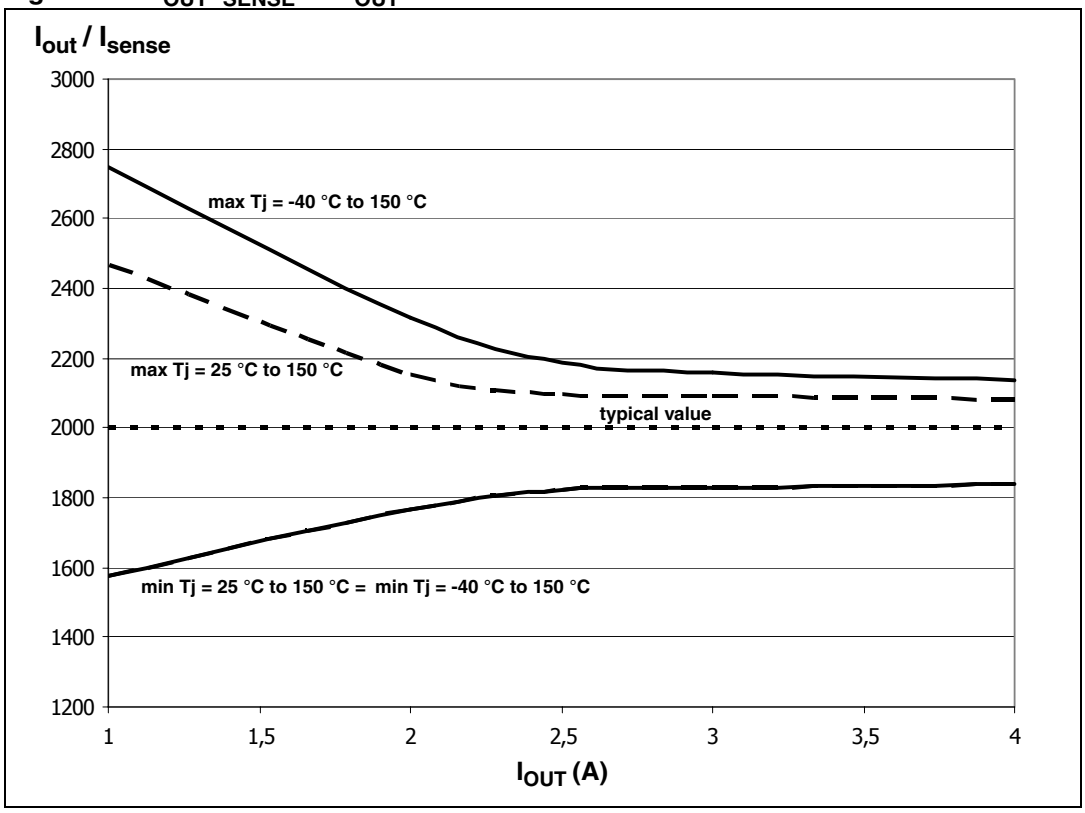

Figure 10. Maximum current sense ratio drift vs. load current

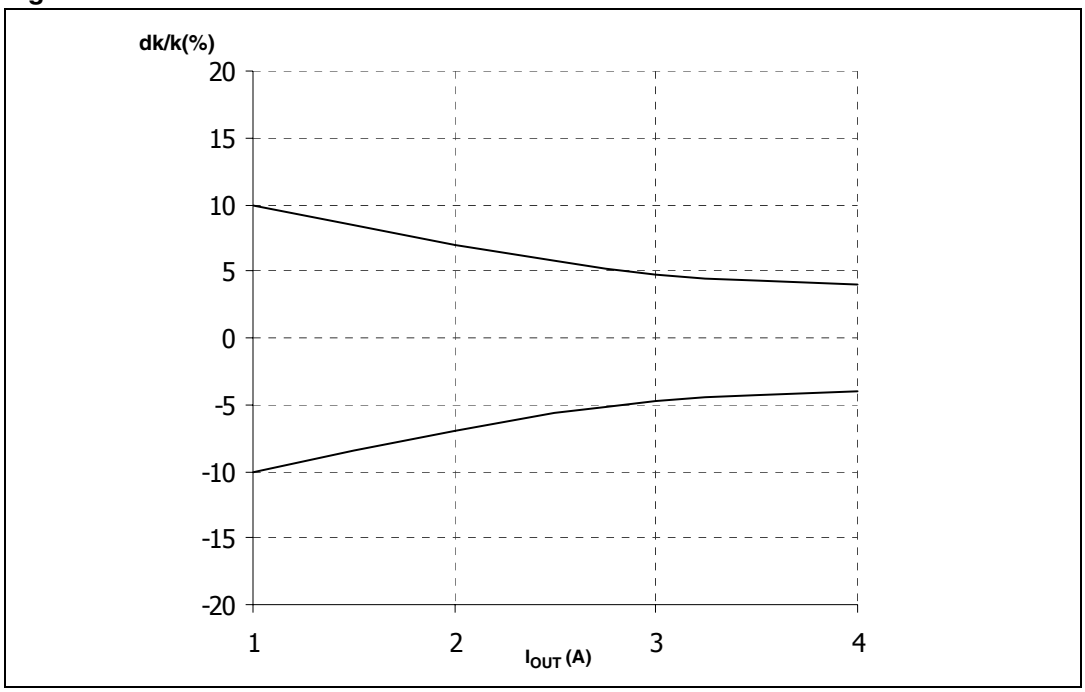

Note: Parameter guaranteed by design; it is not tested.

Table 11. Truth table

Conditions	Input	Output	Sense (V_{CSD}=0V)(1)
Normal operation	L H	L H	0 Nominal
Overtemperature	L H	L L	0 V_{SENSEH}
Undervoltage	L H	L L	0 0
Overload	H H	X (no power limitation) Cycling (power limitation)	Nominal V_{SENSEH}
Short circuit to GND (power limitation)	L H	L L	0 V_{SENSEH}
Open load OFF state (with external pull-up)	L	H	V_{SENSEH}
Short circuit to V_{CC} (external pull-up disconnected)	L H	H H	V_{SENSEH} < Nominal
Negative output voltage clamp	L	L	0

1. If the V_{CSD} is high, the SENSE output is at a high impedance, its potential depends on leakage currents and external circuit.

Table 12. Electrical transient requirements

ISO 7637-2: 2004(E) Test pulse	Test levels(1)		Number of pulses or test times	Burst cycle/pulse repetition time		Delays and Impedance
	III	IV		Min.	Max.	
1	-75V	-100V	5000 pulses	0.5s	5s	2 ms, 10Ω
2a	+37V	+50V	5000 pulses	0.2s	5s	50µs, 2Ω
3a	-100V	-150V	1h	90ms	100ms	0.1µs, 50Ω
3b	+75V	+100V	1h	90ms	100ms	0.1µs, 50Ω
4	-6V	-7V	1 pulse			100ms, 0.01Ω
5b(2)	+65V	+87V	1 pulse			400ms, 2Ω

ISO 7637-2: 2004E Test pulse	Test level results	
	III	VI
1	C	C
2a	C	C
3a	C	C
3b	C	C
4	C	C
5b(2)	C	C

Class	Contents
C	All functions of the device performed as designed after exposure to disturbance.
E	One or more functions of the device did not perform as designed after exposure to disturbance and cannot be returned to proper operation without replacing the device.

1. The above test levels must be considered referred to V_{CC} = 13.5V except for pulse 5b.
2. Valid in case of external load dump clamp: 40V maximum referred to ground.

2.4 Waveforms

Figure 11. Normal operation

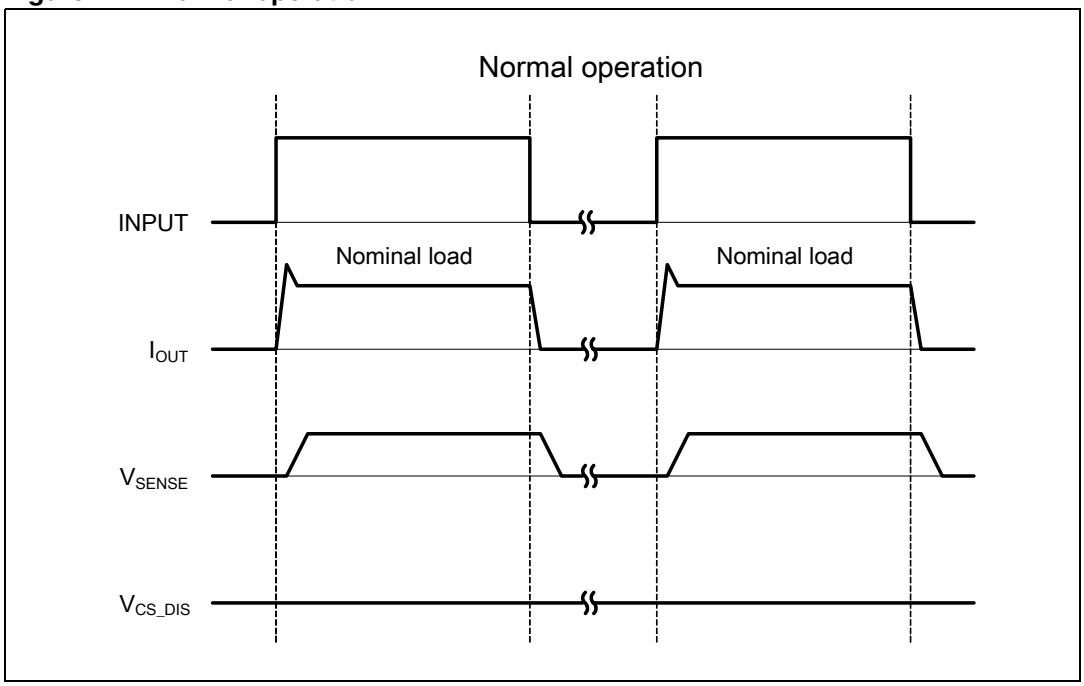

Figure 12. Overload or Short to GND

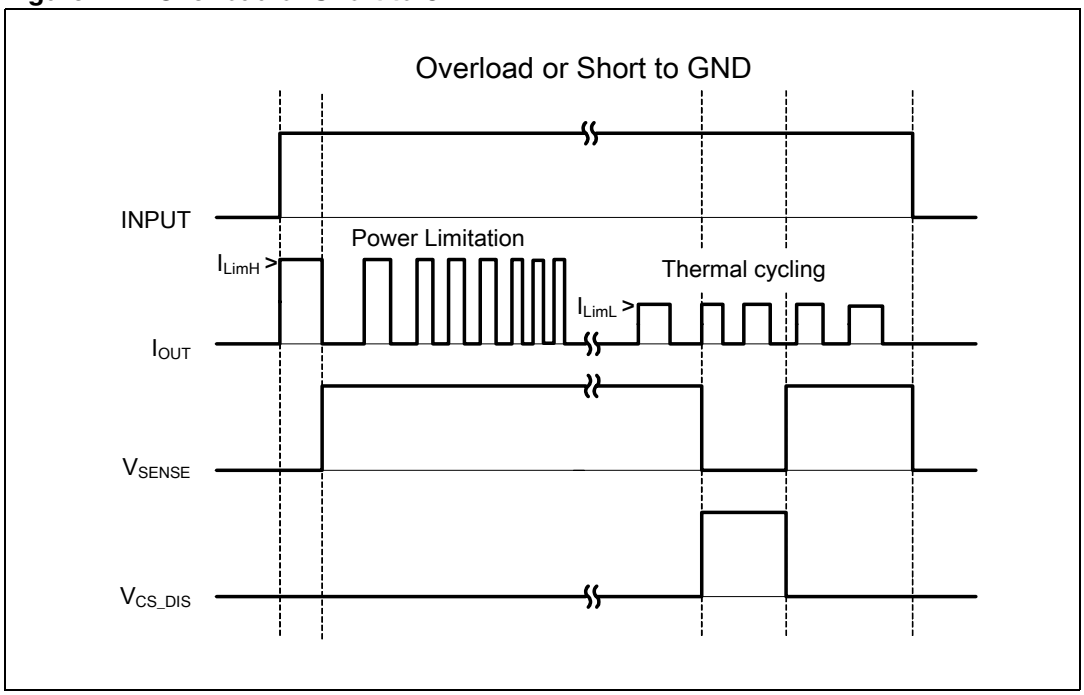

Figure 13. Intermittent Overload

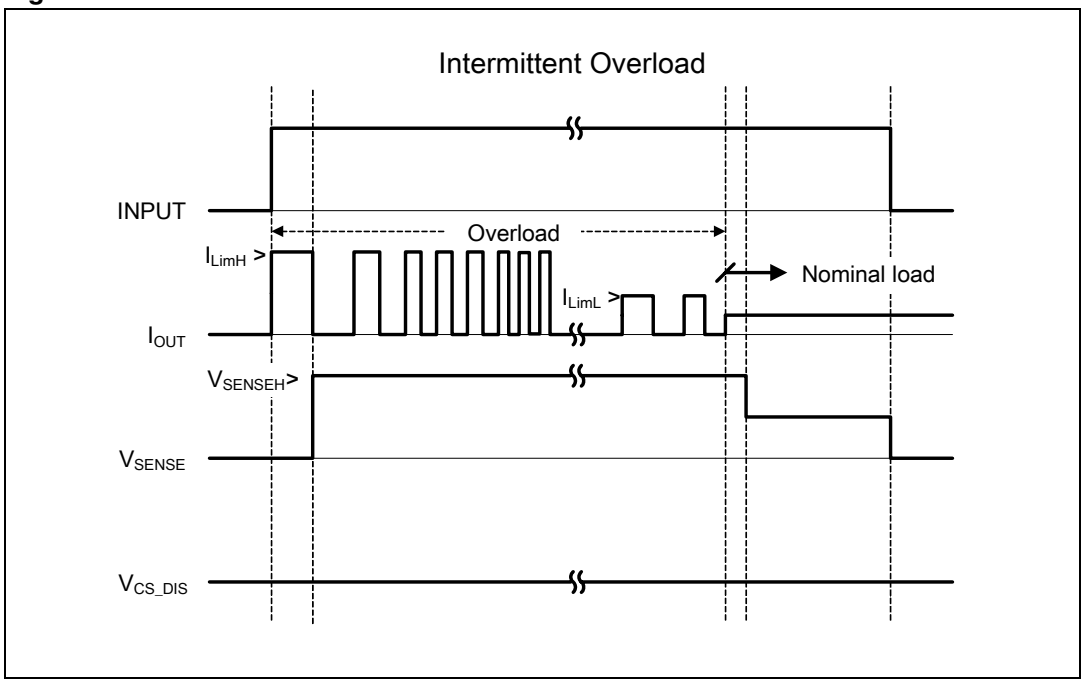

Figure 14. OFF-State Open Load with external circuitry

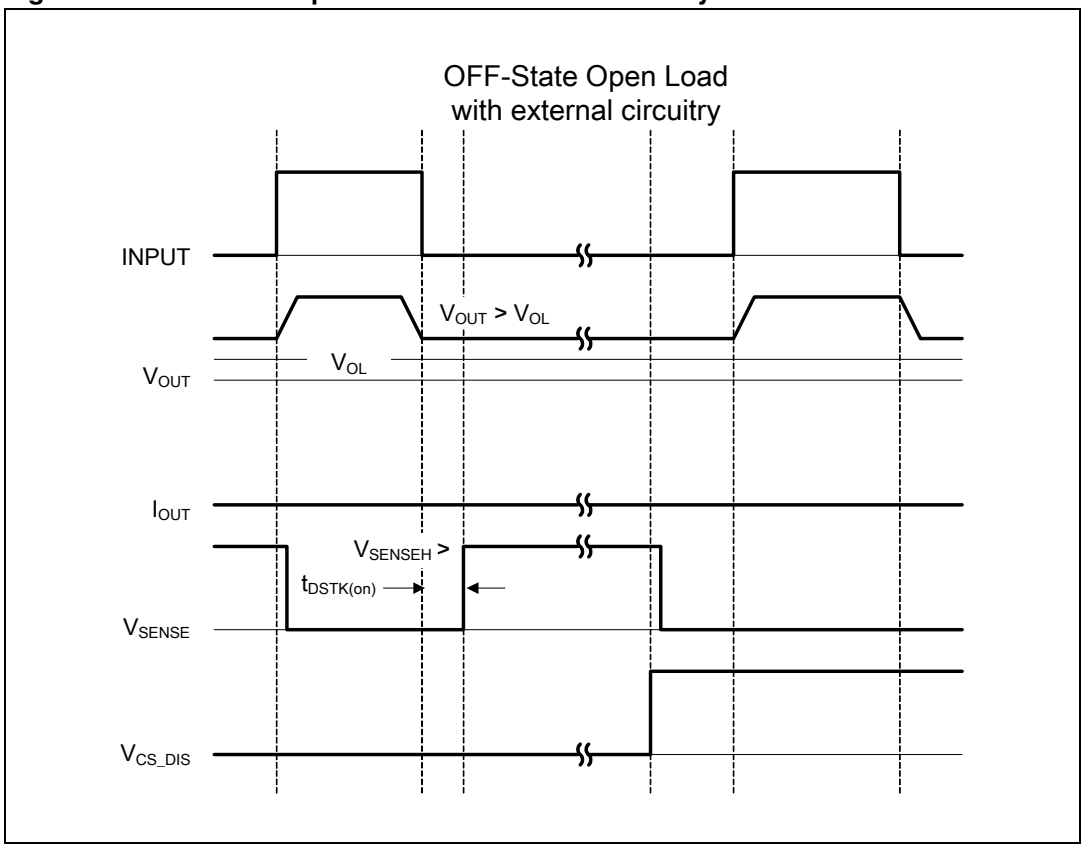

Figure 15. Short to V_{CC}

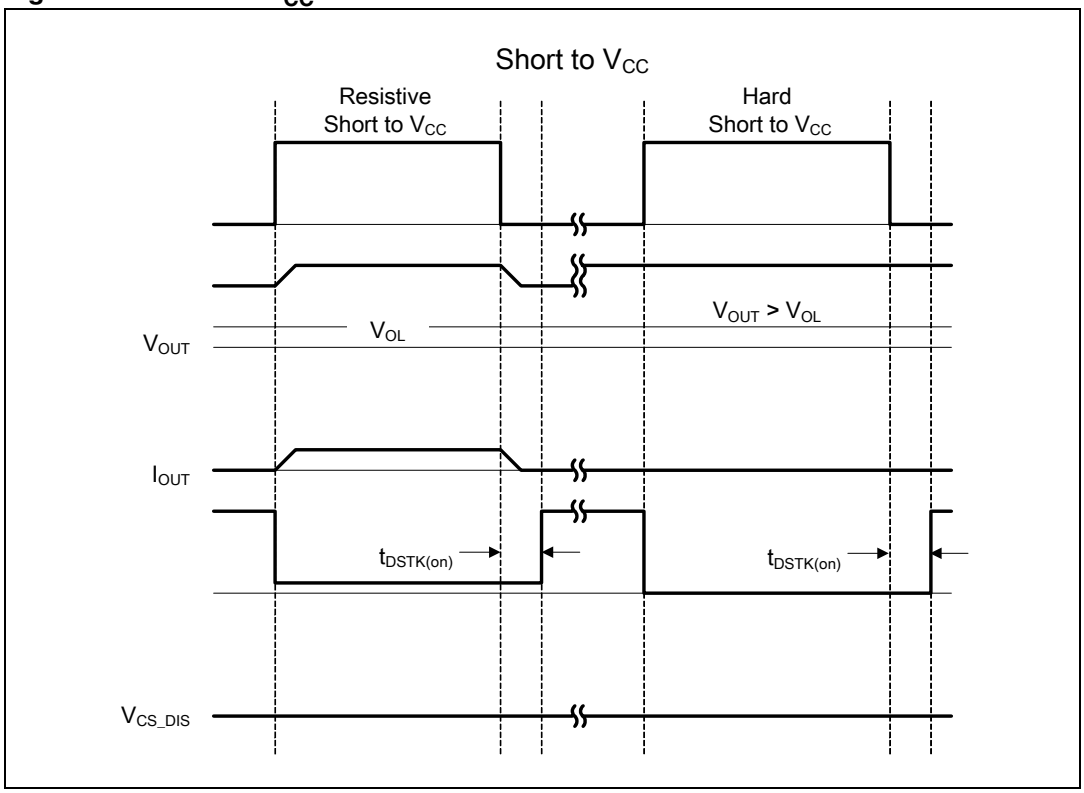

Figure 16. T_J evolution in Overload or Short to GND

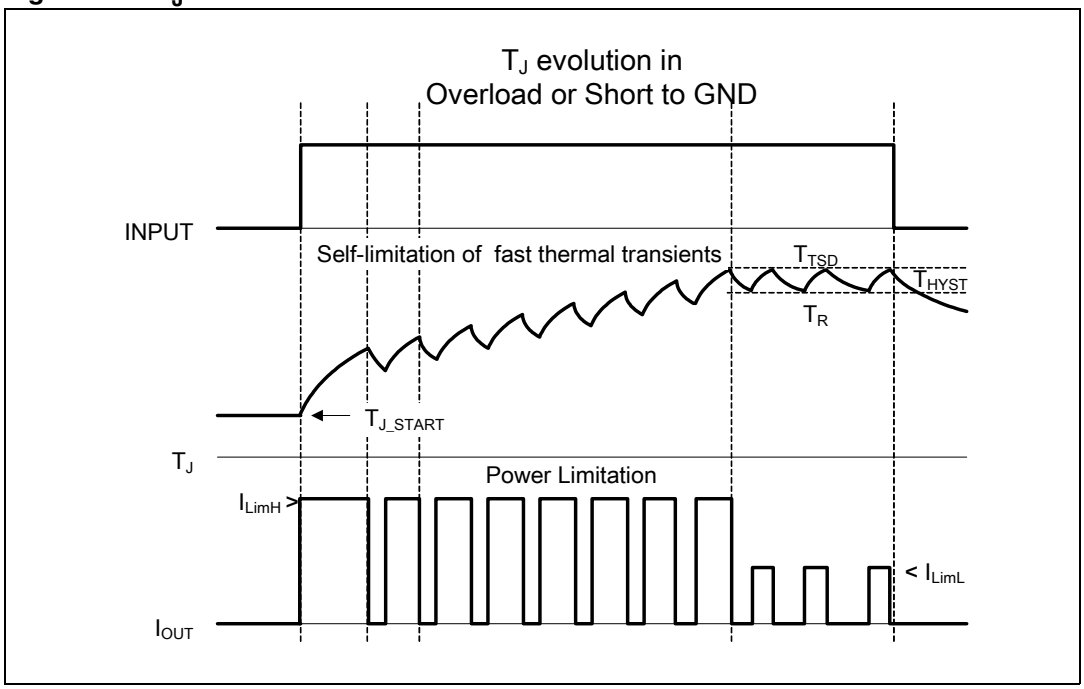

2.5 Electrical characteristics curves

Figure 17. Off state output current

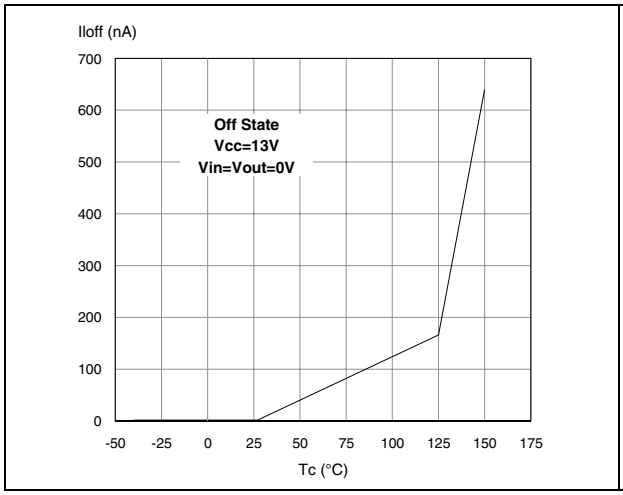

Figure 18. High level input current

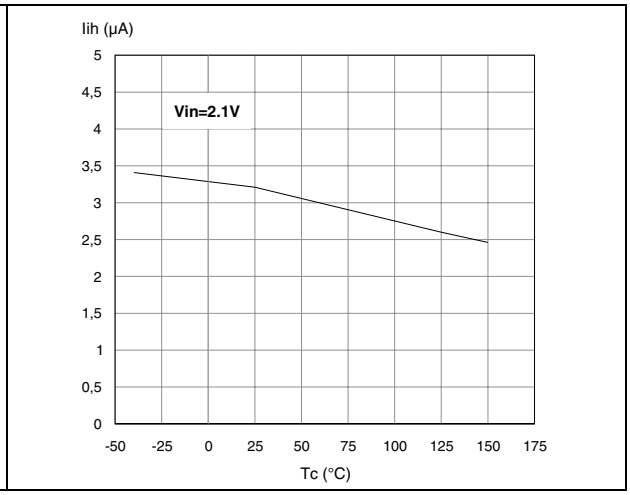

Figure 19. Input clamp level

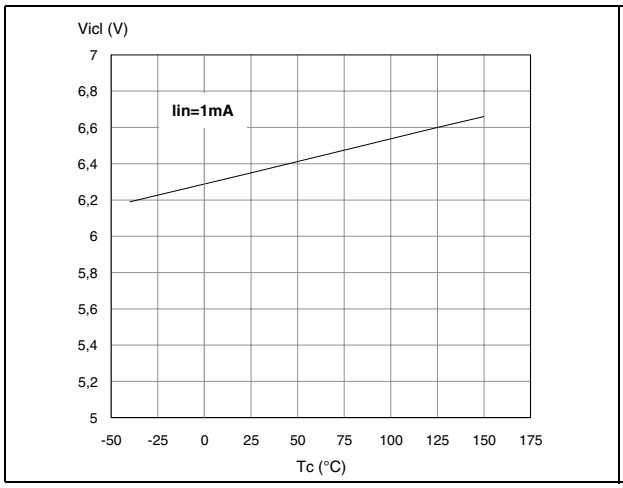

Figure 20. Input low level

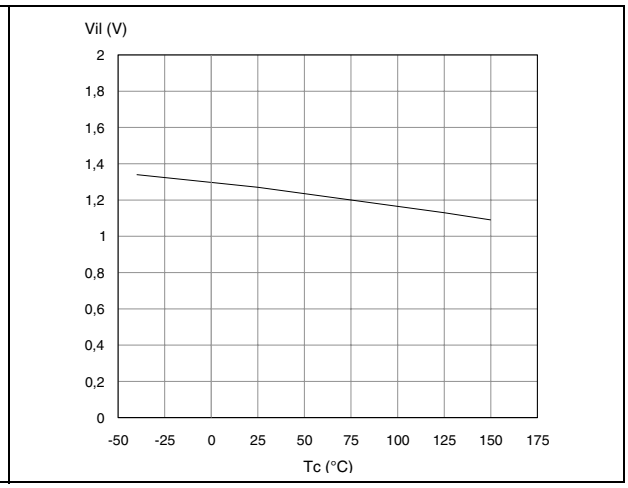

Figure 21. Input high level

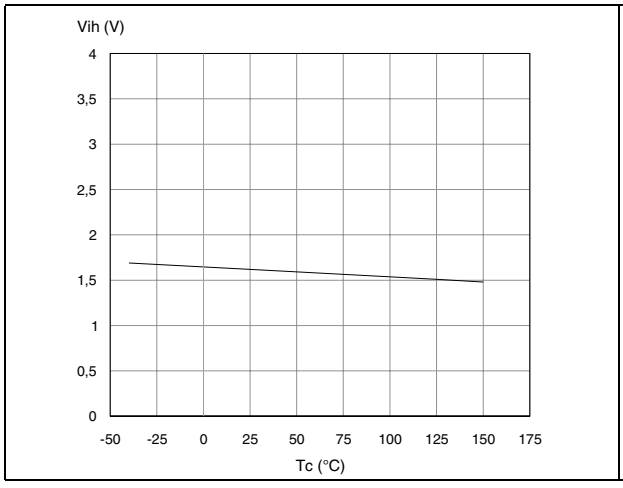

Figure 22. Input hysteresis voltage

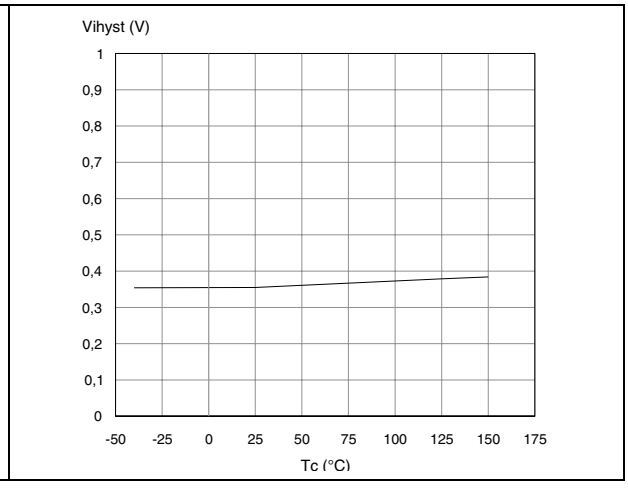

Figure 23. On state resistance vs. T_{case}

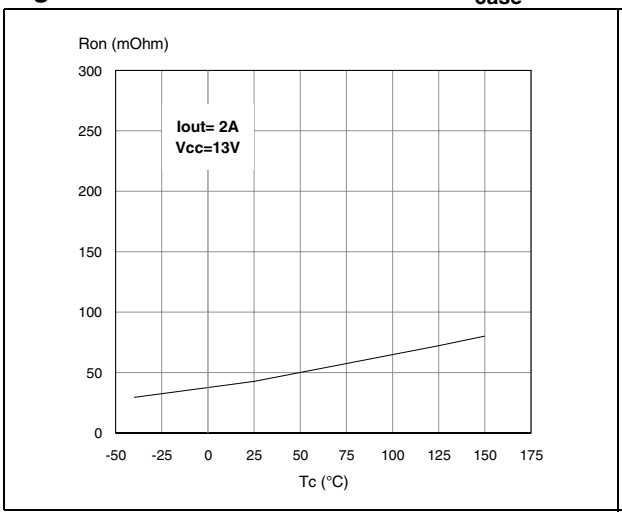

Figure 24. On state resistance vs. V_{CC}

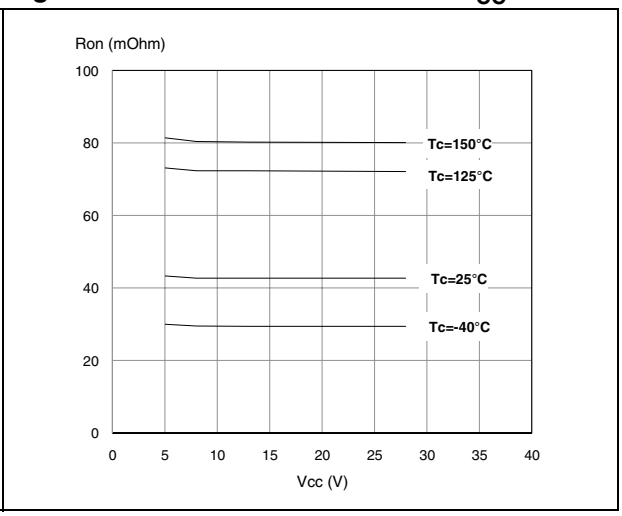

Figure 25. Undervoltage shutdown

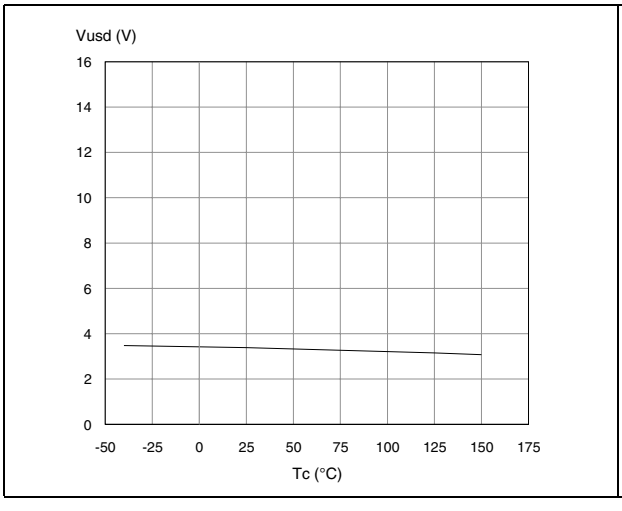

Figure 26. Turn-On voltage slope

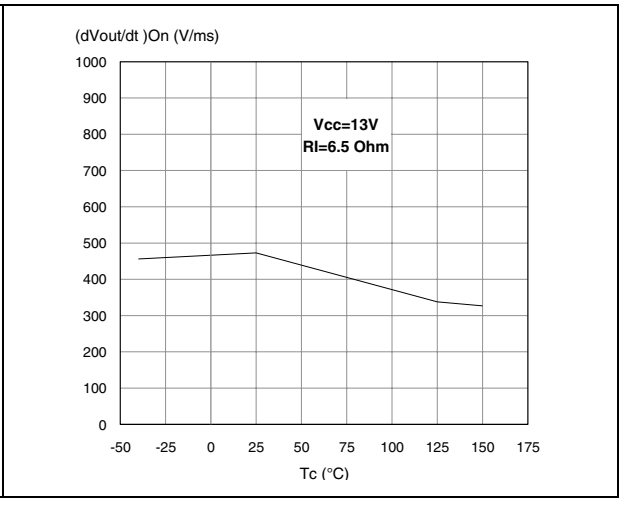

Figure 27. I_{LIMH} Vs. T_{case}

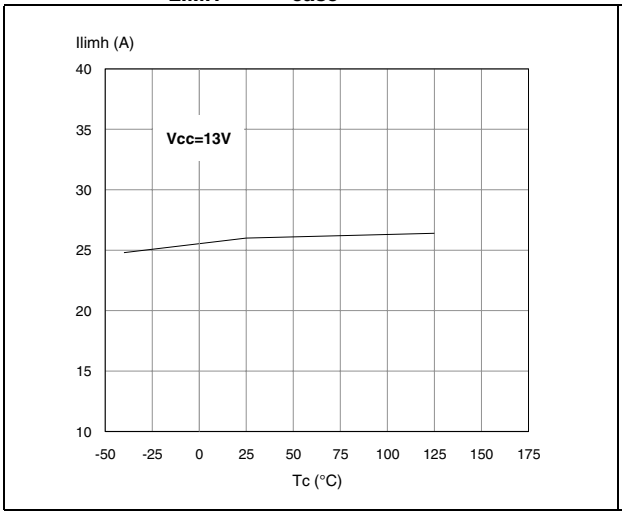

Figure 28. Turn-Off voltage slope

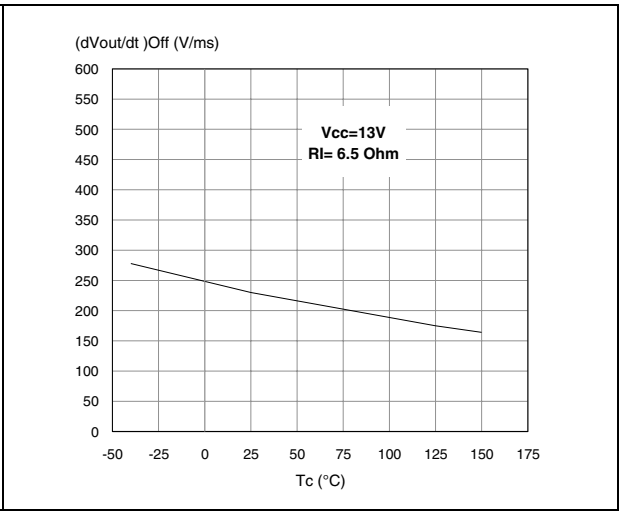

Figure 29. CS_DIS high level voltage

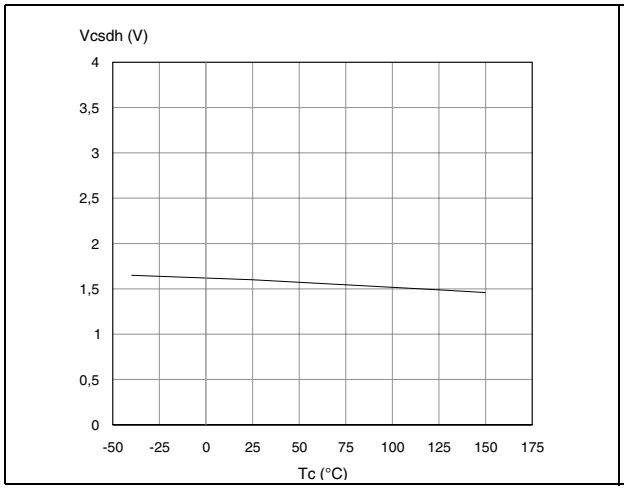

Figure 30. CS_DIS clamp voltage

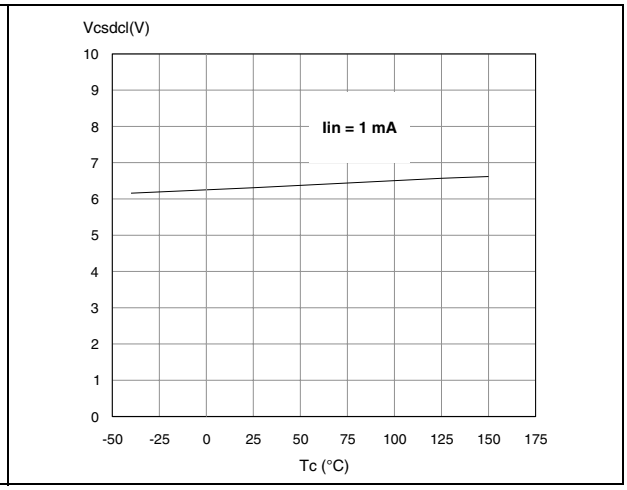

Figure 31. CS_DIS low level voltage

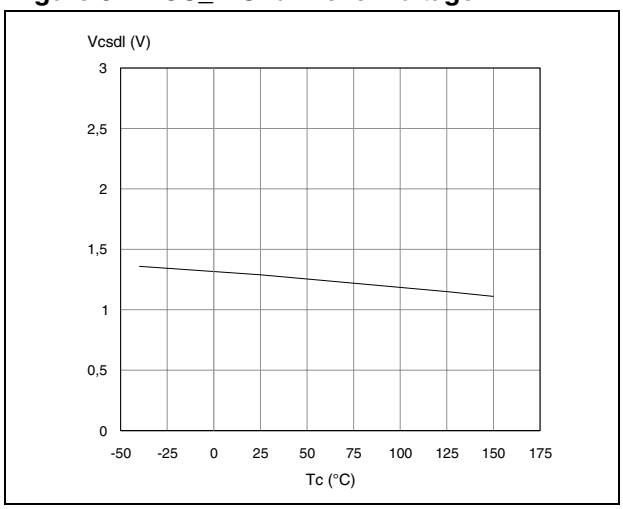

3 Application information

Figure 32. Application schematic

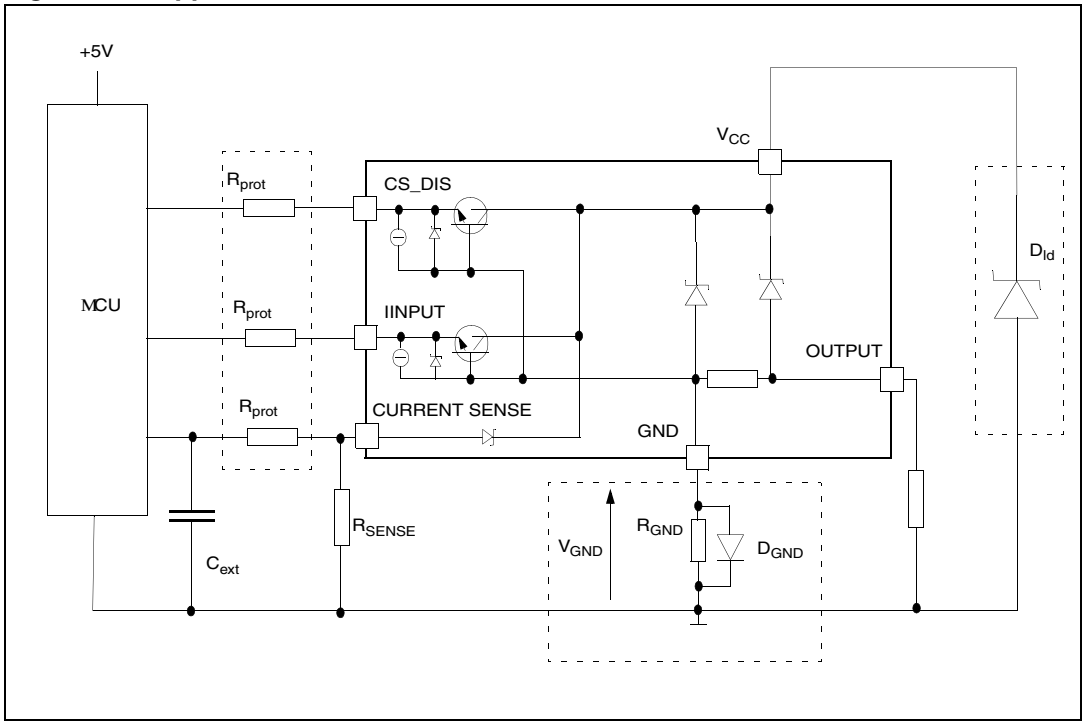

3.1 GND protection network against reverse battery

This section provides two solutions for implementing a ground protection network against reverse battery.

3.1.1 Solution 1: resistor in the ground line (R_{GND} only)

This can be used with any type of load.

The following show how to dimension the R_{GND} resistor:

1. $R_{GND} \leq 600mV / (I_{S(on)max})$
2. $R_{GND} \geq (-V_{CC}) / (-I_{GND})$

where $-I_{GND}$ is the DC reverse ground pin current and can be found in the absolute maximum rating section of the device datasheet.

Power dissipation in R_{GND} (when $V_{CC}<0$ during reverse battery situations) is:

$$P_D = (-V_{CC})^2 / R_{GND}$$

This resistor can be shared amongst several different HSDs. Please note that the value of this resistor should be calculated with formula (1) where $I_{S(on)max}$ becomes the sum of the maximum on-state currents of the different devices.

Please note that, if the microprocessor ground is not shared by the device ground, then the R_{GND} will produce a shift ($I_{S(on)max} * R_{GND}$) in the input thresholds and the status output

values. This shift will vary depending on how many devices are ON in the case of several high side drivers sharing the same R_{GND}.

If the calculated power dissipation requires the use of a large resistor, or several devices have to share the same resistor, then ST suggests using solution 2 below.

3.1.2 Solution 2: diode (D_{GND}) in the ground line

Note that a resistor (R_{GND}=1kΩ) should be inserted in parallel to D_{GND} if the device drives an inductive load.

This small signal diode can be safely shared amongst several different HSDs. Also in this case, the presence of the ground network will produce a shift (j600mV) in the input threshold and in the status output values if the microprocessor ground is not common to the device ground. This shift will not vary if more than one HSD shares the same diode/resistor network.

3.2 Load dump protection

D_{ld} is necessary (Voltage Transient Suppressor) if the load dump peak voltage exceeds the V_{CC} max DC rating. The same applies if the device is subject to transients on the V_{CC} line that are greater than the ones shown in the ISO 7637-2: 2004(E) table.

3.3 MCU I/O protection

If a ground protection network is used and negative transients are present on the V_{CC} line, the control pins will be pulled negative. ST suggests to insert a resistor (R_{prot}) in line to prevent the µC I/O pins from latching up.

The value of these resistors is a compromise between the leakage current of µC and the current required by the HSD I/Os (Input levels compatibility) with the latch-up limit of µC I/Os:

$-V_{CCpeak}/I_{latchup} \leq R_{prot} \leq (V_{OH\mu C}-V_{IH}-V_{GND}) / I_{IHmax}$

Calculation example:

For V_{CCpeak} = - 100V and $I_{latchup} \geq$ 20mA; $V_{OH\mu C} \geq$ 4.5V

$5k\Omega \leq R_{prot} \leq 180k\Omega$

Recommended values: R_{prot} =10kΩ, C_{EXT}=10nF.

3.4 Current sense and diagnostic

The current sense pin performs a double function (see *Figure 33: Current sense and diagnostic*):

- **Current mirror of the load current in normal operation,** delivering a current proportional to the load one according to a know ratio $\mathbf{K_X}$.
  The current I_{SENSE} can be easily converted to a voltage V_{SENSE} by means of an external resistor R_{SENSE}. Linearity between I_{OUT} and V_{SENSE} is ensured up to 5V minimum (see parameter V_{SENSE} in *Table 9: Current sense (8V<VCC<18V)*). The current sense accuracy depends on the output current (refer to current sense electrical characteristics *Table 9: Current sense (8V<VCC<18V)*).

- **Diagnostic flag in fault conditions**, delivering a fixed voltage V_{SENSEH} up to a maximum current I_{SENSEH} in case of the following fault conditions (refer to *Truth table*):
  - Power limitation activation
  - Over-temperature
  - Short to V_{CC} in OFF state
  - Open load in OFF state with additional external components.

A logic level high on CS_DIS pin sets at the same time all the current sense pins of the device in a high impedance state, thus disabling the current monitoring and diagnostic detection. This feature allows multiplexing of the microcontroller analog inputs by sharing of sense resistance and ADC line among different devices.

Figure 33. Current sense and diagnostic

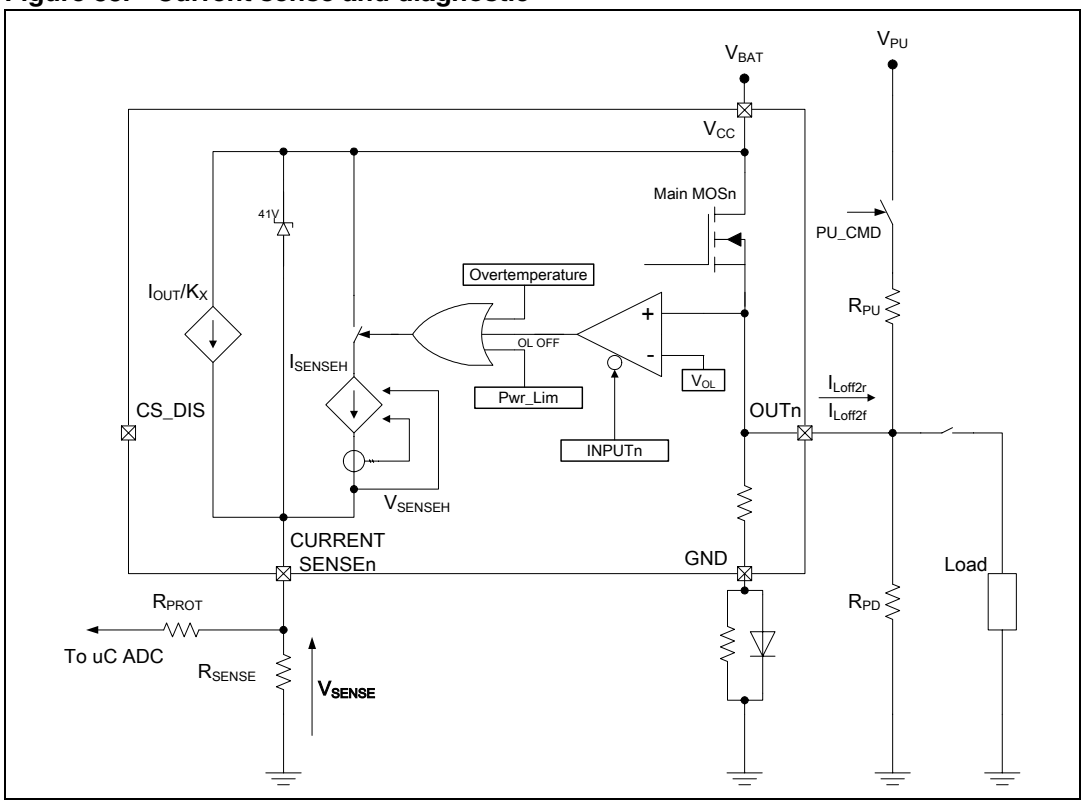

3.4.1 Short to V_{CC} and OFF state open load detection

Short to V_{CC}

A short circuit between V_{CC} and output is indicated by the relevant current sense pin set to V_{SENSEH} during the device off state. Small or no current is delivered by the current sense during the on state depending on the nature of the short circuit.

OFF state open load with external circuitry

Detection of an open load in off mode requires an external pull-up resistor R_{PU} connecting the output to a positive supply voltage V_{PU}.

It is preferable V_{PU} to be switched off during the module stand-by mode in order to avoid the overall stand-by current consumption to increase in normal conditions, i.e. when load is connected.

An external pull down resistor R_{PD} connected between output and GND is mandatory to avoid misdetection in case of floating outputs in off state (see *Figure 33: Current sense and diagnostic*).

R_{PD} must be selected in order to ensure $V_{OUT} < V_{OLmin}$ unless pulled up by the external circuitry:

$$V_{OUT}\big|_{Pull-up_OFF} = R_{PD} \cdot I_{L(off2)f} < V_{OL\min} = 2V$$

$R_{PD} \leq 22\ K\Omega$ is recommended.

For proper open load detection in off state, the external pull-up resistor must be selected according to the following formula:

$$V_{OUT}\big|_{Pull-up_ON} = \frac{R_{PD} \cdot V_{PU} - R_{PU} \cdot R_{PD} \cdot I_{L(off2)r}}{R_{PU} + R_{PD}} > V_{OL\max} = 4V$$

For the values of V_{OLmin} ,V_{OLmax}, $I_{L(off2)r}$ and $I_{L(off2)f}$ see *Table 10: Open load detection (8V<VCC<18V)*.

3.5 Maximum demagnetization energy (V_{CC} = 13.5V)

Figure 34. Maximum turn-Off current versus inductance

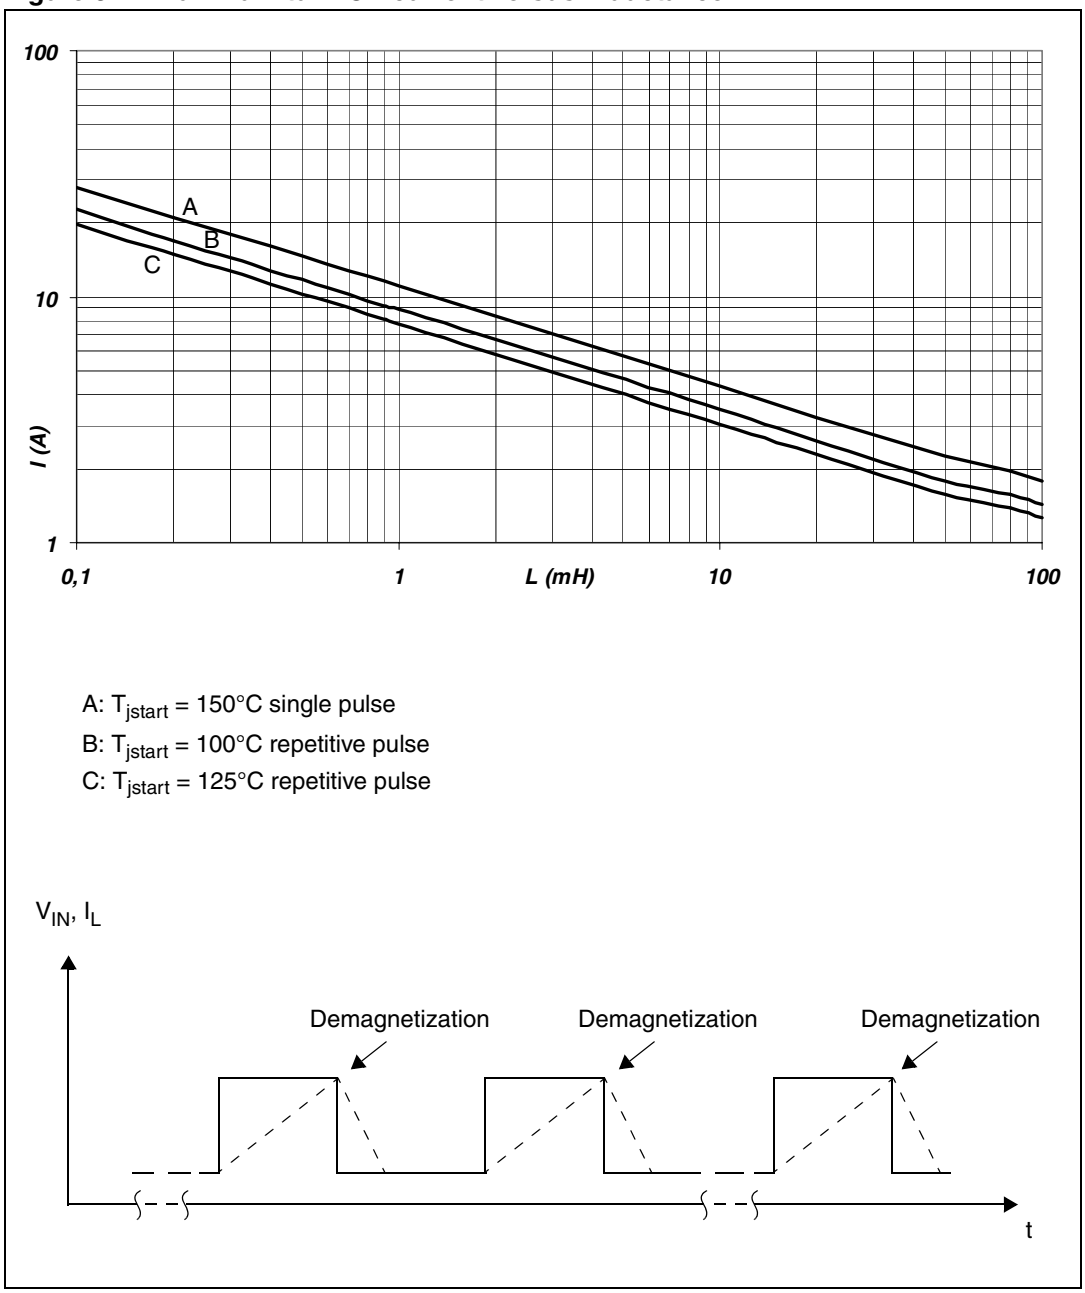

Note: Values are generated with R_L =0 Ω. In case of repetitive pulses, T_{jstart} (at beginning of each demagnetization) of every pulse must not exceed the temperature specified above for curves A and B.

4 Package and PCB thermal data

4.1 PowerSSO-12 thermal data

Figure 35. PowerSSO-12 PC board

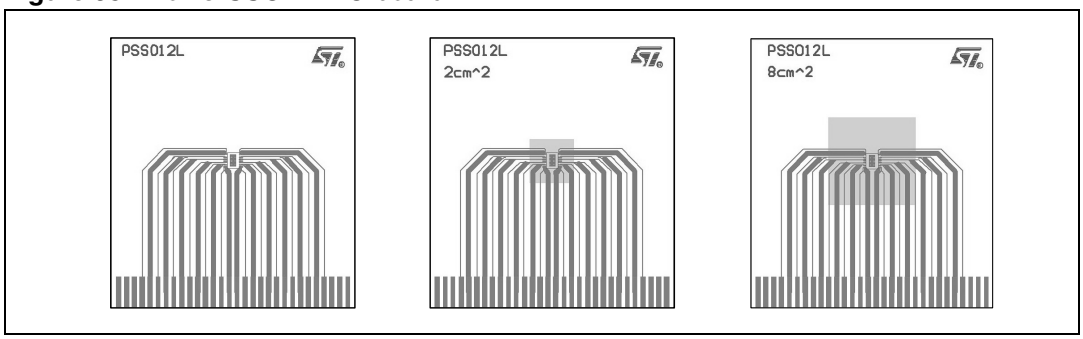

Note: Layout condition of R_{th} and Z_{th} measurements (PCB: Double layer, Thermal Vias, FR4 area= 77mm x 86mm, PCB thickness=1.6mm, Cu thickness=70 µm (front and back side), Copper areas: from minimum pad lay-out to 8cm^2).

Figure 36. $R_{thj\text{-}amb}$ Vs. PCB copper area in open box free air condition

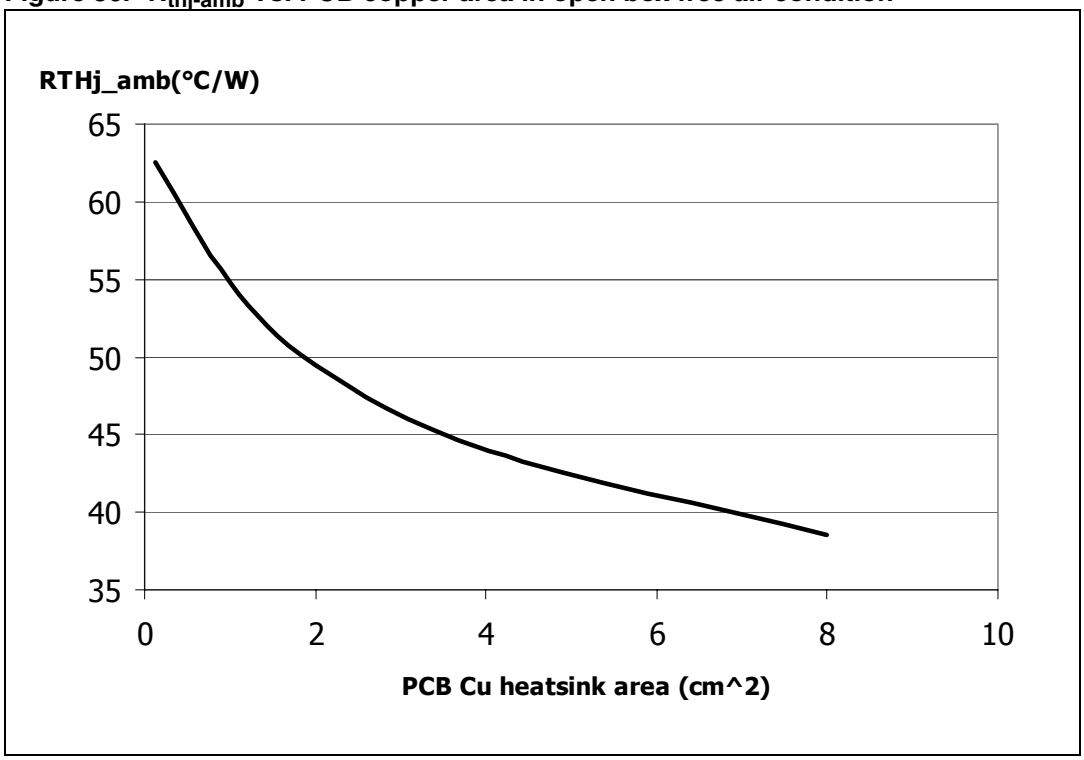

Figure 37. PowerSSO-12 thermal impedance junction ambient single pulse

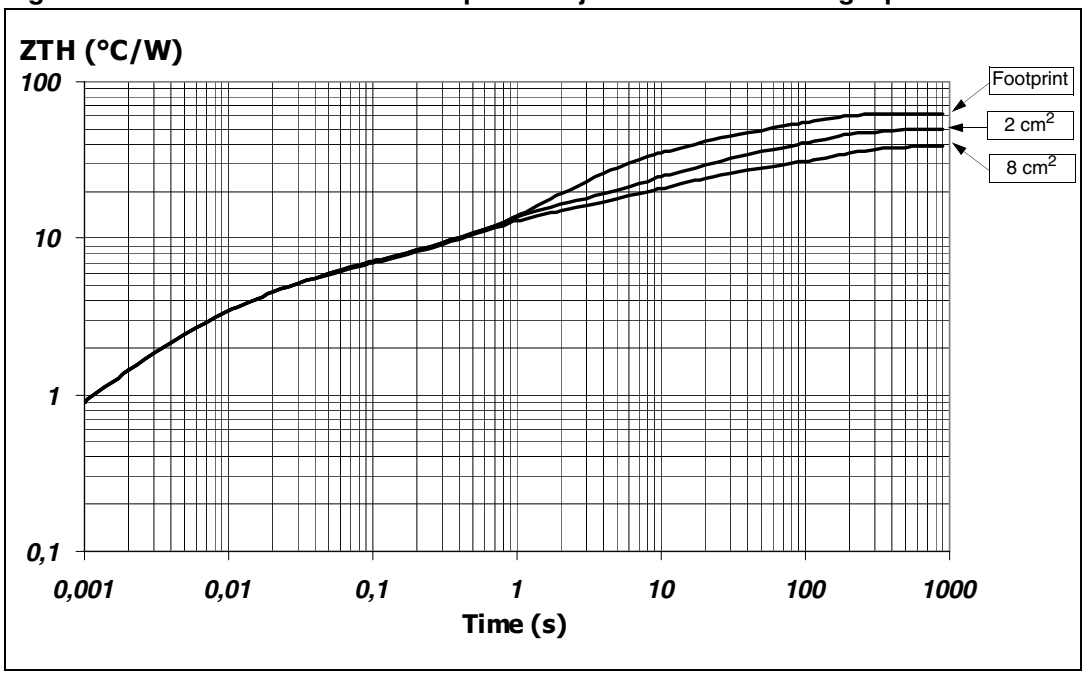

Equation 1: pulse calculation formula

$$Z_{TH\delta} = R_{TH} \cdot \delta + Z_{THtp}(1 - \delta)$$

where $\delta = t_P/T$

Figure 38. Thermal fitting model of a single channel HSD in PowerSSO-12 (a)

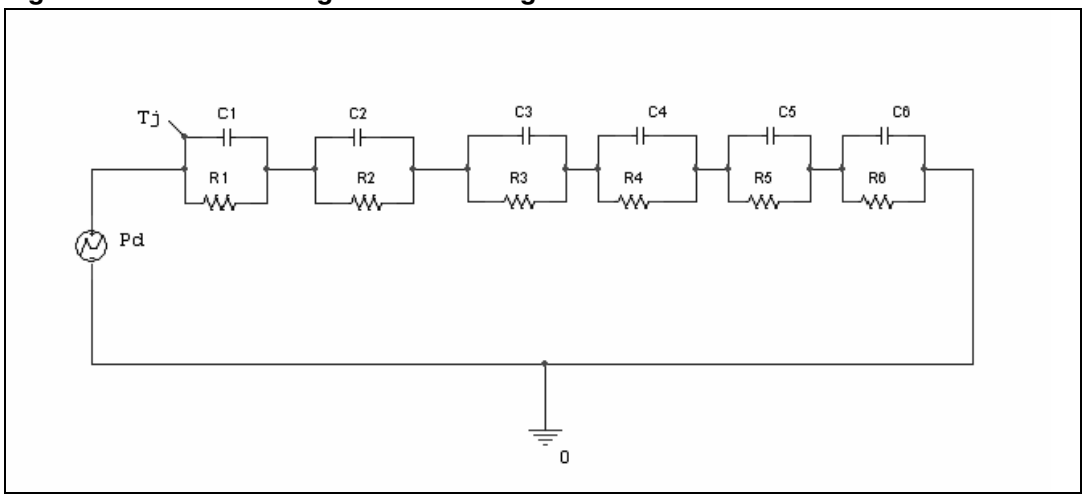

a. The fitting model is a semplified thermal tool and is valid for transient evolutions where the embedded protections (power limitation or thermal cycling during thermal shutdown) are not triggered.

Table 13. Thermal parameter

Area/island (cm^2)	Footprint	2	8
R1 (°C/W)	0.7		
R2 (°C/W)	2.8		
R3 (°C/W)	3		
R4 (°C/W)	8	8	7
R5 (°C/W)	22	15	10
R6 (°C/W)	26	20	15
C1 (W.s/°C)	0.001		
C2 (W.s/°C)	0.0025		
C3 (W.s/°C)	0.0166		
C4 (W.s/°C)	0.2	0.1	0.1
C5 (W.s/°C)	0.27	0.8	1
C6 (W.s/°C)	3	6	9

5 Package information

5.1 ECOPACK® packages

In order to meet environmental requirements, ST offers these devices in ECOPACK® packages. These packages have a Lead-free second-level interconnect. The category of Second-Level Interconnect is marked on the package and on the inner box label, in compliance with JEDEC Standard JESD97.
The maximum ratings related to soldering conditions are also marked on the inner box label. ECOPACK is an ST trademark. ECOPACK specifications are available at: www.st.com.

5.2 Package mechanical data

Figure 39. PowerSSO-12 package dimensions

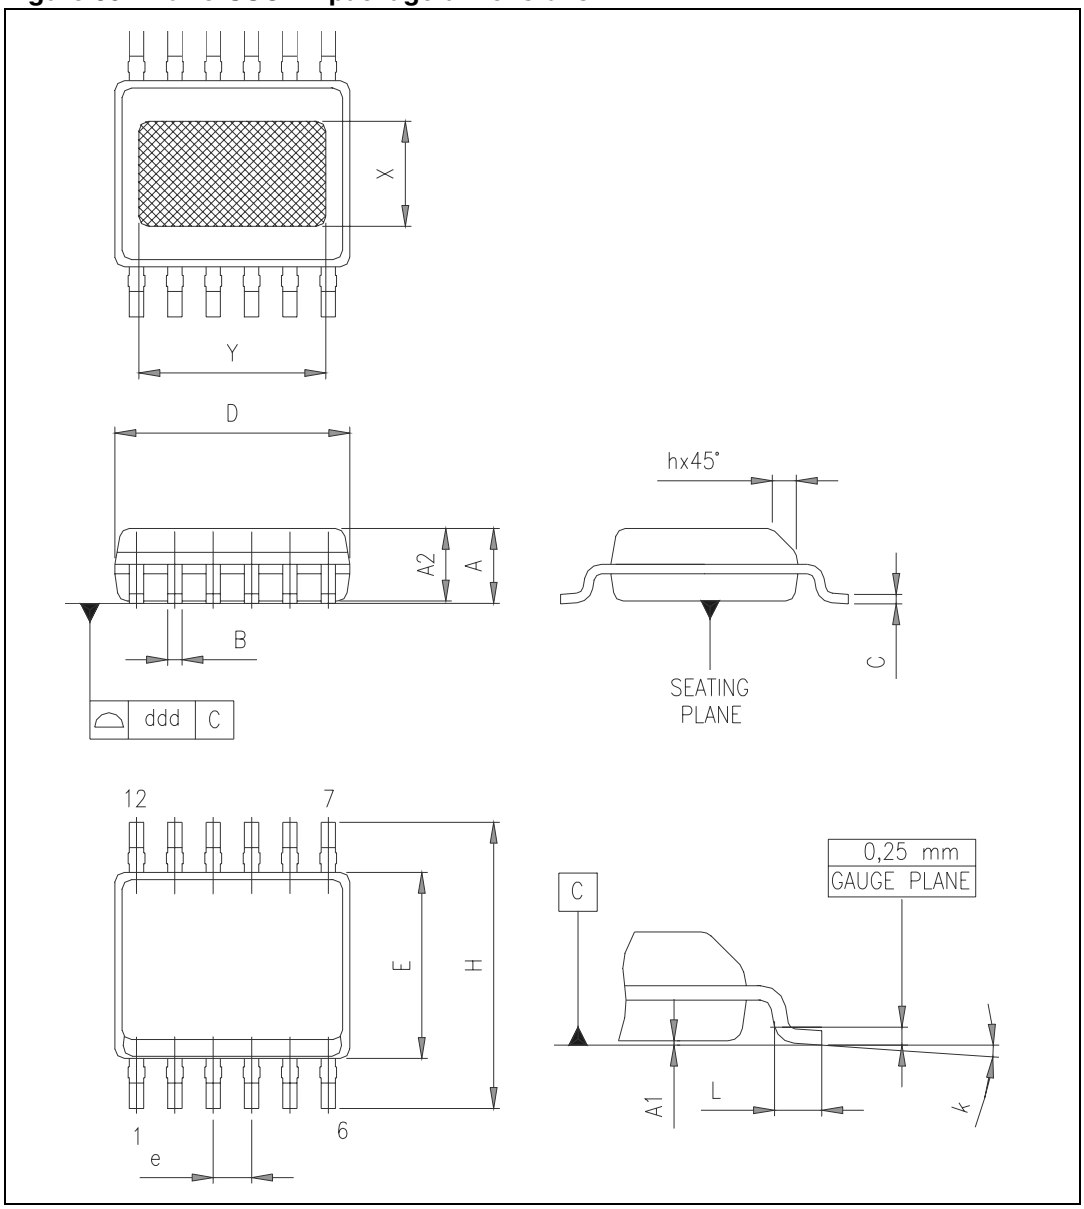

Table 14. PowerSSO-12 mechanical data

Symbol	Millimeters		
	Min.	Typ.	Max.
A	1.250		1.620
A1	0.000		0.100
A2	1.100		1.650
B	0.230		0.410
C	0.190		0.250
D	4.800		5.000
E	3.800		4.000
e		0.800	
H	5.800		6.200
h	0.250		0.500
L	0.400		1.270
k	0°		8°
X	2.200		2.800
Y	2.900		3.500
ddd			0.100

5.3 Packing information

Figure 40. PowerSSO-12 tube shipment (no suffix)

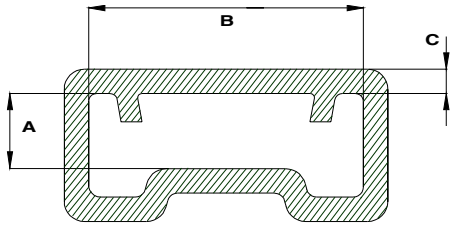

Base Q.ty	100
Bulk Q.ty	2000
Tube length (± 0.5)	532
A	1.85
B	6.75
C (± 0.1)	0.6

All dimensions are in mm.

Figure 41. PowerSSO-12 tape and reel shipment (suffix "TR")

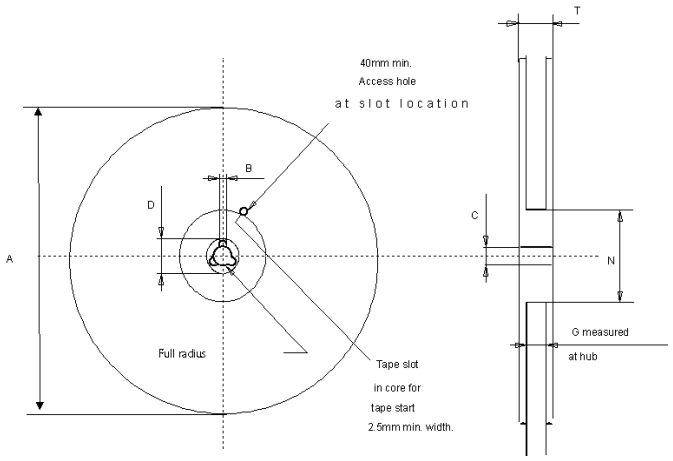

REEL DIMENSIONS

Base Q.ty	2500
Bulk Q.ty	2500
A (max)	330
B (min)	1.5
C (± 0.2)	13
F	20.2
G (+ 2 / -0)	12.4
N (min)	60
T (max)	18.4

TAPE DIMENSIONS

According to Electronic Industries Association (EIA) Standard 481 rev. A, Feb. 1986

Tape width	W	12
Tape Hole Spacing	P0 (± 0.1)	4
Component Spacing	P	8
Hole Diameter	D (± 0.05)	1.5
Hole Diameter	D1 (min)	1.5
Hole Position	F (± 0.1)	5.5
Compartment Depth	K (max)	4.5
Hole Spacing	P1 (± 0.1)	2

All dimensions are in mm.

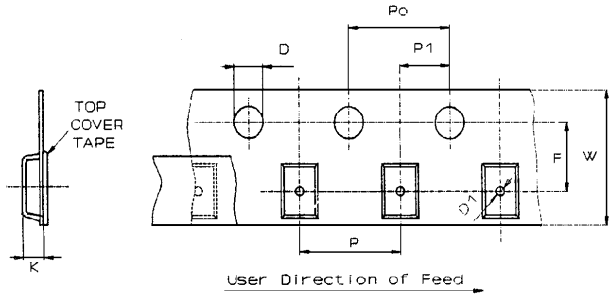

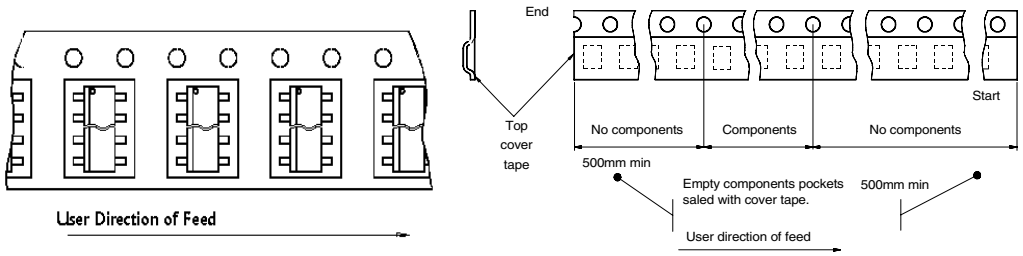

6 Order codes

Table 15. Device summary

Package	Order codes	
	Tube	Tape and reel
PowerSSO-12	VN5E050AJ-E	VN5E050AJTR-E

7 Revision history

Table 16. Document revision history

Date	Revision	Changes
15-Mar-2008	1	Initial release

Please Read Carefully:

Information in this document is provided solely in connection with ST products. STMicroelectronics NV and its subsidiaries (“ST”) reserve the right to make changes, corrections, modifications or improvements, to this document, and the products and services described herein at any time, without notice.

All ST products are sold pursuant to ST’s terms and conditions of sale.

Purchasers are solely responsible for the choice, selection and use of the ST products and services described herein, and ST assumes no liability whatsoever relating to the choice, selection or use of the ST products and services described herein.

No license, express or implied, by estoppel or otherwise, to any intellectual property rights is granted under this document. If any part of this document refers to any third party products or services it shall not be deemed a license grant by ST for the use of such third party products or services, or any intellectual property contained therein or considered as a warranty covering the use in any manner whatsoever of such third party products or services or any intellectual property contained therein.

UNLESS OTHERWISE SET FORTH IN ST’S TERMS AND CONDITIONS OF SALE ST DISCLAIMS ANY EXPRESS OR IMPLIED WARRANTY WITH RESPECT TO THE USE AND/OR SALE OF ST PRODUCTS INCLUDING WITHOUT LIMITATION IMPLIED WARRANTIES OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE (AND THEIR EQUIVALENTS UNDER THE LAWS OF ANY JURISDICTION), OR INFRINGEMENT OF ANY PATENT, COPYRIGHT OR OTHER INTELLECTUAL PROPERTY RIGHT.

UNLESS EXPRESSLY APPROVED IN WRITING BY AN AUTHORIZED ST REPRESENTATIVE, ST PRODUCTS ARE NOT RECOMMENDED, AUTHORIZED OR WARRANTED FOR USE IN MILITARY, AIR CRAFT, SPACE, LIFE SAVING, OR LIFE SUSTAINING APPLICATIONS, NOR IN PRODUCTS OR SYSTEMS WHERE FAILURE OR MALFUNCTION MAY RESULT IN PERSONAL INJURY, DEATH, OR SEVERE PROPERTY OR ENVIRONMENTAL DAMAGE. ST PRODUCTS WHICH ARE NOT SPECIFIED AS "AUTOMOTIVE GRADE" MAY ONLY BE USED IN AUTOMOTIVE APPLICATIONS AT USER’S OWN RISK.

Resale of ST products with provisions different from the statements and/or technical features set forth in this document shall immediately void any warranty granted by ST for the ST product or service described herein and shall not create or extend in any manner whatsoever, any liability of ST.

ST and the ST logo are trademarks or registered trademarks of ST in various countries.

Information in this document supersedes and replaces all information previously supplied.

The ST logo is a registered trademark of STMicroelectronics. All other names are the property of their respective owners.

© 2008 STMicroelectronics - All rights reserved

STMicroelectronics group of companies

Australia - Belgium - Brazil - Canada - China - Czech Republic - Finland - France - Germany - Hong Kong - India - Israel - Italy - Japan - Malaysia - Malta - Morocco - Singapore - Spain - Sweden - Switzerland - United Kingdom - United States of America

www.st.com