



### DESCRIPTION

The MP8030 is a fully integrated, IEEE 802.3af/at/bt-compliant, Power over Ethernet (PoE), powered device (PD) power supply converter. The device features a PD interface and a high-efficiency flyback/forward controller.

The PD interface has all the functions of IEEE 802.3af/at/bt. It also integrates a 100V hot-swap MOSFET for  $\leq 51\text{W}$  applications and one GATE1 driver to enhance efficiency for high-power applications ( $>51\text{W}$ ). The GATE2 driver supports an external, low on resistance N-channel MOSFET to prevent high power loss when the device is powered by an adapter.

The flyback/forward controller is specifically designed for primary-side regulation (PSR) flyback applications, as well as secondary-side regulation (SSR) active-clamp forward applications. It also can be used in an SSR flyback topology.

The MP8030 features overload protection (OLP) with hiccup mode, short-circuit protection (SCP), over-voltage protection (OVP), and thermal shutdown.

The MP8030 is available in a QFN-32 (5mmx6mm) package.

### FEATURES

- Compliant with 802.3af/at/bt Specifications
- Internal Hot-Swap MOSFET for  $\leq 51\text{W}$  Designs
- External FET with GATE1 for  $>51\text{W}$  Designs
- GATE2 N-Channel MOSFET Driver for Adapter Supply
- Supports Automatic Classification
- Automatic Maintain Power Signature Function
- Supports Flexible Topologies with DC/DC Design:
  - Primary-Side Regulation (PSR) for Flyback Applications
  - Secondary-Side Regulation (SSR) for Flyback Applications
  - SSR for Active-Clamp Forward Applications
- EMI Reduction with Frequency Dithering
- Ethernet Alliance (EA Gen 2) Certified
- Available in a QFN-32 (5mmx6mm) Package





Optimized Performance with  
MPS Inductor MPL-AY Series

### APPLICATIONS

- IEEE 802.3af/at/bt-Compliant Devices
- Security Cameras
- Video and VoIP Phones
- WLAN Access Points
- Internet of Things (IoT) Devices
- Pico Base Stations

All MPS parts are lead-free, halogen-free, and adhere to the RoHS directive. For MPS green status, please visit the MPS website under Quality Assurance. "MPS", the MPS logo, and "Simple, Easy Solutions" are trademarks of Monolithic Power Systems, Inc. or its subsidiaries.

## TYPICAL APPLICATION

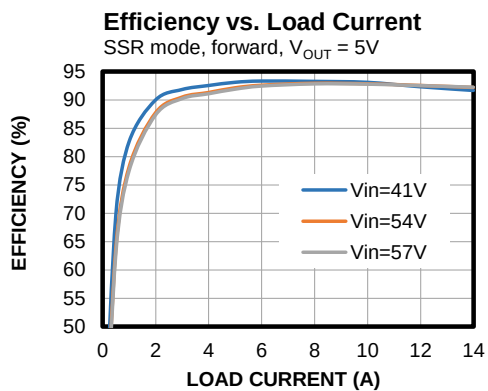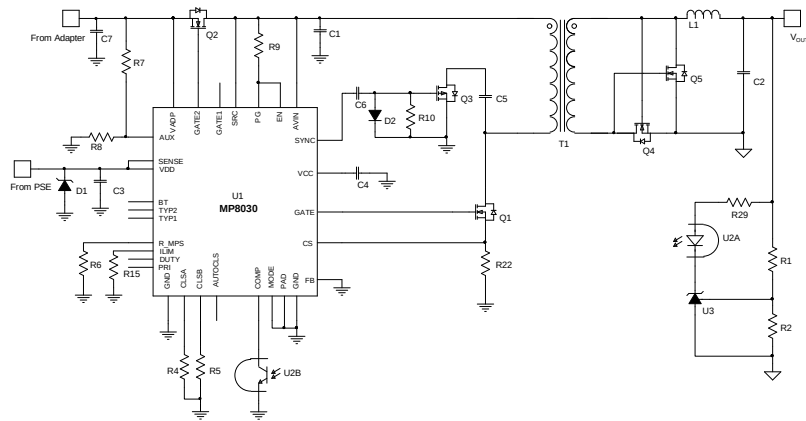

## ORDERING INFORMATION

| Part Number* | Package          | Top Marking | MSL Rating |
|--------------|------------------|-------------|------------|
| MP8030GQJ    | QFN-32 (5mmx6mm) | See Below   | 2          |

\* For Tape & Reel, add suffix -Z (e.g. MP8030GQJ-Z).

## TOP MARKING


**MPSYYWW**

**MP8030**

**LLLLLLL**

MPS: MPS prefix  
 YY: Year code  
 WW: Week code  
 MP8030: Part number  
 LLLLLLL: Lot number

## PACKAGE REFERENCE

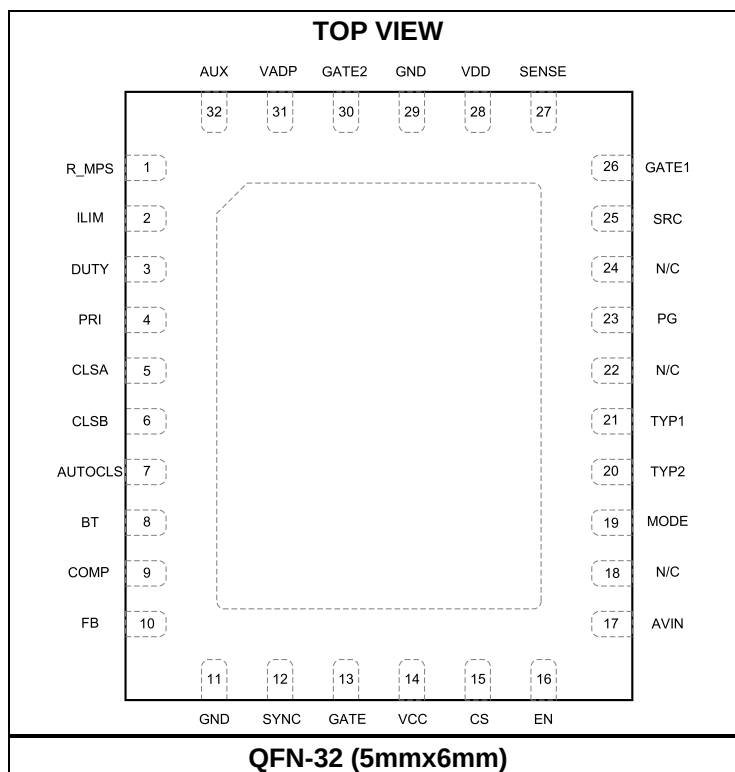

## PIN FUNCTIONS

| Pin #      | Name    | Description                                                                                                                                                                                                                                                                                                                                                                                                                          |
|------------|---------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| 1          | R_MPS   | <b>Automatically maintains power signature load resistor connection.</b> The R_MPS pin generates a 24V output pulse when the maintain power signature function is triggered.                                                                                                                                                                                                                                                         |
| 2          | ILIM    | <b>PD internal hot-swap MOSFET current limit configuration.</b> See the Hot-Swap MOSFET and Current Limit section on page 26 for more details.                                                                                                                                                                                                                                                                                       |
| 3          | DUTY    | <b>Automatic maintain power signature output duty setting pin.</b> See the Automatic Maintain Power Signature Function section on page 28 for more details.                                                                                                                                                                                                                                                                          |
| 4          | PRI     | <b>PSE power and adapter power priority setting pin.</b> Internally pull PRI up to the internal 5V power source through a 1MΩ resistor. The PSE power has a higher priority when PRI is low.                                                                                                                                                                                                                                         |
| 5          | CLSA    | <b>Power class signature pin.</b> CLSA is used during the first two class events.                                                                                                                                                                                                                                                                                                                                                    |
| 6          | CLSB    | <b>Power class signature pin.</b> CLSB is used during the third class event and all subsequent class events.                                                                                                                                                                                                                                                                                                                         |
| 7          | AUTOCLS | <b>Auto-class function enable pin.</b> Pull AUTOCLS low to enable the auto-class function.                                                                                                                                                                                                                                                                                                                                           |
| 8          | BT      | <b>PSE type indicator.</b> BT is an open-drain output.                                                                                                                                                                                                                                                                                                                                                                               |
| 9          | COMP    | <b>DC/DC controller loop compensation pin.</b> COMP is the error amplifier (EA) output in PSR mode. COMP is internally pulled to 5V through a 10kΩ resistor in SSR mode.                                                                                                                                                                                                                                                             |
| 10         | FB      | <b>DC/DC controller output voltage feedback pin.</b> Connect one resistor divider from FB to the sensing winding to regulate the output voltage in PSR mode. In SSR mode, the internal EA is disabled. FB is only used to provide over-voltage protection (OVP).                                                                                                                                                                     |
| 11, 29     | GND     | <b>PD and DC/DC controller power ground.</b> Pin 11 (GND) is the DC/DC controller's ground, and it is the GATE and SYNC drivers' return pin. Place the components related to the DC/DC controller close to pin 11. Pin 29 (GND) is the PD interface's ground. Place the components related to the PD close to pin 29. Connect pin 11 and pin 29 in the PCB. It is recommended to use an exposed thermal pad for thermal dissipation. |
| 12         | SYNC    | <b>The DC/DC controller's synchronous MOSFET gate driver pin.</b>                                                                                                                                                                                                                                                                                                                                                                    |
| 13         | GATE    | <b>The DC/DC controller's main MOSFET gate driver pin.</b>                                                                                                                                                                                                                                                                                                                                                                           |
| 14         | VCC     | <b>DC/DC controller internal circuit supply pin.</b> VCC is powered through the internal LDO from AVIN. Connect a capacitor between this pin and GND to bypass the internal regulator. The VCC capacitor must be at minimum 1μF for flyback applications and at minimum 4.7μF for forward applications. VCC also can be powered from an external power source to reduce internal LDO loss.                                           |
| 15         | CS      | <b>DC/DC controller current sense, PSR V<sub>OUT</sub> compensation, and frequency dither setting pin.</b> See the Frequency Dithering section on page 32 and the Output Voltage Compensation section on page 31 for more details.                                                                                                                                                                                                   |
| 16         | EN      | <b>DC/DC controller on/off control pin.</b> EN is internally connected to GND through a 2.5MΩ resistor.                                                                                                                                                                                                                                                                                                                              |
| 17         | AVIN    | <b>DC/DC controller input power supply pin.</b> Connect a bypass capacitor from the AVIN pin to GND. Connect AVIN to the SRC pin in application.                                                                                                                                                                                                                                                                                     |
| 18, 22, 24 | NC      | <b>No connection.</b> It is recommended to connect these pins to the GND pin.                                                                                                                                                                                                                                                                                                                                                        |
| 19         | MODE    | <b>DC/DC controller PSR/SSR mode and dead-time setting pin.</b> See the Work Mode Detection section on page 30 for more details.                                                                                                                                                                                                                                                                                                     |
| 20         | TYP2    | <b>Allocated PSE power type indicator.</b> TYP2 is an open-drain output.                                                                                                                                                                                                                                                                                                                                                             |
| 21         | TYP1    | <b>Allocated PSE power type indicator.</b> TYP1 is an open-drain output.                                                                                                                                                                                                                                                                                                                                                             |

## PIN FUNCTIONS *(continued)*

| Pin # | Name  | Description                                                                                                                                                                                                                                                                 |
|-------|-------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| 23    | PG    | <b>PD power good indicator.</b> Open-drain output, active high. PG enables the DC/DC controller.                                                                                                                                                                            |
| 25    | SRC   | <b>PD hot-swap MOSFET source pin.</b> It is the power output from the both internal and external hot-swap MOSFETs. Connect AVIN and the DC/DC power input to the SRC pin.                                                                                                   |
| 26    | GATE1 | <b>PD GATE driver of the external, parallel N-channel MOSFET for the PSE power supply.</b>                                                                                                                                                                                  |
| 27    | SENSE | <b>PD external MOSFET current-sense pin.</b> Connect SENSE to VDD if this pin is not used.                                                                                                                                                                                  |
| 28    | VDD   | <b>Positive power supply terminal from the PoE input power rail.</b>                                                                                                                                                                                                        |
| 30    | GATE2 | <b>PD GATE driver of the external N-channel MOSFET for the adapter power supply.</b>                                                                                                                                                                                        |
| 31    | VADP  | <b>Positive power supply terminal from the adapter.</b>                                                                                                                                                                                                                     |
| 32    | AUX   | <b>Auxiliary power input detector pin.</b> Use AUX to configure the adapter's auxiliary power under-voltage lockout (UVLO) threshold. AUX is internally pulled down to GND through a 2MΩ resistor. It is recommended to externally pull AUX to GND if this pin is not used. |

## ABSOLUTE MAXIMUM RATINGS <sup>(1)</sup>

|                                                                     |                               |
|---------------------------------------------------------------------|-------------------------------|
| VDD, SENSE, SRC, TYP1, TYP2, PG, AUX, VADP, BT, AVIN .....          | -0.3V to +100V                |
| R_MPS .....                                                         | -0.3V to +30V                 |
| VCC, GATE, SYNC.....                                                | -0.3V to +18V                 |
| GATE1 to SRC .....                                                  | -0.3V to +6.5V                |
| GATE2 to VADP .....                                                 | -0.3V to +6.5V                |
| SENSE to VDD .....                                                  | -6.5V to +0.3V                |
| FB .....                                                            | -0.5V to +6.5V <sup>(2)</sup> |
| All other pins .....                                                | -0.3V to +6.5V                |
| PG, TYP1, TYP2, BT sinking current.....                             | 5mA                           |
| EN sinking current .....                                            | 0.5mA <sup>(3)</sup>          |
| FB sinking current.....                                             | ±2mA <sup>(2)</sup>           |
| Continuous power dissipation (T <sub>A</sub> = 25°C) <sup>(4)</sup> |                               |
| QFN-32 (5mmx6mm) .....                                              | 3.9W <sup>(5)</sup>           |
| Junction temperature .....                                          | 150°C                         |
| Lead temperature .....                                              | 260°C                         |
| Storage temperature .....                                           | -55°C to +150°C               |

## Recommended Operating Conditions <sup>(6)</sup>

|                                                  |                      |
|--------------------------------------------------|----------------------|
| Supply voltage (V <sub>DD</sub> ) .....          | 0V to 57V            |
| Adapter supply voltage (V <sub>ADP</sub> ) ..... | 0V to 57V            |
| VCC, GATE, SYNC voltage.....                     | 16V                  |
| PG, TYP1, TYP2, BT max sink current.....         | 3mA                  |
| EN maximum sink current.....                     | 0.4mA <sup>(3)</sup> |
| FB maximum sink current.....                     | ±1mA <sup>(2)</sup>  |
| Operating junction temp (T <sub>J</sub> )....    | -40°C to +125°C      |

## Thermal Resistance

**θ<sub>JA</sub>    θ<sub>JC</sub>**

|                                     |               |      |
|-------------------------------------|---------------|------|
| QFN-32 (5mmx6mm)                    |               |      |
| EVL8030-QJ-00A <sup>(5)</sup> ..... | 32.....2..... | °C/W |
| JESD51-7 <sup>(7)</sup> .....       | 26.....1..... | °C/W |

### Notes:

- 1) Exceeding these ratings may damage the device.
- 2) FB is clamped by an internal circuit. The sink/source current should be limited. See the Output Voltage Setting section on page 36 for more details.
- 3) If EN is pulled above 6.5V externally, the pull-up current should be limited. Refer to Enable Control (EN) section on page 29 for more details.
- 4) The maximum allowable power dissipation is a function of the maximum junction temperature, T<sub>J</sub> (MAX), the junction-to-ambient thermal resistance, θ<sub>JA</sub>, and the ambient temperature, T<sub>A</sub>. The maximum allowable continuous power dissipation at any ambient temperature is calculated by P<sub>D</sub> (MAX) = (T<sub>J</sub> (MAX) - T<sub>A</sub>) / θ<sub>JA</sub>. Exceeding the maximum allowable power dissipation can produce an excessive die temperature, and the regulator may go into thermal shutdown. Internal thermal shutdown circuitry protects the device from permanent damage.
- 5) Measured on EVL8030-QJ-00A, 4-layer, 1oz thick Cu, 160mmx55mm PCB.
- 6) The device is not guaranteed to function outside of its operating conditions.
- 7) The value of θ<sub>JA</sub> given in this table is only valid for comparison with other packages and cannot be used for design purposes. These values were calculated in accordance with JESD51-7, and simulated on a specified JEDEC board. They do not represent the performance obtained in an actual application.

## ELECTRICAL CHARACTERISTICS

PD interface section,  $V_{DD} = 54V$ , SRC and AVIN are connected together,  $T_J = -40^{\circ}C$  to  $+125^{\circ}C$  <sup>(8)</sup>, typical values are tested at  $T_J = 25^{\circ}C$ , unless otherwise noted.

| Parameter                                              | Symbol         | Condition                                                                                                              | Min  | Typ   | Max  | Units      |
|--------------------------------------------------------|----------------|------------------------------------------------------------------------------------------------------------------------|------|-------|------|------------|
| <b>Detection</b>                                       |                |                                                                                                                        |      |       |      |            |
| Detection on                                           | $V_{DET-ON}$   | $V_{DD}$ rising                                                                                                        |      | 1     | 1.4  | V          |
| Detection off                                          | $V_{DET-OFF}$  | $V_{DD}$ rising                                                                                                        | 10.1 | 11    |      | V          |
| Bias current                                           | $I_{BIAS}$     | $V_{DD} = 10.1V$ , not in mark event, measure $I_{SUPPLY}$                                                             |      |       | 12   | $\mu A$    |
| Detection resistance                                   | $R_{DET}$      | $V_{DD} = 1.5V$ to $10.1V$ , calculate with $\Delta V / \Delta I$                                                      | 24.1 | 25    | 26.1 | k $\Omega$ |
| <b>Classification</b>                                  |                |                                                                                                                        |      |       |      |            |
| Classification stability time                          |                | From $V_{CL-ON}$ to CLSA or CLSB, stable voltage output                                                                |      | 0.4   | 1    | ms         |
| $V_{CLASS}$ output voltage                             | $V_{CLSA/B}$   | $13V < V_{DD} < 21V$ , $1mA < I_{CLASS} < 44mA$                                                                        | 1.11 | 1.16  | 1.21 | V          |
| Classification current for both the CLSA and CLSB pins | $I_{CLASS}$    | $R_{CLASS} = 578\Omega$ , $13V \leq V_{DD} \leq 21V$ , measure input current, guaranteed by $V_{CLSA}$ and $V_{CLSB}$  | 1.8  | 2     | 2.4  | mA         |
|                                                        |                | $R_{CLASS} = 110\Omega$ , $13V \leq V_{DD} \leq 21V$ , measure input current, guaranteed by $V_{CLSA}$ and $V_{CLSB}$  | 9.9  | 10.55 | 11.3 |            |
|                                                        |                | $R_{CLASS} = 62\Omega$ , $13V \leq V_{DD} \leq 21V$ , measure input current, guaranteed by $V_{CLSA}$ and $V_{CLSB}$   | 17.7 | 18.7  | 19.8 |            |
|                                                        |                | $R_{CLASS} = 41.2\Omega$ , $13V \leq V_{DD} \leq 21V$ , measure input current, guaranteed by $V_{CLSA}$ and $V_{CLSB}$ | 26.6 | 28.15 | 29.7 |            |
|                                                        |                | $R_{CLASS} = 28.7\Omega$ , $13V \leq V_{DD} \leq 21V$ , measure input current, guaranteed by $V_{CLSA}$ and $V_{CLSB}$ | 38.2 | 40.4  | 42.6 |            |
| Auto-class signature current                           | $I_{ACS}$      | After $t_{ACS}$ when the auto-class function is enabled, generated internally.                                         | 1    |       | 3    | mA         |
| Auto-class signature timing                            | $t_{ACS}$      | Change to $I_{ACS}$ , from triggering $V_{CL-ON}$                                                                      | 76   | 81.5  | 87   | ms         |
| Long first class event                                 | $t_{LCE}$      | Determine type 3/4 PoE, from triggering $V_{CL-ON}$                                                                    | 76   | 81.5  | 87   | ms         |
| Classification lower threshold                         | $V_{CL-ON}$    | Regulator turns on, $V_{DD}$ rising                                                                                    | 12   | 12.5  | 13   | V          |
| Classification lower threshold hysteresis              | $V_{CL-L-HYS}$ | Low threshold hysteresis                                                                                               | 1.3  | 1.5   | 1.7  | V          |
| Classification upper threshold                         | $V_{CL-OFF}$   | Regulator turns off, $V_{DD}$ rising                                                                                   | 21   | 22    | 23   | V          |
| Classification upper threshold hysteresis              | $V_{CL-H-HYS}$ | High threshold hysteresis                                                                                              |      | 0.5   |      | V          |
| Mark event reset threshold                             | $V_{MARK-L}$   |                                                                                                                        | 4.5  | 5     | 5.5  | V          |
| Max mark event voltage                                 | $V_{MARK-H}$   |                                                                                                                        | 10.5 | 11    | 11.5 | V          |
| Mark event current                                     | $I_{MARK}$     |                                                                                                                        | 0.5  | 1.1   | 2    | mA         |

## ELECTRICAL CHARACTERISTICS (continued)

PD interface section,  $V_{DD} = 54V$ , SRC and AVIN are connected together,  $T_J = -40^{\circ}C$  to  $+125^{\circ}C$  <sup>(8)</sup>, typical values are tested at  $T_J = 25^{\circ}C$ , unless otherwise noted.

| Parameter                                | Symbol         | Condition                                                                                                             | Min  | Typ  | Max  | Units        |
|------------------------------------------|----------------|-----------------------------------------------------------------------------------------------------------------------|------|------|------|--------------|
| Mark event resistance                    | $R_{MARK}$     | 2-point measurement at 5.5V and 10.1V, with $\Delta V / \Delta I$                                                     |      |      | 12   | k $\Omega$   |
| IC supply current during classification  | $I_{IN-CLASS}$ | $V_{DD} = 17.5V$ , CLSA and CLSB floating                                                                             |      | 180  | 300  | $\mu A$      |
| Class leakage current                    | $I_{LEAKAGE}$  | $V_{CLSA} = V_{CLSB} = 0V$ , $V_{DD} = 57V$ , test both the CLSA and CLSB pins                                        |      |      | 1    | $\mu A$      |
| AUTOCLS low-voltage input                |                |                                                                                                                       |      |      | 0.4  | V            |
| AUTOCLS high-voltage input               |                |                                                                                                                       | 1.2  |      |      | V            |
| <b>Under-Voltage Lockout (UVLO)</b>      |                |                                                                                                                       |      |      |      |              |
| VDD turn-on threshold                    | $V_{DD-R}$     | $V_{DD}$ rising                                                                                                       | 37   | 38.5 | 40   | V            |
| VDD turn-off threshold                   | $V_{DD-F}$     | $V_{DD}$ falling                                                                                                      | 30   | 31.5 | 33   | V            |
| VDD UVLO hysteresis                      | $V_{DD-HYS}$   |                                                                                                                       | 5    | 7    |      | V            |
| IC supply current during operation       | $I_{IN}$       | No load and no $R_{MPS}$ resistor, disconnect AVIN from SRC                                                           |      | 1    | 1.5  | mA           |
| Input leakage current                    |                | $V_{DD} = 29.5V$                                                                                                      |      | 150  | 250  | $\mu A$      |
| <b>Hot-Swap MOSFET and Current Limit</b> |                |                                                                                                                       |      |      |      |              |
| Internal MOSFET on resistance            | $R_{ON}$       | $I_{SRC} = 500mA$                                                                                                     |      | 0.35 |      | $\Omega$     |
| Leakage current                          | $I_{SRC-LK}$   | $V_{DD} = 57V$ , $V_{SRC} = 0V$ , AUX = high, PRI = high                                                              |      | 1    | 15   | $\mu A$      |
| ILIM pin detection period                |                |                                                                                                                       |      | 270  |      | $\mu s$      |
| ILIM pin detection current               |                |                                                                                                                       | 130  | 165  | 180  | $\mu A$      |
| ILIM pin voltage threshold               |                | 0.9A setting voltage range                                                                                            |      |      | 0.8  | V            |
|                                          |                | 1.6A setting voltage range                                                                                            | 1    |      | 2.2  | V            |
| Internal MOSFET current limit            | $I_{LIMIT}$    | ILIM = 0V, $V_{SRC}$ drops from VDD, $V_{DD} - V_{SRC} = 1V$                                                          | 0.75 | 0.9  | 1.05 | A            |
|                                          |                | ILIM connected to GND through a 7.15k $\Omega$ resistor, $V_{SRC}$ drops from VDD, $V_{DD} - V_{SRC} = 1V$            | 1.4  | 1.6  | 1.8  | A            |
| Internal MOSFET inrush limit             | $I_{INRUSH}$   | ILIM = 0V, $V_{SRC}$ ramps up from low to high, $V_{DD} - V_{SRC} = 1V$                                               | 70   | 130  | 190  | mA           |
|                                          |                | ILIM connected to GND through a 7.15k $\Omega$ resistor. $V_{SRC}$ ramps up from low to high, $V_{DD} - V_{SRC} = 1V$ | 170  | 230  | 290  | mA           |
| Inrush current termination               | $I_{TERM}$     | $V_{SRC}$ rising, $I_{TERM} / I_{INRUSH}$                                                                             |      | 75%  |      | $I_{INRUSH}$ |
| Inrush to operation mode delay           | $t_{DELAY}$    |                                                                                                                       | 80   | 90   | 100  | ms           |
| Current foldback threshold               |                | $V_{SRC}$ falling, $V_{DD} - V_{SRC}$                                                                                 | 8.2  | 10   | 11.8 | V            |
| Foldback deglitch time <sup>(9)</sup>    |                | $V_{SRC}$ falling to inrush current foldback                                                                          |      | 1    |      | ms           |
| GATE1 source current                     |                | $V_{GATE1} - V_{SRC} = 4V$                                                                                            |      | 10   |      | $\mu A$      |
| GATE1 sink current                       |                | $V_{GATE1} - V_{SRC} = 4V$                                                                                            |      | 30   |      | $\mu A$      |



## ELECTRICAL CHARACTERISTICS (continued)

PD interface section,  $V_{DD} = 54V$ , SRC and AVIN are connected together,  $T_J = -40^{\circ}C$  to  $+125^{\circ}C$  <sup>(8)</sup>, typical values are tested at  $T_J = 25^{\circ}C$ , unless otherwise noted.

| Parameter                                                                                    | Symbol              | Condition                                                          | Min | Typ   | Max | Units   |
|----------------------------------------------------------------------------------------------|---------------------|--------------------------------------------------------------------|-----|-------|-----|---------|
| GATE1 max driving voltage                                                                    |                     |                                                                    |     | 6     |     | V       |
| External MOSFET current limit                                                                |                     | $V_{DD} - V_{SENSE}$                                               | 22  | 26    | 30  | mV      |
| SENSE pin leakage current                                                                    |                     | $V_{SENSE} = V_{DD} = 54V$                                         |     |       | 0.1 | $\mu A$ |
| <b>PG, BT, TYP1, TYP2</b>                                                                    |                     |                                                                    |     |       |     |         |
| Output low voltage                                                                           |                     | $I_{SINK} = 1mA$                                                   |     | 0.2   | 0.4 | V       |
| Leakage current                                                                              |                     | Logic = high, connect to 57V                                       |     |       | 1   | $\mu A$ |
| <b>Maintain Power Signature</b>                                                              |                     |                                                                    |     |       |     |         |
| Automatic maintain power signature current enable threshold                                  | $I_{PORT-MPS}$      | Load current falling                                               |     | 36    |     | mA      |
| Automatic maintain power signature current threshold hysteresis                              |                     | Load current rises to disable the maintain power signature current |     | 10    |     | mA      |
| R_MPS pin output voltage                                                                     |                     | 1mA to 20mA                                                        | 23  | 24    | 25  | V       |
| Type 1/2 PSE, R_MPS output duty cycle                                                        |                     | Duty cycle                                                         |     | 37%   |     |         |
|                                                                                              |                     | On period                                                          | 75  | 85    | 95  | ms      |
|                                                                                              |                     | Off period                                                         | 115 | 140   | 165 | ms      |
| Type 3/4 PSE, R_MPS output duty cycle with DUTY pin shorted to GND                           |                     | Duty cycle                                                         |     | 6%    |     |         |
|                                                                                              |                     | On period                                                          | 14  | 16    | 18  | ms      |
|                                                                                              |                     | Off period                                                         | 210 | 250   | 290 | ms      |
| Type 3/4 PSE, R_MPS output duty cycle with DUTY pin to GND through a 7.15k $\Omega$ resistor |                     | Duty cycle                                                         |     | 11.5% |     | ms      |
|                                                                                              |                     | On period                                                          | 26  | 31    | 36  | ms      |
|                                                                                              |                     | Off period                                                         | 200 | 235   | 270 | ms      |
| Type 3/4 PSE, R_MPS output duty cycle with DUTY pin floating                                 |                     | Duty cycle                                                         |     | 17%   |     |         |
|                                                                                              |                     | On period                                                          | 39  | 45    | 52  | ms      |
|                                                                                              |                     | Off period                                                         | 190 | 221   | 260 | ms      |
| External FET voltage drop control threshold                                                  |                     | $V_{DS} = V_{SENSE} - V_{SRC}$                                     |     | 26    |     | mV      |
| DUTY pin detection current                                                                   |                     |                                                                    | 130 | 165   | 180 | $\mu A$ |
| DUTY pin detection period                                                                    |                     |                                                                    |     | 130   |     | $\mu s$ |
| DUTY pin voltage threshold                                                                   |                     | 6% duty cycle setting voltage range                                |     |       | 0.8 | V       |
|                                                                                              |                     | 11.5% duty cycle setting voltage range                             | 1   |       | 2.2 | V       |
|                                                                                              |                     | 17% duty cycle setting voltage range                               | 2.5 |       |     | V       |
| <b>Adapter Supply</b>                                                                        |                     |                                                                    |     |       |     |         |
| VADP pin UVLO rising                                                                         | ADP <sub>UV-R</sub> |                                                                    | 7.8 | 8.3   | 8.8 | V       |
| VADP pin UVLO falling                                                                        | ADP <sub>UV-F</sub> |                                                                    | 6.5 | 7     | 7.5 | V       |

# ELECTRICAL CHARACTERISTICS (continued)

PD interface section,  $V_{DD} = 54V$ , SRC and AVIN are connected together,  $T_J = -40^{\circ}C$  to  $+125^{\circ}C$  <sup>(8)</sup>, typical values are tested at  $T_J = 25^{\circ}C$ , unless otherwise noted.

| Parameter                                   | Symbol        | Condition                                                       | Min  | Typ  | Max  | Units       |
|---------------------------------------------|---------------|-----------------------------------------------------------------|------|------|------|-------------|
| AUX pin high threshold voltage              | $V_{AUX-H}$   |                                                                 | 1.92 | 2    | 2.08 | V           |
| AUX pin threshold hysteresis                | $V_{AUX-HYS}$ |                                                                 |      | 0.15 |      | V           |
| AUX leakage current                         |               | $V_{AUX} = 2V$                                                  |      | 1    |      | $\mu A$     |
|                                             |               | $V_{AUX} = 57V$                                                 |      | 2.5  |      | $\mu A$     |
| GATE2 source current                        |               | $V_{GATE2} - V_{ADP} = 4V$                                      |      | 20   |      | $\mu A$     |
| GATE2 sink current                          |               | $V_{GATE2} - V_{ADP} = 4V$                                      | 200  |      |      | $\mu A$     |
| GATE2 max driving voltage                   |               | GATE2 to VADP                                                   |      | 6    |      | V           |
| GATE2 turn-on threshold                     |               | $V_{ADP} - V_{SRC}$ voltage after the adapter supply is enabled | 0    |      | 0.45 | V           |
| <b>Power Priority</b>                       |               |                                                                 |      |      |      |             |
| PRI pin input high voltage                  |               |                                                                 | 2    |      |      | V           |
| PRI pin input low voltage                   |               |                                                                 |      |      | 0.4  | V           |
| PRI pin internal pull up resistor           |               | Pull up to the internal 5V $V_{CC}$                             |      | 1    |      | $M\Omega$   |
| <b>Thermal Shutdown</b>                     |               |                                                                 |      |      |      |             |
| Thermal shutdown temperature <sup>(9)</sup> | $T_{PD-SD}$   |                                                                 |      | 150  |      | $^{\circ}C$ |
| Thermal shutdown hysteresis <sup>(9)</sup>  | $T_{PD-HYS}$  |                                                                 |      | 20   |      | $^{\circ}C$ |

## ELECTRICAL CHARACTERISTICS

Controller section,  $V_{DD} = 54V$ , SRC and AVIN are connected together,  $T_J = -40^{\circ}C$  to  $+125^{\circ}C$  <sup>(8)</sup>, typical values are tested at  $T_J = 25^{\circ}C$ , unless otherwise noted.

| Parameter                                   | Symbol               | Condition                                                                                                                                                    | Min  | Typ  | Max                 | Units            |
|---------------------------------------------|----------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------|------|------|---------------------|------------------|
| Power Supply and UVLO                       |                      |                                                                                                                                                              |      |      |                     |                  |
| AVIN UVLO rising threshold                  | V <sub>AVIN-R</sub>  | V <sub>AVIN</sub> rising, start charging to V <sub>CC</sub>                                                                                                  | 4.5  | 5.5  | 6.5                 | V                |
| AVIN UVLO falling threshold                 | V <sub>AVIN-F</sub>  | V <sub>AVIN</sub> falling                                                                                                                                    | 3.8  | 4.8  | 5.8                 | V                |
| VCC regulation voltage                      | V <sub>CC</sub>      | Load = 0mA to 20mA                                                                                                                                           |      | 8.5  |                     | V                |
| VCC dropout voltage                         | V <sub>CC-DROP</sub> | V <sub>AVIN</sub> = 8V, I <sub>VCC</sub> = 10mA                                                                                                              |      | 1.5  |                     | V                |
| VCC UVLO rising threshold                   | V <sub>CC-R</sub>    | V <sub>AVIN</sub> > V <sub>AVIN-R</sub> , V <sub>CC</sub> rising                                                                                             | 5.4  | 5.7  | 6.0                 | V                |
| VCC UVLO falling threshold                  | V <sub>CC-F</sub>    | V <sub>AVIN</sub> > V <sub>AVIN-R</sub> , V <sub>CC</sub> falling                                                                                            | 5    | 5.3  | 5.6                 | V                |
| Quiescent current                           | I <sub>Q</sub>       | MODE pin float, V <sub>FB</sub> = -0.1V, CS = 100mV, COMP = 0V, I <sub>Q</sub> = I <sub>DD</sub> - I <sub>COMP</sub> , GATE and SYNC floating, test AVIN pin |      | 900  |                     | μA               |
|                                             |                      | MODE = 0V, V <sub>COMP</sub> = 0V, I <sub>Q</sub> = I <sub>DD</sub> - I <sub>COMP</sub> , GATE and SYNC floating, test the AVIN pin                          |      | 500  |                     | μA               |
| Enable (EN) Control                         |                      |                                                                                                                                                              |      |      |                     |                  |
| EN turn-on threshold                        | V <sub>EN-R</sub>    | Start switching                                                                                                                                              | 1.9  | 2    | 2.1                 | V                |
| EN turn-on hysteresis                       | V <sub>EN-HYS</sub>  | Stop switching                                                                                                                                               |      | 0.2  |                     | V                |
| EN high micro-power threshold               | V <sub>EN-H</sub>    | Start internal logic                                                                                                                                         |      |      | 1.0                 | V                |
| EN low micro-power threshold                | V <sub>EN-L</sub>    | Stop internal logic                                                                                                                                          | 0.4  |      |                     | V                |
| EN input current                            | I <sub>EN</sub>      | V <sub>EN</sub> = 5V                                                                                                                                         |      | 2    |                     | μA               |
| EN turn-on delay                            |                      | EN on to GATE output                                                                                                                                         |      | 500  |                     | μs               |
| Voltage Feedback (FB)                       |                      |                                                                                                                                                              |      |      |                     |                  |
| FB reference voltage                        | V <sub>REF</sub>     | T <sub>J</sub> = 25°C                                                                                                                                        | 1.98 | 2    | 2.02                | V                |
|                                             |                      | T <sub>J</sub> = -40°C to +125°C                                                                                                                             | 1.97 | 2    | 2.03                | V                |
| FB leakage current                          | I <sub>FB</sub>      | V <sub>FB</sub> = 2V                                                                                                                                         |      | 10   | 50                  | nA               |
| FB OVP threshold                            | V <sub>FBOVP</sub>   |                                                                                                                                                              | 120% | 125% | 130%                | V <sub>REF</sub> |
| OVP hiccup off time                         |                      |                                                                                                                                                              |      | 340  |                     | ms               |
| Minimum diode conduction time for FB sample | t <sub>SAMPLE</sub>  |                                                                                                                                                              |      | 0.5  | 0.6 <sup>(10)</sup> | μs               |
| Regulation compensation current into FB     |                      | V <sub>CS</sub> = 50mV, R <sub>CS-GND</sub> = 3.3kΩ <sup>(11)</sup>                                                                                          |      | 2.7  |                     | μA               |
|                                             |                      | V <sub>CS</sub> = 50mV, R <sub>CS-GND</sub> = 6.8kΩ <sup>(11)</sup>                                                                                          |      | 5.4  |                     | μA               |
|                                             |                      | V <sub>CS</sub> = 50mV, R <sub>CS-GND</sub> = 12.7kΩ <sup>(11)</sup>                                                                                         |      | 10.8 |                     | μA               |
| Error Amplifier (EA)                        |                      |                                                                                                                                                              |      |      |                     |                  |
| EA transconductance                         | G <sub>EA</sub>      | MODE floating, V <sub>FB</sub> is ±50mV from V <sub>REF</sub> , V <sub>COMP</sub> = 1.5V                                                                     |      | 0.59 |                     | mA/V             |
| EA maximum source current                   | I <sub>EA</sub>      | MODE floating, V <sub>COMP</sub> = 1.5V, V <sub>FB</sub> = 1.9V                                                                                              |      | -110 |                     | μA               |

## ELECTRICAL CHARACTERISTICS (continued)

Controller section,  $V_{DD} = 54V$ , SRC and AVIN are connected together,  $T_J = -40^{\circ}C$  to  $+125^{\circ}C$  <sup>(8)</sup>, typical values are tested at  $T_J = 25^{\circ}C$ , unless otherwise noted.

| Parameter                                                                        | Symbol                              | Condition                                                       | Min  | Typ | Max  | Units |
|----------------------------------------------------------------------------------|-------------------------------------|-----------------------------------------------------------------|------|-----|------|-------|
| EA maximum sink current                                                          | I <sub>EA</sub>                     | MODE floating, V <sub>COMP</sub> = 1.5V, V <sub>FB</sub> = 2.1V |      | 110 |      | μA    |
| COMP high voltage                                                                | V <sub>COMP</sub>                   | MODE floating, V <sub>FB</sub> = 1.9V                           |      | 4   |      | V     |
|                                                                                  |                                     | MODE = 0V, float COMP                                           |      | 5   |      |       |
| COMP internal pull-up resistor                                                   |                                     | SSR mode                                                        |      | 10  |      | kΩ    |
| Soft Start (SS)                                                                  |                                     |                                                                 |      |     |      |       |
| Internal soft-start time                                                         | t <sub>SS</sub>                     | MODE floating, test FB from 0V to 2V                            |      | 15  |      | ms    |
|                                                                                  |                                     | MODE = 0V, test COMP from 1.5V to 3.5V                          |      | 20  |      |       |
| Current Sense (CS)                                                               |                                     |                                                                 |      |     |      |       |
| Maximum CS limit                                                                 | I <sub>LIMIT-MAX</sub>              |                                                                 | 140  | 160 | 180  | mV    |
| Low threshold current limit                                                      | I <sub>LIMIT-MIN</sub>              | In PSR mode                                                     | 33   | 36  | 39   | mV    |
| SCP limit                                                                        |                                     |                                                                 | 240  | 300 | 360  | mV    |
| Current leading edge blanking time                                               | t <sub>LEB</sub>                    |                                                                 |      | 250 |      | ns    |
| CS amplifier gain                                                                | G <sub>CS</sub>                     |                                                                 |      | 11  |      | V/V   |
| CS input bias current                                                            |                                     | V <sub>CS</sub> = 160mV                                         |      | 10  | 50   | nA    |
| Pulse-Width Modulation (PWM) Switching                                           |                                     |                                                                 |      |     |      |       |
| Switching frequency                                                              | f <sub>SW</sub>                     |                                                                 | 225  | 250 | 275  | kHz   |
| Minimum foldback frequency in PFM mode                                           |                                     | In PSR mode, COMP = 0V                                          |      | 30  |      | kHz   |
| Mode, Dead Time, Dither, V <sub>OUT</sub> Compensation Setting (MODE and CS Pin) |                                     |                                                                 |      |     |      |       |
| MODE pin detection current                                                       | I <sub>MODE</sub>                   |                                                                 | 35   | 40  | 45   | μA    |
| CS pin detection current                                                         | I <sub>CS</sub>                     |                                                                 | 90   | 100 | 110  | μA    |
| MODE and CS pin detection period                                                 | t <sub>MODE</sub> , t <sub>CS</sub> |                                                                 |      | 200 |      | μs    |
| MODE, CS pin detection threshold voltage <sup>(12)</sup>                         | V <sub>MODE</sub> , V <sub>CS</sub> | Voltage level 1 range                                           |      |     | 0.15 | V     |
|                                                                                  |                                     | Voltage level 2 range                                           | 0.25 |     | 0.4  | V     |
|                                                                                  |                                     | Voltage level 3 range                                           | 0.55 |     | 0.85 | V     |
|                                                                                  |                                     | Voltage level 4 range                                           | 1.1  |     | 1.5  | V     |
|                                                                                  |                                     | Voltage level 5 range                                           | 2.2  |     |      | V     |
| GATE Driver Signal                                                               |                                     |                                                                 |      |     |      |       |
| GATE driver impedance (sourcing)                                                 | I <sub>GATE</sub>                   | I <sub>GATE</sub> = -20mA                                       |      | 2   |      | Ω     |
| GATE driver impedance (sinking)                                                  | I <sub>GATE</sub>                   | I <sub>GATE</sub> = 20mA                                        |      | 1.7 |      | Ω     |
| GATE source current capability <sup>(9)</sup>                                    |                                     | V <sub>CC</sub> = 8.5V, GATE = 10nF, test gate rising speed     |      | 2   |      | A     |

## ELECTRICAL CHARACTERISTICS (continued)

Controller section,  $V_{DD} = 54V$ , SRC and AVIN are connected together,  $T_J = -40^{\circ}C$  to  $+125^{\circ}C$  <sup>(8)</sup>, typical values are tested at  $T_J = 25^{\circ}C$ , unless otherwise noted.

| Parameter                                          | Symbol       | Condition                                                  | Min             | Typ | Max  | Units       |
|----------------------------------------------------|--------------|------------------------------------------------------------|-----------------|-----|------|-------------|
| GATE sink current capability <sup>(9)</sup>        |              | $V_{CC} = 8.5V$ , GATE = 10nF, test gate falling speed     |                 | 1.7 |      | A           |
| GATE output high voltage                           | $V_{GATE}$   |                                                            | $V_{CC} - 0.05$ |     |      | V           |
| GATE output low voltage                            | $V_{GATE}$   |                                                            |                 |     | 0.05 | V           |
| Minimum GATE on time                               | $t_{ON-MIN}$ |                                                            |                 | 250 |      | ns          |
| GATE max duty cycle                                | $D_{MAX}$    |                                                            |                 | 70  |      | %           |
| <b>SYNC Driver Signal</b>                          |              |                                                            |                 |     |      |             |
| SYNC driver impedance (sourcing)                   | $I_{SYNC}$   | $I_{GATE} = -20mA$                                         |                 | 5   |      | $\Omega$    |
| SYNC driver impedance (sinking)                    | $I_{SYNC}$   | $I_{GATE} = 20mA$                                          |                 | 2.3 |      | $\Omega$    |
| SYNC source current capability <sup>(9)</sup>      |              | $V_{CC} = 8.5V$ , SYNC = 10nF, test the SYNC rising speed  |                 | 0.8 |      | A           |
| SYNC sink current capability <sup>(9)</sup>        |              | $V_{CC} = 8.5V$ , SYNC = 10nF, test the SYNC falling speed |                 | 1.2 |      | A           |
| SYNC output high voltage                           | $V_{SYNC}$   |                                                            | $V_{CC} - 0.05$ |     |      | V           |
| SYNC output low voltage                            | $V_{SYNC}$   |                                                            |                 |     | 0.05 | V           |
| <b>Protection</b>                                  |              |                                                            |                 |     |      |             |
| Overload protection hiccup on time <sup>(9)</sup>  |              |                                                            |                 | 4.8 |      | ms          |
| Overload protection hiccup off time <sup>(9)</sup> |              |                                                            |                 | 340 |      | ms          |
| Thermal shutdown temperature <sup>(9)</sup>        | $T_{SD}$     |                                                            |                 | 150 |      | $^{\circ}C$ |
| Thermal shutdown hysteresis <sup>(9)</sup>         | $T_{HYS}$    |                                                            |                 | 20  |      | $^{\circ}C$ |

### Notes:

8) Guaranteed by over-temperature correlation. Not tested in production.

9) Guaranteed by characterization. Not tested in production.







10) It is recommended to make the output diode conduction time longer than 0.7 $\mu s$ .

11)  $R_{CS-GND}$  is the resistance from the CS pin to GND. This includes the current-sense resistor from the MOSFET source to GND and the resistor from the MOSFET's source to the CS pin.

12) For different voltage levels, see Table 6 on page 30 and Table 7 on page 32.







# TYPICAL CHARACTERISTICS

VDD = 54V, T<sub>A</sub> = 25°C, unless otherwise noted.

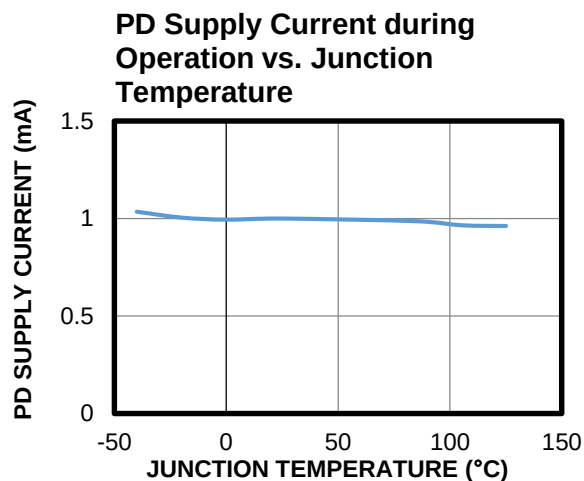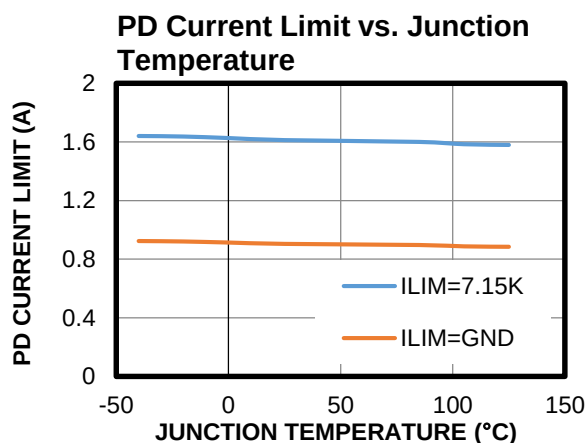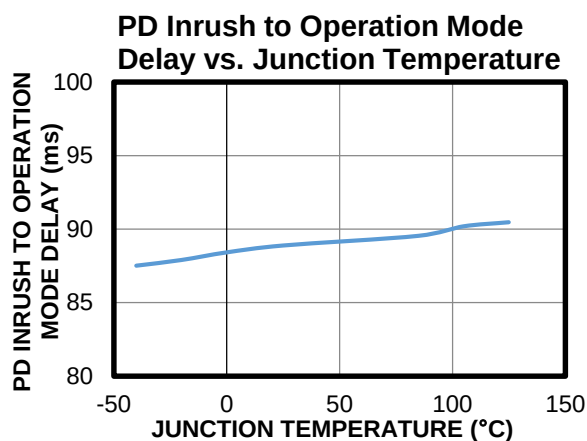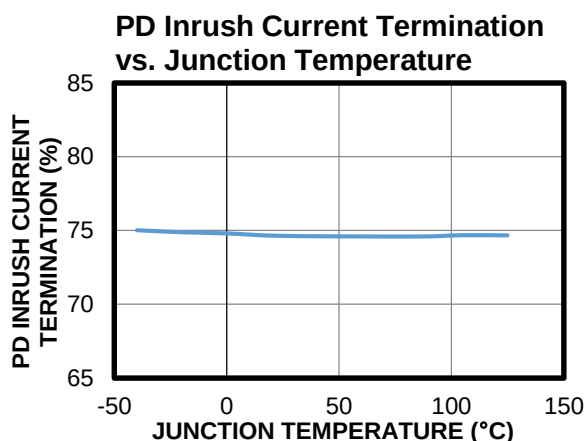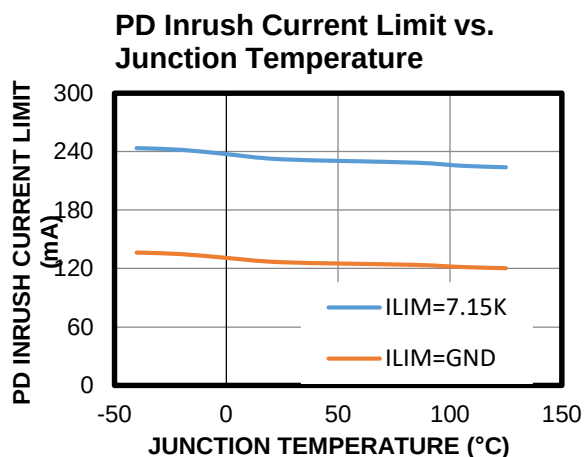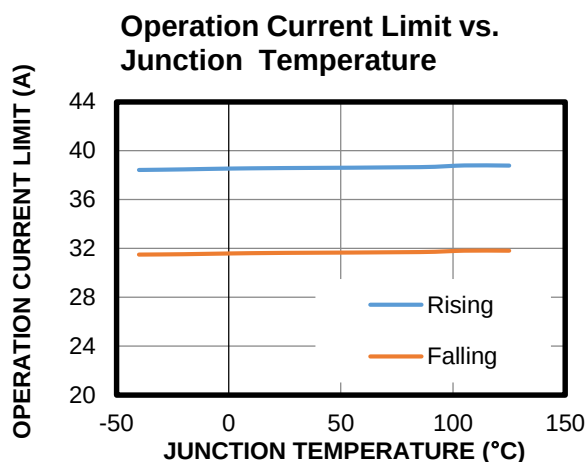







# TYPICAL CHARACTERISTICS (continued)

$V_{DD} = 54V$ ,  $T_A = 25^{\circ}C$ , unless otherwise noted.

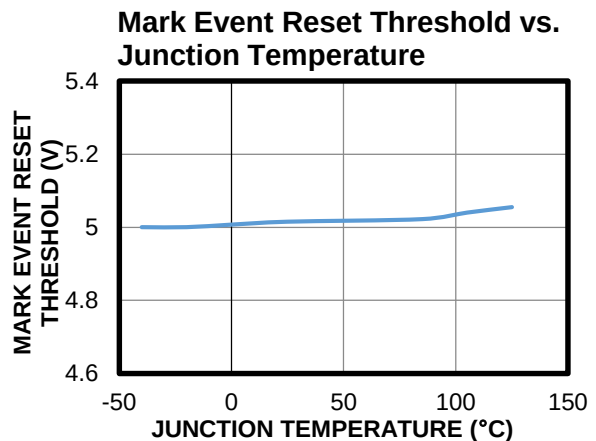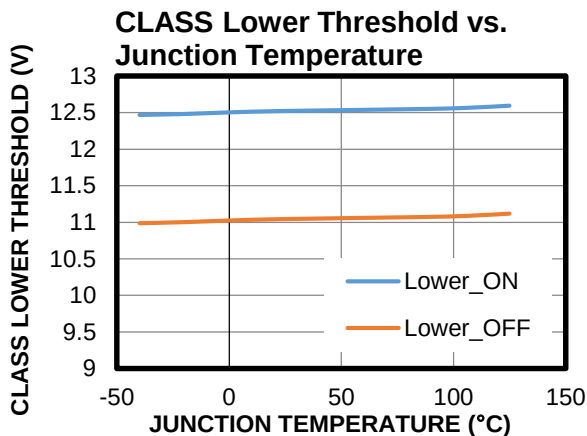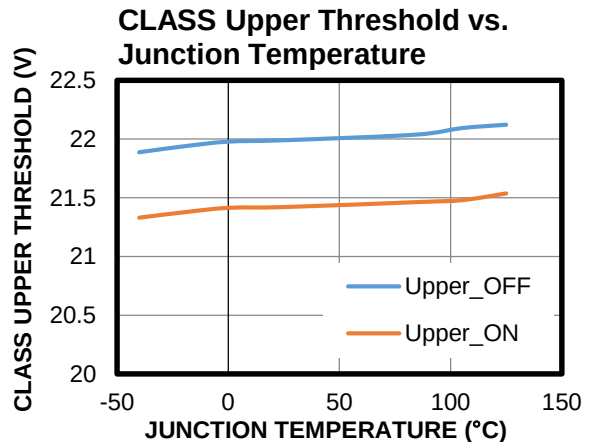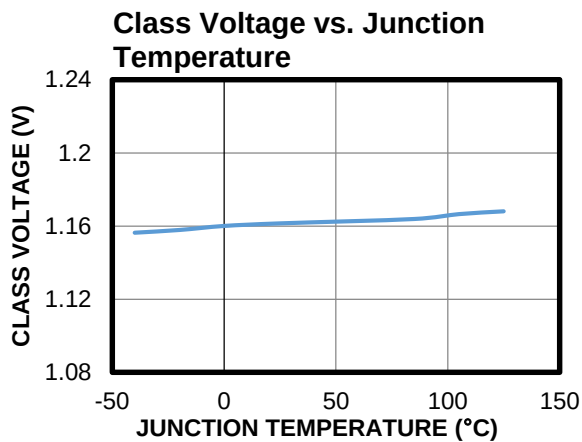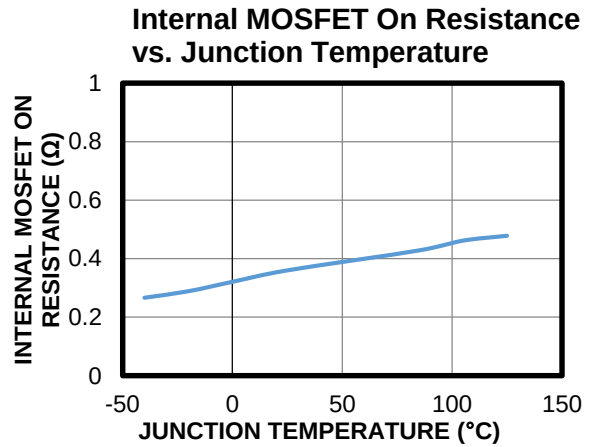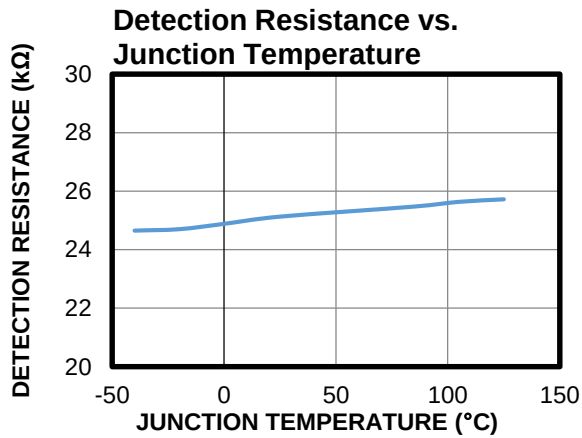

# TYPICAL CHARACTERISTICS (continued)

$V_{DD} = 54V$ ,  $T_A = 25^{\circ}C$ , unless otherwise noted.

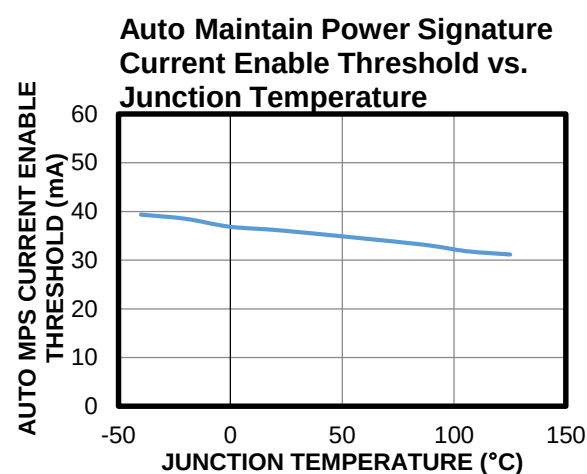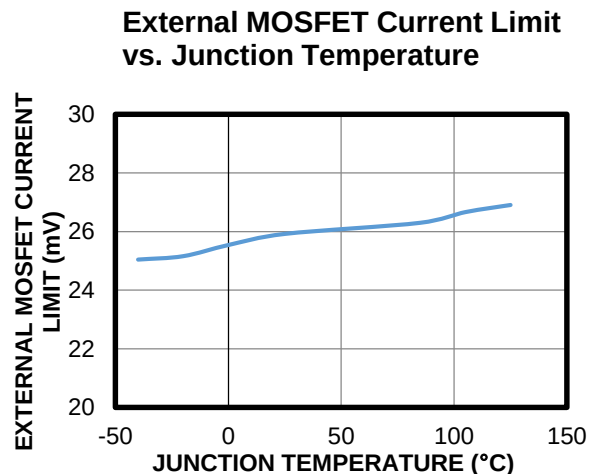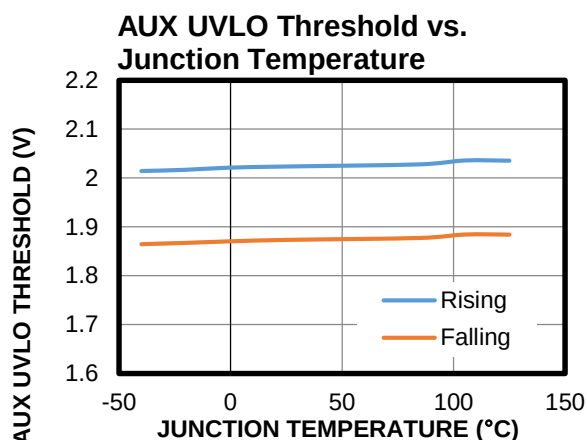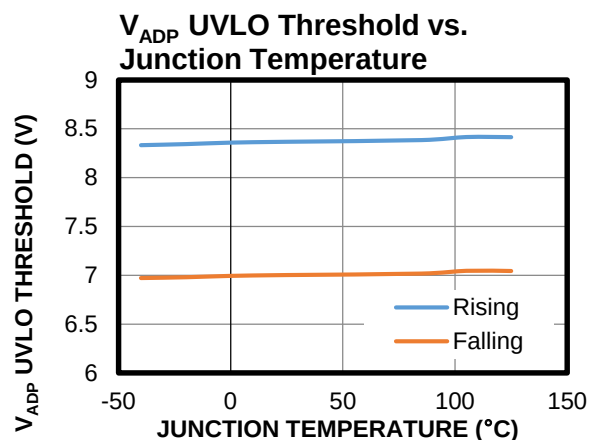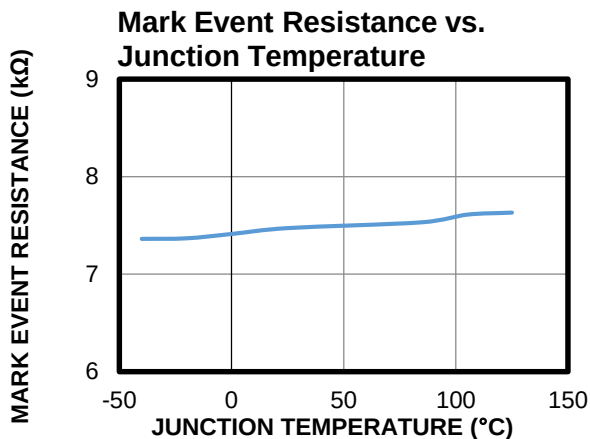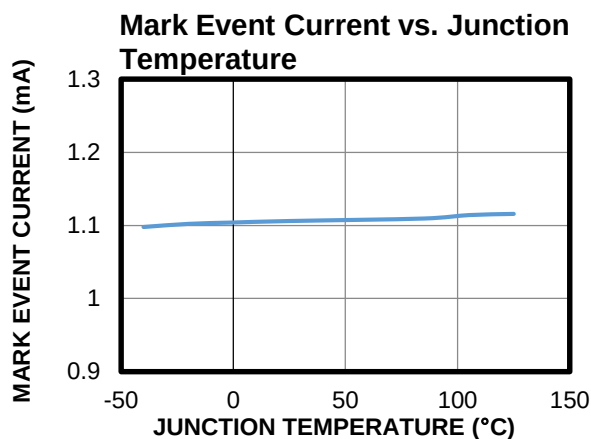





# TYPICAL CHARACTERISTICS (continued)

$V_{DD} = 54V$ ,  $T_A = 25^{\circ}C$ , unless otherwise noted.


## VCC Voltage vs. VCC Load Current

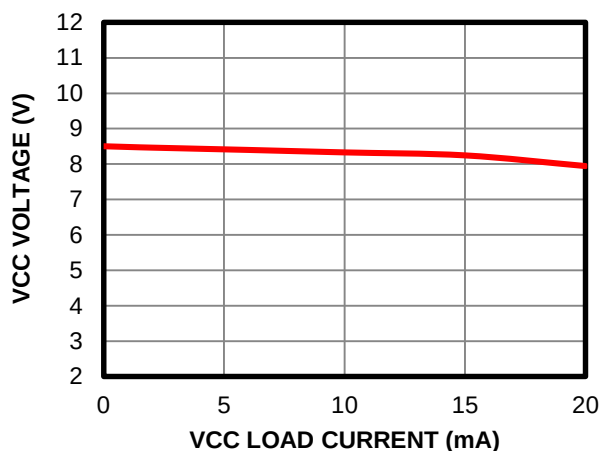


## EN UVLO Threshold vs. Junction Temperature

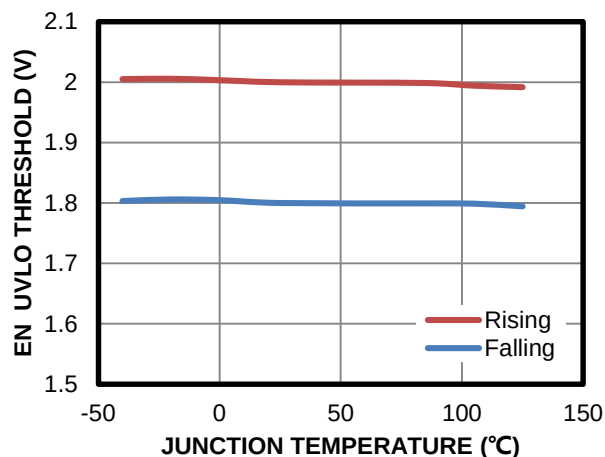


## VCC UVLO vs. Junction Temperature

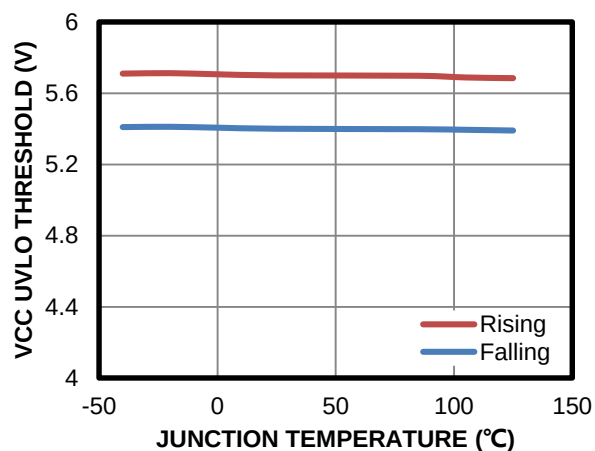


## Reference Voltage vs. Junction Temperature

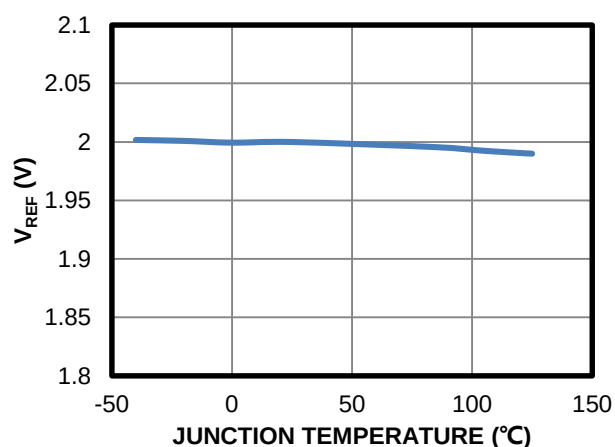

## Frequency vs. Junction Temperature

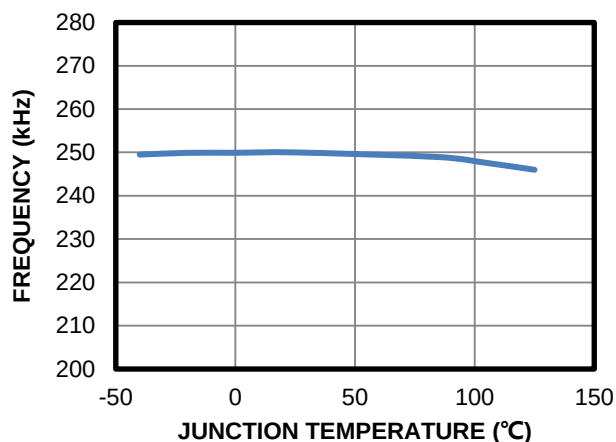


## Minimum Foldback Frequency vs. Junction Temperature PSR mode

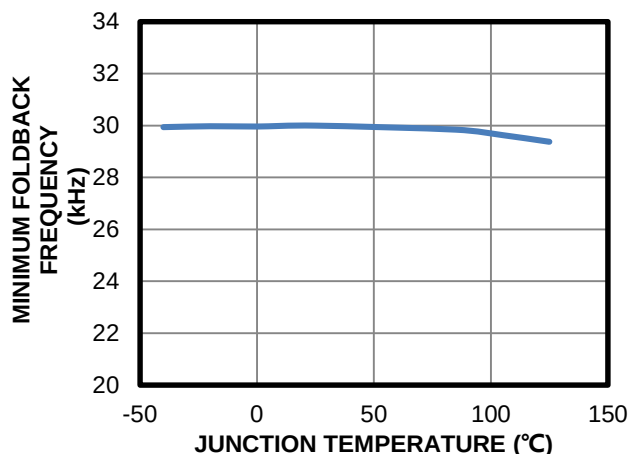

# TYPICAL CHARACTERISTICS (continued)


$V_{DD} = 54V$ ,  $T_A = 25^{\circ}C$ , unless otherwise noted.

**Current Limit vs. Junction Temperature**

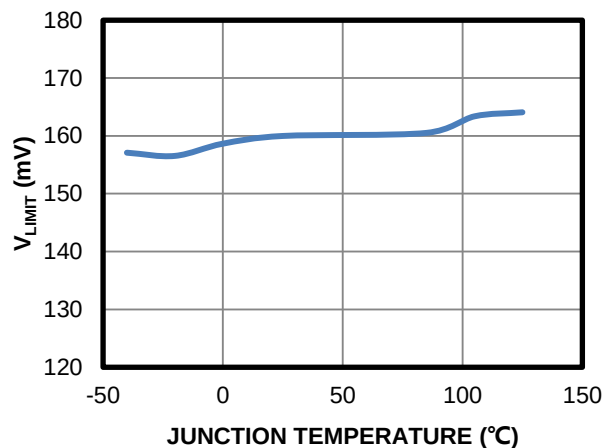


**Low Threshold Current Limit vs. Junction Temperature**

PSR mode

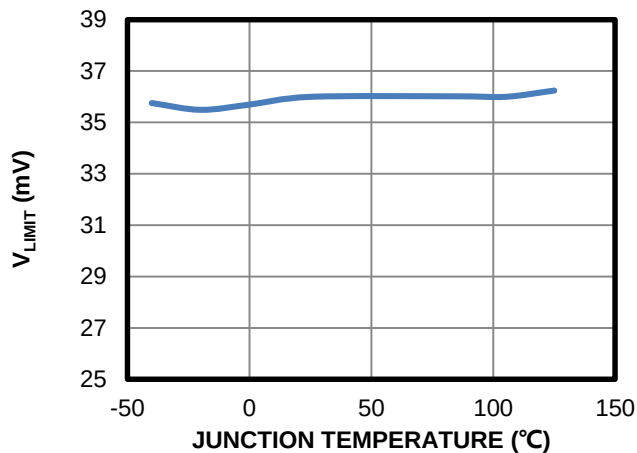


**OVP Threshold vs. Junction Temperature**

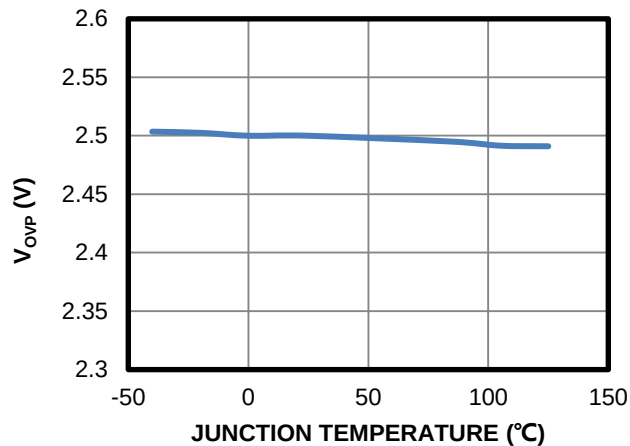


# TYPICAL PERFORMANCE CHARACTERISTICS

$V_{DD} = 54V$ ,  $V_{ADP} = 48V$ ,  $V_{OUT} = 5V$ ,  $I_{OUT} = 14A$ ,  $T_A = 25^{\circ}C$ , set in SSR forward mode, unless otherwise noted.


## Efficiency vs. Load Current

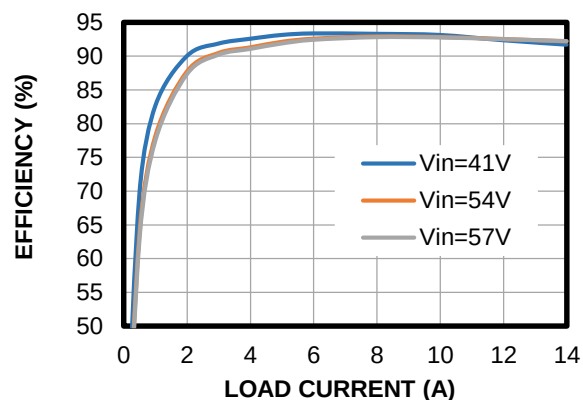

## Load Regulation

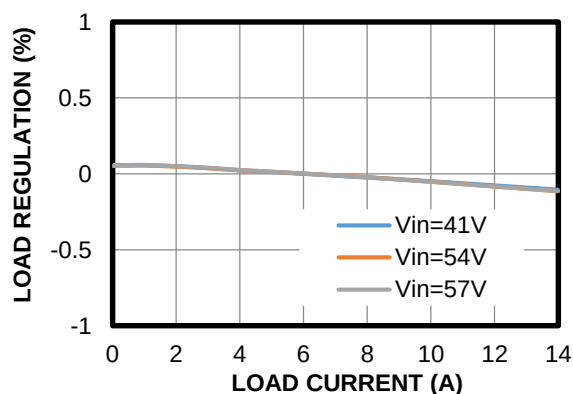


## Line Regulation

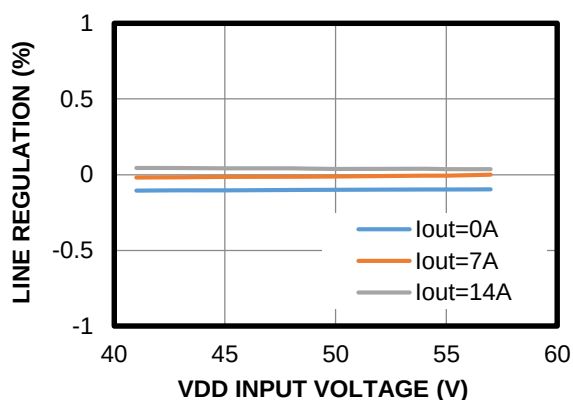


# TYPICAL PERFORMANCE CHARACTERISTICS *(continued)*

$V_{DD} = 54V$ ,  $V_{ADP} = 48V$ ,  $V_{OUT} = 5V$ ,  $I_{OUT} = 14A$ ,  $T_A = 25^{\circ}C$ , set in SSR forward mode, unless otherwise noted.


## Steady State

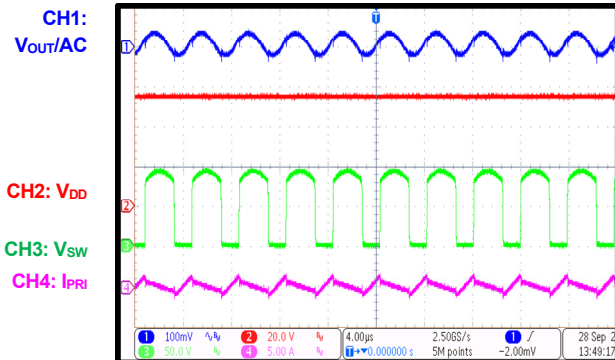 $I_{OUT} = 0A$ 


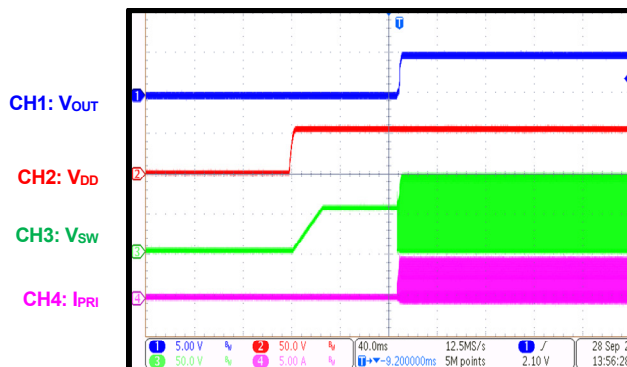
## Steady State

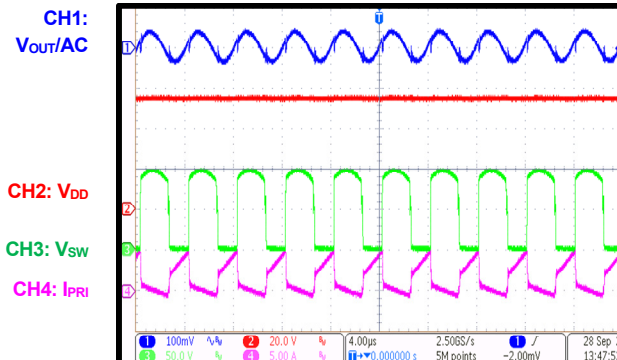 $I_{OUT} = 14A$ 


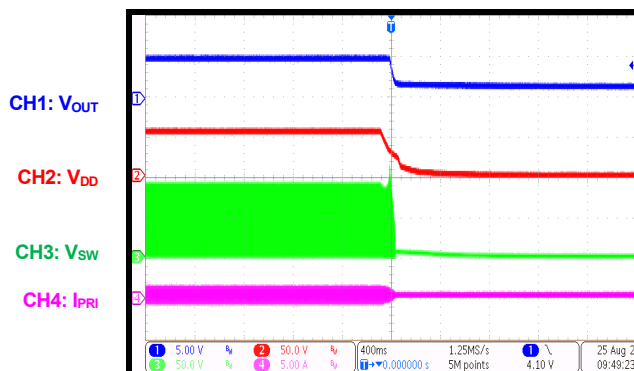
## Start-Up through VDD

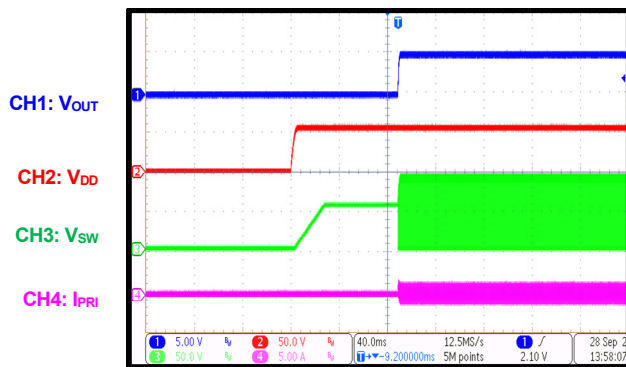 $I_{OUT} = 0A$ 


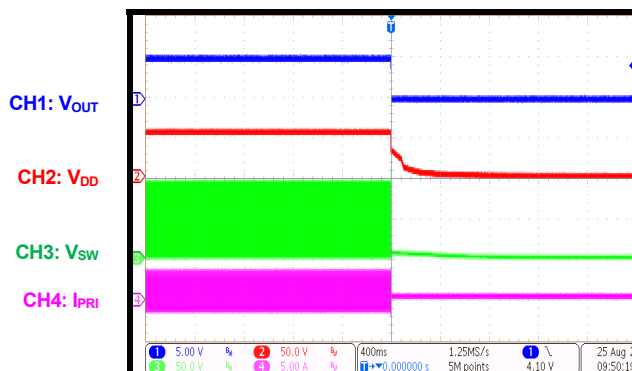
## Start-Up through VDD

 $I_{OUT} = 14A$ 


## Shutdown through VDD

 $I_{OUT} = 0A$ 


## Shutdown through VDD


 $I_{OUT} = 14A$ 


# TYPICAL PERFORMANCE CHARACTERISTICS *(continued)*

$V_{DD} = 54V$ ,  $V_{ADP} = 48V$ ,  $V_{OUT} = 5V$ ,  $I_{OUT} = 14A$ ,  $T_A = 25^{\circ}C$ , set in SSR forward mode, unless otherwise noted.


## SCP Entry

$I_{OUT} = 0A$  to short

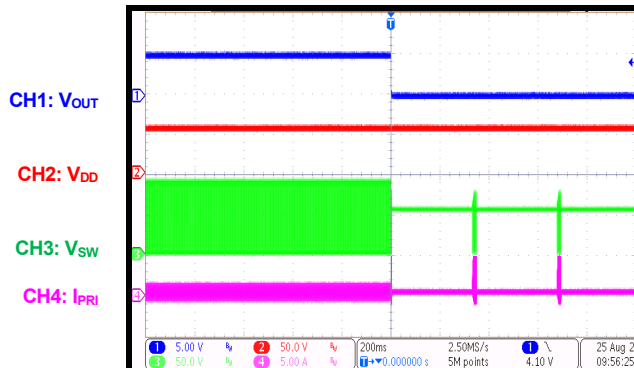


## SCP Entry

$I_{OUT} = 14A$  to short

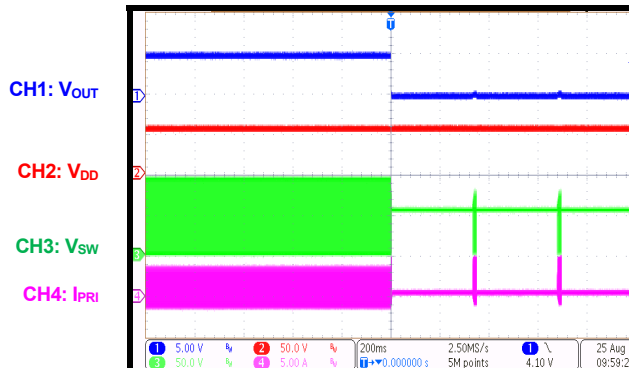


## SCP Recovery

$I_{OUT} = \text{short to } 0A$

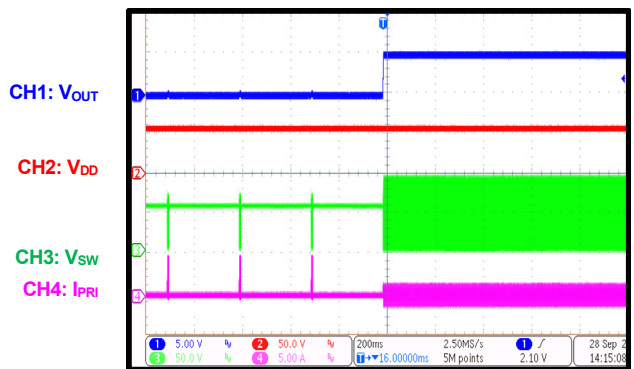


## SCP Recovery

$I_{OUT} = \text{short to } 14A$

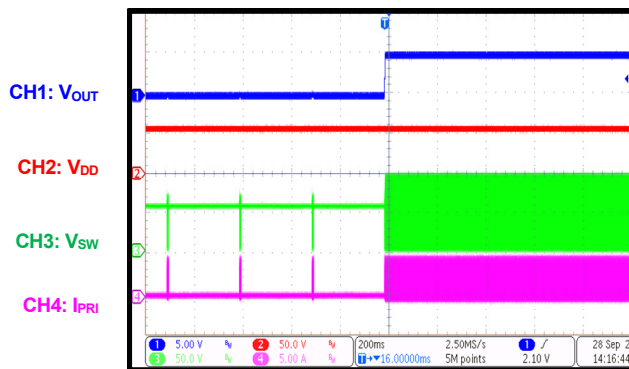


## PSE Start-Up

$I_{OUT} = 0A$

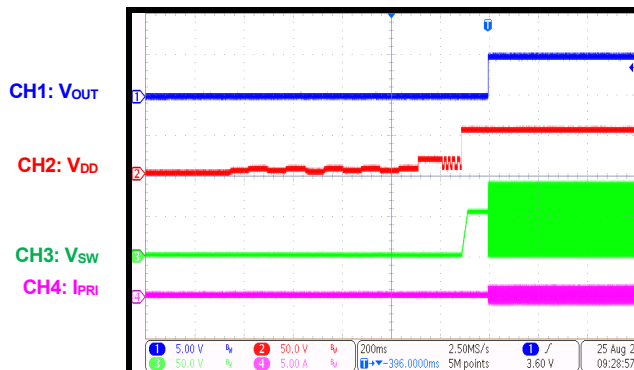

## PSE Start-Up

$I_{OUT} = 14A$

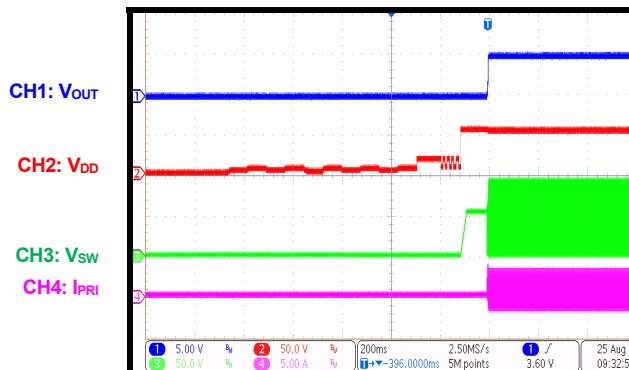


# TYPICAL PERFORMANCE CHARACTERISTICS *(continued)*

$V_{DD} = 54V$ ,  $V_{ADP} = 48V$ ,  $V_{OUT} = 5V$ ,  $I_{OUT} = 14A$ ,  $T_A = 25^{\circ}C$ , set in SSR forward mode, unless otherwise noted.


## Adapter Start-Up

$I_{OUT} = 0A$

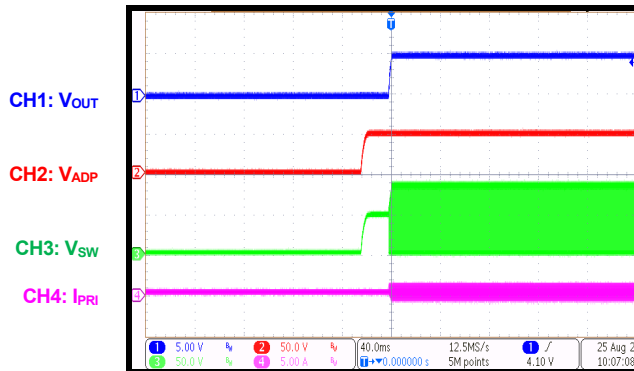


## Adapter Start-Up

$I_{OUT} = 14A$

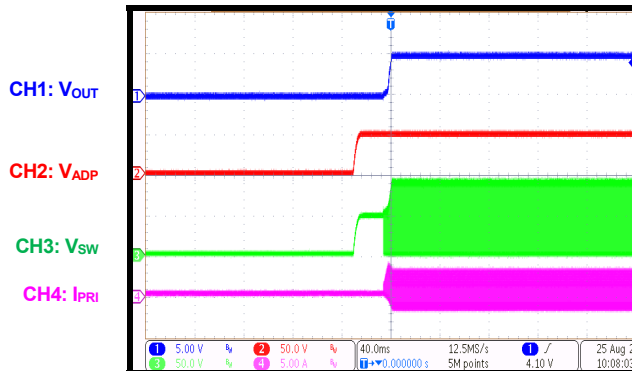


## Adapter Shutdown

$I_{OUT} = 0A$

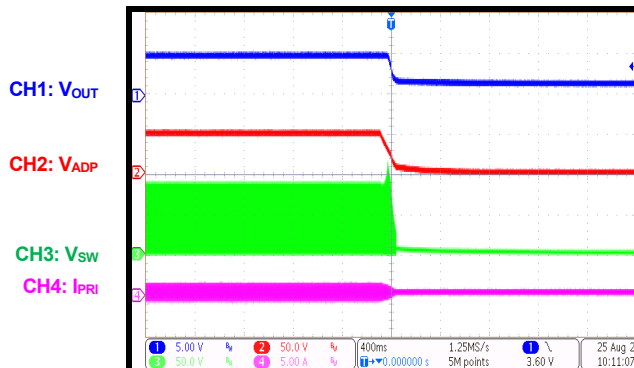


## Adapter Shutdown

$I_{OUT} = 14A$

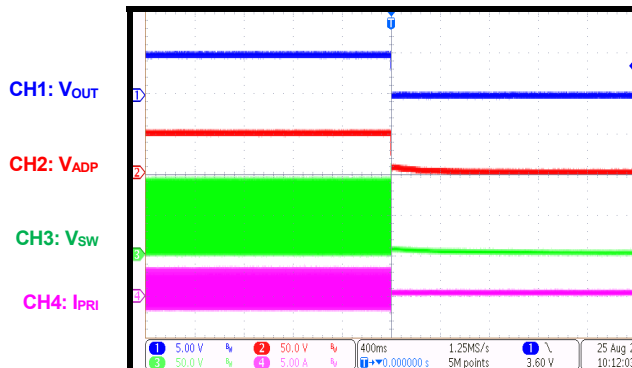


## Load Transient Response

$I_{OUT} = 0A$  to  $7A$ ,  $I_{RAMP} = 25mA/\mu s$

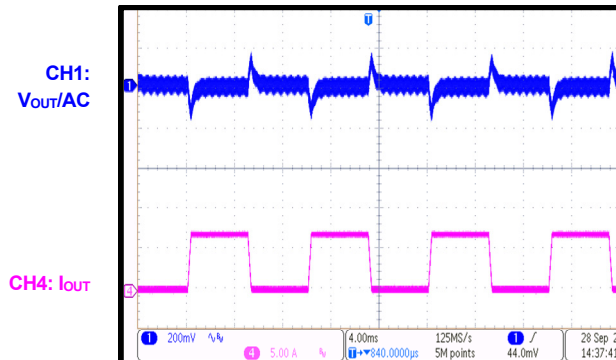

## Load Transient Response


$I_{OUT} = 7A$  to  $14A$ ,  $I_{RAMP} = 25mA/\mu s$

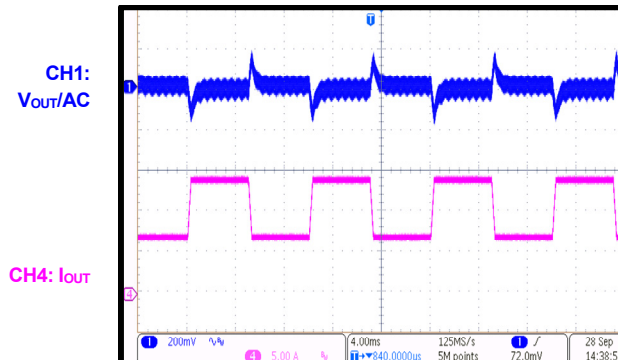


## TYPICAL PERFORMANCE CHARACTERISTICS *(continued)*

$V_{DD} = 54V$ ,  $V_{ADP} = 48V$ ,  $V_{OUT} = 5V$ ,  $I_{OUT} = 14A$ ,  $T_A = 25^{\circ}C$ , set in SSR forward mode, unless otherwise noted.


### Conducted Emissions Results

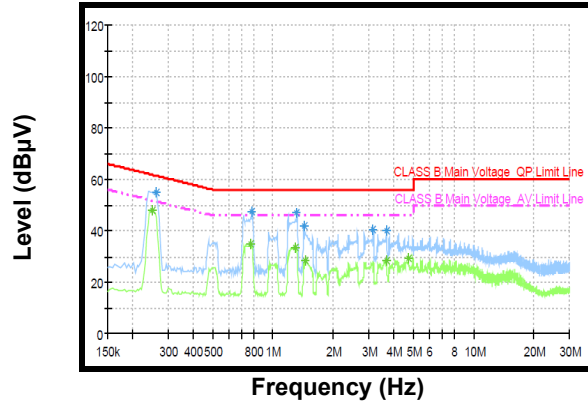

### Radiated Emissions Results

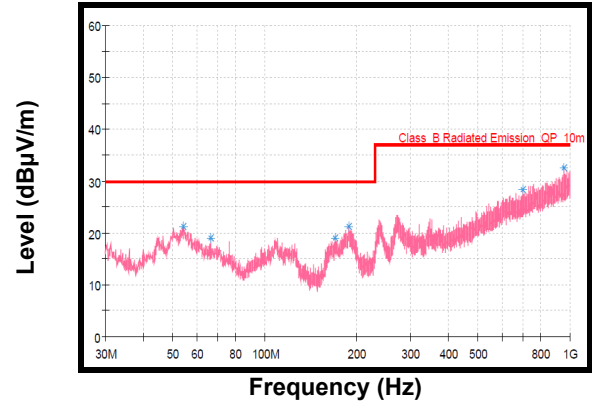

# FUNCTIONAL BLOCK DIAGRAM

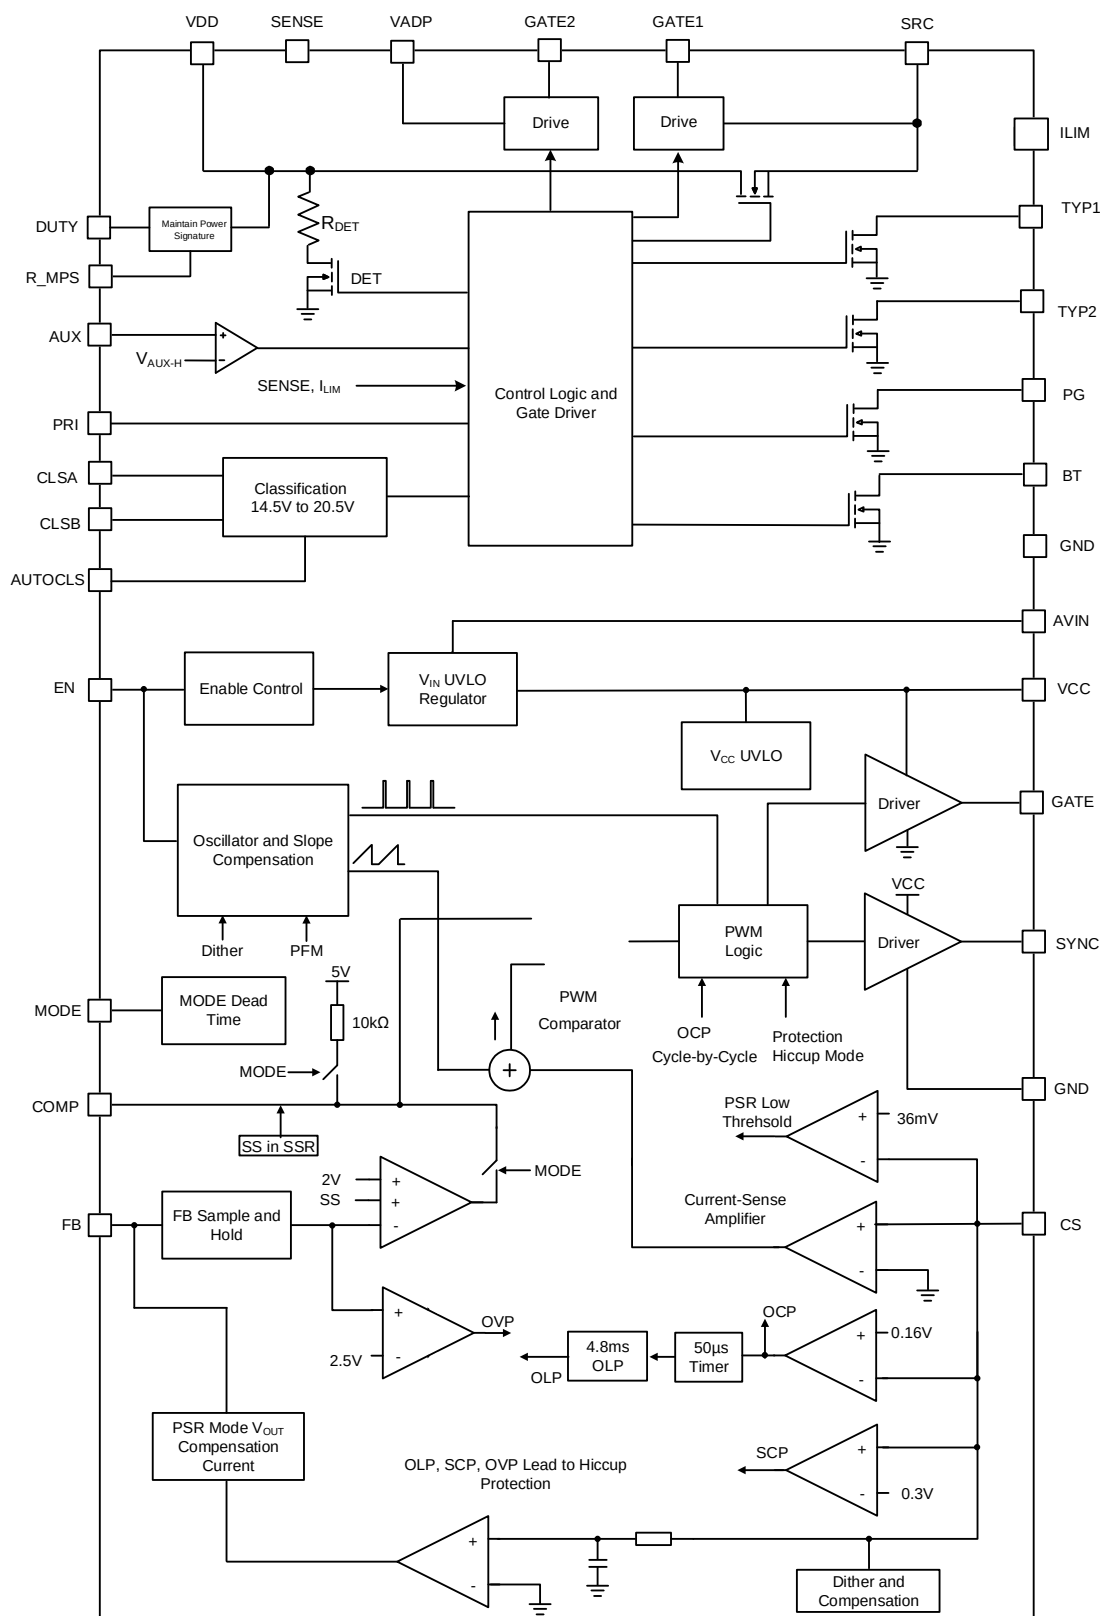

**Figure 1: Functional Block Diagram**



## OPERATION

The MP8030 is a fully integrated, IEEE 802.3af/at/bt-compliant, Power over Ethernet (PoE) powered device (PD) power supply converter. It includes a PD interface and high-efficiency flyback/forward controller.

### PD INTERFACE

The MP8030 PD interface has all the functions of IEEE 802.3af/at/bt, including detection, classification, input current control, a 100V hot-swap MOSFET, and an automatic maintain power signature function.

### Detection

The MP8030 PD integrates an internal detection resistor. When the PSE applies two safe voltages (between 2.7V and 10.1V) to the MP8030, the MP8030 PD will typically show a 25kΩ resistance between the VDD and GND pins.

### Classification

PSE distributes power to PDs based on the classification results. Classification mode is active when the input voltage is between 14.5V and 20.5V. The MP8030 PD presents different currents in classification mode (see Table 1).

**Table 1: Different Classification Power Rating and Setting with PD**

| PD Class | Power Rating (W) | Class Cycle with Max Power | CLSA Signature | CLSB Signature | CLSA Resistor (Ω) | CLSB Resistor (Ω) |
|----------|------------------|----------------------------|----------------|----------------|-------------------|-------------------|
| 0        | 0.44 to 12.95    | 1                          | 0              | 0              | 578               | 578               |
| 1        | 0.44 to 3.84     | 1                          | 1              | 1              | 110               | 110               |
| 2        | 3.84 to 6.49     | 1                          | 2              | 2              | 62                | 62                |
| 3        | 6.49 to 12.95    | 1                          | 3              | 3              | 41.2              | 41.2              |
| 4        | 12.95 to 25.5    | 2, 3                       | 4              | 4              | 28.7              | 28.7              |
| 5        | 25.5 to 40       | 4                          | 4              | 0              | 28.7              | 578               |
| 6        | 40 to 51         | 4                          | 4              | 1              | 28.7              | 110               |
| 7        | 51 to 62         | 5                          | 4              | 2              | 28.7              | 62                |
| 8        | 62 to 71.3       | 5                          | 4              | 3              | 28.7              | 41.2              |

IEEE802.3bt supports an 8-level class power rating, with up to 5 classification cycle operations. These classification cycles have the below functions:

- All PSEs perform one cycle classification for the class 0, class 1, class 2, and class 3 PDs.
- Type 2 PSEs perform 2-cycle classification if a class 4 signature is detected during the first class cycle.
- Type 3 and type 4 PSEs start their third cycle classification if a class 4 signature is detected during the first and second class cycle. Based on the third classification result, type 3 and type 4 PSEs follow one of the operations listed below:

If the third classification result is a class 4 signature, classification stops and there is a class 4 PD.

If the third classification result is a class 0 or class 1 signature, the device continues to the fourth cycle classification.

If the third classification result is class 2 or class 3 signature, the type 4 PSE performs a fourth and fifth cycle classification.

The MP8030 PD performs a class signature signal with the CLSA pin in the first and second class cycles. The MP8030 PD performs a class signature signal with the CLSB pin in the remaining class cycles, unless  $V_{DD}$  drops to its mark event reset threshold.

Both CLSA and CLSB use the same 1.16V output voltage for classification. The maximum output current is limited for protection.

### Auto-Class Function

IEEE802.3bt also supports an auto-class function that allows the PD to communicate its effective maximum power consumption to the PSE. When MP8030 PD auto-class function is enabled (by pulling the AUTOCLS pin low), the PD switches the class current to class 0 within

76ms to 87ms. After the first long time classification function works, this class 0 classification current lasts until the first class is complete.

The auto-class function can indicate to a type 3 or 4 PSE that it supports the auto-class function.

### Under-Voltage Lockout (UVLO) and the Power Supply Voltage

The MP8030 PD integrates one under-voltage lockout (UVLO) circuit with a large hysteresis. The UVLO block ensures that the PD starts up when  $V_{DD}$  exceeds 40V and shuts down when  $V_{DD}$  drops below 30V.

The MP8030 PD also has an inrush current limit during start-up. This current is about 1/7 of the steady state current limit configured by the ILIM pin.

### Hot-Swap MOSFET and Current Limit

The MP8030 PD interface integrates one 100V MOSFET for output disconnect.

When the PD voltage is powered by the PSE, and  $V_{DD}$  exceeds the rising UVLO threshold, the hot-swap MOSFET starts passing a limited current ( $I_{INRUSH}$ ) to charge the DC/DC converter's input bulk capacitor. The inrush current limit function works until it drops below 75% of the inrush current limit, and then the current limit changes to the normal current limit threshold.

To meet the different power ratings, the MP8030 PD supports a configurable current limit with the ILIM pin. The ILIM pin sources a current after  $V_{DD}$  rises to the UVLO threshold. This current detects the configured current limit level. Table 2 shows the ILIM configurations.

**Table 2: ILIM Configurations**


| ILIM to GND Resistance (k $\Omega$ ) |      |      | Current Limit (A) |
|--------------------------------------|------|------|-------------------|
| Min                                  | Typ  | Max  |                   |
| 0                                    | 0    | 1.4  | 0.9               |
| 5.76                                 | 7.15 | 9.09 | 1.6               |

The GATE1 pin can drive one external N-channel MOSFET, which is connected in parallel with the internal 0.35 $\Omega$  MOSFET. GATE1 turns on the external MOSFET after  $t_{DELAY}$  (about 90ms) completes. If  $V_{DD} - V_{SRC}$  exceeds 10V after this delay, GATE1 does not turn on because over-current protection (OCP)

is triggered. If  $V_{SRC}$  is below  $V_{DD}$  by less than 10V, GATE1 turns on to charge the bulk capacitor. The MP8030 PD turns off the external MOSFET under light-load conditions.

The internal MOSFET and external MOSFET have different current limit control loops. The internal MOSFET current limit is configured by the ILIM pin, while the external MOSFET current limit is configured by a resistor ( $R_{SENSE}$ ) between the VDD and SENSE pins. To reduce additional power loss and cost, the external MOSFET current limit can be disabled by removing  $R_{SENSE}$  (connecting the SENSE pin to the VDD pin). It is recommended for  $R_{SENSE}$  to be 18m $\Omega$ . When an external  $R_{SENSE}$  is used, it is recommended to connect the ILIM pin to GND for the lowest total current limit.

Figure 2 shows the internal and external MOSFET start-up sequence.

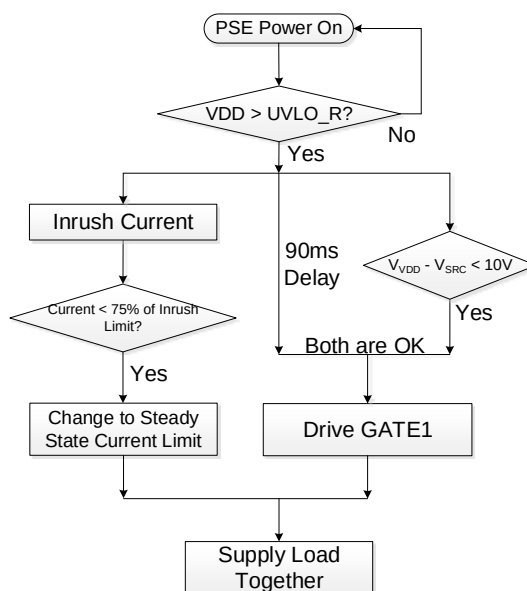

**Figure 2: Internal MOSFET and External MOSFET Start-Up Sequence**

The internal and external MOSFETs have fast-off current protection if there is a short-circuit event. After GATE1 turns off, the internal MOSFET recovers if  $V_{IN} - V_{SRC} < 10V$ .

If an overload event occurs when both the internal MOSFET and external MOSFET are connected, the current limit function can work in a few ways, described below:

- If the internal MOSFET triggers a current limit first, the internal current is limited, and

additional current goes through the external MOSFET. If the external MOSFET also reaches its current limit, the external MOSFET pulls GATE1 low and  $V_{SRC}$  drops. If  $V_{DD} - V_{SRC}$  exceeds 10V for 1ms, the external MOSFET turns off, and the internal MOSFET current limit switches to the inrush limit threshold. At the same time, PG pulls low to disable the DC/DC controller, then works in a new start cycle with the inrush current limit. During this over-current condition, PG recovers without a 90ms delay after the inrush completes.

- If the external MOSFET triggers the current limit first, GATE1 pulls low. Additional current passes through the internal MOSFET and finally triggers the internal current limit.  $V_{SRC}$  drops after both current limits are triggered and finally runs into current foldback mode (inrush current limit). At the same time, PG is pulled low.
- If the internal MOSFET or external MOSFET triggers the fast-off current limit, the MP8030 PD quickly turns off the related MOSFET then restarts with a delay.

### Power Good (PG) and Delay


The MP8030 PD has one PG output to enable the DC/DC controller after the inrush period finishes and the PSE is ready to provide high power. PG is an open-drain output with up to a 100V voltage rating.

PG is in high impedance when the device meets the below conditions:

- The device has changed to the steady current limit, which means that the inrush period is complete.
- The 90ms delay ( $t_{DELAY}$ ) from UVLO has completed.

Then a wall power adapter is detected on AUX, and  $V_{ADP}$  exceeds its UVLO threshold (see Figure 3).

The PG signal resets when  $V_{DD}$  UVLO\_F is triggered, if over-temperature protection (OTP) occurs, or if  $V_{DD} - V_{SRC} > 10V$  for more than 1ms. The 90ms timer only works after  $V_{DD}$  UVLO is triggered.

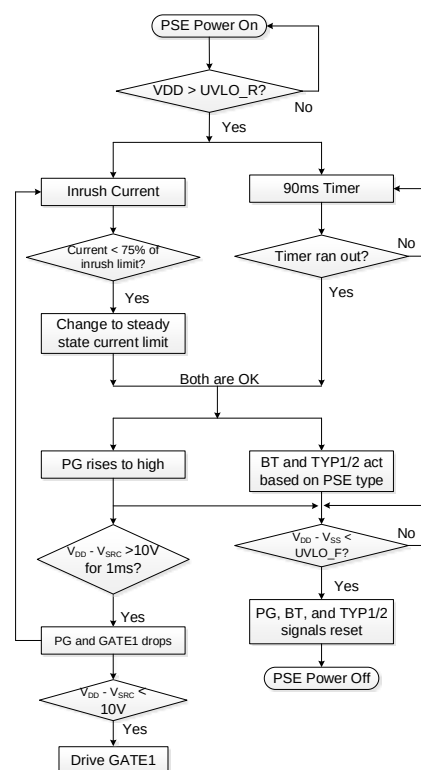

**Figure 3: PG Logic**

### PSE and Allocated Power Indicators

IEEE802.3bt supports 4 different PSE power supplies. The BT, TYP1, and TYP2 pins indicate the PSE-allocated power type. Table 3 on page 28 lists the detailed power level indicators. Note that the indicator only shows high when it is in logic high and pulled up to a high voltage through an external pull-up resistor.

The TYP1, TYP2, and BT signals are active after  $t_{DELAY}$  (about 90ms). The outputs become inactive (high impedance) when the input voltage ( $V_{DD}$ ) falls below its UVLO threshold, or if OTP is triggered. The BT, TYP1, and TYP2 signals are latched in the MP8030 PD after start-up and do not reset until  $V_{DD}$  drops to its mark event reset threshold.

The TYP1 and TYP2 pins go low if an adapter is detected. BT is high under this condition.

Table 4 on page 28 shows demotion cases.

**Table 3: PSE and Allocated Power Indicator**

| PSE Type         | PD Class                                 | PSE Allocated Power                | Number of Class Cycles | BT   | TYP1 | TYP2 |
|------------------|------------------------------------------|------------------------------------|------------------------|------|------|------|
| Type 1<br>Type 2 | Class 0<br>Class 1<br>Class 2<br>Class 3 | 12.95W<br>3.84W<br>6.49W<br>12.95W | 1                      | High | High | High |
| Type 2           | Class 4                                  | 25.5W                              | 2                      | High | High | Low  |
| Type 3<br>Type 4 | Class 0<br>Class 1<br>Class 2<br>Class 3 | 12.95W<br>3.84W<br>6.49W<br>12.95W | 1                      | Low  | High | High |
|                  | Class 4                                  | 25.5W                              | 2, 3                   | Low  | High | Low  |
|                  | Class 5<br>Class 6                       | 40W<br>51W                         | 4                      | Low  | Low  | High |
| Type 4           | Class 7<br>Class 8                       | 62W<br>71.3W                       | 5                      | Low  | Low  | Low  |

**Table 4: Power Demotion Cases**

| PSE Type         | PD Class    | PSE Allocated Power | Number of Class Cycles | BT   | TYP1 | TYP2 |
|------------------|-------------|---------------------|------------------------|------|------|------|
| Type 2           | Class 4     | 12.95               | 1                      | High | High | High |
| Type 3<br>Type 4 | Classes 4–8 | 12.95               | 1                      | Low  | High | High |
| Type 3<br>Type 4 | Classes 5–8 | 25.5                | 2, 3                   | Low  | High | Low  |
| Type 3<br>Type 4 | Classes 7–8 | 51                  | 4                      | Low  | Low  | High |

### Automatic Maintain Power Signature Function

To maintain the PSE power supply, the MP8030 supports an automatic maintain power signature and the current is configured by a resistor on the R\_MPS pin.

The MP8030 also has one DUTY pin to configure the R\_MPS pin's duty cycle, which can compensate the effects of the long cable and bulk bus capacitors. After  $V_{DD}$  reaches the UVLO rising threshold, the DUTY pin sources one pulse current to detect the maintain power signature function duty cycle setting. Table 5 shows the DUTY pin's configuration options. The DUTY signal resets after  $V_{DD}$  falls to its UVLO falling threshold.

**Table 5: DUTY Configurations**

| DUTY to GND Resistance (k $\Omega$ ) |       |       | R_MPS Duty Cycle (%) |
|--------------------------------------|-------|-------|----------------------|
| Min                                  | Typ   | Max   |                      |
| 0                                    | 0     | 1.4   | 6                    |
| 5.76                                 | 7.15  | 9.09  | 11.5                 |
| 17.4                                 | Float | Float | 17                   |

With type 1 and type 2 PSE inputs, the MP8030 generates a voltage on the R\_MPS pin with a fixed 37% duty cycle.

### Wall Adapter Power Supply

For applications where an auxiliary power source, such as a wall adapter, is used to power the device, the MP8030 PD features wall power adapter detection. Once the adapter voltage ( $V_{ADP}$ ) exceeds about 8.3V, the MP8030 PD enables wall adapter detection.

The resistor divider connected from VADP to AUX can detect the adapter status. Once the AUX voltage exceeds the internal reference voltage, the MP8030 PD switches the power source from the PSE to the adapter if the adapter has higher priority.

GATE2 drives the external N-channel MOSFET and provides a smooth switch between the PSE and auxiliary wall adapter with less power loss compared to a traditional diode input. After the adapter supply is enabled, the PG signal is pulled high, the TYP1/TYP2 pins output low, and the BT pin stays high.

When PRI is high, setting AUX high disables the DET, CLS, and maintain power signature functions. When PRI is low, setting AUX high cannot disable the DET, CLS, and maintain power signature functions.

If an adapter has a higher priority and replaces the PSE power supply, BT and TYP1/2 are updated once the AUX and ADP\_UV signals are working. If the PSE has a higher priority and replaces the adapter supply, the MP8030 PD changes the BT and TYP1/2 statuses to Hi-Z. If PSE UVLO occurs, the statuses change to indicate the latest PSE power type after inrush is complete and the 90ms timer has finished.

### Power Priority

The adapter is available when both AUX and  $V_{ADP}$  exceed their UVLO thresholds. The MP8030 PD can source a current from the adapter or PSE if both the adapter and PSE are connected. This is determined by the PRI and AUX pin settings.

The PRI pin is internally pulled up to the internal VCC. If the PRI pin is floating (the adapter has higher priority) and  $V_{ADP}/AUX$  exceed their UVLO thresholds, the MP8030 PD disables the PSE power supply, and enables the adapter power source. If AUX is below its falling threshold, the MP8030 PD supplies power via the PSE, even PRI pin is floating.

If the PRI pin is connected to GND, PSE has the higher priority. Regardless of the AUX signal, PSE outputs power, unless  $V_{DD}$  is below its UVLO threshold.

If PSE has a higher priority and the adapter is connected before PSE plug-in, a reverse block MOSFET ( $Q_{REV}$ ) must be added to reversely block the power from the adapter during PoE detection and classification (see Figure 4). At the same time, the output downstream DC/DC controller should lower the power rating so that the inrush current charges the MP8030 bus capacitor ( $C_{BUS}$ ). If  $C_{BUS}$  is not charged quickly, the current limit may not be met, and the device may fail to start up.

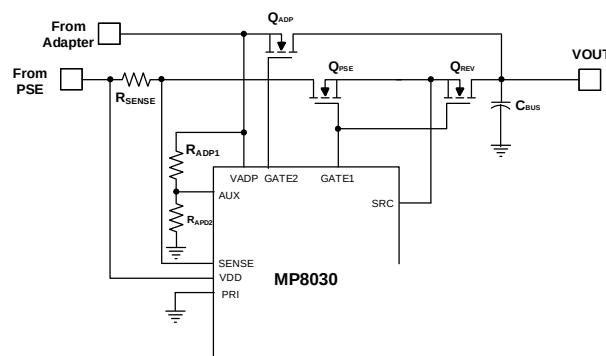


Figure 4: Reverse Block Solution

## DC/DC CONTROLLER

### Start-Up and Power Supply

The MP8030 DC/DC controller features a high-voltage internal start-up circuit. When the voltage between AVIN and GND exceeds 5.5V, the capacitor at VCC is charged through the internal LDO. Normally  $V_{CC}$  is regulated to 8.5V (if AVIN is high enough), and the  $V_{CC}$  UVLO threshold is typically 5.7V. In addition to  $V_{CC}$  UVLO, the DC/DC controller has an EN UVLO threshold that is typically 2V. When  $V_{CC}$  exceeds 5.7V and the EN pin is high, the DC/DC controller starts working.

$V_{CC}$  can be powered from the transformer auxiliary winding to save IC power loss after the DC/DC controller starts switching. The auxiliary power exceeds the  $V_{CC}$  regulation voltage to override the internal LDO. There is one internal reverse blocking circuit, which means that  $V_{CC}$  can exceed AVIN if  $V_{CC}$  has biased power. The VCC power should stay below 16V due to the pin's voltage rating.

If AVIN is below 8.5V and  $V_{CC}$  cannot be regulated to 8.5V, the internal high-voltage VCC LDO has a 1.5V voltage drop. This means the DC/DC controller can work when the input is as low as 8V.

### Enable (EN) Control

The EN pin enables and disables the MP8030 DC/DC controller. When the EN voltage exceeds 1V, the controller starts up some of the internal circuits. This is called micro-power mode. If the EN voltage exceeds the turn-on threshold (2V), the controller enables all functions and starts the GATE/SYNC driver signal. The GATE/SYNC signal can be disabled when the EN voltage drops to about 1.8V, but micro-power mode is disabled only after the EN



voltage falls below 0.4V. After shutdown, the controller sinks a current (typically less than 1 $\mu$ A) from the input power.

One internal Zener diode on the EN pin clamps the EN voltage when the voltage divider exceeds 6.5V. Use an external pull-up resistor and ensure that the Zener diode is clamped to have a current below 0.4mA flowing into EN.

### Work Mode Detection

Once enabled, the DC/DC controller outputs a 40 $\mu$ A current to the MODE pin to detect the resistor setting. If the MODE pin voltage exceeds 2.2V, the DC/DC controller works in primary-side regulation (PSR) mode, and the internal EA is enabled. If the MODE pin is connected to GND through a resistor, the DC/DC controller works in secondary-side regulation (SSR) mode, and the internal EA is disabled. Meanwhile, COMP is pulled up to the internal 5V power source through a 10k $\Omega$  resistor (see Table 6).

**Table 6: MODE Pin Configurations**

| MODE to GND<br>Resistance (k $\Omega$ ) |             |       | Work<br>Mode | Dead Time<br>(ns) |
|-----------------------------------------|-------------|-------|--------------|-------------------|
| Min                                     | Typ<br>(1%) | Max   |              |                   |
| 0                                       | 0           | 3.3   | SSR          | 100               |
| 7.32                                    | 7.5         | 8.2   | SSR          | 150               |
| 16                                      | 16.9        | 18.7  | SSR          | 200               |
| 32.4                                    | 32.4        | 33    | SSR          | 300               |
| 64.9                                    | Float       | Float | PSR          | 150               |

In PSR mode, the  $V_{OUT}$  feedback signal is detected by auxiliary winding from the FB pin, and the DC/DC controller reduces the frequency accordingly, but the frequency stays above 30kHz under light loads. In SSR mode, the  $V_{OUT}$  feedback signal is detected through the COMP pin, and the DC/DC controller maintains a fixed frequency. Meanwhile, the peak current can be regulated via the COMP voltage until power save mode (PSM) is triggered.

After the DC/DC controller is enabled, the device does not start switching for 500 $\mu$ s. The mode, dead time, dither, and  $V_{OUT}$  compensation settings can be detected by the DC/DC controller during this period.

The MODE pin can set the device to PSR or SSR mode, and it can also configure the dead time between the GATE and SYNC pins.

The MODE pin detection current lasts about 200 $\mu$ s. Generally, it is sufficient to place one resistor from MODE to GND. In a noisy environment, the device may require a filtering capacitor placed from MODE to GND. The capacitance should be below 100pF so that the MODE pin voltage can rise to a steady state before the DC/DC controller detects  $V_{MODE}$ .

### PWM Operation

The MP8030 DC/DC controller can be set in flyback and forward topologies. In a flyback topology, the external N-channel MOSFET turns on at the beginning of each cycle, forcing the current in the transformer to increase. The current through the MOSFET can be sensed. When the sum of the current-sense (CS) signal and the slope compensation signal rises above the voltage set by the COMP pin, the external MOSFET turns off. The transformer current then transmits energy from primary-side winding to secondary-side winding, and the output capacitor is charged through the Schottky diode.

The transformer primary-side current is controlled by the COMP voltage, which itself is controlled by the output feedback voltage. Thus, the output voltage controls the transformer current to satisfy the load. In forward topologies, the energy is transferred from primary to secondary winding when the primary-side N-channel MOSFET is turned on, and the primary-side peak current is controlled by the COMP voltage. The COMP voltage is controlled by the external TL431 and optocoupler feedback.

### Voltage Control

There are multiple methods to control the voltage. These methods are described in greater detail below.

#### Primary-Side Regulation (PSR) Mode

Unlike traditional flybacks with opto-isolator feedback, the MP8030 DC/DC controller can detect the auxiliary winding voltage from the FB pin during the secondary-side output diode conduction period.

Assume that the secondary winding is the master, and the auxiliary winding is the slave. When the secondary-side diode conducts, the FB voltage can be calculated with Equation (1):

$$V_{FB} = \frac{N_A}{N_S} \times (V_{OUT} + V_{DOF}) \times \frac{R_{FBL}}{R_{FBH} + R_{FBL}} \quad (1)$$

Where  $V_{DOF}$  is the output diode forward-drop voltage,  $V_{OUT}$  is the output voltage,  $N_A$  and  $N_S$  are the turns of the auxiliary winding and the secondary-side output winding, respectively, and  $R_{FBH}$  and  $R_{FBL}$  are the resistor dividers for FB sampling.

Figure 5 shows the discontinuous conduction mode (DCM) condition for FB sampling.

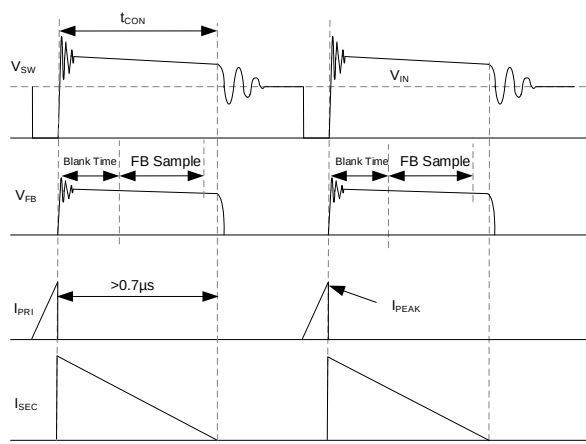


Figure 5: DCM Condition FB Sample

Figure 6 shows the continuous conduction mode (CCM) condition for FB sampling.

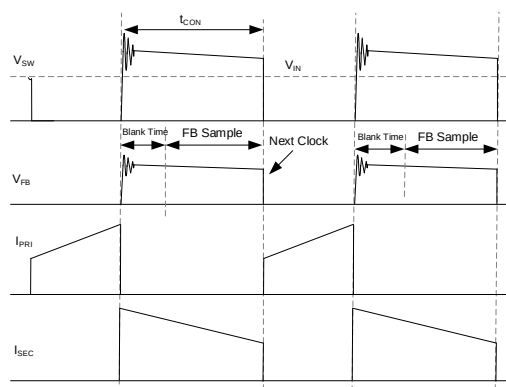


Figure 6: CCM Condition FB Sample

The DC/DC controller regulates the primary-side MOSFET switching to keep the  $V_{CS}$  current signal above 36mV (typically), and starts sampling the auxiliary winding voltage after the power MOSFET turns off. A 300ns blanking

time is added to prevent spike ringing due to the leakage inductance. To guarantee that there is a sufficiently long FB sample period, the output diode current conduction time ( $t_{CON}$ ) under light loads (before the diode current drops to 0A in each cycle) should be longer than 600ns. Generally, design the transformer and insure that  $t_{CON}$  is longer than 700ns and  $V_{CS\_PK} = 33mV$ . The DC/DC controller GATE signal also provides a 1.2μs minimum off time, though it is limited by a maximum 70% duty cycle. This guarantees that there is a sufficient FB sample time when the DC/DC controller works with a high duty cycle.

During the FB sense period, the FB signal is sent into the negative input of the EA, and this value is held after the sense window elapses. The EA output is generated on the COMP pin and controls the transformer peak current to match the output regulation requirement.

### Secondary-Side Regulation (SSR) Mode

The MP8030 DC/DC controller can also be set for traditional SSR mode. In SSR mode, the  $V_{OUT}$  signal is fed back to the COMP pin through one optocoupler. All the PSR FB voltage detection functions are disabled, and FB should be connected to GND.

Under light loads, the DC/DC controller maintains a fixed frequency. In SSR mode, the peak current drops low following the COMP voltage, until the PSM threshold is triggered. The 36mV minimum current limit does not work in SSR mode.

In SSR mode, the DC/DC controller can support both flyback and forward topologies, while the device can only support a flyback topology in PSR mode.

### Output Voltage Compensation

In PSR mode, the auxiliary winding waveform reflects the secondary-side winding voltage, but output voltage ( $V_{OUT}$ ) differs from the output winding voltage due to output diode voltage drop, as well as power winding resistance. The dropout voltage varies when the conducted current changes.

The resistance from the CS pin to GND can set the compensation gain of the dropout voltage when the current varies. The current-sense signal is filtered internally, and then controls the

current sinking from the FB pin based on the average voltage from the CS pin. There are 3 types of different current gains, from the average CS voltage to the FB sinking current (see Table 7). The FB sinking current leads to a voltage drop on the FB high-side feedback resistor so that it compensates  $V_{OUT}$  (see Figure 7).

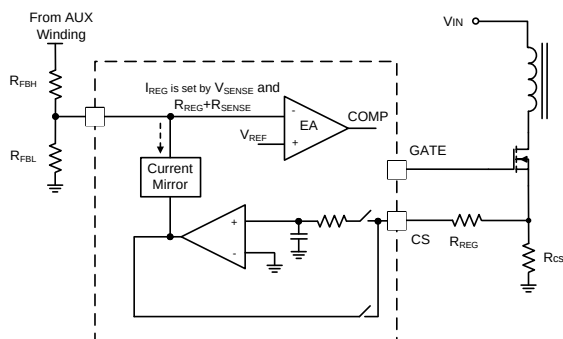


Figure 7: Output Voltage Compensation

In SSR mode, this voltage compensation function is disabled.

### Frequency Dithering

The DC/DC controller integrates one frequency dithering circuit to minimize EMI emissions. During steady state, the frequency is fixed internally, but frequency dithering circuit is added to the configured frequency with 1.5kHz modulation. In PSR mode, the frequency dithering is fixed at  $\pm 6\%$  of the switching frequency. In SSR mode, the frequency dithering can be configured to be  $\pm 3\%$ ,  $\pm 6\%$ , or  $\pm 9\%$ , based on the resistor connected from the CS pin to GND.

Table 7 lists the dithering and  $V_{OUT}$  compensation configuration options.

Table 7: CS Pin Configurations

| CS to GND Resistance (kΩ) |          |     | PSR Mode           |                                 | SSR Mode           |
|---------------------------|----------|-----|--------------------|---------------------------------|--------------------|
| Min                       | Typ (1%) | Max | Dither Range (kHz) | $I_{FB} / V_{CS}$ Ratio (uA/mV) | Dither Range (kHz) |
| 0                         | 0        | 1.3 | 0                  | 0                               | 0                  |
| 3                         | 3.3      | 3.6 | $\pm 15$           | 0.054                           | $\pm 7.5$          |
| 6.2                       | 6.8      | 7.5 | $\pm 15$           | 0.108                           | $\pm 15$           |
| 12.7                      | 12.7     | 13  | $\pm 15$           | 0.216                           | $\pm 22.5$         |
| 24.9                      | 25.5     | 28  | $\pm 15$           | 0                               | $\pm 22.5$         |

The CS pin detection current lasts about 200μs after start-up. Generally, it is sufficient to connect a resistor between the CS and GND

pins. In noisy environments, a capacitor may be required between CS and GND to provide filtering.

### Current Sense and Over-Current Protection (OCP)

The MP8030 DC/DC controller is a peak current mode flyback/forward controller. The current through the external MOSFET can be sensed through a sensing resistor, which is connected in series with the MOSFET's source. The sensed voltage on the CS pin is then amplified and fed to the high-speed current comparator for current control mode. The current comparator takes this sensed voltage (plus the slope compensation) as one of its inputs, then compares it with the COMP voltage. When the amplified current signal exceeds the COMP voltage, the comparator outputs low, turning off the power MOSFET.

If the voltage on the CS pin exceeds the current limit threshold voltage (typically 160mV), the DC/DC controller turns off the GATE output for that cycle until the internal oscillator starts the next cycle and senses the current again. The DC/DC controller limits the current of the MOSFET cycle-by-cycle.

### Error Amplifier (EA)

In PSR mode, the DC/DC controller senses the FB voltage during the flyback period with an FB signal pulse. Then the FB signal is held and fed to the error amplifier (EA). The EA regulates the COMP voltage based on the FB signal. The COMP voltage controls the transformer's peak current to regulate the output voltage.

In SSR mode, the internal EA is disabled, and the COMP pin is pulled up by an internal resistor. The external optocoupler can be connected to the COMP pin for the  $V_{OUT}$  signal feedback.

### Light-Load Control

Under light-load conditions in PSR mode, the COMP voltage decreases to regulate the lower transformer peak current. If the sensed peak current signal is below 36mV, the DC/DC controller does not decrease the transformer current and it decreases the frequency. As a result, the transferred energy decreases and the output voltage is regulated.



The DC/DC controller limits the minimum frequency above 30kHz under light loads in PSR mode. This can help detect  $V_{OUT}$  with a minimum frequency and prevent audible noise. This minimum frequency requires a load to maintain  $V_{OUT}$ ; otherwise,  $V_{OUT}$  can rise and trigger over-voltage-protection (OVP).

Under light loads in SSR mode, the DC/DC controller maintains a fixed frequency and COMP continues to drop until it reaches the PSM threshold.

### Over-Voltage Protection (OVP)

The DC/DC controller features OVP. If the voltage at FB exceeds 125% of  $V_{REF}$ , the DC/DC controller shuts off the gate driving signal and enters hiccup mode immediately. The DC/DC controller restarts after 340ms and resumes normal operation if the fault is removed.

To avoid the mistriggering due to the oscillation of the leakage inductance and the parasitic capacitance, OVP sampling has a blanking time.

### Overload Protection (OLP)

The DC/DC controller limits the peak current cycle-by-cycle under over-current protection (OCP) conditions. If the load continues increasing after triggering OCP,  $V_{OUT}$  decreases and the peak current triggers OCP every cycle.

The DC/DC controller sets overload detection by monitoring the CS pin voltage. Once the internal soft start finishes, overload protection (OLP) is enabled. If an OCP signal is detected and lasts for longer than 4.8ms, the DC/DC controller turns off the GATE driver. After a 340ms delay, the DC/DC controller restarts with a new start-up cycle. During OLP, a one-shot timer is activated for 50 $\mu$ s after one OCP pulse. That means if there is one OCP pulse in a 50 $\mu$ s period, the DC/DC controller registers this as an OCP condition. If this condition is removed within 4.75ms, the DC/DC controller returns to normal operation.

### Short-Circuit Protection (SCP)

When the output is shorted to ground, the part works in OCP mode and the current is limited cycle-by-cycle. In this scenario the part may trigger OLP.

If the peak current cannot be limited by the 160mV CS voltage in every cycle due to minimum gate on time, the current may run away and the transformer may saturate. If the monitored CS voltage reaches 300mV, the part turns off GATE and initiates hiccup protection immediately with a 340ms off time.

If the short circuit is removed,  $V_{OUT}$  recovers after the next restart cycle with a 340ms delay.

### Soft Start (SS)

The DC/DC controller provides soft start (SS) by charging an internal capacitor with a current source. During soft start, the SS signal controls the voltage of the internal capacitor and ramps up slowly. The SS capacitor is discharged completely in the event of a commanded shutdown, thermal shutdown, or a protection.

In PSR mode, the SS signal clamps the FB reference voltage. The FB reference's soft-start time is typically 15ms, with a voltage between 0V and 2V.

In SSR mode, the SS signal clamps the COMP voltage until COMP rises up to match the switching current. The SS signal continuously ramps up with the same rate. Generally, COMP takes about 20ms to ramp from 1.5V to 3.5V.

### Minimum On Time

The transformer parasitic capacitance and gate driver signal induce a current spike on the CS resistor when the power switch turns on. The DC/DC controller includes a 250ns leading edge blanking period to avoid falsely terminating the switching pulse. During this blanking period, the current-sense comparator is disabled, and the gate driver cannot switch off.

### Gate Driver

The DC/DC controller integrates one high-current gate driver for the primary-side N-channel MOSFET. The high-current gate driver provides a strong driving capability and benefits for MOSFET selection. If the external MOSFET's  $Q_G$  is low and the switching speed is low due to EMI, it is recommended to have a minimum 5 $\Omega$  resistance.

The DC/DC controller also integrates one SYNC driver pin, which can be used to turn the second switch off when it is high, or turn the

second switch on when it is low. Figure 8 on page 34 shows the phase and dead time relationship between GATE and SYNC.

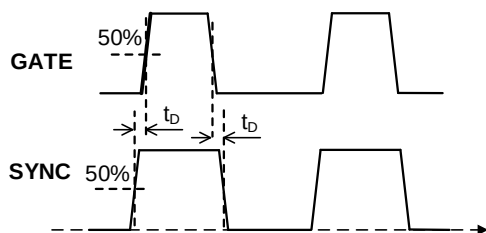


Figure 8: GATE and SYNC Driver

If the IC turns off due to UVLO or a different protection, both the GATE and SYNC pins maintain a low voltage level.

### Transformer Inductance Consideration

In PSR mode, the DC/DC controller samples  $V_{OUT}$  during the flyback time. The secondary diode conduction time with a minimum peak current (controlled by a 33mV minimum CS limit) should be longer than  $0.7\mu s$ . The transformer inductance should also be sufficiently high. The transformer's primary inductance can be calculated with Equation (2):

$$L_{PRI} \geq (V_{OUT} + V_{DOF}) \times \frac{N_P}{N_S} \times 0.7\mu s \times \frac{R_{SENSE}}{33mV} \quad (2)$$

Where  $V_{DOF}$  is the output rectifier diode's forward-drop voltage.

In SSR mode, there is no limit for inductance, but it is recommended to set the peak current high enough to avoid triggering PSM logic if the device is designed for CCM mode. This is because PSM may result in a higher output voltage ripple, especially in sync mode forward topologies.

### Over-Temperature Protection (OTP)

Thermal shutdown is implemented to prevent the chip from thermal runaway. The MP8030 has a separate temperature monitoring circuit for the PD and DC/DC power controller. The two thermal protections do not affect one other. Once the temperature drops below its recovery threshold, the thermal shutdown condition is removed, and the MP8030 is enabled.

## APPLICATION INFORMATION

### Selecting a TVS Diode

To limit the input transient voltage within the absolute maximum ratings, a TVS diode should be placed across the rectified voltage (between VDD and GND). It is recommended to use a SMAJ58A or a diode with an equivalent protection voltage for general indoor applications. The outdoor transient levels (or special applications) require additional protection.

### Selecting the PD Input Capacitor

A 0.05 $\mu$ F to 0.12 $\mu$ F input bypass capacitor must be placed from VDD to GND for IEEE 802.3bt standard specifications. A 0.1 $\mu$ F, 100V ceramic capacitor is recommended.

### Selecting the Classification Resistors ( $R_{CLSA}$ and $R_{CLSB}$ )

Connect a resistor from CLSA and CLSB to GND to configure the classification current according to the IEEE 802.3bt standard. The assigned class power should correspond to the maximum average power drawn by the PD during operation. To select  $R_{CLSA}$  and  $R_{CLSB}$ , see Table 1 on page 25.

### Wall Power Adapter Detection Circuit

The MP8030 PD features wall power adapter detection. Once the input voltage (between VADP and GND) exceeds about 8.3V, the PD enables wall adapter detection. Then the resistor divider from VADP to the AUX pin can configure the threshold to switch from the PoE to an adapter (see Figure 9).

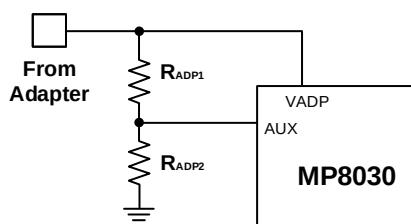


Figure 9: Wall Adapter Threshold Setting

### PG Pin Setting

The PG pin is an active high, open-drain output that requires an external pull-up resistor. The PG pin's maximum sinking current should be limited below 3mA, so a 20k $\Omega$  to 100k $\Omega$  pull-up resistor should be placed between SRC and PG. Connect PG to the DC/DC controller's

downstream EN pin to enable the downstream DC/DC converter.

PG is in high impedance if all of the following conditions are met:

- The steady current limit changes, which means the inrush period is complete.
- $t_{DELAY}$  (about 90ms) from UVLO is complete.

Then wall power adapter is detected on AUX, and  $V_{ADP}$  exceeds its UVLO threshold.

### BT, TYP1, TYP2 Indicator Connection

The BT, TYP1, and TYP2 pins are active low, open-drain outputs that indicate the PSE type or the presence of a wall adapter. Optocouplers can interface these pins to circuitry on the secondary side of the converter. Design the optocoupler interface for the BT, TYP1, and TYP2 signals (see Figure 10).

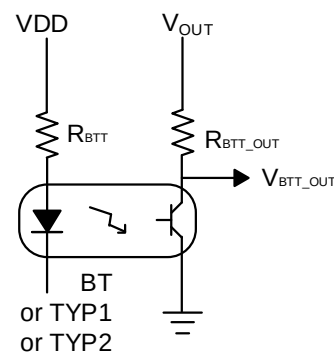


Figure 10: BT, TYP1, and TYP2 Interface

BT, TYP1, and TYP2 should have maximum sinking currents at 3mA, and  $R_{BT}$  should exceed 20k $\Omega$  to match the maximum 57V input.

The BT, TYP1, and TYP2 devices each light separate LEDs. These three LEDs indicate the PSE type. When lighting an LED from VDD to BT/TYP1/TYP2, the resistance can be higher to match the LED's maximum current and reduce power loss.

### Configurable Current Limit

After the MP8030's  $V_{DD}$  exceeds its UVLO threshold, the ILIM pin sources a current that detects the configurable current limit. By connecting ILIM to GND through a resistor (or shorting ILIM to GND), the MP8030's current limit can be configured (see Table 2 on page 26).

The MP8030 PD also has an inrush current limit function after start-up. This limit is about 1/7 of the steady state current limit.

### Selecting the PoE Power MOSFET

The MP8030 PD internal hot-swap MOSFET has a maximum 1.6A current limit. For type 1–3 PDs ( $\leq 51\text{W}$ ), the internal hot-swap MOSFET can support the application. For type 4 PDs ( $> 51\text{W}$ ), an external MOSFET must be placed in parallel with the internal hot-swap MOSFET. The GATE1 pin can drive one external N-channel MOSFET. The MOSFET should be selected to meet the following specifications:

- The voltage rating should be 100V at minimum for high-voltage surge environments.
- On resistance  $R_{DS(ON)}$ :  $R_{DS(ON)}$  should be below 200m $\Omega$  for power dissipation considerations and for light-load shutdown functions. A 100m $\Omega$   $R_{DS(ON)}$  is recommended.
- Gate charge ( $Q_G$ ):  $Q_G$  is recommended to be as small as possible to satisfy faster response times under overload conditions. It is recommended for  $Q_G$  to be below 15nC ( $V_{GATE} = 4.5\text{V}$ ).
- The gate threshold voltage should be below 4V to fully drive the GATE1 and GATE2 voltages.

### SENSE Pin Setting

The external parallel MOSFET current limit is configured by a resistor ( $R_{SENSE}$ ) between the VDD and SENSE pins. It is recommended for  $R_{SENSE}$  to be 18m $\Omega$ . The total current limit can be calculated with Equation (3):

$$I_{IN\_LIM} = I_{INNER} + \frac{26\text{mV}}{R_{SENSE}} \quad (3)$$

Where  $I_{IN\_LIM}$  is the MP8030 PD total current limit, and  $I_{INNER}$  is the MP8030 PD internal hot-swap MOSFET current limit. When the external MOSFET is connected, it is recommended to set  $I_{INNER}$  to 0.9A.

### Selecting the Adapter's MOSFET


The MP8030 PD's GATE2 pin is designed to drive one external N-channel MOSFET for the adapter supply. Select the adapter MOSFET

using the same guidelines for the PSE MOSFET.

### Output Voltage Setting

For the MP8030 DC/DC controller, there are two feedback modes (PSR and SSR).

In PSR mode, the converter detects the auxiliary winding voltage from the FB pin.  $R_{FBH}$  and  $R_{FBL}$  comprise the resistor divider used for feedback sampling (see Figure 11).



**Figure 11: Feedback in PSR mode**

When the primary-side power MOSFET turns off, the auxiliary winding voltage is proportional to the output winding.  $V_{OUT}$  can be estimated with Equation (4):

$$V_{OUT} = \frac{V_{REF} \times (R_{FBH} + R_{FBL})}{R_{FBL}} \times \frac{N_S}{N_A} - V_{DOF} \quad (4)$$

Where  $N_S$  is transformer's secondary-side winding turns,  $N_A$  is transformer's auxiliary winding turns,  $V_{DOF}$  is the output rectifier diode's forward-drop voltage, and  $V_{REF}$  is the reference voltage on the FB pin.

When the main power MOSFET turns on, the auxiliary winding voltage is negative, and the FB voltage is limited at about -0.7V. The current flowing out of the FB pin can be estimated with Equation (5):

$$I_{FB} = \frac{1}{R_{FBH}} \times \left( \frac{V_{IN} \times N_A}{N_P} - 0.7 \right) \quad (5)$$

$R_{FBH}$  should be high enough to limit the FB negative current below 1mA. However, due to FB parasitic capacitance,  $R_{FBH}$  should be not too high. It is recommended for  $R_{FBH}$  to be between 49.9k $\Omega$  and 100k $\Omega$ .

In SSR mode, the output voltage is set by an external TL431 regulator. If the TL431's reference voltage is 2.5V, and the expected output voltage is 12V, then the upper and lower

resistor divider ratio is 3.8. Then TL431 generates an amplified signal and controls the MP8030 DC/DC controller's COMP pin through an optocoupler, such as PC357. COMP controls the current, and then  $V_{OUT}$  is regulated based on the feedback signal.


### Work Mode Setting

Once enabled, the MP8030 DC/DC controller outputs a 40 $\mu$ A current to the MODE pin to detect the MODE resistance. If the MODE pin's voltage exceeds 2.2V, the MP8030 DC/DC controller works in PSR mode or SSR mode. The MODE pin can also configure the dead time between the GATE and SYNC pins (see Table 6 on page 30).

### VCC Power Supply Setting

The VCC voltage is regulated by the internal LDO from AVIN.  $V_{CC}$  is typically regulated to 8.5V. It is recommended to place a decoupling capacitor between VCC and GND

In flyback mode, the VCC capacitor is recommended to be 1 $\mu$ F at minimum.  $V_{CC}$  can also be powered from transformer auxiliary winding to reduce high-voltage LDO power loss (see Figure 12).




**Figure 12: Flyback  $V_{CC}$  from  $N_A$  Winding**

The auxiliary winding supply voltage can be calculated with Equation (6):

$$V_{CC} = \frac{N_A}{N_S} \times (V_{OUT} + V_{DOF}) - V_{DVCCF} \quad (6)$$

Where  $V_{DVCCF}$  is the diode ( $D_{VCC}$ ) voltage drop from auxiliary winding.

In forward mode, the VCC capacitor is recommend to be 4.7 $\mu$ F at minimum.  $V_{CC}$  can also be powered from transformer auxiliary winding (see Figure 13).

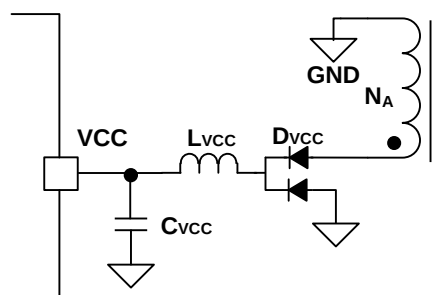

**Figure 13: Forward  $V_{CC}$  from  $N_A$  Winding**

The auxiliary winding supply voltage can be calculated with Equation (7):

$$V_{CC} = \frac{N_A}{N_S} \times V_{OUT} \quad (7)$$

$V_{CC}$  should be below 16V.

### $V_{OUT}$ Compensation and Frequency Dithering Setting

The CS pin can be used to set  $V_{OUT}$  compensation as well as the frequency dithering function. Once enabled, the MP8030 DC/DC controller outputs a 100 $\mu$ A current to the CS pin to detect the CS resistance. The MP8030 DC/DC controller determines the compensation type and the frequency dithering type based on the resistance (see Table 7 on page 32).

The  $V_{OUT}$  compensation function is only enabled in PSR mode.

### Current-Sense Resistor Setting

The MP8030 DC/DC controller is a peak current mode flyback/forward controller. The current through the external MOSFET can be sensed through a current-sense resistor. If the sensed voltage on the CS pin exceeds the current limit threshold voltage (typically 160mV), the MP8030 DC/DC controller turns off the GATE output for that cycle.

To avoid reaching the current limit, the voltage across the current-sense resistor ( $R_{CS}$ ) should be less than 80% of the current limit voltage (about 160mV).  $R_{CS}$  can be estimated with Equation (8):

$$R_{CS} = \frac{0.8 \times 160\text{mV}}{I_{PEAK}} \quad (8)$$

Where  $I_{PEAK}$  is the primary-side peak current.



## Selecting the Power MOSFET

The MP8030 DC/DC controller is capable of driving a wide variety of N-channel power MOSFETS. The critical parameters when selecting a MOSFET are the maximum drain-to-source voltage ( $V_{DS(MAX)}$ ), maximum current ( $I_{D(MAX)}$ ), on resistance ( $R_{DS(ON)}$ ), total gate charge ( $Q_G$ ), and turn-on threshold ( $V_{TH}$ ).

In flyback applications, the off-state voltage across the MOSFET (which determines when the MOSFET shuts down) can be calculated with Equation (9):

$$V_{MOSFET} = V_{IN} + N \times V_{OUT} \quad (9)$$

Considering the voltage spike when the device turns off,  $V_{DS(MAX)}$  should be greater than 1.5 times  $V_{MOSFET}$ .

In forward applications, the off-state voltage across the MOSFET is calculated with:

$$V_{MOSFET} = \frac{D \times V_{IN}}{1 - D} + V_{IN} \quad (10)$$

Where D is the duty cycle. Generally, the maximum duty cycle is limited at 70%.

The maximum current through the power MOSFET occurs when the input voltage is at its minimum and the output power is at its maximum. The current rating of the MOSFET should be greater than 1.5 times  $I_{RMS}$ .

The on resistance of the MOSFET determines the conduction loss. This resistance should be low.

$Q_G$  determines the commutation time. A high  $Q_G$  leads to high switching loss, while a low  $Q_G$  may cause a fast turn-on/off speed that affects the spike and kick.

Consider the turn-on threshold voltage ( $V_{TH}$ ). GATE is powered by  $V_{CC}$ , so  $V_{TH}$  must be below  $V_{CC}$ .

## Selecting the Flyback Transformer

The transformer in a flyback converter determines the converter's duty cycle, peak current, efficiency, MOSFET, and output diode rating. A good transformer should consider the winding ratio, primary-side inductance, saturation current, leakage inductance, current rating, and core selection.

The transformer winding ratio determines the duty cycle. Calculate the duty cycle with Equation (11):

$$D = \frac{N \times V_{OUT}}{N \times V_{OUT} + V_{IN}} \quad (11)$$

Where N is the transformer primary winding to output winding ratio, and D is the duty cycle. Typically, a duty cycle of about 45% is recommended for most applications.

The primary-side inductance affects the input current ripple ratio factor. A high inductance results in a large transformer size and high cost; a low inductance results in high switching peak current and RMS current, which reduces efficiency. Choose a primary-side inductance to make the current ripple ratio factor about 30% to 50% of the input current. Estimate the primary-side inductance with Equation (12):

$$L_P = \frac{V_{IN} \times D^2}{2 \times n \times I_{IN} \times f_{SW}} \quad (12)$$

Where n is the current ripple ratio,  $I_{IN}$  is the input current, and  $L_P$  is the primary inductance. Calculate  $L_P$  based on the minimum input voltage condition.

The transformer should have a high saturation current to support the switching peak current; otherwise, the transformer inductance decreases sharply. The CS resistor can be used to limit the switching peak current.

The energy stored in the leakage inductance cannot couple to the secondary side, causing a high spike when the MOSFET turns off. This decreases efficiency and increases MOSFET stress. Normally, the transformer leakage inductance can be controlled below 3% of the transformer inductance.

The current rating counts the maximum RMS current, which flows through each winding. The current density should be controlled; otherwise, it can cause a high resistive power loss.

## Diode Conduction Time Setting (For PSR Flyback)

In PSR mode, the MP8030 DC/DC controller starts sampling the auxiliary winding voltage after the primary power MOSFET turns off.


A blanking time is added in the MP8030 DC/DC controller to prevent spike ringing due to the leakage inductance. To guarantee a sufficiently long FB sample period, the output diode current conduction time ( $t_{CON}$ ) under light loads should be longer than 600ns. Design the transformer and ensure that  $t_{CON}$  is longer than 700ns when  $V_{CS\_PK} = 33mV$ . This relationship can be calculated with Equation (13):

$$\frac{33mV \times L_P \times N_S}{R_{CS} \times N_P \times (V_{OUT} + V_{DOF})} \geq 700ns \quad (13)$$

Where  $V_{DOF}$  is the output diode's forward-drop voltage.

### Selecting the RCD Snubber for Flyback Applications

The transformer leakage inductance causes spikes and excessive ringing on the MOSFET drain's voltage waveform. An RCD snubber circuit limits the MOSFET voltage spike (see Figure 14).

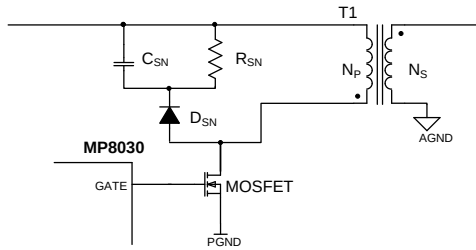

**Figure 14: RCD Snubber Circuit**

The power dissipation in the snubber circuit can be estimated with Equation (14):

$$P_{SN} = \frac{1}{2} \times L_K \times I_{PEAK}^2 \times f_{SW} \quad (14)$$

Where  $L_K$  is the leakage inductance and  $I_{PEAK}$  is the peak switching current. Since  $R_{SN}$  consumes the leakage inductance power loss,  $R_{SN}$  can be calculated with Equation (15)

$$R_{SN} = \frac{V_{SN}^2}{P_{SN}} \quad (15)$$

Where  $V_{SN}$  is the expected snubber voltage on the snubber capacitor ( $C_{SN}$ ).

$C_{SN}$  can be designed to achieve an appropriate voltage ripple on the snubber, estimated with Equation (16):

$$\Delta V_{SN} = \frac{V_{SN}}{R_{SN} \times C_{SN} \times f_{SW}} \quad (16)$$

Generally, a 15% ripple is recommended.

### Selecting Output Diode for Flyback Applications

The flyback output rectifier diode supplies current to the output capacitor when the primary-side MOSFET is off. A Schottky diode reduces losses due to the diode's forward voltage and recovery time. The diode should be rated for a reverse voltage 1.5 times greater than  $V_{DIODE}$ .  $V_{DIODE}$  can be calculated with Equation (17):

$$V_{DIODE} = \frac{V_{IN}}{N} + V_{OUT} \quad (17)$$

The average current rating must exceed the maximum expected load current, and the peak current rating must exceed the output winding peak current.

It is recommended to use an RC snubber circuit for the output diode.

### Selecting the Forward Transformer

The forward transformer transfers energy to output when the power MOSFET turns on. This transformer's key parameters are the winding ratio, primary winding turns, current rating, and core selection.

The transformer winding ratio determines the duty cycle (D). D can be estimated with Equation (18):

$$D = \frac{V_{OUT} \times N}{V_{IN}} \quad (18)$$

Where N is the transformer's primary winding to output winding ratio. A duty cycle of about 45% is recommended for most applications.

When the power MOSFET turns on, the transformer transfers energy to the output. At the same time, the input voltage generates a primary-side current in the transformer. There should be sufficient primary winding to ensure that the transformer does not saturate. The peak exciting current is calculated with Equation (19):



$$I_{EXC} = \frac{V_{OUT} \times N}{2 \times L_P \times f_{SW}} \quad (19)$$

Where  $I_{EXC}$  is the peak primary-side current, and  $L_P$  is the primary inductance. Use  $I_{EXC}$  to calculate the primary winding. There should be sufficient margins for extreme conditions, such as load transient response and OCP.


The current rating is based on the maximum RMS current, which flows through each winding. The current density should be controlled; otherwise, it can cause a high resistive power loss.

### Selecting the Forward SYNC MOSFET

The MP8030 DC/DC controller supports active-clamp forward applications. The active clamp P-channel MOSFET must have same maximum voltage as the main switch power MOSFET, and its maximum current should exceed the peak primary-side current and RMS current.

### Selecting the Forward Output MOSFET

The forward output MOSFET requires two diodes to conduct the current. If higher efficiency is required, the diodes must be replaced by MOSFETs (see Figure 15).

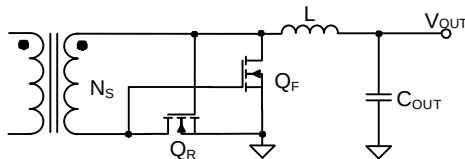

**Figure 15: Forward Output MOSFET**

The MOSFET voltage rating should exceed the maximum  $V_{DS}$  voltage. The maximum  $V_{DS}$  voltage for  $Q_R$  ( $V_R$ ) can be calculated with Equation (20):

$$V_R = \frac{D \times V_{IN}}{N \times (1-D)} \quad (20)$$

Where  $N$  is the transformer primary winding to output winding ratio, and  $D$  is the primary MOSFET duty cycle. A margin is typically required.

The maximum  $V_{DS}$  voltage for  $Q_F$  ( $V_F$ ) can be estimated with Equation (21):

$$V_F = \frac{V_{IN}}{N} \quad (21)$$

The MOSFET current rating should exceed its maximum RMS current and peak current. The  $Q_R$  RMS current can be estimated with Equation (22)

$$I_R = I_{OUT} \times \sqrt{D} \times \sqrt{1 + \frac{1}{3} \times \left(\frac{I_{PP}}{I_{OUT}}\right)^2} \quad (22)$$

Where  $I_{PP}$  is the  $L$  peak-to-peak current.

The  $Q_F$  RMS current can be calculated with Equation (23):

$$I_F = I_{OUT} \times \sqrt{1-D} \times \sqrt{1 + \frac{1}{3} \times \left(\frac{I_{PP}}{I_{OUT}}\right)^2} \quad (23)$$

The  $Q_R$  MOSFET's gate driving voltage is equal to  $V_F$ , and the  $Q_F$  MOSFET's gate driving voltage is equal to  $V_R$ . If the driving voltage exceeds the MOSFETs' maximum gate voltage, a clamp circuit is required. The MOSFET's turn-on resistance determines the conduction loss, while  $Q_G$  determines the driver circuit loss. These values should be low enough to increase efficiency with a lower rising temperature.

### Selecting the Forward Output Inductor

Optimized Performance with MPS Inductor  
MPL-AY Series

A forward output inductor is required to supply constant current to the output load while the main power MOSFET turns on. A larger-value inductor results in less ripple current and a lower output voltage ripple. However, a larger-value inductor has a larger physical size, higher series resistance, and lower saturation current. A good rule for determining the inductance is to allow the peak-to-peak ripple current in the inductor to be approximately 30% to 50% of the maximum output current. The inductance value can be estimated with Equation (24):

$$L = \frac{V_{OUT}}{f_{SW} \times \Delta I_L} \times \left(1 - \frac{V_{OUT} \times N}{V_{IN}}\right) \quad (24)$$

Where  $V_{OUT}$  is the output voltage,  $V_{IN}$  is the input voltage,  $f_{SW}$  is the switching frequency, and  $\Delta I_L$  is the peak-to-peak inductor ripple current. Choose an inductor that does not saturate under the maximum inductor peak current.

MPS inductors are optimized and tested for use with our complete line of integrated circuits.

Table 8 lists our power inductor recommendations. Select a part number based on your design requirements.

**Table 8: Power Inductor Selection**

| Part Number    | Inductor Value | Manufacturer |
|----------------|----------------|--------------|
| MPL-AY         | 1μH to 10μH    | MPS          |
| MPL-AY1265-2R2 | 2.2μH          | MPS          |

Visit [MonolithicPower.com](http://MonolithicPower.com) under Products > Inductors for more information.

### Selecting the Input Capacitor

An input capacitor is required to supply the AC ripple current to the inductor while limiting noise at the input source. A low-ESR capacitor is required to minimize the noise at the IC. Ceramic capacitors are recommended, though tantalum or low-ESR electrolytic capacitors are sufficient. For ceramic capacitors, the capacitance dominates the input voltage ripple at the switching frequency.

In flyback mode, the input voltage ripple can be calculated with Equation (25):

$$\Delta V_{IN} = I_{IN} \times \frac{V_{IN}}{f_{SW} \times C_{IN} \times (N \times V_{OUT} + V_{IN})} \quad (25)$$

Where  $\Delta V_{IN}$  is the input voltage ripple,  $I_{IN}$  is the input current, and  $C_{IN}$  is the input capacitor.

In forward mode, the input voltage ripple can be estimated with Equation (26):

$$\Delta V_{IN} = \frac{I_{IN}}{f_{SW} \times C_{IN}} \times \left(1 - \frac{V_{OUT} \times N}{V_{IN}}\right) \quad (26)$$

Note that this equation ignores the primary-side current, which makes current ripple smaller.

### Selecting the Output Capacitor

The output capacitor maintains the DC output voltage. For the best results, use ceramic capacitors or low-ESR capacitors to minimize the output voltage ripple. For ceramic

capacitors, the capacitance dominates the output voltage ripple at the switching frequency.

In flyback mode, the output voltage ripple can be calculated with Equation (27):

$$\Delta V_{OUT} = \frac{N \times V_{OUT}}{(V_{IN} + N \times V_{OUT}) \times f_{SW}} \times \frac{I_{OUT}}{C_{OUT}} \quad (27)$$

If the output voltage ripple is too high, a  $\pi$  filter is required. Choose the inductor to be between 0.1μH to 0.47μH to achieve an optimal output voltage ripple and system stability.

In forward mode, the output voltage ripple can be estimated with Equation (28):

$$\Delta V_{OUT} = \frac{V_{OUT}}{8 \times f_{SW}^2 \times L \times C_{OUT}} \times \left(1 - \frac{V_{OUT} \times N}{V_{IN}}\right) \quad (28)$$

### Design Example

Table 9 is a forward design example following the application guidelines for the specifications below.

**Table 9: Forward Design Example**

|                  |            |
|------------------|------------|
| PoE Input        | 41V to 57V |
| V <sub>OUT</sub> | 5V         |
| I <sub>OUT</sub> | 14A        |

The detailed application schematic is shown in Figure 19 on page 44. The typical performance and circuit waveforms are shown in the Typical Performance Characteristics section on page 19. For more device applications, refer to the related evaluation board datasheet.

Table 9 is a flyback design example following the application guidelines for the specifications below.

**Table 10: Flyback Design Example**

|                  |            |
|------------------|------------|
| PoE Input        | 41V to 57V |
| V <sub>OUT</sub> | 12V        |
| I <sub>OUT</sub> | 6A         |

The detailed application schematic is shown in Figure 20 on page 44. For more device applications, refer to the related evaluation board datasheet.

## PCB Layout Guidelines

An efficient PCB layout for the PoE front-end and high-frequency switching power supply are critical for stable operation. A suboptimal layout may result in reduced performance, excessive EMI, resistive loss, and system instability. For the best results, refer to Figure 16, Figure 17 (on page 43), and Figure 18 (on page 43), and follow the guidelines below.

### The PD Interface Circuit

All component placements must follow the power flow from RJ-45, the Ethernet transformer, the diode bridges, the TVS diode to 0.1μF capacitor, and the DC/DC converter's input bulk capacitor.


1. Ensure that all power connections are as short as possible with wide traces.
2. Place the current-sense resistor ( $R_{SENSE}$ ) as close to VDD pin as possible.
3. Use a Kelvin connection between  $R_{SENSE}$  and the SENSE pin for an accurate current limit.
4. Place the PoE input capacitor as close to the VDD pin as possible.
5. Place the adapter's input capacitor as close to the VADP pin as possible.
6. Place the SRC capacitor as close to the SRC pin as possible.
7. Place a wide copper plane and vias under the MP8030, PoE power MOSFET and adapter MOSFET to improve thermal performance.

### Forward Topology

1. Keep the input loop between the input capacitor, transformer, MOSFET, CS resistor, and GND plane as short as possible for minimal noise and ringing.
2. Keep the active-clamp loop between the input capacitor, transformer, C5, and Q3 as short as possible for minimal noise and ringing.
3. Keep the output high-frequency current loop between the transformers, Q<sub>4</sub>, and Q<sub>5</sub> as short as possible.

4. The VCC capacitor must be placed close to the VCC and GND pins for the best decoupling.
5. Route the COMP feedback trace far away from noisy sources, such as the switching node.
6. Use a single-point connection between power GND and signal GND.

Figure 16 shows the recommended forward layout, which is based on the Typical Application section on page 2. For more details, refer to the related evaluation board datasheet.

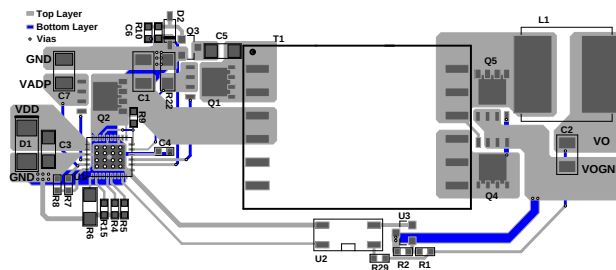


**Figure 16: Recommended PCB Layout for Forward Topology**

### Flyback Topology


1. Keep the input loop between the input bulk capacitor, transformer, MOSFET, CS resistor, and GND plane as short as possible for minimal noise and ringing.
2. Keep the output loop between the rectifier MOSFET, output capacitor, and transformer as short as possible.
3. The clamp loop circuit between D<sub>SN</sub>, C<sub>SN</sub>, and the transformer should be as small as possible.
4. The VCC capacitor must be placed close to the VCC and GND pin for the best decoupling.
5. Route the feedback trace far away from noisy sources, such as the switching node.
6. Place the COMP components close to the COMP pin.
7. Use a single-point connection between power GND and signal GND.

Figure 17 on page 43 shows a recommended flyback layout. For more details, refer to the related evaluation board datasheet.

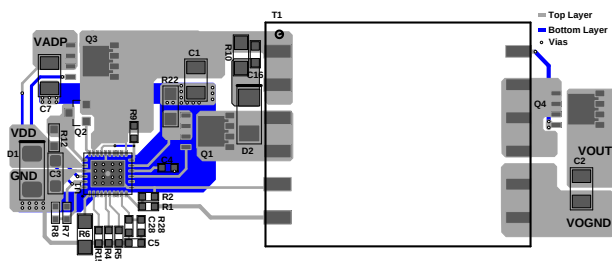

**Figure 17: Recommended PCB Layout for Flyback Topology**

Figure 18 shows the recommended schematic for a flyback layout.

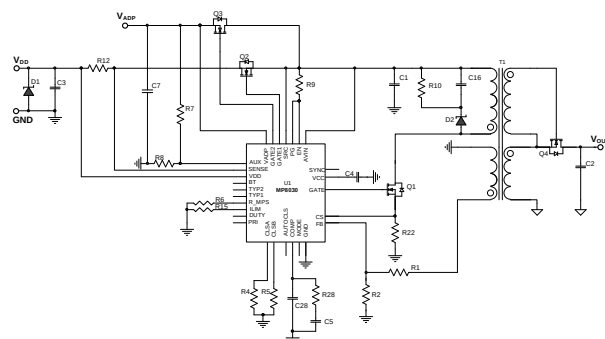

**Figure 18: Recommended Flyback Layout**

# TYPICAL APPLICATION CIRCUITS

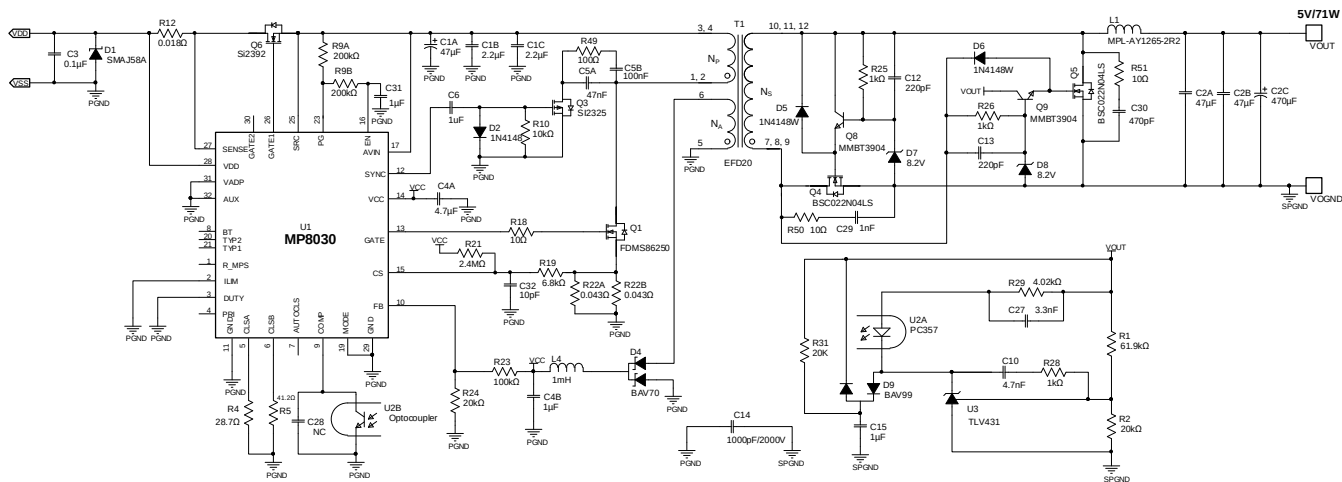


Figure 19: Typical SSR Forward Application Circuit ( $V_{IN} = 41V$  to  $57V$ ,  $V_{OUT} = 5V$ ,  $I_{OUT} = 14A$ )


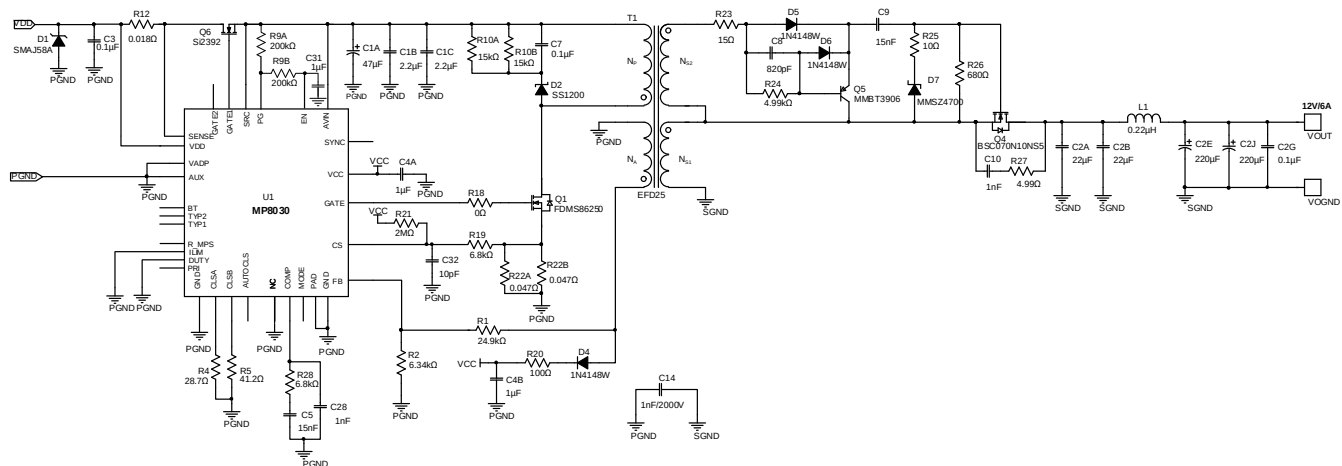



Figure 20: Typical PSR Flyback Application Circuit ( $V_{IN} = 41V$  to  $57V$ ,  $V_{OUT} = 12V$ ,  $I_{OUT} = 6A$ )

# PACKAGE INFORMATION


## QFN-32 (5mmx6mm)

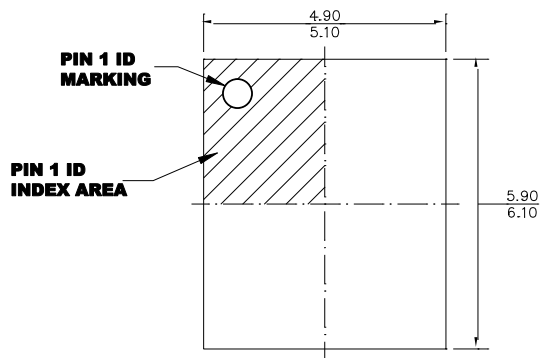


**TOP VIEW**

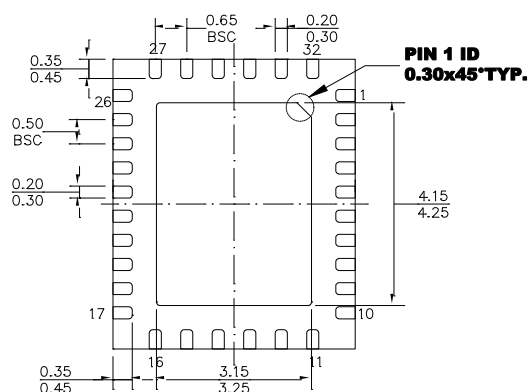

**BOTTOM VIEW**



**SIDE VIEW**

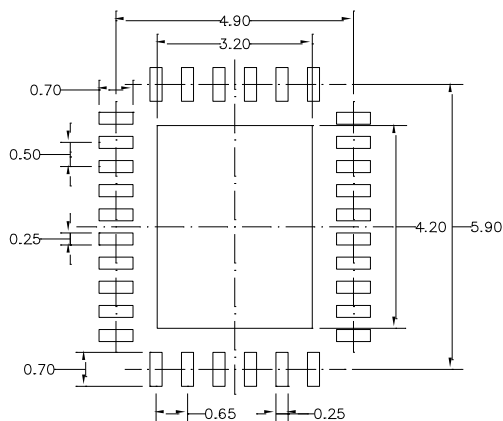


**RECOMMENDED LAND PATTERN**

### NOTE:

- 1) ALL DIMENSIONS ARE IN MILLIMETERS.
- 2) EXPOSED PADDLE SIZE DOES NOT INCLUDE MOLD FLASH.
- 3) LEAD COPLANARITY SHALL BE 0.08 MILLIMETERS MAX.
- 4) JEDEC REFERENCE IS MO-220.
- 5) DRAWING IS NOT TO SCALE.

## CARRIER INFORMATION

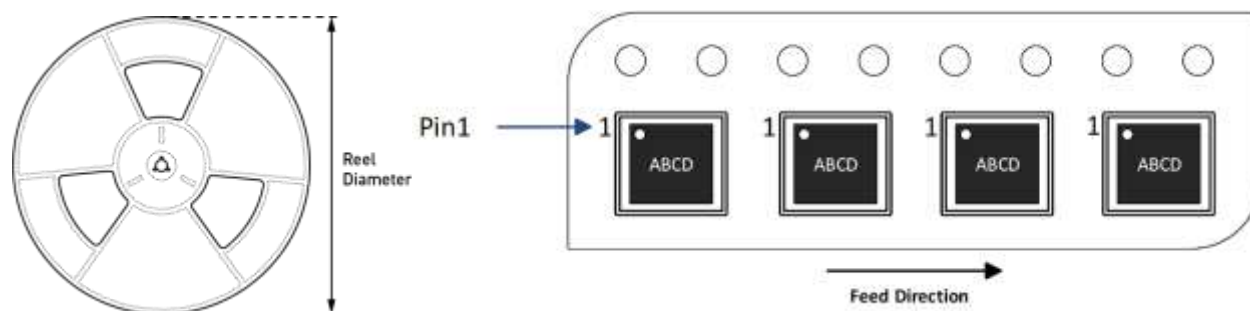

| Part Number | Package Description | Quantity/ Reel | Quantity/ Tube | Quantity/ Tray | Reel Diameter | Carrier Tape Width | Carrier Tape Pitch |
|-------------|---------------------|----------------|----------------|----------------|---------------|--------------------|--------------------|
| MP8030GQJ-Z | QFN-32 (5mmx6mm)    | 5000           | N/A            | N/A            | 13in          | 12mm               | 8mm                |



## REVISION HISTORY

| Revision # | Revision Date | Description     | Pages Updated |
|------------|---------------|-----------------|---------------|
| 1.0        | 1/31/2022     | Initial Release | -             |

**Notice:** The information in this document is subject to change without notice. Please contact MPS for current specifications. Users should warrant and guarantee that third-party Intellectual Property rights are not infringed upon when integrating MPS products into any application. MPS will not assume any legal responsibility for any said applications.