

LM10QML

LM10QML Operational Amplifier and Voltage Reference



Literature Number: SNOSAP1

LM10QML

Operational Amplifier and Voltage Reference

General Description

The LM10 is a monolithic linear IC consisting of a precision reference, an adjustable reference buffer and an independent, high quality op amp.

The unit can operate from a total supply voltage as low as 1.1V or as high as 40V, drawing only 270 μ A. A complementary output stage swings within 15 mV of the supply terminals or will deliver ± 20 mA output current with ± 0.4 V saturation. Reference output can be as low as 200 mV.

The circuit is recommended for portable equipment and is completely specified for operation from a single power cell. In contrast, high output-drive capability, both voltage and current, along with thermal overload protection, suggest it in demanding general-purpose applications.

The device is capable of operating in a floating mode, independent of fixed supplies. It can function as a remote com-

parator, signal conditioner, SCR controller or transmitter for analog signals, delivering the processed signal on the same line used to supply power. It is also suited for operation in a wide range of voltage- and current-regulator applications, from low voltages to several hundred volts, providing greater precision than existing ICs.


Features

- Input offset voltage: 2.0 mV (max)
- Input offset current: 0.7 nA (max)
- Input bias current: 20 nA (max)
- Reference regulation: 0.1% (max)
- Offset voltage drift: 2 μ V/ $^{\circ}$ C
- Reference drift: 0.002%/ $^{\circ}$ C

Ordering Information


NS Part Number	SMD Part Number	NS Package Number	Package Description
LM10H/883	5962-8760401GA	H08A	8LD Metal Can

Connection and Functional Diagram

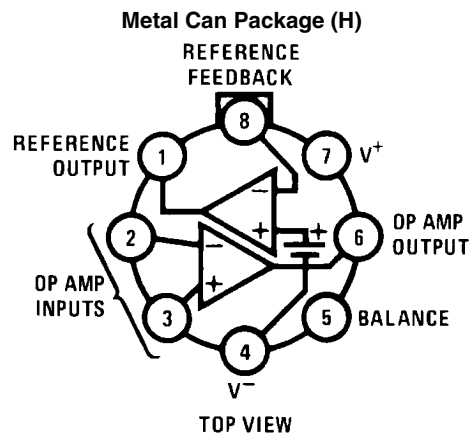


See NS Package Number H08A 20149701

Operational Amplifier Schematic — (Pin numbers are for 8-pin packages)

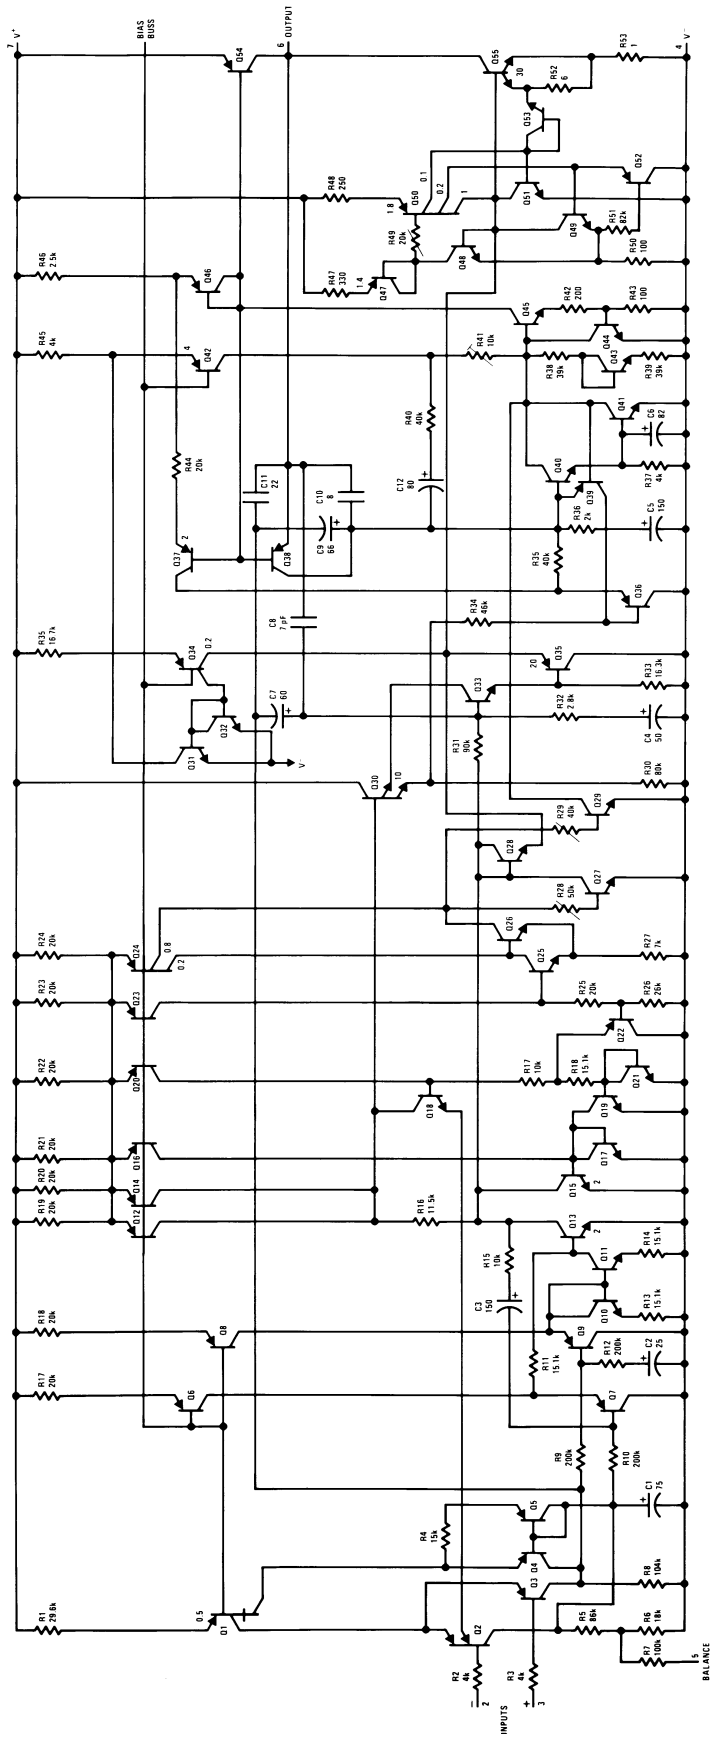

20149713

Reference and Internal Regulator Schematic — (Pin numbers are for 8-pin packages)

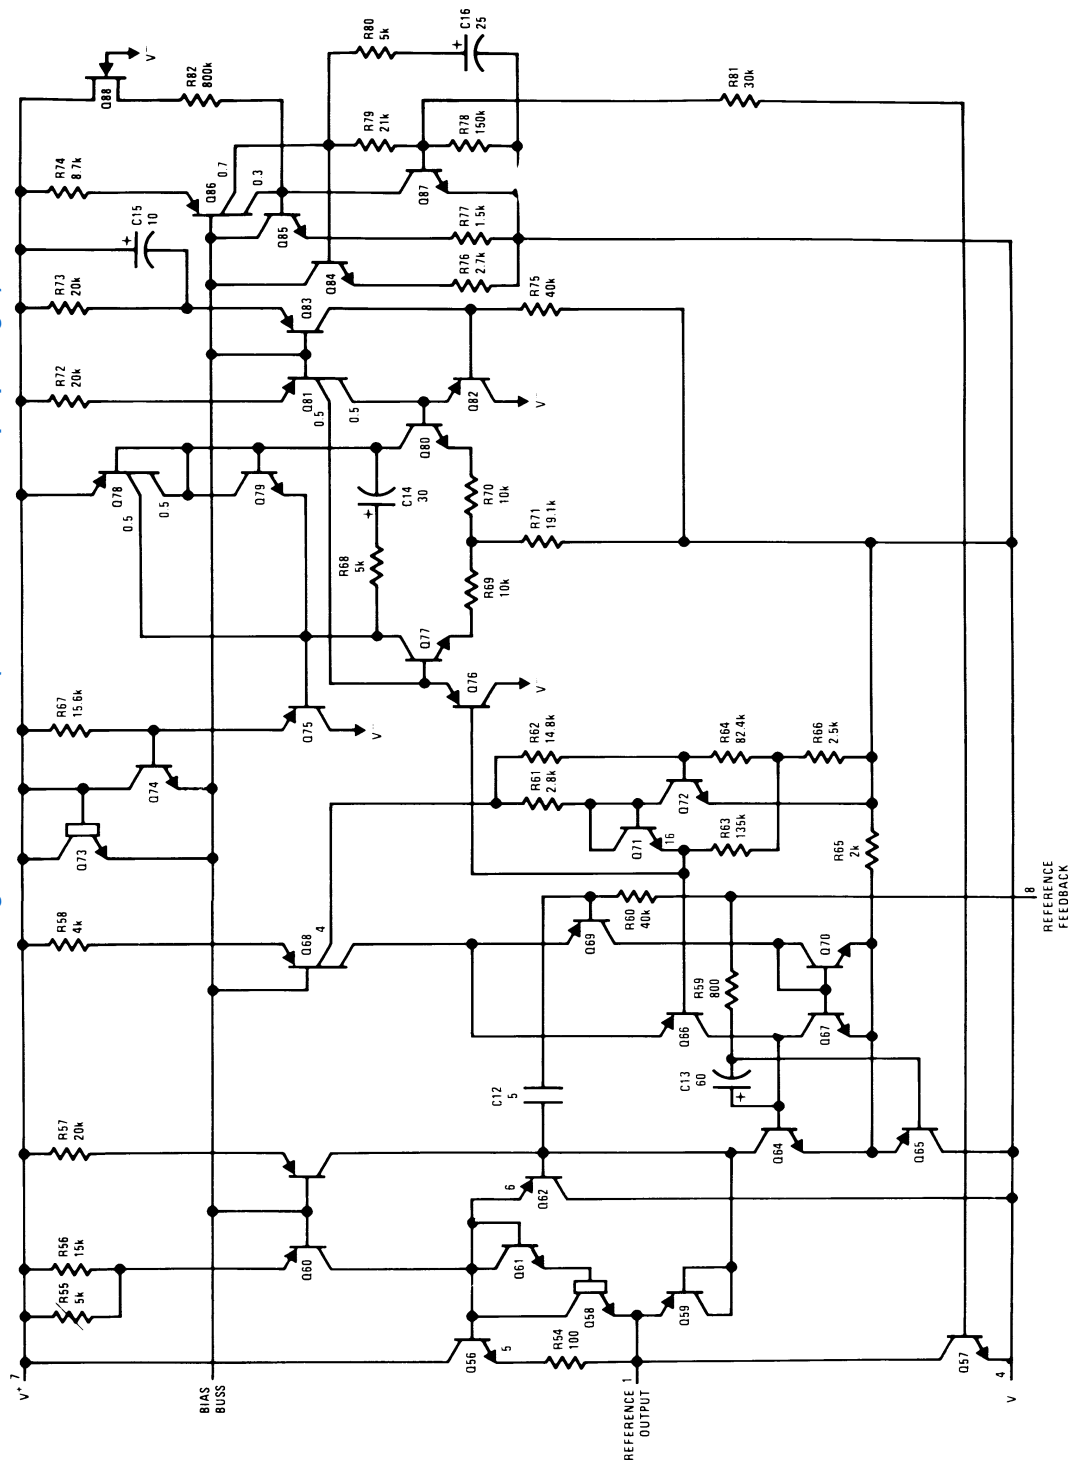

20149714

Absolute Maximum Ratings *(Note 1)*

Total Supply Voltage	45V
Differential Input Voltage <i>(Note 3)</i>	±40V
Power Dissipation (P_{Dmax}) <i>(Note 2)</i>	Internally Limited
Output Short-circuit Duration <i>(Note 4)</i>	Continuous
Storage Temperature Range	$-55^{\circ}\text{C} \leq T_A \leq +150^{\circ}\text{C}$
Maximum Junction Temperature (T_{Jmax})	150°C
Lead Temperature (Soldering 10 seconds)	300°C
Thermal Resistance	
θ_{JA}	
Still Air	150°C
500LF/Min Air flow	45°C
θ_{JC}	
	45°C
ESD	Rating to be determined

Quality Conformance Inspection

Mil-Std-883, Method 5005 - Group A

Subgroup	Description	Temp °C
1	Static tests at	+25
2	Static tests at	+125
3	Static tests at	-55
4	Dynamic tests at	+25
5	Dynamic tests at	+125
6	Dynamic tests at	-55
7	Functional tests at	+25
8A	Functional tests at	+125
8B	Functional tests at	-55
9	Switching tests at	+25
10	Switching tests at	+125
11	Switching tests at	-55
12	Settling time at	+25
13	Settling time at	+125
14	Settling time at	-55

LM10H Electrical Characteristics

DC Parameters

The following conditions apply to all the following parameters, unless otherwise specified.

DC: At room temperature $1.2V \leq V_S \leq 45V$, $V_S^- \leq V_{CM} \leq V_S \pm 0.85V$.

DC: At temperature extremes $1.3V \leq V_S \leq 45V$, $V_S^- \leq V_{CM} \leq V_S \pm 1.0V$.

Symbol	Parameter	Conditions	Notes	Min	Max	Unit	Sub-groups
V_{IO}	Input Offset Voltage	$I_O = 0mA$		-2.0	2.0	mV	1
				-3.0	3.0	mV	2, 3
		$V_S = 1.2V$, $I_O = \pm 2mA$		-3.0	3.0	mV	1
		$V_S = 1.3V$, $I_O = \pm 2mA$		-4.0	4.0	mV	2, 3
		$V_S = 4V$, $I_O = \pm 20mA$		-3.0	3.0	mV	1
		$V_S = 4V$, $I_O = \pm 15mA$		-4.0	4.0	mV	2, 3
I_{IO}	Input Offset Current			-0.7	0.7	nA	1
				-1.5	1.5	nA	2, 3
I_{IB}	Input Bias Current				20	nA	1
					30	nA	2, 3
CMRR	Common Mode Rejection	$V_S = 45V$, $-20V \leq V_{CM} \leq 24.2V$		93		dB	1
				87		dB	2, 3
PSRR	Supply Voltage Rejection	$V_S^+ = 0.85V$, $-0.35V \geq V_S^- \geq -44.2V$		90		dB	1
		$V_S^+ = 1V$, $-0.3V \geq V_S^- \geq -44.2V$		84		dB	2, 3
		$0.85V \leq V_S^+ \leq 44.6V$, $V_S^- = -0.35V$		96		dB	1
		$1V \leq V_S^+ \leq 44.6V$, $V_S^- = -0.3V$		90		dB	2, 3
V_{RLine}	Line Regulation	$I_{Ref} = 1mA$		91		dB	1
				85		dB	2, 3
V_{RLoad}	Load Regulation	$V_S = 1.2V$, $0 \leq I_O \leq 1mA$		60		dB	1
		$V_S = 1.3V$, $0 \leq I_O \leq 1mA$		57		dB	2, 3
I_S	Supply Current				400	μA	1
					500	μA	2, 3
A_V	Large Signal Voltage Gain	$V_S = \pm 20V$, $I_O = 0A$, $V_O = \pm 19.95V$		120		K	4
				80		K	5, 6
		$V_S = \pm 2V$, $I_O = \pm 20mA$, $V_O = \pm 1.4V$		5.0		K	4
		$V_S = \pm 2V$, $I_O = \pm 15mA$, $V_O = \pm 1.4V$		1.5		K	5, 6
		$V_S^+ = 0.85V$, $V_{CM} = -0.25V$ $V_S^- = -0.35V$, $I_O = \pm 2mA$, $-0.15V \leq V_O \leq 0.65V$,		1.5		K	4
		$V_S^+ = 1V$, $V_{CM} = -0.35V$ $V_S^- = -0.3V$, $I_O = \pm 2mA$, $+0.05V \leq V_O \leq 0.65V$,		0.5		K	5, 6

Symbol	Parameter	Conditions	Notes	Min	Max	Unit	Sub-groups
A_{VSH}	Shunt Gain	$1.1V \leq V_{OUT} \leq 6.1V$, $-5mA \leq I_{OUT} \leq -0.1mA$	(Note 6)	14		K	4
		$1.2V \leq V_{OUT} \leq 6.2V$, $-5mA \leq I_{OUT} \leq -0.1mA$	(Note 6)	6.0		K	5, 6
		$1.4V \leq V_{OUT} \leq 6.4V$, $-5mA \leq I_{OUT} \leq -0.1mA$	(Note 6)	8.0		K	4
		$1.4V \leq V_{OUT} \leq 6.4V$, $-20mA \leq I_{OUT} \leq -0.1mA$	(Note 6)	4.0		K	5, 6
A_V	Amplifier Gain	$0.2V \leq V_{Ref} \leq 35V$, $I_{Ref} = 1mA$		50		K	
				23		K	
V_{Sense}	Feedback Sense Voltage	$0.2V \leq V_{Ref} \leq 35V$, $0 \leq I_{Ref} \leq 1mA$		195	205	mV	
				194	206	mV	
I_{Sense}	Feedback Current				50	nA	
					65	nA	
ΔI_S	Supply Current Change	$0.5V \leq V_O \leq 25V$		-75	75	μA	
		$V_S = 5V$, $4.5V \leq V_O \leq 5V$		-60	60	μA	
R_I	Input Resistance		(Note 5)		250	$K\Omega$	
			(Note 5)		150	$K\Omega$	

Note 1: Absolute Maximum Ratings indicate limits beyond which damage to the device may occur. Operating Ratings indicate conditions for which the device is functional, but do not guarantee specific performance limits. For guaranteed specifications and test conditions, see the Electrical Characteristics. The guaranteed specifications apply only for the test conditions listed. Some performance characteristics may degrade when the device is not operated under the listed test conditions.

Note 2: The maximum power dissipation must be derated at elevated temperatures and is dictated by T_{Jmax} (maximum junction temperature), θ_{JA} (package junction to ambient thermal resistance), and T_A (ambient temperature). The maximum allowable power dissipation at any temperature is $P_{Dmax} = (T_{Jmax} - T_A) / \theta_{JA}$ or the number given in the Absolute Maximum Ratings, whichever is lower..

Note 3: The Input voltage can exceed the supply voltages provided that the voltage from the input to any other terminal does not exceed the maximum differential input voltage and excess dissipation is accounted for when $V_I < V_S^-$.

Note 4: Internal thermal limiting prevents excessive heating that could result in sudden failure, but the IC can be subjected to accelerated stress with a shorted output and worst-case conditions.

Note 5: Guaranteed parameter, not tested,

Note 6: This defines operation in floating applications such as the bootstrapped regulator or two-wire transmitter. Output is connected to the V_S^+ terminal of the IC and input common mode is referred to V_S^- (see typical applications). Effect of larger output-voltage swings with higher load resistance can be accounted for by adding the positive-supply rejection error.

Definition of Terms

Input offset voltage: That voltage which must be applied between the input terminals to bias the unloaded output in the linear region.

Input offset current: The difference in the currents at the input terminals when the unloaded output is in the linear region.

Input bias current: The absolute value of the average of the two input currents.

Input resistance: The ratio of the change in input voltage to the change in input current on either input with the other grounded.

Large signal voltage gain: The ratio of the specified output voltage swing to the change in differential input voltage required to produce it.

Shunt gain: The ratio of the specified output voltage swing to the change in differential input voltage required to produce it with the output tied to the V_{S+} terminal of the IC. The load and power source are connected between the V_{S+} and V_{S-} terminals, and input common-mode is referred to the V_{S-} terminal.

Common-mode rejection: The ratio of the input voltage range to the change in offset voltage between the extremes.

Supply-voltage rejection: The ratio of the specified supply-voltage change to the change in offset voltage between the extremes.

Line regulation: The average change in reference output voltage over the specified supply voltage range.

Load regulation: The change in reference output voltage from no load to that load specified.


Feedback sense voltage: The voltage, referred to V_{S-} , on the reference feedback terminal while operating in regulation.

Reference amplifier gain: The ratio of the specified reference output change to the change in feedback sense voltage required to produce it.


Feedback current: The absolute value of the current at the feedback terminal when operating in regulation.

Supply current: The current required from the power source to operate the amplifier and reference with their outputs unloaded and operating in the linear range.


Typical Performance Characteristics (Op Amp)

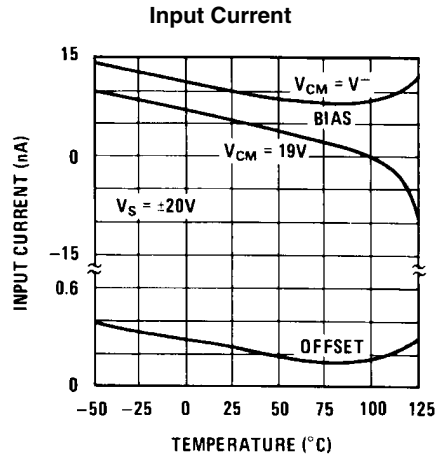


20149718

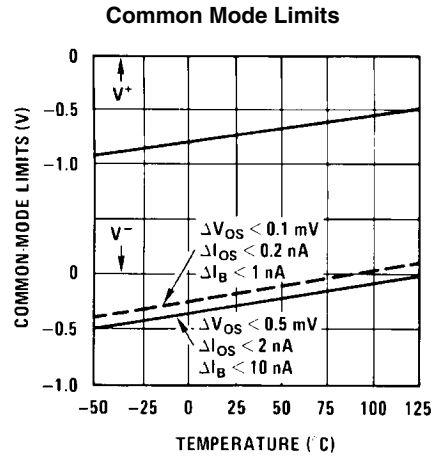


20149719

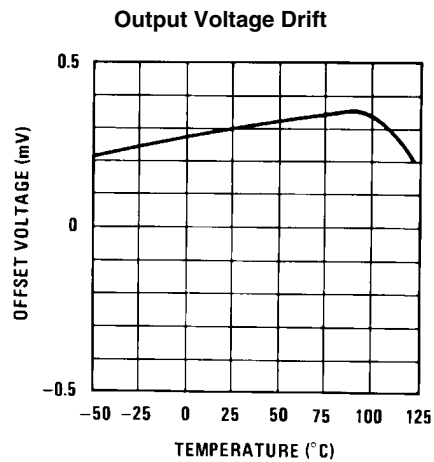


20149720

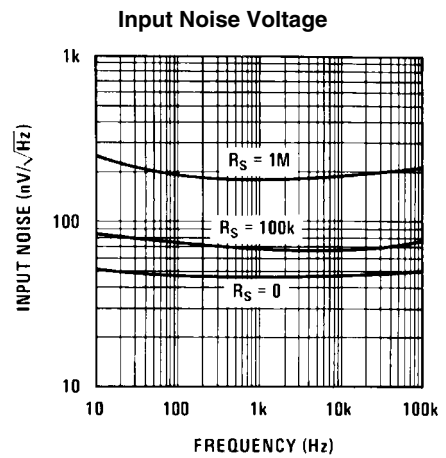







20149721

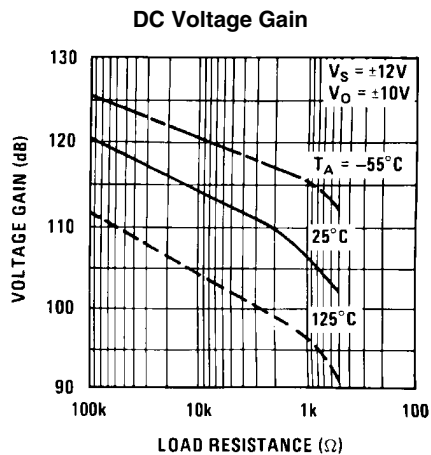


20149722

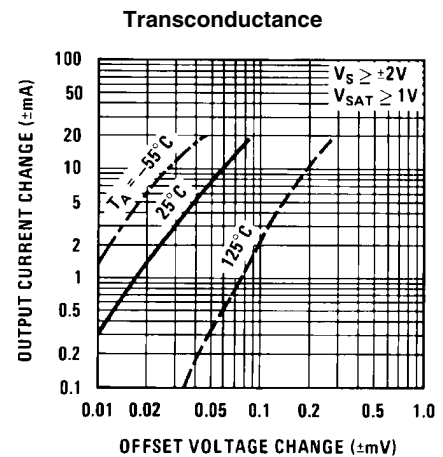

20149723

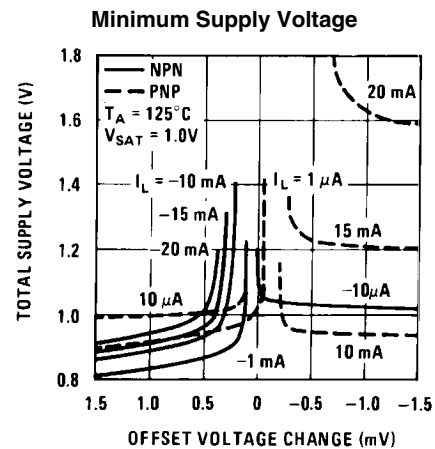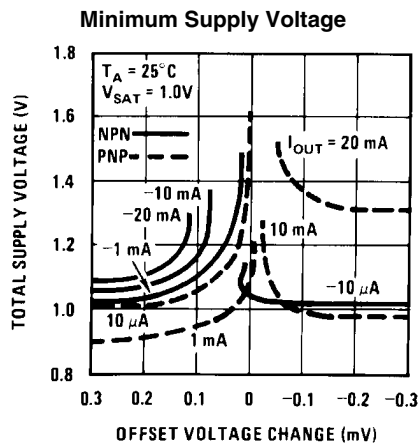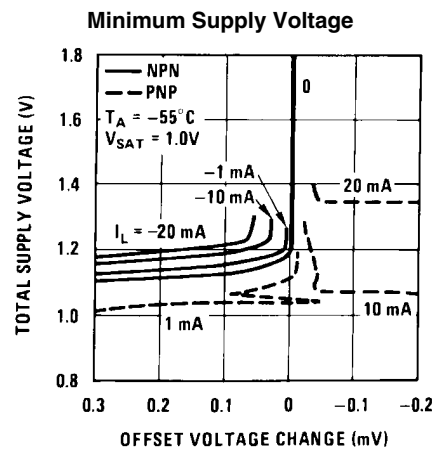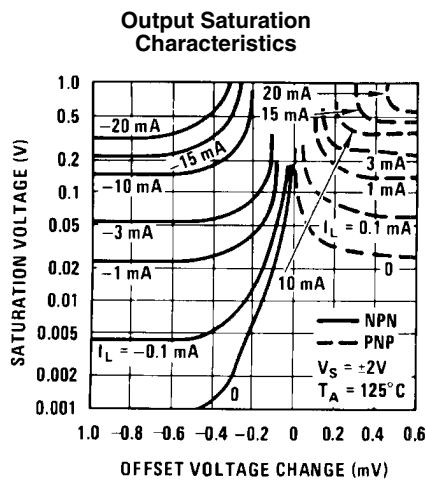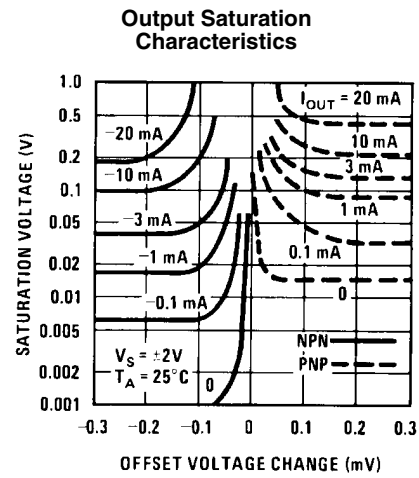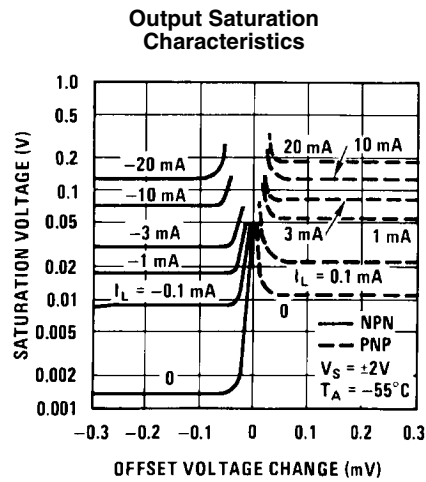


Frequency Response

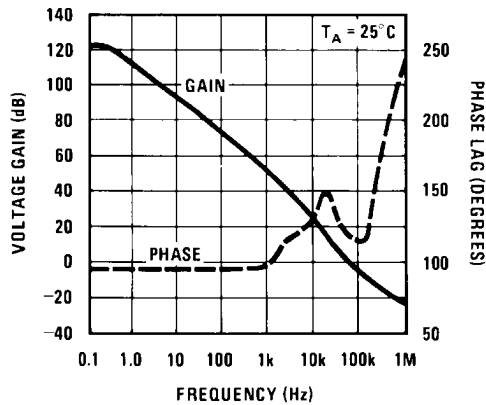


20149730

Output Impedance

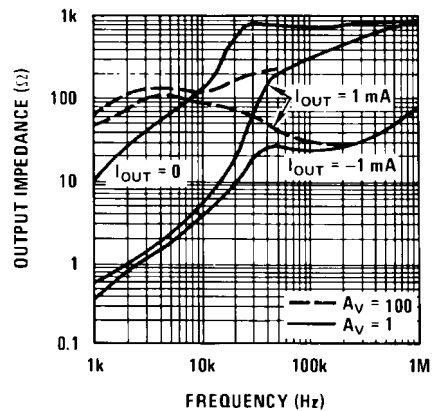


20149731

Typical Stability Range

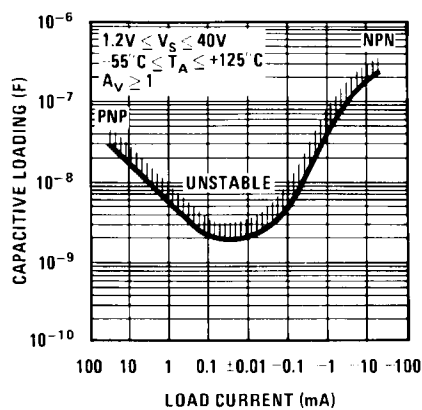


20149732


Large Signal Response

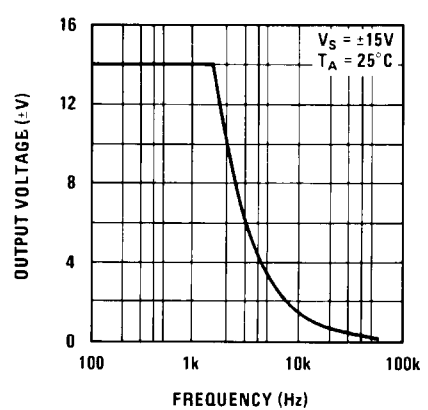

20149733

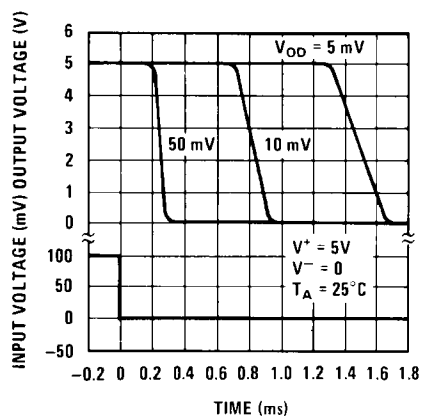
Comparator Response
Time For Various
Input Overdrives

20149734

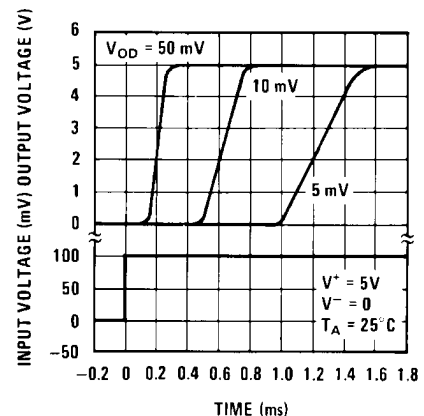Comparator Response
Time For Various
Input Overdrives


20149735

Follower Pulse Response

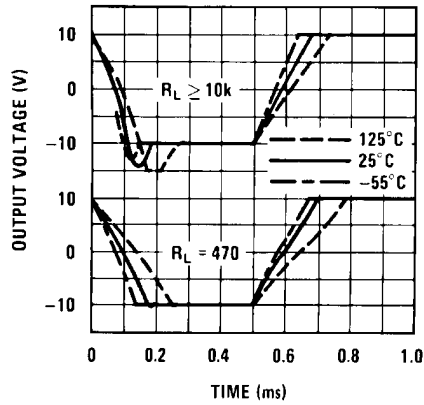


20149736

Noise Rejection

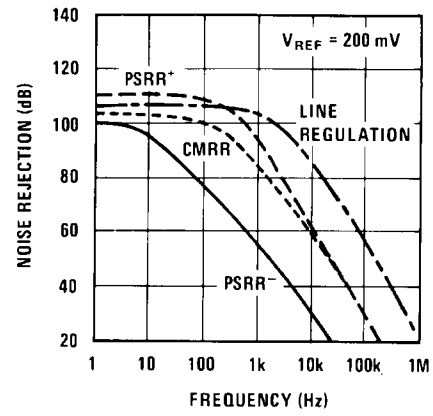


20149737

Rejection Slew Limiting

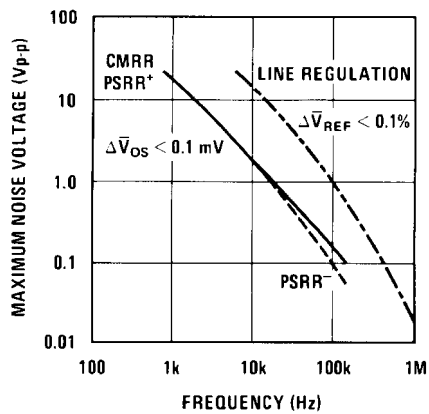


20149738

Supply Current

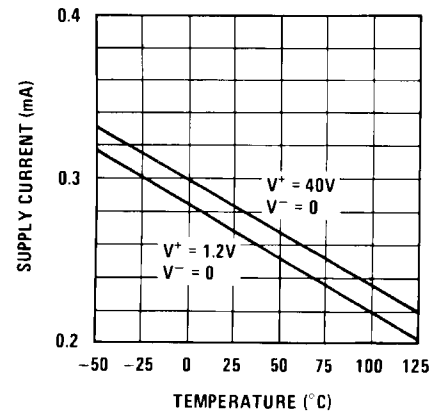


20149739

Thermal Gradient Feedback

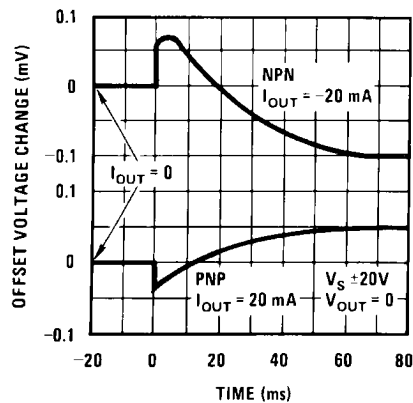


20149740


Thermal Gradient Cross-coupling

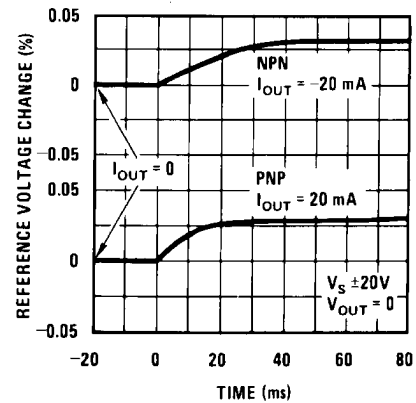


20149741

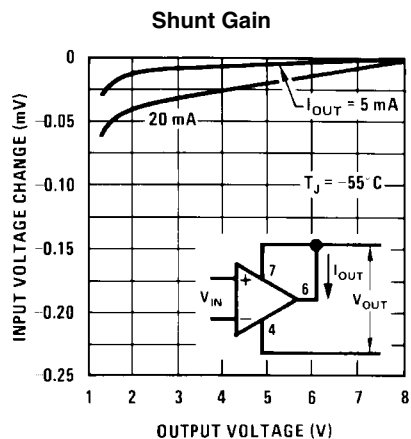


20149742

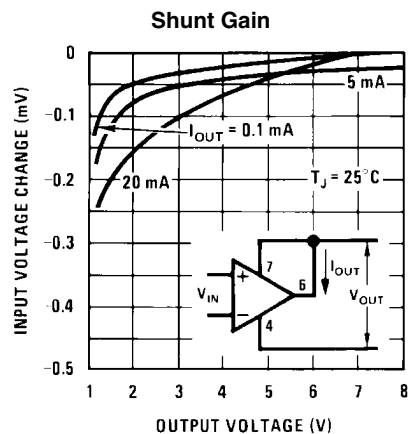


20149743

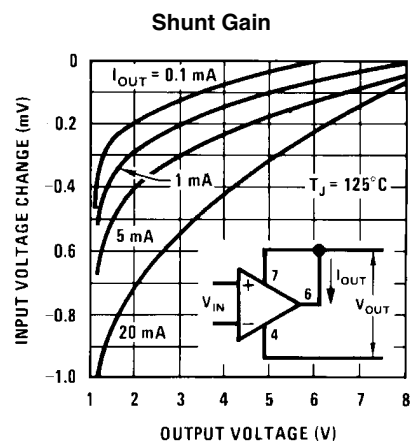


20149744

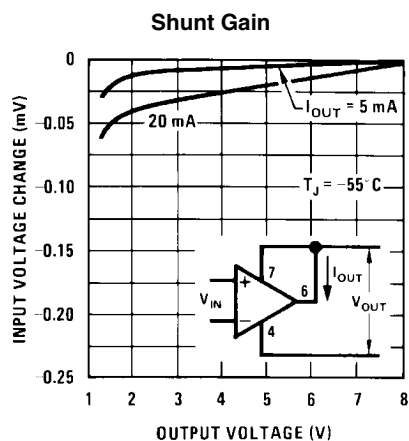

20149742

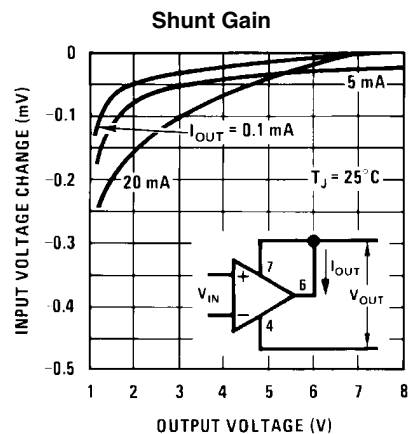


20149743

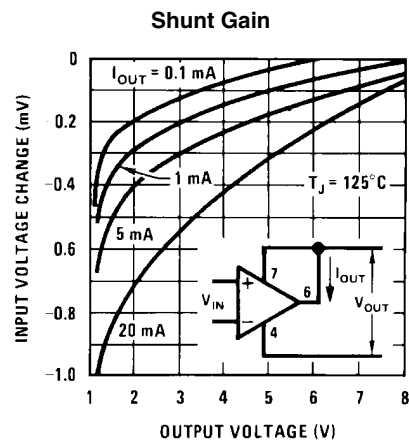


20149744


Typical Performance Characteristics (Reference)

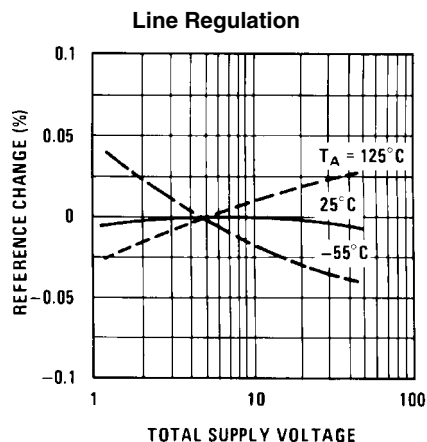


20149745

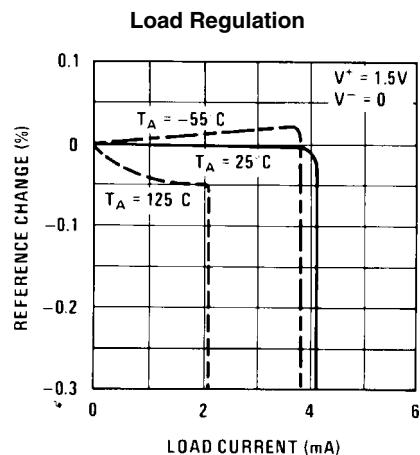


20149746

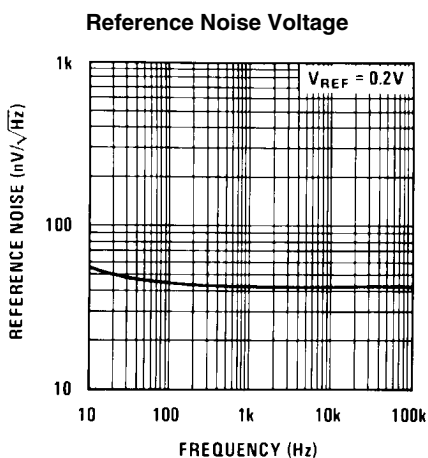


20149747

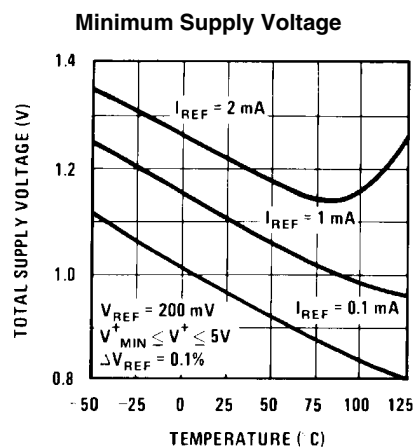

20149748

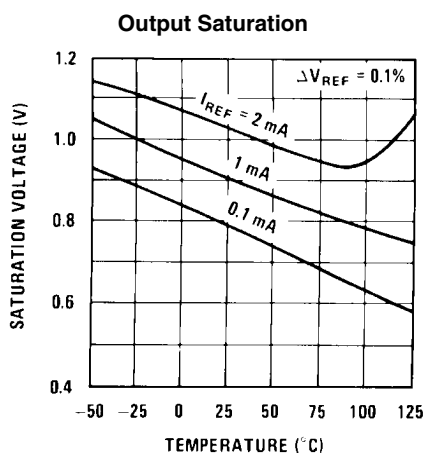

20149749

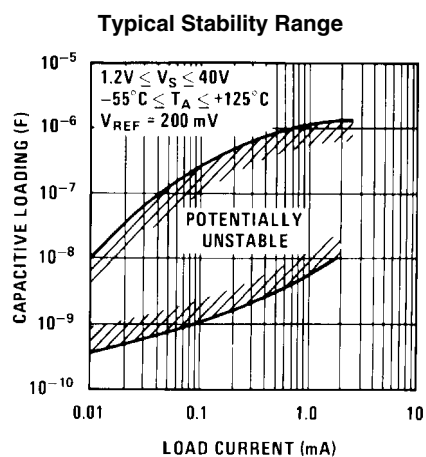


20149750

Typical Applications *(Note 8)*

(Pin numbers are for devices in 8-pin packages)


Op Amp Offset Adjustment

Standard

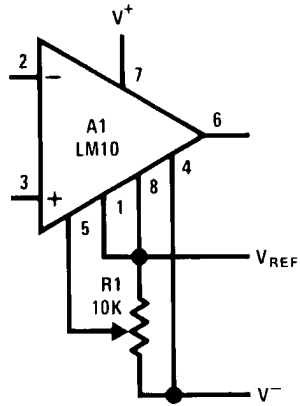


20149751

Limited Range

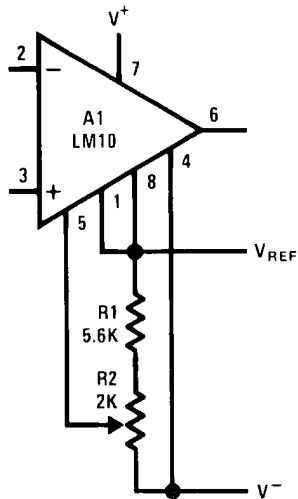

20149752


Limited Range With Boosted Reference

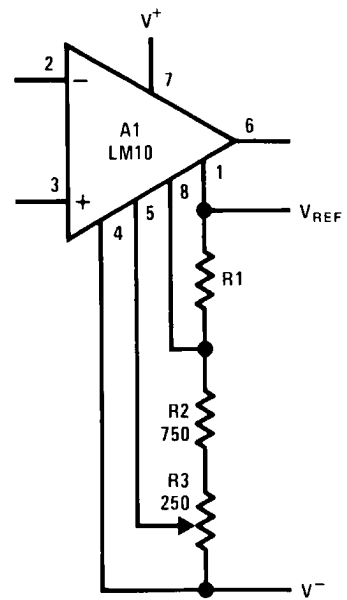

20149753


Positive Regulators (Note 7)

Low Voltage

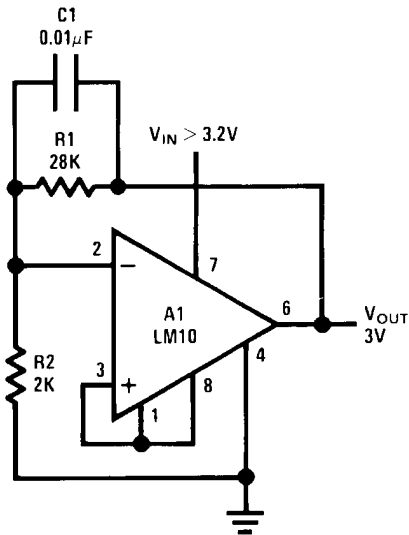


20149754

Best Regulation

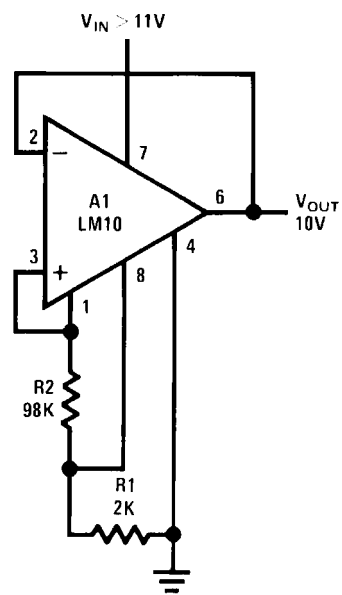

20149755


Zero Output

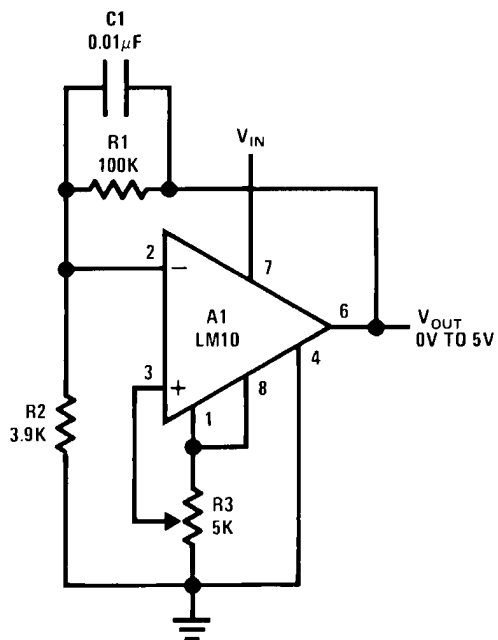

20149756


Note 7: Use only electrolytic output capacitors.

Current Regulator

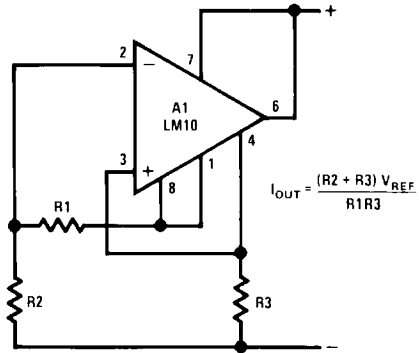

20149757


Shunt Regulator

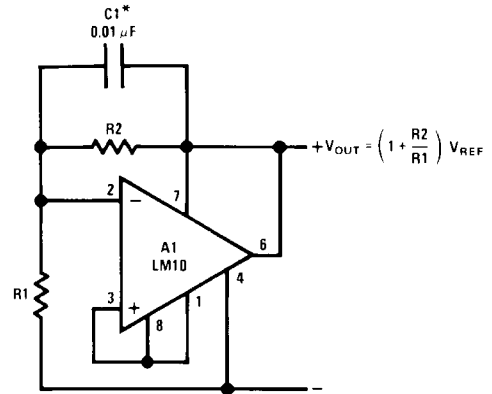

20149758

Required For Capacitive Loading


Negative Regulator

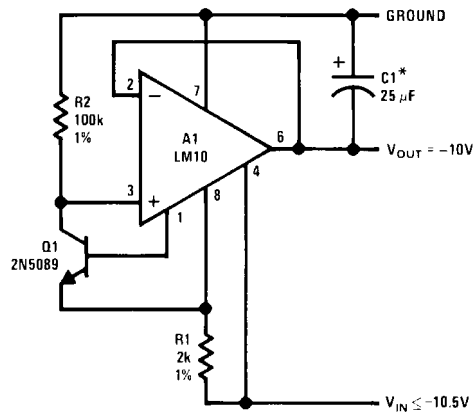

20149759


*Electrolytic

Precision Regulator

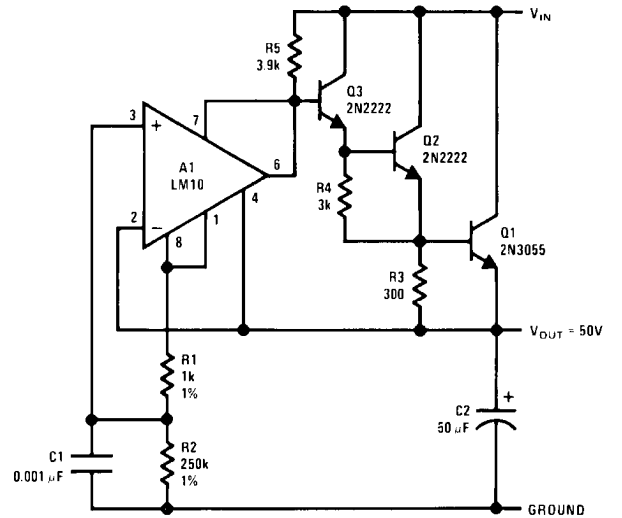

20149760


Laboratory Power Supply

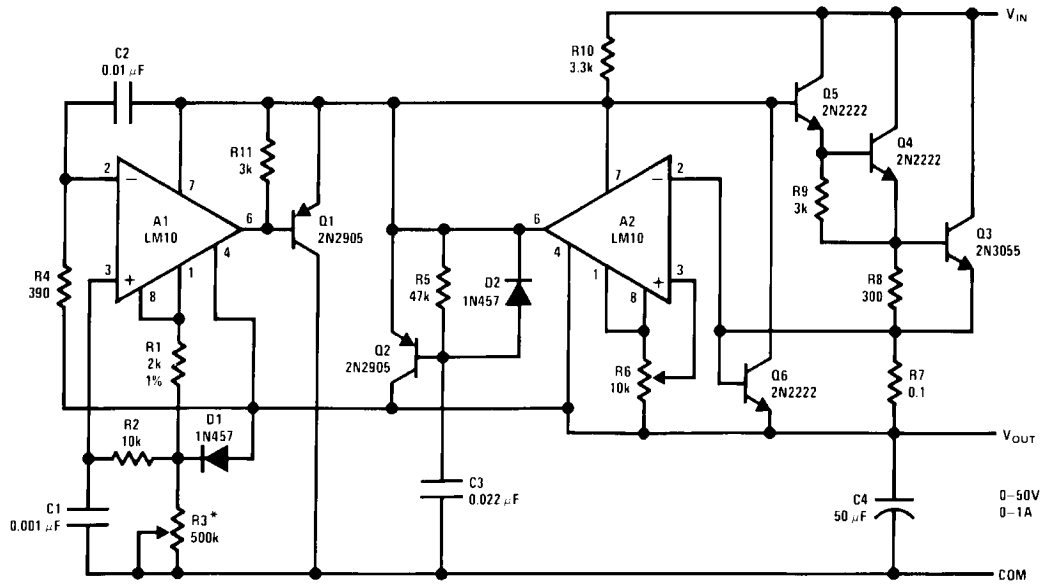

20149761

$$*V_O = 10^{-4} R_3$$

HV Regulator

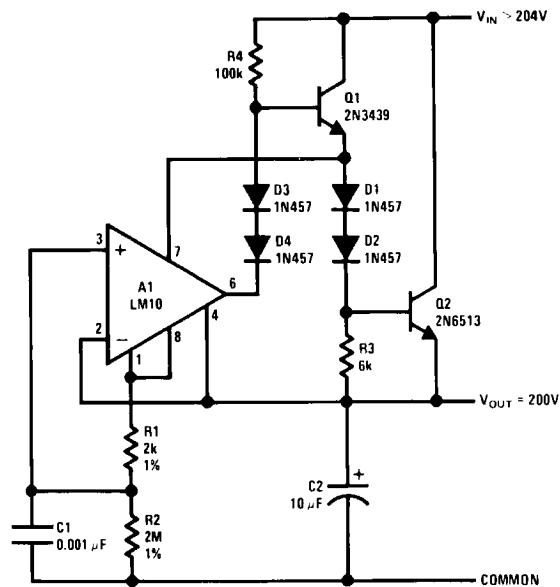


20149762

$$V_{OUT} = \frac{R_2}{R_1} V_{REF}$$


20149784

Protected HV Regulator

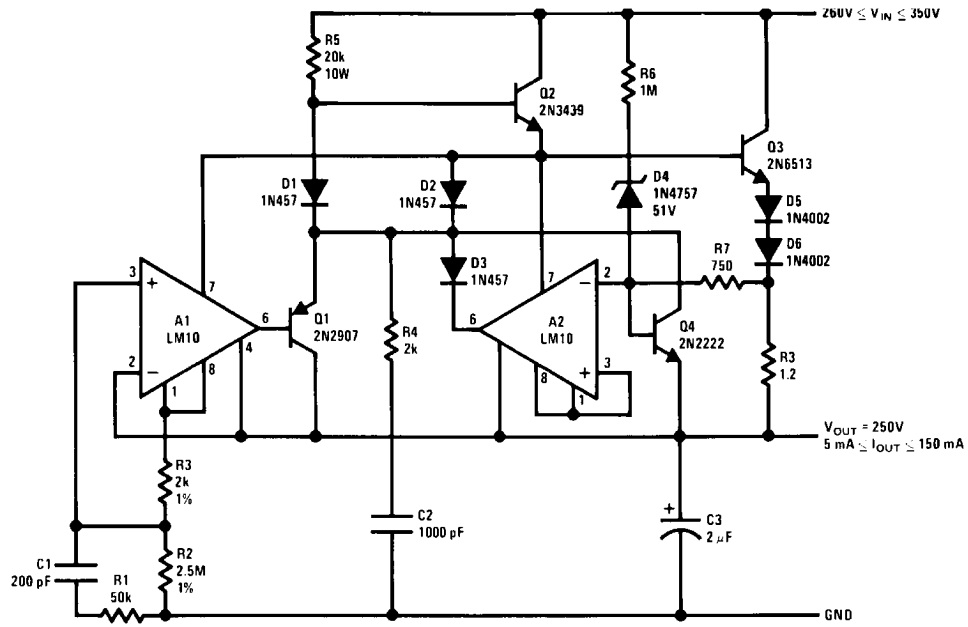

20149763


Flame Detector

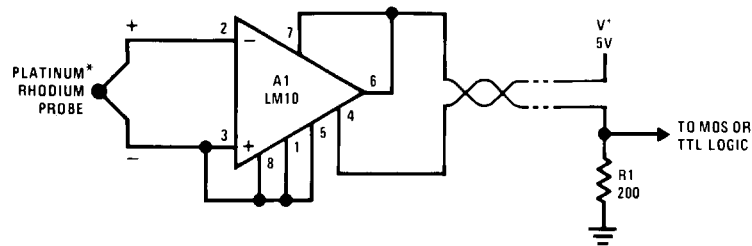

20149764

*800°C Threshold Is Established By Connecting Balance To V_{Ref} .


Light Level Sensor

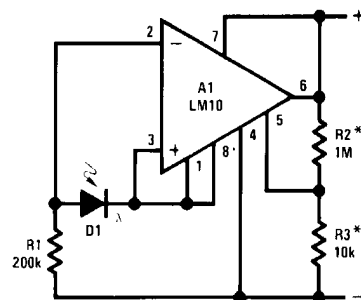

20149765


*Provides Hysteresis

Remote Amplifier

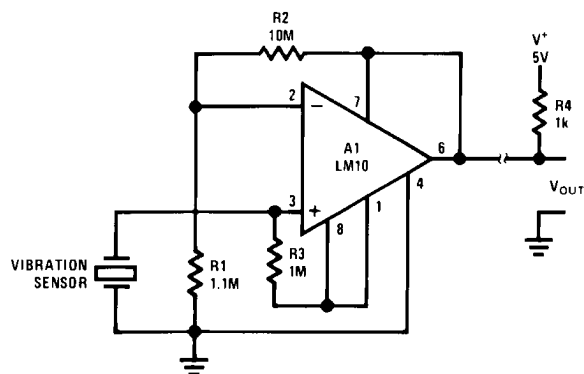


20149766

Remote Thermocouple Amplifier

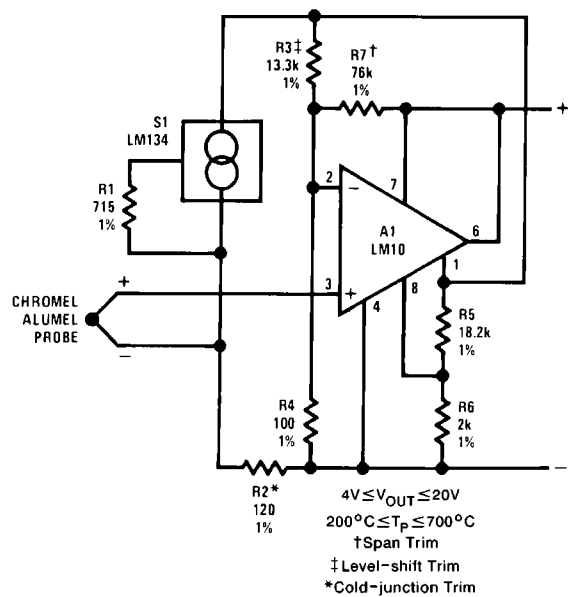


20149767

Transmitter for Bridge Sensor

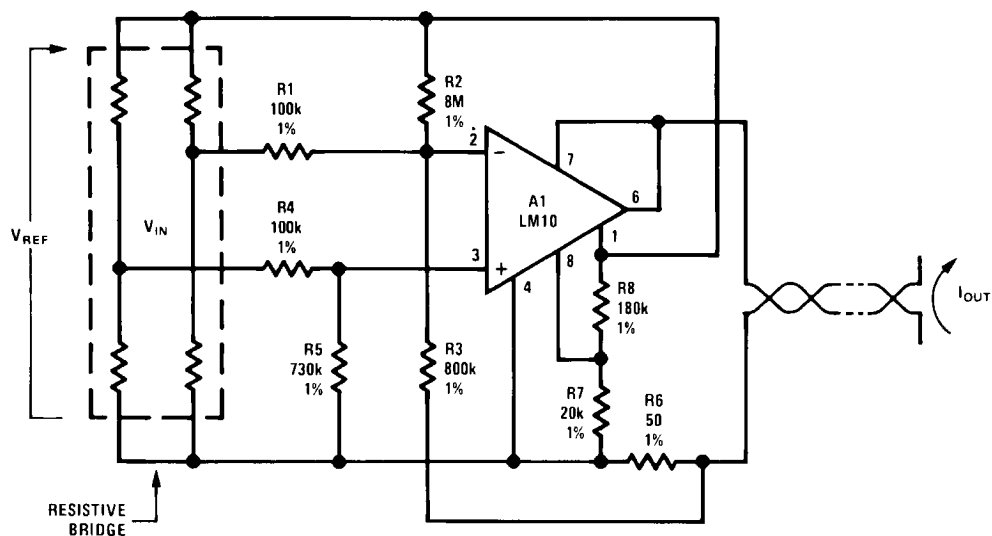

20149768


Precision Thermocouple Transmitter

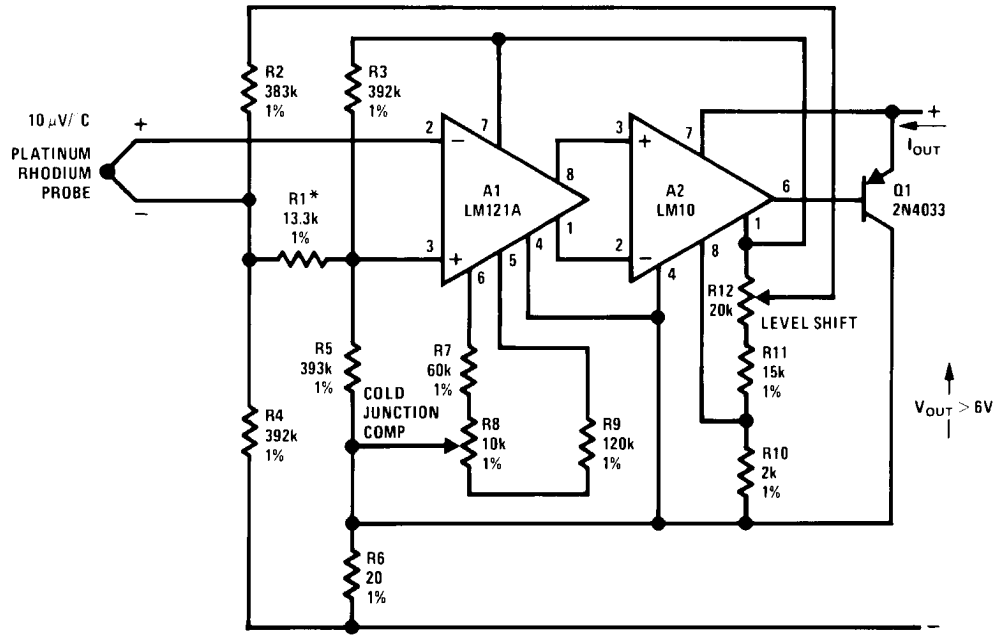

$10 \text{ mA} \leq I_{OUT} \leq 50 \text{ mA}$ $500^\circ\text{C} \leq T_P \leq 1500^\circ\text{C}$ *Gain Trim


20149769

Resistance Thermometer Transmitter

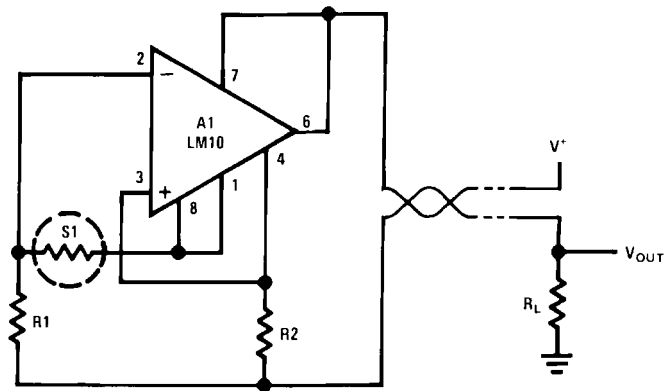

20149770

Optical Pyrometer

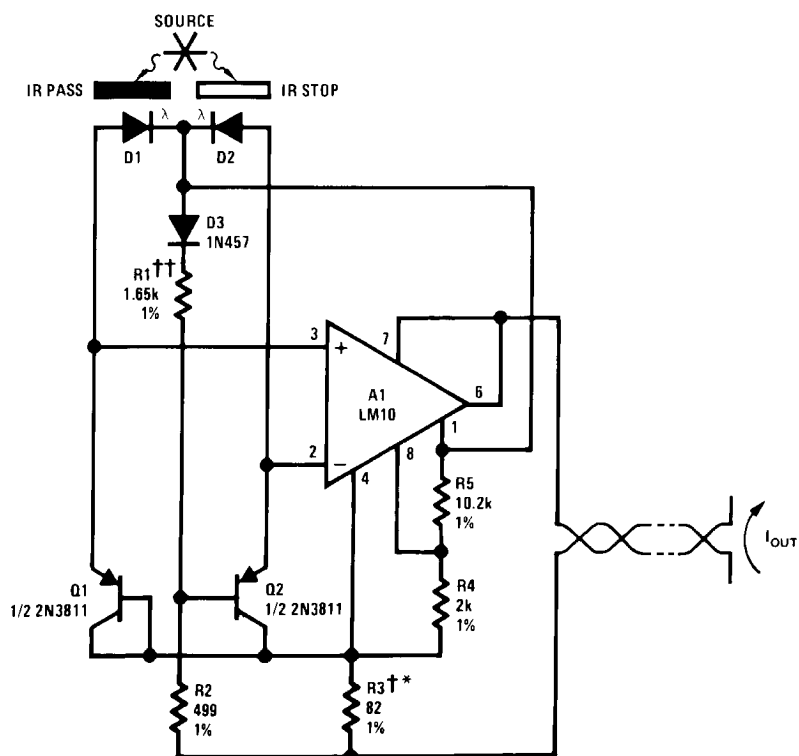

20149771

††Level-shift Trim


*Scale Factor Trim

†Copper Wire Wound

$$1 \text{ mA} \leq I_{OUT} \leq 5 \text{ mA}$$

$$0.01 \leq \frac{I_{D2}}{I_{D1}} \leq 100$$

Thermocouple Transmitter

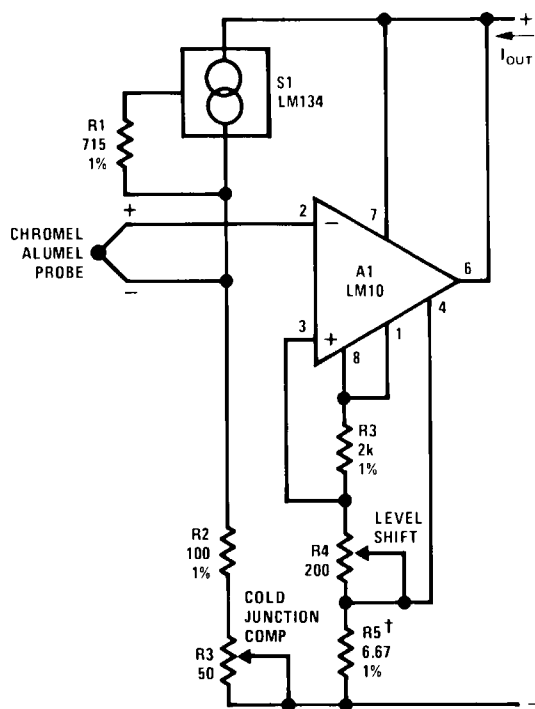


20149772

$$200^{\circ}\text{C} \leq T_p \leq 700^{\circ}\text{C}$$

$$1\text{ mA} \leq I_{\text{OUT}} \leq 5\text{ mA}$$

†Gain Trim

Logarithmic Light Sensor

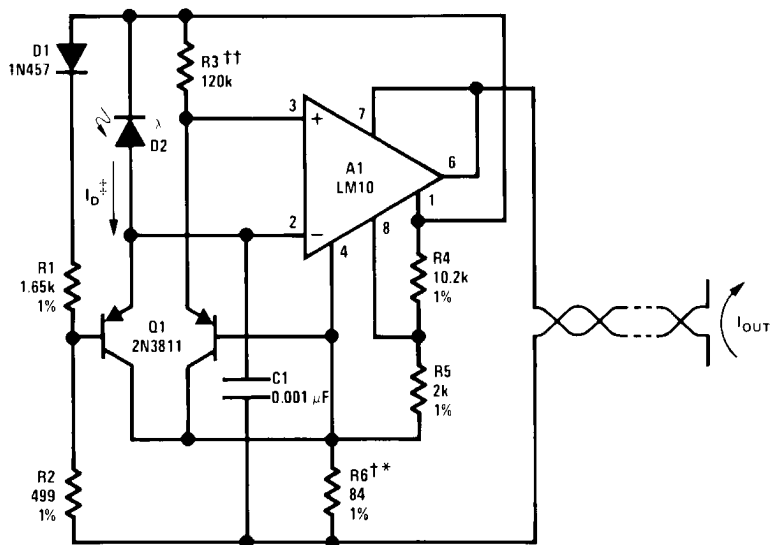

20149773

$$1\text{ mA} \leq I_{\text{OUT}} \leq 5\text{ mA}$$


$$\pm 50\text{ }\mu\text{A} \leq I_D \leq 500\text{ }\mu\text{A}$$

††Center Scale Trim

†Scale Factor Trim


*Copper Wire Wound

Battery-level Indicator

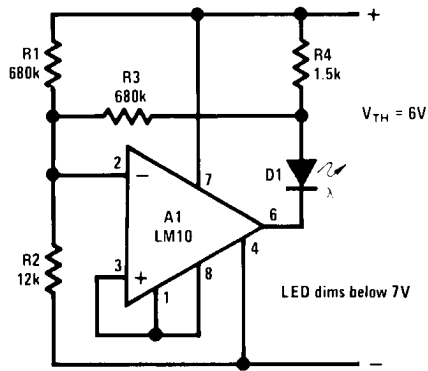


20149774

Battery-threshold Indicator

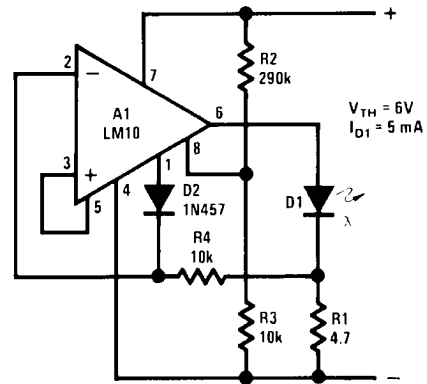


20149775

Single-cell Voltage Monitor

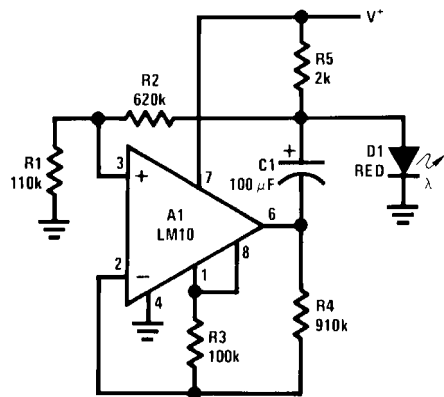


20149776

Double-ended Voltage Monitor

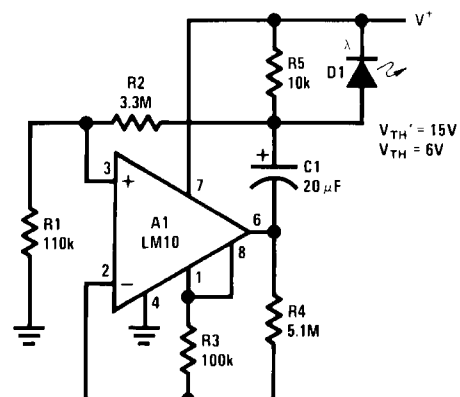


20149777

Meter Amplifier

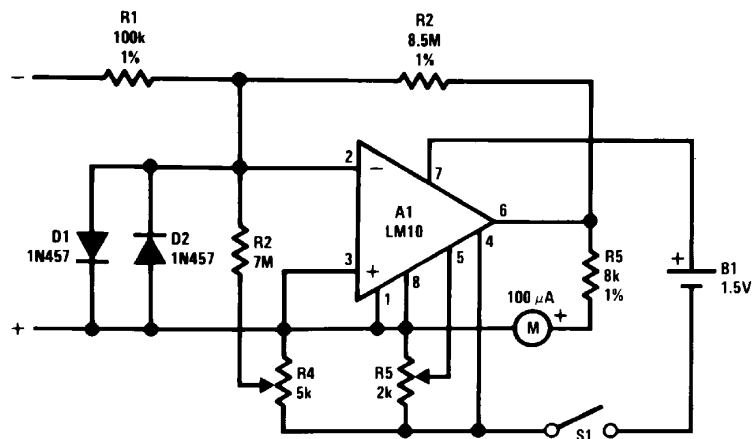

20149778

Thermometer

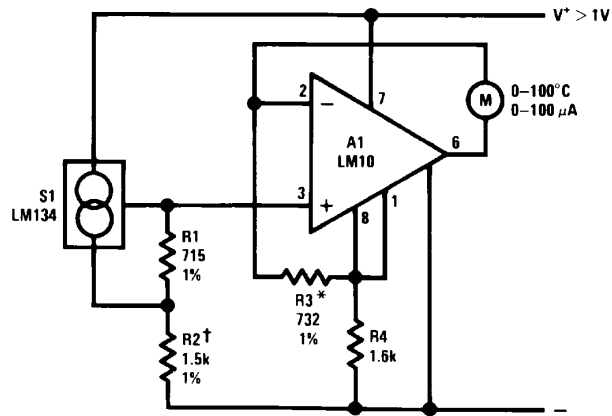


20149779

*Trim For Span

†Trim For Zero


Light Meter

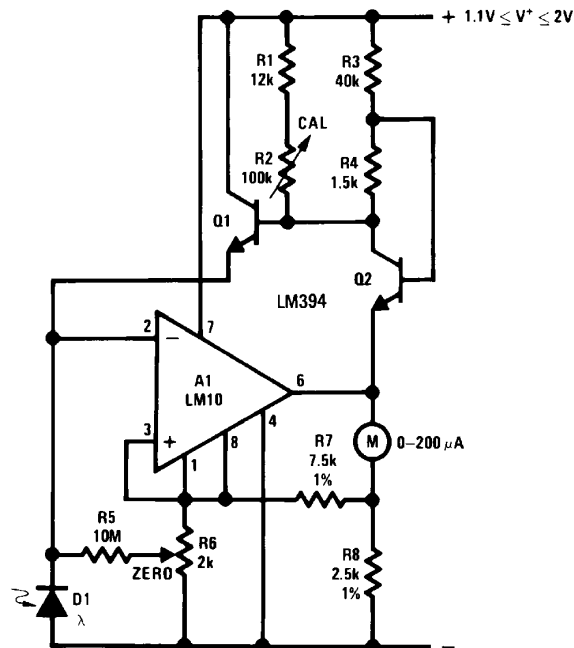

20149780

$$1 \leq \lambda/\lambda_0 \leq 10^5$$

Microphone Amplifier

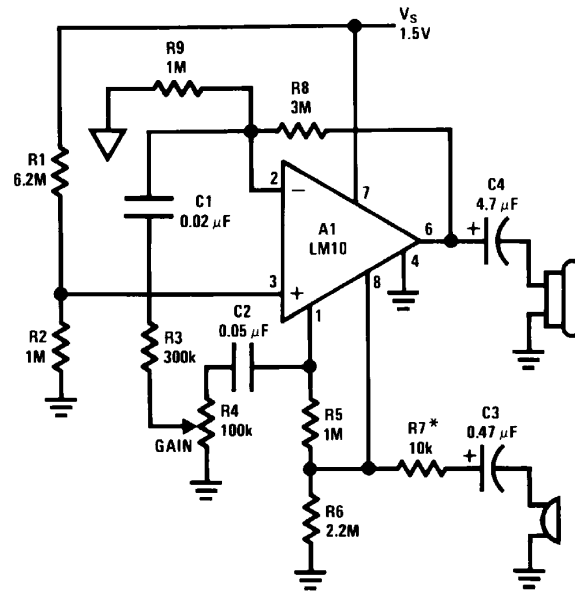


20149781

 $Z_{OUT} \sim 680\Omega @ 5 \text{ kHz}$
 $A_v \leq 1k$
 $f_1 \sim 100 \text{ Hz}$
 $f_2 \sim 5 \text{ kHz}$
 $R_L \sim 500$

*Max Gain Trim

Isolated Voltage Sensor

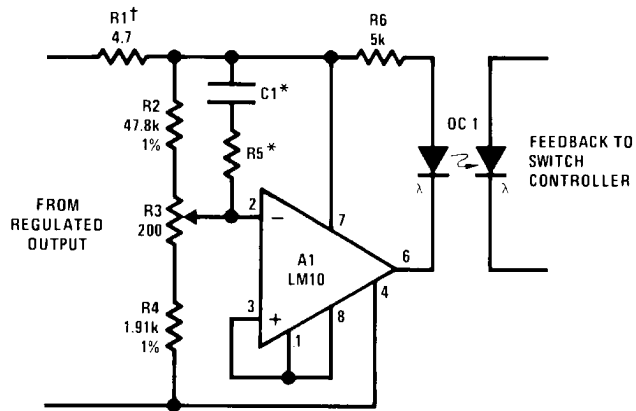


20149782

†Controls "Loop Gain"

*Optional Frequency Shaping

Light-level Controller

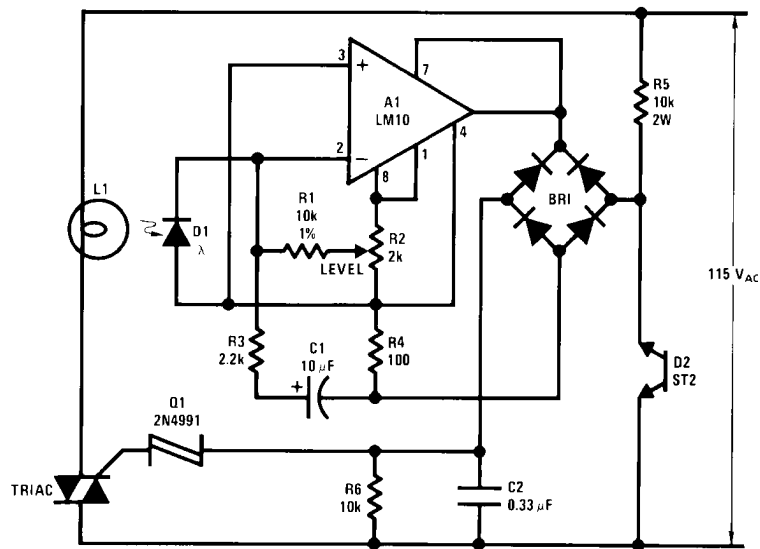

20149783

Note 8: Circuit descriptions available in application note AN-211.

Application Hints


With heavy amplifier loading to V_S^- , resistance drops in the V_S^- lead can adversely affect reference regulation. Lead resistance can approach 1Ω . Therefore, the common to the

reference circuitry should be connected as close as possible to the package.

Revision History

Date Released	Revision	Section	Changes
10/26/2010	A	New release to corporate format	1 MDS converted to standard corporate format. MNLM10-X Rev 0AL will be archived

Physical Dimensions inches (millimeters) unless otherwise noted

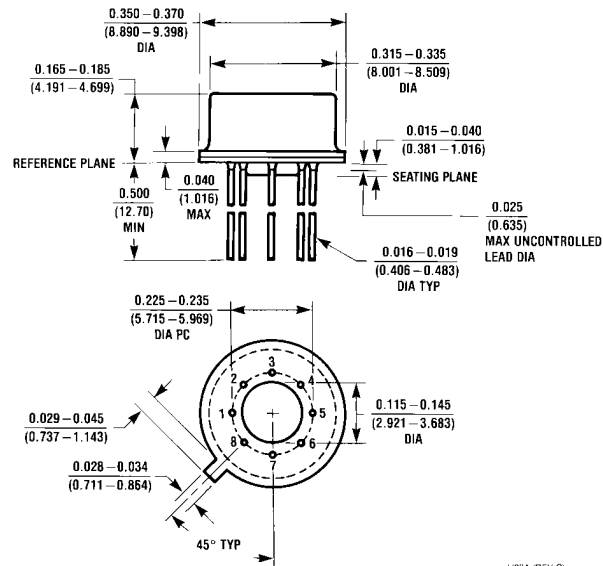

H08A (REV C)

Metal Can Package (H)
NS Package Number H08A

Notes

For more National Semiconductor product information and proven design tools, visit the following Web sites at:
www.national.com

Products		Design Support	
Amplifiers	www.national.com/amplifiers	WEBENCH® Tools	www.national.com/webench
Audio	www.national.com/audio	App Notes	www.national.com/appnotes
Clock and Timing	www.national.com/timing	Reference Designs	www.national.com/refdesigns
Data Converters	www.national.com/adc	Samples	www.national.com/samples
Interface	www.national.com/interface	Eval Boards	www.national.com/evalboards
LVDS	www.national.com/lvds	Packaging	www.national.com/packaging
Power Management	www.national.com/power	Green Compliance	www.national.com/quality/green
Switching Regulators	www.national.com/switchers	Distributors	www.national.com/contacts
LDOs	www.national.com/ldo	Quality and Reliability	www.national.com/quality
LED Lighting	www.national.com/led	Feedback/Support	www.national.com/feedback
Voltage References	www.national.com/vref	Design Made Easy	www.national.com/easy
PowerWise® Solutions	www.national.com/powerwise	Applications & Markets	www.national.com/solutions
Serial Digital Interface (SDI)	www.national.com/sdi	Mil/Aero	www.national.com/milaero
Temperature Sensors	www.national.com/tempsensors	SolarMagic™	www.national.com/solarmagic
PLL/VCO	www.national.com/wireless	PowerWise® Design University	www.national.com/training

THE CONTENTS OF THIS DOCUMENT ARE PROVIDED IN CONNECTION WITH NATIONAL SEMICONDUCTOR CORPORATION ("NATIONAL") PRODUCTS. NATIONAL MAKES NO REPRESENTATIONS OR WARRANTIES WITH RESPECT TO THE ACCURACY OR COMPLETENESS OF THE CONTENTS OF THIS PUBLICATION AND RESERVES THE RIGHT TO MAKE CHANGES TO SPECIFICATIONS AND PRODUCT DESCRIPTIONS AT ANY TIME WITHOUT NOTICE. NO LICENSE, WHETHER EXPRESS, IMPLIED, ARISING BY ESTOPPEL OR OTHERWISE, TO ANY INTELLECTUAL PROPERTY RIGHTS IS GRANTED BY THIS DOCUMENT.

TESTING AND OTHER QUALITY CONTROLS ARE USED TO THE EXTENT NATIONAL DEEMS NECESSARY TO SUPPORT NATIONAL'S PRODUCT WARRANTY. EXCEPT WHERE MANDATED BY GOVERNMENT REQUIREMENTS, TESTING OF ALL PARAMETERS OF EACH PRODUCT IS NOT NECESSARILY PERFORMED. NATIONAL ASSUMES NO LIABILITY FOR APPLICATIONS ASSISTANCE OR BUYER PRODUCT DESIGN. BUYERS ARE RESPONSIBLE FOR THEIR PRODUCTS AND APPLICATIONS USING NATIONAL COMPONENTS. PRIOR TO USING OR DISTRIBUTING ANY PRODUCTS THAT INCLUDE NATIONAL COMPONENTS, BUYERS SHOULD PROVIDE ADEQUATE DESIGN, TESTING AND OPERATING SAFEGUARDS.

EXCEPT AS PROVIDED IN NATIONAL'S TERMS AND CONDITIONS OF SALE FOR SUCH PRODUCTS, NATIONAL ASSUMES NO LIABILITY WHATSOEVER, AND NATIONAL DISCLAIMS ANY EXPRESS OR IMPLIED WARRANTY RELATING TO THE SALE AND/OR USE OF NATIONAL PRODUCTS INCLUDING LIABILITY OR WARRANTIES RELATING TO FITNESS FOR A PARTICULAR PURPOSE, MERCHANTABILITY, OR INFRINGEMENT OF ANY PATENT, COPYRIGHT OR OTHER INTELLECTUAL PROPERTY RIGHT.

LIFE SUPPORT POLICY

NATIONAL'S PRODUCTS ARE NOT AUTHORIZED FOR USE AS CRITICAL COMPONENTS IN LIFE SUPPORT DEVICES OR SYSTEMS WITHOUT THE EXPRESS PRIOR WRITTEN APPROVAL OF THE CHIEF EXECUTIVE OFFICER AND GENERAL COUNSEL OF NATIONAL SEMICONDUCTOR CORPORATION. As used herein:

Life support devices or systems are devices which (a) are intended for surgical implant into the body, or (b) support or sustain life and whose failure to perform when properly used in accordance with instructions for use provided in the labeling can be reasonably expected to result in a significant injury to the user. A critical component is any component in a life support device or system whose failure to perform can be reasonably expected to cause the failure of the life support device or system or to affect its safety or effectiveness.

National Semiconductor and the National Semiconductor logo are registered trademarks of National Semiconductor Corporation. All other brand or product names may be trademarks or registered trademarks of their respective holders.

Copyright© 2010 National Semiconductor Corporation

For the most current product information visit us at www.national.com



**National Semiconductor
Americas Technical
Support Center**
Email: support@nsc.com
Tel: 1-800-272-9959

**National Semiconductor Europe
Technical Support Center**
Email: europe.support@nsc.com

**National Semiconductor Asia
Pacific Technical Support Center**
Email: ap.support@nsc.com

**National Semiconductor Japan
Technical Support Center**
Email: jpn.feedback@nsc.com

IMPORTANT NOTICE

Texas Instruments Incorporated and its subsidiaries (TI) reserve the right to make corrections, modifications, enhancements, improvements, and other changes to its products and services at any time and to discontinue any product or service without notice. Customers should obtain the latest relevant information before placing orders and should verify that such information is current and complete. All products are sold subject to TI's terms and conditions of sale supplied at the time of order acknowledgment.

TI warrants performance of its hardware products to the specifications applicable at the time of sale in accordance with TI's standard warranty. Testing and other quality control techniques are used to the extent TI deems necessary to support this warranty. Except where mandated by government requirements, testing of all parameters of each product is not necessarily performed.

TI assumes no liability for applications assistance or customer product design. Customers are responsible for their products and applications using TI components. To minimize the risks associated with customer products and applications, customers should provide adequate design and operating safeguards.

TI does not warrant or represent that any license, either express or implied, is granted under any TI patent right, copyright, mask work right, or other TI intellectual property right relating to any combination, machine, or process in which TI products or services are used. Information published by TI regarding third-party products or services does not constitute a license from TI to use such products or services or a warranty or endorsement thereof. Use of such information may require a license from a third party under the patents or other intellectual property of the third party, or a license from TI under the patents or other intellectual property of TI.

Reproduction of TI information in TI data books or data sheets is permissible only if reproduction is without alteration and is accompanied by all associated warranties, conditions, limitations, and notices. Reproduction of this information with alteration is an unfair and deceptive business practice. TI is not responsible or liable for such altered documentation. Information of third parties may be subject to additional restrictions.

Resale of TI products or services with statements different from or beyond the parameters stated by TI for that product or service voids all express and any implied warranties for the associated TI product or service and is an unfair and deceptive business practice. TI is not responsible or liable for any such statements.

TI products are not authorized for use in safety-critical applications (such as life support) where a failure of the TI product would reasonably be expected to cause severe personal injury or death, unless officers of the parties have executed an agreement specifically governing such use. Buyers represent that they have all necessary expertise in the safety and regulatory ramifications of their applications, and acknowledge and agree that they are solely responsible for all legal, regulatory and safety-related requirements concerning their products and any use of TI products in such safety-critical applications, notwithstanding any applications-related information or support that may be provided by TI. Further, Buyers must fully indemnify TI and its representatives against any damages arising out of the use of TI products in such safety-critical applications.

TI products are neither designed nor intended for use in military/aerospace applications or environments unless the TI products are specifically designated by TI as military-grade or "enhanced plastic." Only products designated by TI as military-grade meet military specifications. Buyers acknowledge and agree that any such use of TI products which TI has not designated as military-grade is solely at the Buyer's risk, and that they are solely responsible for compliance with all legal and regulatory requirements in connection with such use.

TI products are neither designed nor intended for use in automotive applications or environments unless the specific TI products are designated by TI as compliant with ISO/TS 16949 requirements. Buyers acknowledge and agree that, if they use any non-designated products in automotive applications, TI will not be responsible for any failure to meet such requirements.

Following are URLs where you can obtain information on other Texas Instruments products and application solutions:

Products

Audio	www.ti.com/audio
Amplifiers	amplifier.ti.com
Data Converters	dataconverter.ti.com
DLP® Products	www.dlp.com
DSP	dsp.ti.com
Clocks and Timers	www.ti.com/clocks
Interface	interface.ti.com
Logic	logic.ti.com
Power Mgmt	power.ti.com
Microcontrollers	microcontroller.ti.com
RFID	www.ti-rfid.com
OMAP Mobile Processors	www.ti.com/omap
Wireless Connectivity	www.ti.com/wirelessconnectivity

Applications

Communications and Telecom	www.ti.com/communications
Computers and Peripherals	www.ti.com/computers
Consumer Electronics	www.ti.com/consumer-apps
Energy and Lighting	www.ti.com/energy
Industrial	www.ti.com/industrial
Medical	www.ti.com/medical
Security	www.ti.com/security
Space, Avionics and Defense	www.ti.com/space-avionics-defense
Transportation and Automotive	www.ti.com/automotive
Video and Imaging	www.ti.com/video

TI E2E Community Home Page

e2e.ti.com

Mailing Address: Texas Instruments, Post Office Box 655303, Dallas, Texas 75265
Copyright © 2011, Texas Instruments Incorporated