


1

2

3



4

5

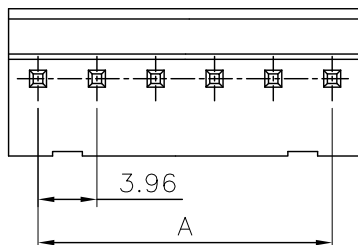

Dimension:

Pos	Dim.A	Dim.B
2	3.96	7.92
3	7.92	11.88
4	11.88	15.84
5	15.84	19.80
6	19.80	23.76
7	23.76	27.72
8	27.72	31.68
9	31.86	35.64
10	35.64	39.60
11	39.60	43.56
12	43.56	47.52
13	47.52	51.48
14	51.48	55.44
15	55.44	59.40
16	59.40	63.36
17	63.36	67.32
18	67.32	71.28
20	75.24	79.20

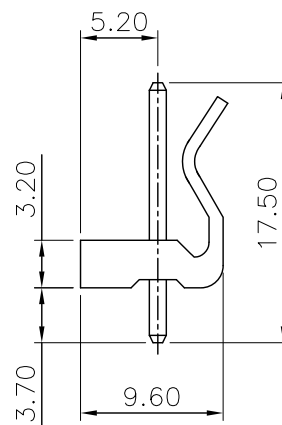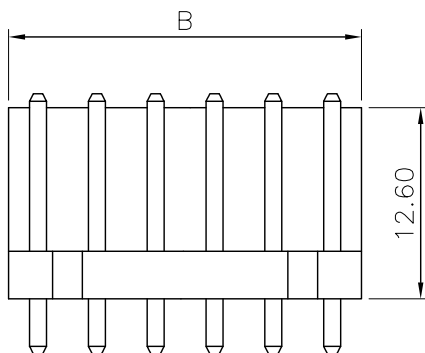

Specifications:

Current rating:7.0 Amps

Voltage rating:250V AC,DC

Dielectric Withstanding:1,500V AC;DC

Operating Temperature:-25°C ~ +85°C

Contact resistance:10mohm Max

Insulation resistance:1,000Mohm min.

Materials and Finish:

Insulator:Nylon 66 (UL94V-2)

Insulator Color:Transparent White

Contact material:Brass


Plating:Tin Plated

How To Order

2219S-XX

No. Of Positions

S:Straight Type

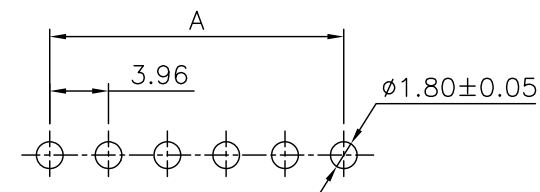

P.C.B. Layout

F			
E			
D			
C			
B	05-OCT-2017		Jamie Wang
A	02-Nov-2005		Cel king
REV	DATE	FILE	BY

DRAWN:
Cel king

CHECKED:
Jeremy Liu

APPROVAL:
Mike Wu

GENERAL TOLERANCE:

.X=±0.20

.XX=±0.15

UNIT: MM

SCALE: 1:1

SHEET: 1 / 1

PROJECTION:



繼德工業股份有限公司
Neltron Industrial Co., Ltd.

DESCRIPTION:

3.96mm Header Straight Type

PART NO:

2219S-XX

SIZE

A4