

REV.	SPECIFICATION	ECN NO.	APPD.
R2			

Material and Plating:

Housing: PBT, 30% Glass Filled,UL94V-0 , BLACK .

Signal Contacts: Phosphor Bronze .

Electrical Characteristics:

Current Rating: 1 AMP.



Dielectric Withstanding Voltage:AC 500V For 1 minute.

Insulator Resistance: 1000M Ω min.at DC 500V.


Contact Resistance: 20m Ω max.at DC 100mA.

Operating Temperature: -55°C~+105°C.


***RoHS Compliant**

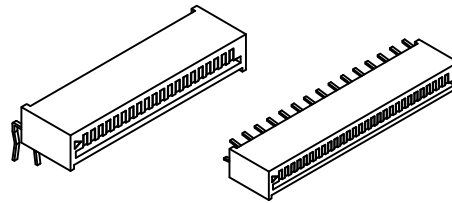

Side Entry



Top Entry



FFC/FPC Dimension

Thickness 0.3±0.05mm



2532-	xx	T	x	A
Series	No. of			A: Tray Package
	Pin Count			U: Tube Package
T: Tin Plated				S: Top Entry (Straight)
				R: Side Entry (Right Angle)

Position	3 Thru 36
Dimension	
A	(No. of Positions X 1.25)+3.4
B	(No. of Positions X 1.25)+1.3
C	(No. of Positions X 1.25)-1.25


Tolerances	Dwg. No.	2532D01001	Title:	
x = ±0.5	Projection			
.x = ±0.25	Unit	mm	Scale	1:1
.xx = ±0.15	Drawn By	YTY06/07'14		

2532 Series	
FFC/FPC Connector	
1.25mm Non ZIF Type	


OUPIN			
OUPIN ELECTRONIC(KUNSHAN) CO., LTD.			
P/N: 2532-xxTxA			
SHEET	1/1	Ver.No.	R2

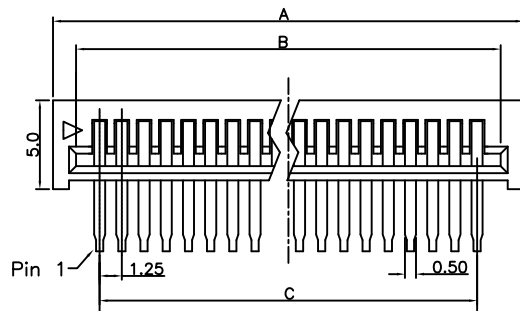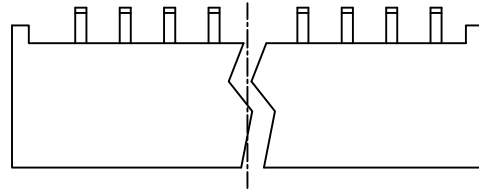

2532-xxTR

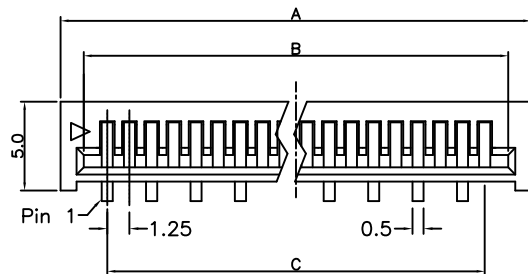

2532-xxTS

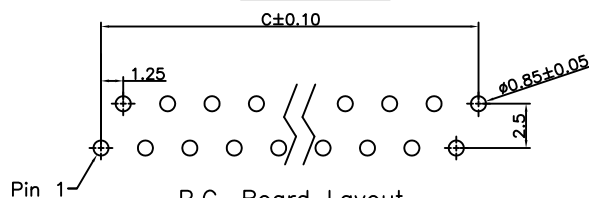

P.C. Board Layout
(Tolerance:±0.05mm)