REV.	SPECIFICATION	ECN NO.	APPD.

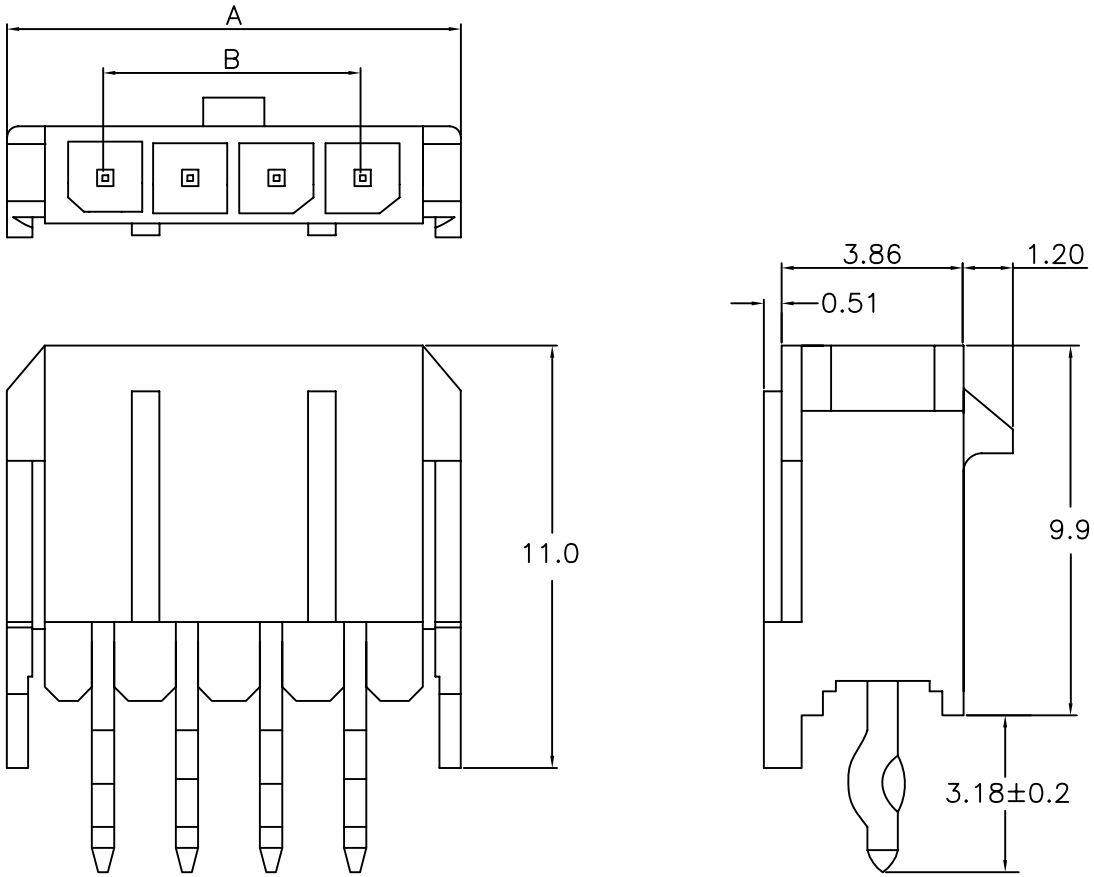

Material:

Housing: Thermoplastic Polyester Glass Filled UL94V-0.
Contact: Copper Alloy.

Electrical Characteristics:

Current Rating: 5.0 AMP
Dielectric Withstanding Voltage: 1500V AC.
Voltage Rating: 250V DC/AC RMS.
Insulator Resistance: 1000MΩ min.
Contact Resistance: 10mΩ max.
Operating Temperature: -25°C ~+85°C.

***RoHS Compliant**

4976-	1	X	xx	T	S	B
Series	Single Row		No. of Position	T: Tin Plated	S: Straight	B: Bulk Package

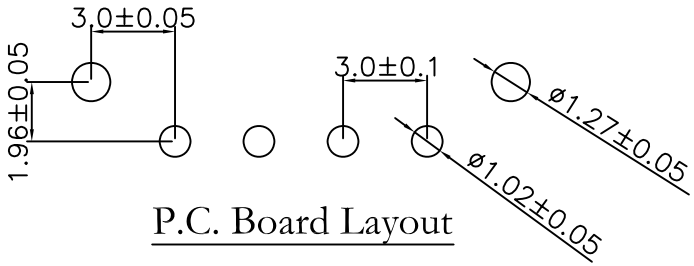

P.C. Board Layout

Position	2 Thru 12
Dimension	
A	3.00 X No. of Positions+3.65
B	3.00 X (No. of Positions−1)

Tolerances	Dwg. No.	4976D01004	Title: 4976 Series 3.00mm Wafer Dip Straight	OUPIIN ELECTRONIC(KUNSHAN) CO., LTD.
x = ±0.5	Projection			P/N: 4976−1XxxTSB
.x = ±0.25	Unit mm	Scale 1:1		SHEET 1/1 Ver.No. R3
.xx = ±0.15	Drawn By	Peggy 06/20'12	①732	