
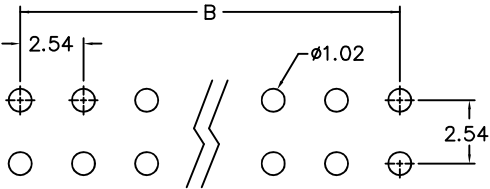

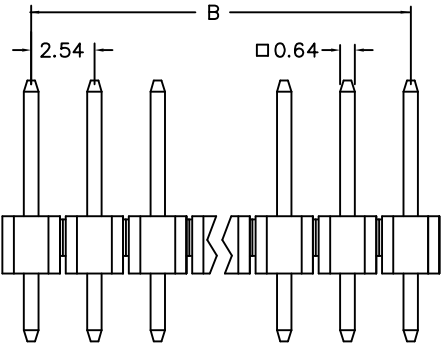



REV.	SPECIFICATION	ECN NO.	APPD.

Material:
Housing: PBT, UL94V-0,Black.
Contacts: Brass, Gold Plated or 80~120u" Tin Plated over Nickel 50u".

Electrical Characteristics:
Current Rating: 3 AMP.
Dielectric Withstanding Voltage:AC 1000V.
Insulator Resistance: 1000MΩ min.
Contact Resistance: 20mΩ max.
Operating Temperature: -40°C~+105°C.

***RoHS Compliant**

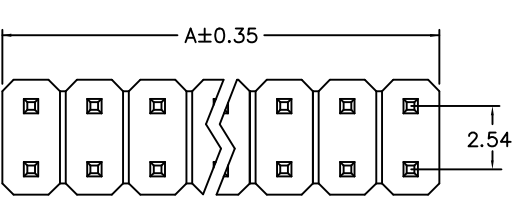

P.C. Board Layout

Standard item:
ie: 2011-2XxxG00SB(Total 11.60mm Dip 3.0mm Mate 6.1mm)
Custom item:
ie: 2011-2XxxG00S-2.5-5.9B(2011-2XxxG00S-L1-L2B)
2.5mm Dip Length(increment of 0.10mm)
5.9mm Mate Length(increment of 0.10mm)

2011- 2 X xx G 00 S B
Series Double Row No. of Pin Per Row G: Gold Plated T: Tin Plated 00: Gold Flash 10: 10u" 15: 15u" 30: 30u" Blank: for Tin Plated S: Straight B: Bulk Package

Positions	2 Thru 80
A	2.54 X No. of Positions/2 -0.25
B	2.54 X No. of Positions/2 -2.54

Tolerances	Dwg No.	2011D01004		Title: 2011 Series Pin Header 2.54mmX2.54mm Double Row Straight Solder Type	 OUPIIN ELECTRONIC(KUNSHAN) CO., LTD.			
x = ±0.5	Projection				P/N: 2011-2XxxG00SB			
.x = ±0.25	Unit mm	Scale	1:1		SHEET 1/1 Ver.No. B4			
.xx = ±0.15	Drawn By	Jerry 11/14'19			535			

535