
2011 SERIES
PIN HEADER 2.54mmX2.54mm(0.100"X0.100")

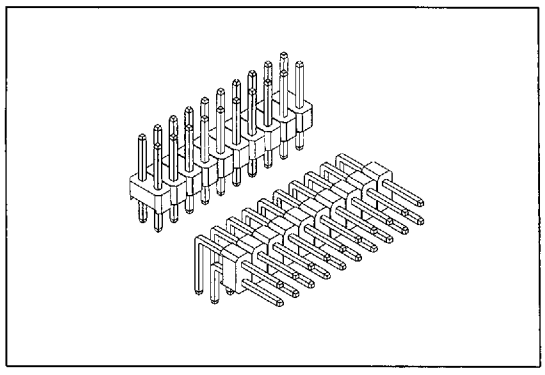



Material:
Housing: 30% Glass filled PBT UL94V-0.
Contacts: Brass
Plating: Gold plated: 5μ" over 50μ" nickel.
Tin plated: 150μ" over 70μ" nickel.

Electrical Characteristics:
Current Rating: 1 AMP
Insulator Resistance: 5000M Ω min. at DC 500V
Contact Resistance: 20m Ω max. at DC 100mA
Operating Temperature: -55°C ~+105°C

Features:
* Available in Straight and Right angle.
* Side-to-side and end-to-end stackable.
* Custom design offered.

Mates with: 1001,2006,2041,2042,2043,2044,2045
2046,2047,2048,2049.

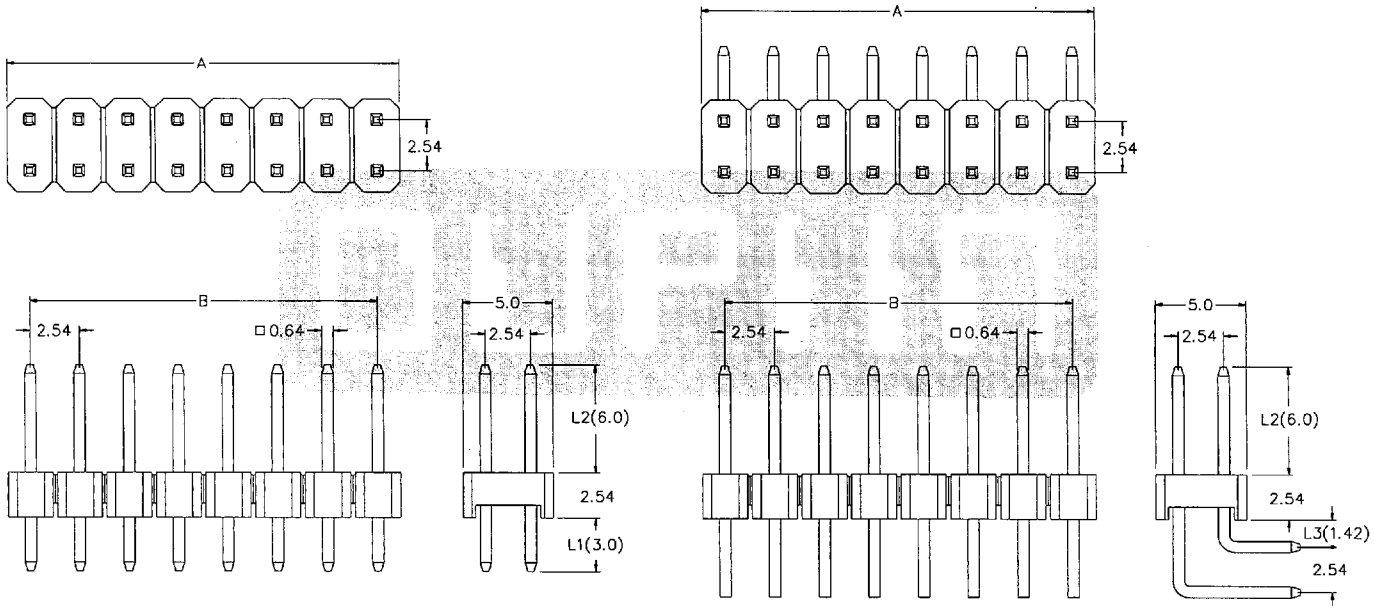

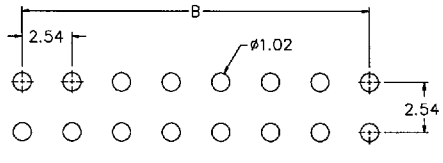

P.C. Board Layout

Position / Dimension	4 Thru 80
A	2.54 X No. of Positions
B	2.54 X No. of Positions -2.54

Ordering information

2011-2 X	40	G	S
Series Double Row	No. of Pin Per Row	G: Gold Plated T: Tin Plated	S: Straight R: Right Angle

Custom Design: Straight (i.e. 2011- 2 X 40 G S / L1 / L2)
Right Angle (i.e. 2011-2 X 40 G R/ L1 / L2 / L3)
L1: Dip Length
L2: Mating length
L3: Extended Length (currently only 1.42mm available.)

9017757 0000005 3T5