
3011 Series

Box Header With Ejectors 2.54mm(0.100")

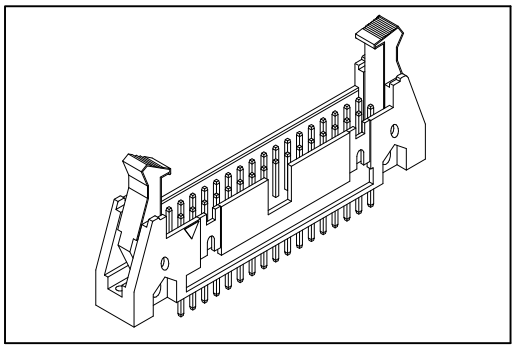

Material:

Housing: Thermoplastic Polyester Glass Filled UL94V-0.
Contacts: Copper Alloy.


Electrical Characteristics:


Current Rating: 2 A.
Dielectric Withstanding Voltage: AC 1000V.
Insulator Resistance: 1000MΩ min.
Contact Resistance: 20mΩ max.
Operating Temperature: -40°C~+105°C.

Features:


* Choices of Eject lever.
* Fully shrouded provides ultimate reliability.
* Black or gray insulator available.
* Additional plating options available.

Mates with: 1001

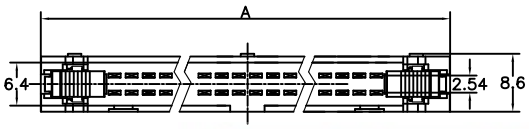





Long Lever




Short Lever

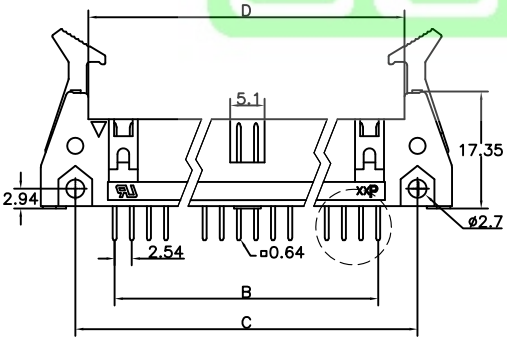




Straight Type




Right Angle Type



P.C. Board Layout



Dip Type



Press Fit Type

Position	Dimension			
	A	B	C	D
10	31.88	10.16	21.84	17.96
14	36.96	15.24	26.92	23.04
16	39.50	17.78	29.46	25.58
20	44.58	22.86	34.54	30.66
26	52.20	30.48	42.16	38.28
30	57.28	35.56	47.24	43.36
34	62.36	40.64	52.32	48.44
40	69.98	48.26	59.94	56.06
50	82.68	60.96	72.64	68.76
60	95.38	73.66	85.34	81.46
64	100.46	78.74	90.42	86.54

Ordering information

3011-	64	G	00	S	P	B	1	A
Series	No. of Pin Count	G: Gold Plated C: Selective Gold	00: G/F	S: Straight R: Right Angle *SW: Straight Wire Wrap	Blank: Dip Type P: Press Fit Type	B: Black Y: Grey	1: With Long Ejectors 2: With Short Ejectors 3: Without Ejectors	A: Tray Package

* Currently only full gold plated Straight wire wrap available and dip length is 15.0mm.

Information including designs, specifications and components may be changed or updated without notice.