

Micro-SIL Reed Relays

Including coaxial types
for stacking on 0.15 x 0.6 inches pitch
giving **SUPERB PACKING DENSITY**

**New
3 Volt
Version**

FEATURES


- **SoftCenter™** construction (see opposite)
- Highest quality instrumentation grade switches
- 1 Form A (energise to make)
- 2 Form A (energise to make)
- 1 Form B (energise to break)
- 1 Form C (changeover)
- 1 Form A Coaxial 50 Ohms impedance (energise to make)
- 1 Form A Coaxial 75 Ohms impedance (energise to make)
- Insulation resistance greater than 10^{12} ohms
- 3, 5 and 12 Volt coils are standard, with or without internal diode

The mu-metal packaged Series 109 and 109RF and the plastic packaged Series 109P and Series 109PH, are magnetically screened single-in-line reed relays that stack on 0.15 inches x 0.6 inches pitch. The adjacent column gives further details of the device types available.

These relays require little more than half the board area of the more usual 0.2 x 0.8 inch devices, this allows around 80 percent more relays onto your board. These are the ideal choice for high density applications such as A.T.E. switching matrices or where very little board area is available.

Mu-metal, due to its high permeability and low magnetic remanance is used to provide magnetic screening. This eliminates problems that would otherwise occur due to magnetic interaction. Interaction is usually measured as a percentage increase in the voltage required to operate a relay when two additional relays, stacked one each side, are themselves operated. An unscreened device mounted on this pitch would have an interaction figure of around 40 percent. Relays of this size without magnetic screening would therefore be totally unsuitable for applications where dense packing is required. Pickering Series 109 and 109RF have a typical interaction figure of 1 percent. Series 109P and 109PH have a typical figure of 3 percent.

Two types of Form A (energise to make) switches are available, a general purpose switch (switch no.1) and a vacuum sputtered ruthenium switch (switch no.2) which is ideal for low level or "cold" switching applications. 5 volt coils normally have a resistance of 500 ohms and 12 volt coils are 1000 ohms. A sensitive single pole 5 volt device with a 1000 ohms coil is also available. Internal back E.M.F. clamping diodes are an option for all types. The small size of these relays often makes it possible to increase the functionality of existing designs without increasing the size of printed circuit boards.

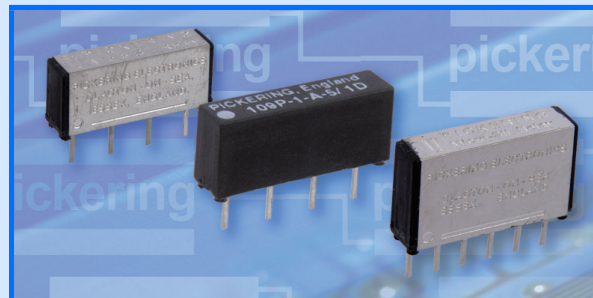

Description of Device Types

See reverse side of data sheet for dimensional details.

Series 109 1 Form A, 2 Form A, 1 Form B, 1 Form C

Similar in construction to the Pickering Series 107 and Series 108. These patented devices are encapsulated in mu-metal cans using very high resistivity resins.

Series 109RF Coaxial 1 Form A

Coaxial relays in mu-metal cans. They are available with a characteristic impedance of either 50 or 75 ohms. For R.F. up to 2GHz, telecoms, video or high speed digital switching up to 500 Mbits/sec. Contact technical sales office for further data.


Series 109P 1 Form A, 1 Form C

The electrical specification and dimensions are identical to the 1 Form A Series 109. They are encapsulated using the same resins within a plastic package which features an internal mumetal magnetic screen.

Series 109PH 1 Form A

The electrical specification is again identical but the mu-metal screened plastic package is slightly different having an increased stand-off from the printed circuit board.

Pickering SoftCenter™ Construction

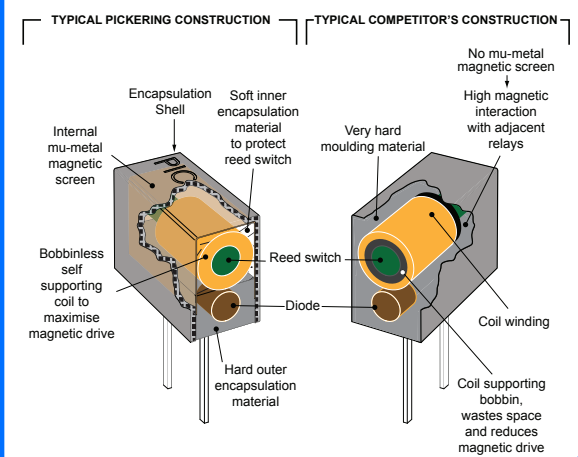

www.pickeringrelay.com

Series 109 switch ratings

The contact ratings for each switch type are shown below:

Sw. No	Switch form	Power rating	Max. switch current	Max. carry current	Max. switching volts
1	A	10 Watts	0.5 Amp.	1.2 Amp.	200
2	A	10 Watts	0.5 Amp.	1.2 Amp.	200
3	C	3 Watts	0.1 Amp.	0.1 Amp.	30

Switch no.1 is intended for general purpose use.

Switch no.2 is intended for switching low levels. It is the ideal switch for A.T.E. systems where cold switching techniques are often used.

Special high sensitivity 5 volt model

Standard 5 volt coils have a resistance of 500 ohms. A special model is available featuring a 1000 ohms, 5 volt coil. This type is identified by a letter "L" in the part number, signifying low coil power. (see table below).

Device type	Package Style	Type Number	Coil voltage	Coil resistance	Max. contact resistance (initial)
1 Form A Switch No. 1	1	109-1-A-5/1D	5	500	0.15 Ohms
		109-1-A-5L/1D	5	1000	0.15 Ohms
		109-1-A-12/1D	12	1000	0.15 Ohms
1 Form A Switch No. 2	1	109-1-A-3/2D	3	330	0.12 Ohms
		109-1-A-5/2D	5	500	0.12 Ohms
		109-1-A-5L/2D	5	1000	0.12 Ohms
		109-1-A-12/2D	12	1000	0.12 Ohms
1 Form B Switch No. 2	2	109-1-B-5/2D	5	750	0.12 Ohms
1 Form C	5	109-1-C-3/3D	3	100	0.25 Ohms
		109-1-C-5/3D	5	150	0.25 Ohms
2 Form A Switch No. 2	3	109-2-A-5/2D	5	375	0.14 Ohms
		109-2-A-12/2D	12	750	0.14 Ohms
50 Ohms Coaxial Switch No. 1	4	109RF50-1-A-5/1D	5	375	0.15 Ohms
		109RF50-1-A-12/1D	12	600	0.15 Ohms
50 Ohms Coaxial Switch No. 2	4	109RF50-1-A-3/2D	3	200	0.12 Ohms
		109RF50-1-A-5/2D	5	375	0.12 Ohms
		109RF50-1-A-12/2D	12	600	0.12 Ohms
75 Ohms Coaxial Switch No. 1	4	109RF75-1-A-5/1D	5	375	0.15 Ohms
		109RF75-1-A-12/1D	12	600	0.15 Ohms
75 Ohms Coaxial Switch No. 2	4	109RF75-1-A-5/2D	5	375	0.12 Ohms
		109RF75-1-A-12/2D	12	600	0.12 Ohms
1 Form A Switch No. 1	6	109P-1-A-5/1D	5	500	0.15 Ohms
		109P-1-A-5L/1D	5	1000	0.15 Ohms
		109P-1-A-12/1D	12	1000	0.15 Ohms
1 Form A Switch No. 2	6	109P-1-A-3/2D	3	250	0.12 Ohms
		109P-1-A-5/2D	5	500	0.12 Ohms
		109P-1-A-5L/2D	5	1000	0.12 Ohms
		109P-1-A-12/2D	12	1000	0.12 Ohms
1 Form C	7	109P-1-C-5/3D	5	150	0.25 Ohms

When an internal diode is required, the suffix D is added to the part number as shown in the table. If a diode is not required, the D suffix should be omitted.

Switch life

The life of a reed relay will depend upon the switch load and the end of life criteria. As an example, with an 'end of life' contact resistance specification of 0.5 ohms, switching low loads (10 volts at 10mA resistive) or when 'cold' switching, typical life will be 1000 Million operations. At the maximum load of 10 Watts (resistive), typical life will be 10 Million operations. In the event of abusive conditions, for example high currents due to capacitive inrushes, this figure will reduce considerably. Switch type number /1 is the preferred option where higher currents are involved, switch type number /2 is preferred for low level or 'cold' switching.

Pickering will be pleased to perform life testing with any particular load condition, do not hesitate to contact our Engineering Department.

Pickering Electronics Limited
Stephenson Road
Clacton-on-Sea
CO15 4NL
England
email: sales@pickeringrelay.com
Tel. (UK) 01255 428141
(International) +44 1255 428141
Fax. (UK) 01255 475058
(International) +44 1255 475058




ISO9001
Manufacture of Reed Relays
FM 29036


Pin configuration and dimensional data

Dimensions in Inches (Millimetres in brackets).


Package Style 1

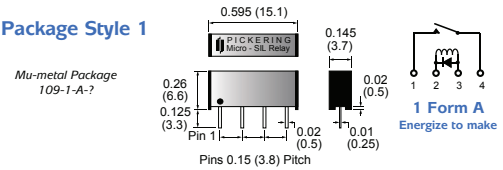


Package Style 2

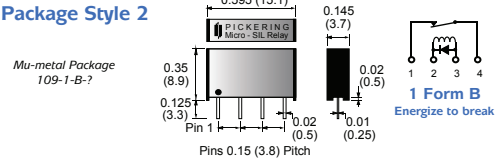


Package Style 3

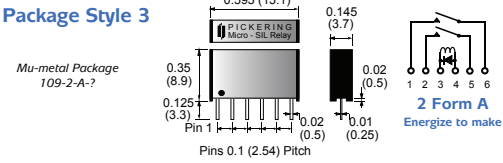


Package Style 4

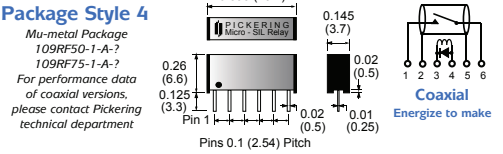


Package Style 5

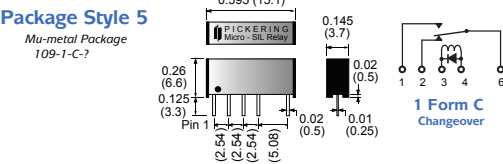

Package Style 6

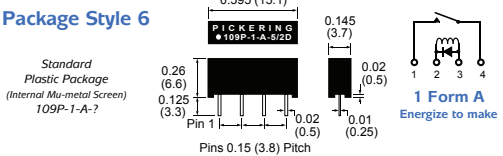

Package Style 7

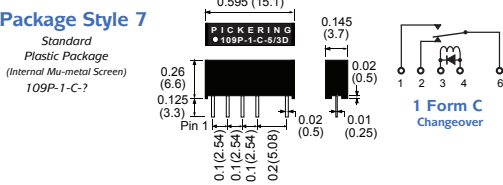

Alternative pin configurations

Alternative pin configurations are available, for example, 1 Form A relays with pins on 0.1 inches (2.54mm) pitch to enable insertion into standard SIL sockets. Please contact our technical sales office for further information

Order Code

The following example indicates data required to process your order promptly:

109 - 1 - A - 5 / 2 D

Series _____
Number of reeds _____
Switch form _____
Coil voltage _____
Switch number (1 or 2 See table adjacent) _____
Diode if fitted (Omit if not required) _____

Please ask us for a FREE evaluation sample