

This document is the property of Berg Electronics. The design and specifications disclosed hereon are proprietary and shall not be reproduced, copied or used for manufacture or sale of devices without expressed written authorization.


PART NO. 28JR175-1

MATERIAL

BODY: BERYLLIUM COPPER, QQ-C-530, ALLOY 173, 1/2 HD
CONTACT: TFE FLUOROCARBON, ASTM-D1710, TYPE 1, GRADE 1
INSULATOR: PROPRIETARY BRIGHT NICKEL (IP23)
CONTACT: GOLD

IMPEDANCE: 50 OHMS
FREQUENCY RANGE: DC-4 GHZ
VOLTAGE RATING: 500 VRMS
INSULATION RESISTANCE: 5,000 MEGOHMS
V.S.W.R.: 1.30 MAX. TO 4 GHZ
CONNECTOR MEETS M39012

COVER DRAWING

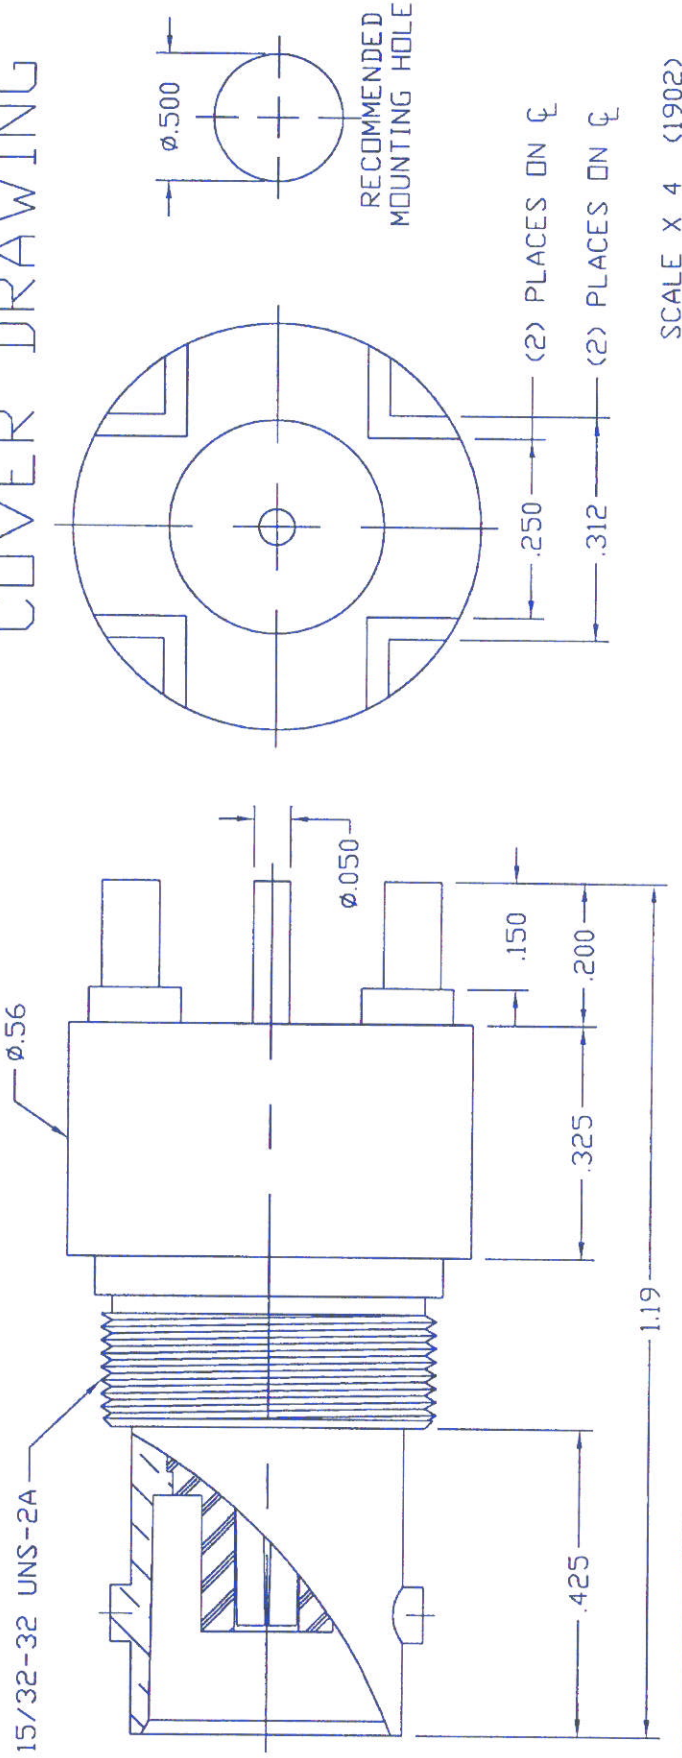

SCALE X 4 (1902)

APPROVED	TOLERANCES (EXCEPT AS NOTED)	DRAWN BY: T.L.BROWNING	DATE: 10/2/92	TITLE: BNC JACK
	DIM. .XX ±.020 .XXX ±.005 ANGLES ±1° CONC. .005 TIR SURF. 64 √	SCALE:	CAD FILE:	RECEPTACLE
				SINGLE HOLE MT.
				P.C.B. MOUNT
	FSCM NO. 24931			PART NO. 28JR175-1
				SHT. 1 OF 1