


1. Description

The ADM3485E is a 3.3V powered, half-duplex, low-power RS-485 transceiver that fully meets the requirements of the TIA/EIA-485 standard. The ADM3485E includes a driver and a receiver, both of which can be independently enabled and disabled. When both are disabled, both the driver and the receiver output a high impedance state. The ADM3485E has a 1/8 load that allows 256 ADM3485E transceivers to be connected to the same communication bus. Error-free data transfer of up to 12Mbps is possible. The ADM3485E operates from a voltage range of 3.0 to 3.6V and features fail-safe, over temperature protection, current limit protection, over-voltage protection, and other functions.

2. Features

- 3.3V power supply, half-duplex
- 1/8 unit load allows up to 256 devices on the bus
- Driver output short-circuit protection function
- Over temperature protection function
- Low power shutdown function
- Receiver open circuit protection function
- Strong anti-noise ability
- Integrated transient voltage resistance function
- Transmission rate up to 12Mbps in an electrical noise environment;

3. Pinning information

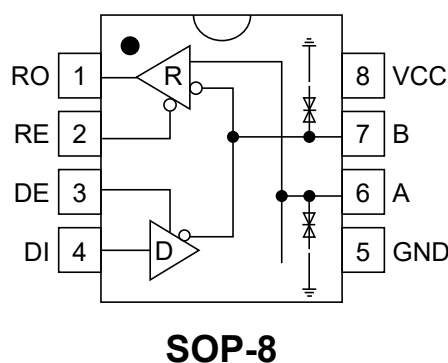



4. Limiting Values

Parameter	Symbol	Value	Units
Supply voltage	V_{CC}	7	V
Voltage of control port	/RE, DE, DI	-0.3 to 7	V
Bus side input voltage	A, B	-7 to 13	V
Receiver output voltage	RO	-0.3 to 7	V
Operating temperature range		-40 to 85	°C
Storage temperature range		-60 to 150	°C
Welding temperature		300	°C
Continuous power dissipation	SOP-8	400	mW

The maximum limit parameter value means that exceeding these values may cause irreversible damage to the device. Under these conditions, it is not conducive to the normal operation of the device. Continuous operation of the device under the maximum allowable rating may affect the reliability of the device. The reference point of all voltages is ground.



5.Pin Functions

Pin number	Pin name	Pin function
1	RO	Receiver output When /RE is low level: if $A-B \geq 200\text{mV}$, RO=high; if $A-B \leq -200\text{mV}$, RO=low
2	/RE	Receiver output enable control When /RE is low level, receiver output is enabled, and RO output is available. When /RE is high level, receiver output is disabled, and RO is in high impedance state. When /RE is high level and DE is low level, the device enters low power consumption mode.
3	DE	Driver output enable control When DE is high level, driver output is available; when DE is low level, the output is in high impedance state. When /RE is high level and DE is low level, the device enters low power consumption mode.
4	DI	Driver input When DE is high level, the DI low level forces the non-inverting driver output A low and inverting driver output B high; The DI high level forces the non-inverting driver output A high and inverting driver output B low.
5	GND	Ground
6	A	Non-inverting receiver input and non-inverting driver output
7	B	Inverting receiver input and inverting driver output
8	VCC	Power supply



6.Driver Electrical Characteristics

($V_{CC}=5V \pm 5\%$, $T_A=T_{MIN}$ to T_{MAX} , unless otherwise noted.) (Notes 1, 2)

Parameter	Symbol	Conditions	Min	Typ	Max	Units
Differential output voltage (no load)	V_{OD1}			3.3		V
Differential output voltage	V_{OD2}	Figure 2, $R_L=54\Omega$	1.2		V_{CC}	V
		Figure 2, $R_L=100\Omega$	2		V_{CC}	V
Change in magnitude of differential output voltage (NOTE1)	ΔV_{OD}	Figure 2, $R_L=54\Omega$			0.2	V
Common mode output voltage	V_{OC}	Figure 2, $R_L=54\Omega$			3	V
Change in magnitude of common mode output voltage (NOTE1)	ΔV_{OC}	Figure 2, $R_L=54\Omega$			0.2	V
Input high voltage	V_{IH}	DE, DI, /RE	2			V
Input low voltage	V_{IL}	DE, DI, /RE			0.8	V
Logic input current	I_{IN1}	DE, DI, /RE	-2		2	μA
Output short-circuit current,short-circuit to high	I_{OSD1}	Short-circuit to 0V~12V			250	mA
Output short-circuit current,short-circuit to low	I_{OSD2}	Short-circuit to -7V~0V	-250			mA
Thermal shutdown threshold				140		$^{\circ}C$
Thermal shutdown hysteresis				20		$^{\circ}C$

(unless otherwise stated $V_{CC}=3.3V \pm 10\%$, $Temp=T_{MIN} \sim T_{MAX}$, typical value is $V_{CC}=+3.3V$, $T_{emp}=25^{\circ}C$)

NOTE1: ΔV_{OD} and ΔV_{OC} are the changes in V_{OD} and V_{OC} amplitude caused by a change of DI state of the input signal.



7. Receiver Electrical Characteristics

Parameter	Symbol	Conditions	Min	Typ	Max	Units
Input current (A, B)	I_{IN2}	DE=0V, $V_{CC}=0$ or 3.3V, $V_{IN}=12V$			125	μA
		DE=0V, $V_{CC}=0$ or 3.3V, $V_{IN}=-7V$	-100			μA
Positive-going input threshold voltage	V_{IT+}	$-7V \leq V_{CM} \leq 12V$			200	mV
Negative-going input threshold voltage	V_{IT-}	$-7V \leq V_{CM} \leq 12V$	-200			mV
Hysteresis voltage	V_{hys}	$-7V \leq V_{CM} \leq 12V$	10	30		mV
High level output voltage	V_{OH}	$I_{OUT}=-2.5mA$, $V_{ID}=200$ mV	$V_{CC}-1.5$			V
Low level output voltage	V_{OL}	$I_{OUT}=2.5mA$, $V_{ID}=-200$ mV			0.4	V
Tristate leakage current	I_{OZR}	$0.4V < V_O < 2.4V$			± 1	μA
Receiver input resistance	R_{IN}	$-7V \leq V_{CM} \leq 12V$	96			k Ω
Receiver short-circuit current	I_{OSR}	$0V \leq V_O \leq V_{CC}$	± 8		± 60	mA

(unless otherwise stated $V_{CC}=3.3V \pm 10\%$, Temp= $T_{MIN} \sim T_{MAX}$, typical value is $V_{CC}=+3.3V$, Temp= $25^{\circ}C$)

8. Supply Current

Parameter	Symbol	Conditions	Min	Typ	Max	Units
Supply current	I_{CC1}	/RE=0V, DE=0V		520	800	μA
	I_{CC2}	/RE= V_{CC} , DE= V_{CC}		540	700	μA



9.Driver Switching Characteristics

Parameter	Symbol	Conditions	Min	Typ	Max	Units
Driver differentialoutput delay	t_{DD}	$R_{DIFF}=60\Omega$, $C_{L1}=C_{L2}=100pF$			125	μA
Driver differentialoutput transition time	t_{TD}	(see Figure 3 and Figure 4)	-100			μA
Driver propagationdelay, low-to-high	t_{PLH}	$R_{DIFF}=27\Omega$			200	mV
Driver propagationdelay, high-to-low	t_{PHL}	(see Figure 3 and Figure 4)	-200			mV
$ t_{PLH} - t_{PHL} $	t_{PDS}		10	30		mV
Driver enable to output high	t_{PZH}	$R_L=110\Omega$, (see Figure 5, 6)	$V_{CC}-1.5$			V
Driver enable to output low	t_{PZL}				0.4	V
Driver disable time from low	t_{PLZ}				± 1	μA
Driver disable time from high	t_{PHZ}		96			k Ω
Driver enable from shutdownto output high	t_{DSH}		± 8		± 60	mA
Driver enable from shutdownto output low	t_{DSL}					



10. Receiver Switching Characteristics

Parameter	Symbol	Conditions	Min	Typ	Max	Units
Receiver input to output delay (low to high)	t_{RPLH}	$C_L=15pF$ See Figure 7 and Figure 8		80	150	ns
Receiver input to output delay (high to low)	t_{RPHL}			80	150	ns
$ t_{RPLH} - t_{RPHL} $	t_{RPDS}			7	10	ns
Receiver enable to output low	t_{RPZL}	$C_L=15pF$ See Figure 7 and Figure 8		20	50	ns
Receiver enable to output high	f_{RPZH}			20	50	ns
Receiver disable time from low	t_{PRLZ}			20	45	ns
Receiver disable time from high	f_{PRHZ}			20	45	ns
Receiver enable from shutdown to output high	f_{RPSH}			200	1400	ns
Receiver enable from shutdown to output low	t_{RPSL}			200	1400	ns
Time to shutdown	t_{SHDN}	NOTE2	80		300	ns

NOTE2: The device is put into shutdown by bringing RE high and DE low. If the enable inputs are in this state for less than 80ns, the device is guaranteed not to enter shutdown. If the enable inputs are in this state for at least 300ns, the device is guaranteed to have entered shutdown.



3.3V power supply, up to 256 nodes, 12Mbps half-duplex,
RS485/RS422 transceiver

11.Function Table

Driver

Control		Input	Output	
/RE	DE	DI	A	B
X	1	1	H	L
X	1	0	L	H
0	0	X	Z	Z
1	0	X	Z (shutdown)	
X: don't care; Z: high impedance				

Receiver

Control		Input	Output
/RE	DE	A-B	RO
0	X	≥200mV	H
0	X	≤-200mV	L
0	X	Open/short-circuit	H
1	X	X	Z
X: don't care; Z: high impedance			



12. Test Circuit




Figure 1. Driver Differential Output Voltage and Common-Mode Output Voltage

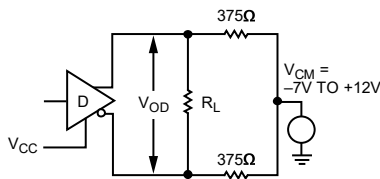


Figure 2. Driver Differential Output Voltage with Varying Common-Mode Voltage


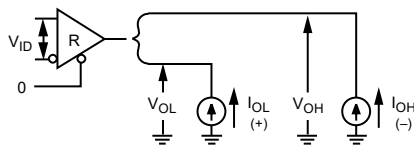


Figure 3. Receiver Output Voltage High and Output Voltage Low

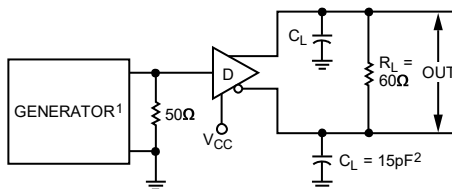

¹PPR=250kHz, 50% DUTY CYCLE, $t_r \leq 6.0\text{ns}$, $Z_o=50\Omega$.
² C_L INCLUDES PROBE AND STRAY CAPACITANCE.


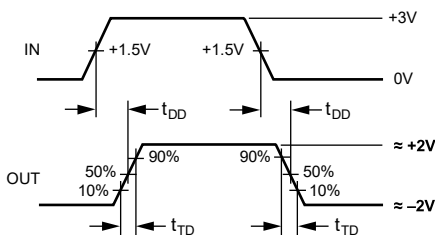


Figure 4. Driver Differential Output Delay and Transition Times

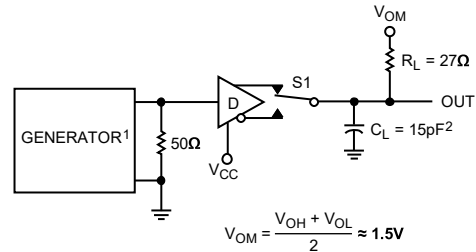

¹PPR=250kHz, 50% DUTY CYCLE, $t_r \leq 6.0\text{ns}$, $Z_o=50\Omega$.
² C_L INCLUDES PROBE AND STRAY CAPACITANCE.


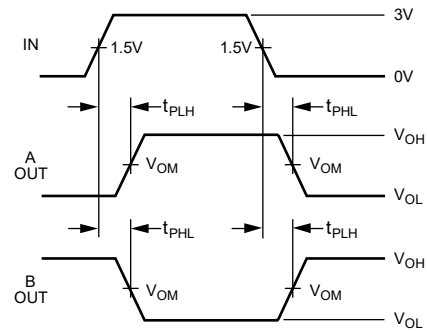


Figure 5. Driver Propagation Delays

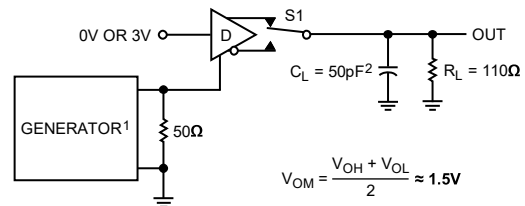

¹PPR=250kHz, 50% DUTY CYCLE, $t_r \leq 6.0\text{ns}$, $Z_o=50\Omega$.
² C_L INCLUDES PROBE AND STRAY CAPACITANCE.


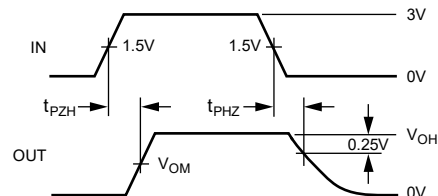



Figure 6. Driver Enable and Disable Times (t_{PZH} , t_{PSH} , t_{PHZ})



3.3V power supply, up to 256 nodes, 12Mbps half-duplex,
RS485/RS422 transceiver

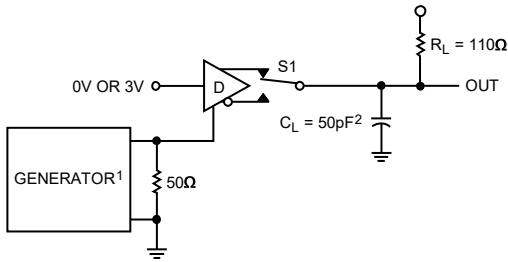

¹PPR=250kHz, 50% DUTY CYCLE, $t_R \leq 6.0\text{ns}$, $Z_0=50\Omega$.
² C_L INCLUDES PROBE AND STRAY CAPACITANCE.

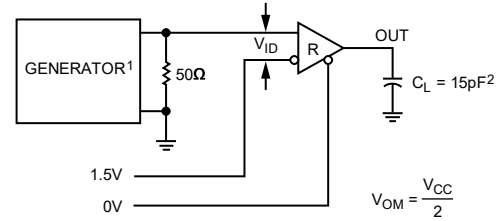

¹PPR=250kHz, 50% DUTY CYCLE, $t_R \leq 6.0\text{ns}$, $Z_0=50\Omega$.
² C_L INCLUDES PROBE AND STRAY CAPACITANCE.

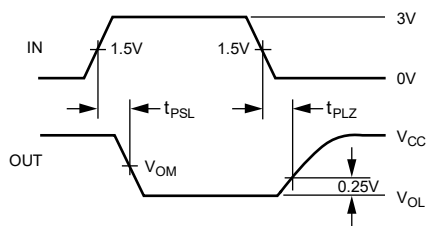


Figure 7. Driver Enable and Disable Times (t_{PZL} , t_{PSL} , t_{PLZ})


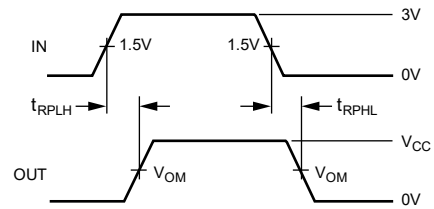


Figure 8. Receiver Propagation Delays



¹PPR=250kHz, 50% DUTY CYCLE, $t_R \leq 6.0\text{ns}$, $Z_0=50\Omega$.
² C_L INCLUDES PROBE AND STRAY CAPACITANCE.

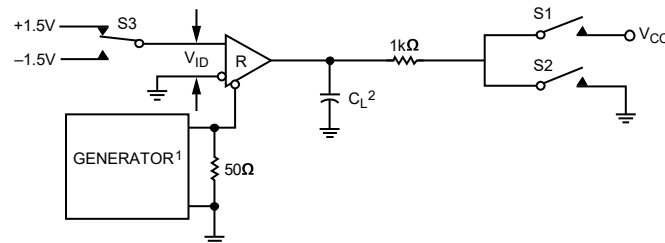

3.3V power supply, up to 256 nodes, 12Mbps half-duplex,
RS485/RS422 transceiver

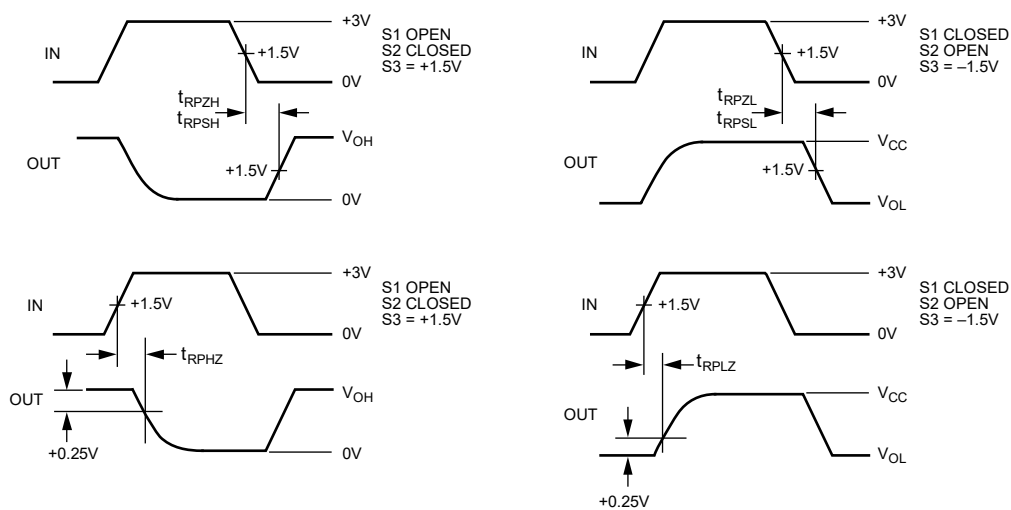


Figure 9. Receiver Enable and Disable Times



13. General Description

1 Brief description

The ADM3485E is a half-duplex high-speed transceiver for RS-485/RS-422 communication, and includes one driver and one receiver. It has fail-safe, over-voltage protection and over-current protection. The ADM3485E allows error-free data transmission up to 12Mbps.

2 Allowing up to 256 transceivers on the bus

The standard RS-485 receiver has an input impedance of 12k Ω (1 unit load), and the standard driver can drive up to 32 unit loads. The receiver of the ADM3485E transceiver has a 1/8 unit load receiver input impedance (96k Ω), allowing up to 256 transceivers to be connected in parallel on one bus. These devices can be combined arbitrarily, or combined with other RS-485 transceivers, as long as the total load does not exceed 32 units.

3 Driver output protection

Two mechanisms are used to avoid faults or bus collisions that cause excessive output current and excessive power consumption. First, over-current protection provides fast short-circuit protection over the entire common-mode voltage range (refer to the typical operating characteristics). Second, the thermal shutdown circuit forces the driver output into a high impedance state when the die temperature exceeds 140°C.

4 Typical applications

4.1 Bus networking: The ADM3485E RS485 transceiver is designed for bidirectional data communication on multi-point bus transmission lines. Figure 10 shows a typical network application circuit. These devices can also be used as linear repeaters with cables longer than 4000 feet. In order to reduce reflections, terminal matching should be done at both ends of the transmission line with their characteristic impedance, and the length of the branch wires other than the main line should be as short as possible.

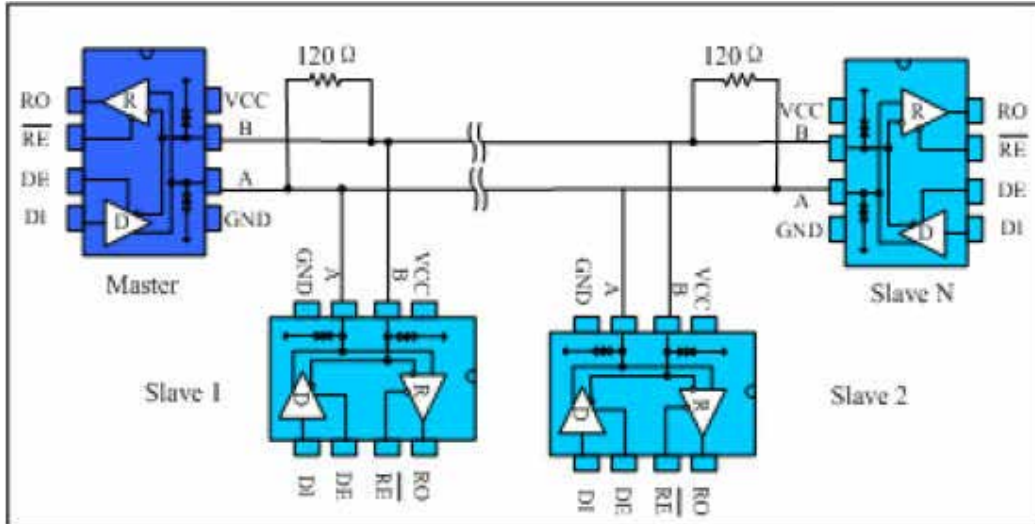


Figure 10. Bus-type RS485 half-duplex communication network

4.2 Hand-in-hand networking:

Also known as daisy chain topology, it is the standard and specification of RS485

bus wiring, and is the RS485 bus topology recommended by organizations such as TIA. The wiring method is that the master control device and multiple slave devices form a hand-in-hand connection, as shown in Figure 11, the hand-inhand way is to leave no branches. This wiring method has the advantages of low signal reflection and high communication success rate.

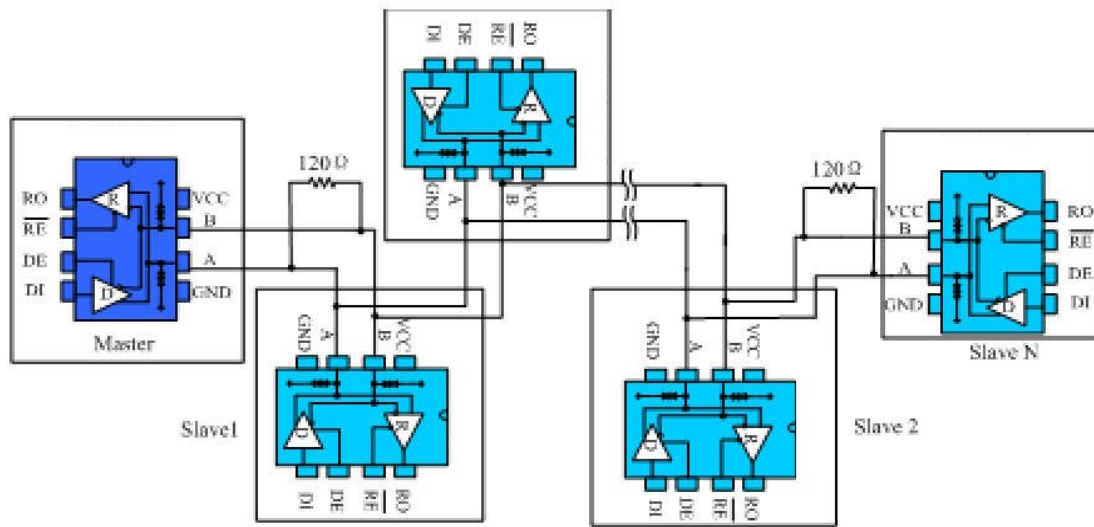


Figure 11. Hand-in-hand type RS485 half-duplex communication network

4.2 Hand-in-hand networking:

In harsh environments, RS485 communication ports are usually protected against static electricity, lightning and surge protection, etc. and it is even necessary to prevent 380V power supply access to avoid damage of smart meters and industrial control hosts. Figure 12 shows 3 common kinds of RS485 bus port protection schemes. The first scheme is to connect the TVS device to the protection ground in parallel with the AB port, the TVS device in parallel with the AB port, the thermistor in series with the AB port and the gas discharge tube is connected to the protection ground to form a three-level protection scheme. The second scheme is a three-level protection scheme including TVS connected to the ground in parallel with AB, the thermistor in series and the varistor in parallel with AB. The third one includes pull-down resistors connected to the power supply and ground respectively for AB, TVS between AB and the thermistor connected to A or B port.



3.3V power supply, up to 256 nodes, 12Mbps half-duplex,
RS485/RS422 transceiver


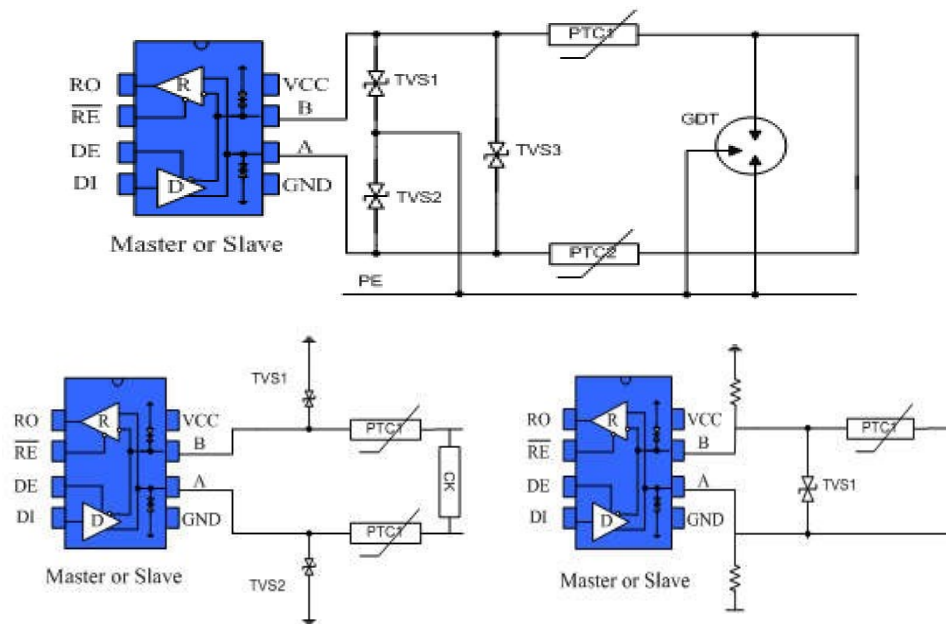


Figure 12. Port protection scheme



3.3V power supply, up to 256 nodes, 12Mbps half-duplex,
RS485/RS422 transceiver

14.SOP-8 Package Outline Dimensions

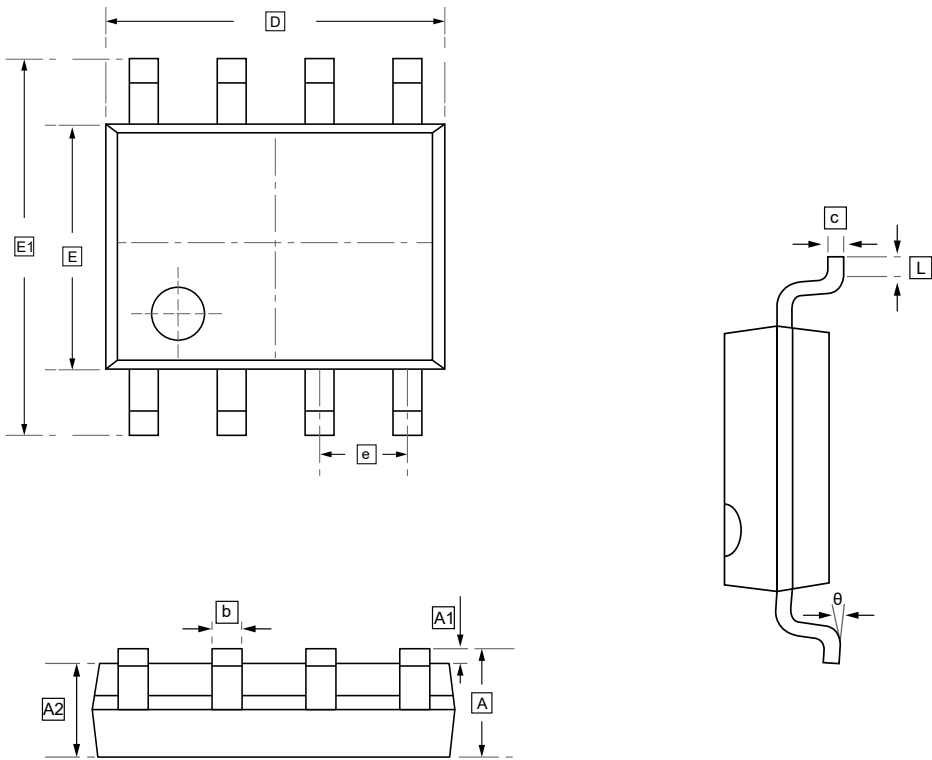


DIMENSIONS (mm are the original dimensions)

Symbol	A	A1	A2	b	c	D	E	E1	e	L	θ
Min	1.350	0.000	1.350	0.330	0.170	4.700	3.800	5.800	1.270	0.400	0°
Max	1.750	0.100	1.550	0.510	0.250	5.100	4.000	6.200	BSC	1.270	8°



3.3V power supply, up to 256 nodes, 12Mbps half-duplex,
RS485/RS422 transceiver

15.Ordering information



y: Year Code
ww: Week Code

Order Code	Package	Base QTY	Delivery Mode
UMW ADM3485EARZ	SOP-8	2500	Tape and reel



16.Disclaimer

UMW reserves the right to make changes to all products, specifications. Customers should obtain the latest version of product documentation and verify the completeness and currency of the information before placing an order.

When applying our products, please do not exceed the maximum rated values, as this may affect the reliability of the entire system. Under certain conditions, any semiconductor product may experience faults or failures. Buyers are responsible for adhering to safety standards and implementing safety measures during system design, prototyping, and manufacturing when using our products to prevent potential failure risks that could lead to personal injury or property damage.

Unless explicitly stated in writing, UMW products are not intended for use in medical, life-saving, or life-sustaining applications, nor for any other applications where product failure could result in personal injury or death. If customers use or sell the product for such applications without explicit authorization, they assume all associated risks.

When reselling, applying, or exporting, please comply with export control laws and regulations of China, the United States, the United Kingdom, the European Union, and other relevant countries, regions, and international organizations.

This document and any actions by UMW do not grant any intellectual property rights, whether express or implied, by estoppel or otherwise. The product names and marks mentioned herein may be trademarks of their respective owners.