

# LM4838 Boomer® Audio Power Amplifier Series Stereo 2W Audio Power Amplifiers with DC Volume Control and Selectable Gain

Check for Samples: [LM4838](#)

## FEATURES

- DC Volume Control Interface
- System Beep Detect
- Stereo Switchable Bridged/Single-Ended Power Amplifiers
- Selectable Internal/External Gain and Bass Boost
- “Click and Pop” Suppression Circuitry
- Thermal Shutdown Protection Circuitry

## APPLICATIONS

- Portable and Desktop Computers
- Multimedia Monitors
- Portable Radios, PDAs, and Portable TVs

## DESCRIPTION

The LM4838 is a monolithic integrated circuit that provides DC volume control, and stereo bridged audio power amplifiers capable of producing 2W into 4Ω with less than 1.0% THD or 2.2W into 3Ω with less than 1.0% THD (see Notes below).

Boomer™ audio integrated circuits were designed specifically to provide high quality audio while requiring a minimum amount of external components. The LM4838 incorporates a DC volume control, stereo bridged audio power amplifiers and a selectable gain or bass boost, making it optimally suited for multimedia monitors, portable radios, desktop, and portable computer applications.

The LM4838 features an externally controlled, low-power consumption shutdown mode, and both a power amplifier and headphone mute for maximum system flexibility and performance.

**Note:** When properly mounted to the circuit board, the LM4838NJB, LM4838PWP, and LM4838NYC will deliver 2W into 4Ω. The LM4838PW and LM4838YZR will deliver 1.1W into 8Ω. See [Application Information](#) section [Exposed-DAP package PCB Mounting Considerations](#) for more information.

**Note:** An LM4838NJB and LM4838PWP that have been properly mounted to the circuit board and forced-air cooled will deliver 2.2W into 3Ω.

**Table 1. Key Specifications**

|                                            |                                    | VALUE | UNIT     |
|--------------------------------------------|------------------------------------|-------|----------|
| P <sub>O</sub> at 1% THD+N                 | into 3Ω (NJB & PWP)                | 2.2   | W (typ)  |
|                                            | into 4Ω (NJB, PWP, NYC)            | 2.0   | W (typ)  |
|                                            | into 8Ω (PW, PWP, YZR, NJB, & NYC) | 1.1   | W (typ)  |
| Single-ended mode - THD+N at 85mW into 32Ω |                                    | 1.0   | %(typ)   |
| Shutdown current                           |                                    | 0.7   | μA (typ) |




Please be aware that an important notice concerning availability, standard warranty, and use in critical applications of Texas Instruments semiconductor products and disclaimers thereto appears at the end of this data sheet.

Boomer is a trademark of Texas Instruments.


All other trademarks are the property of their respective owners.

**Block Diagram**

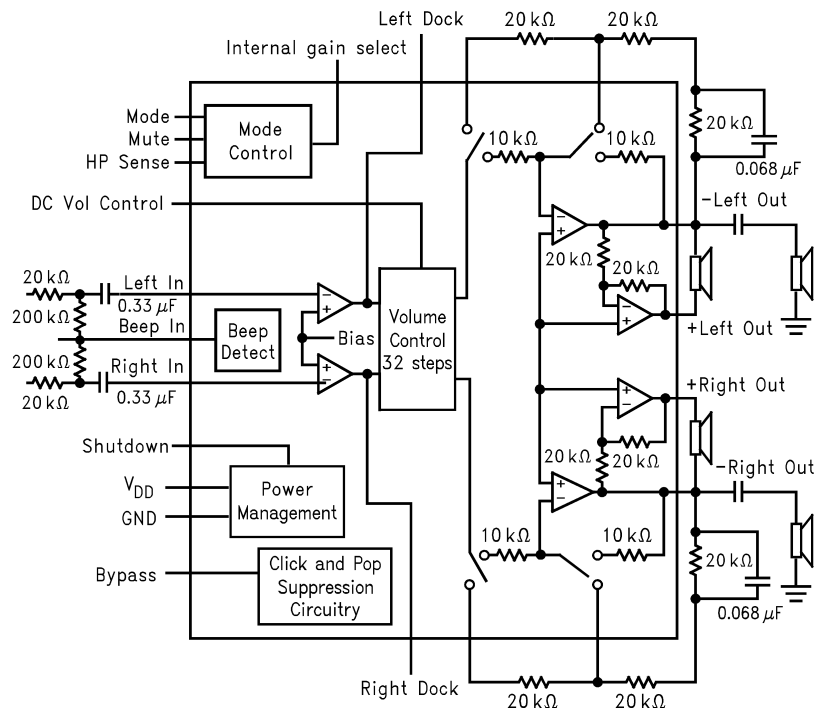


**Figure 1. LM4838 Block Diagram**


**Connection Diagrams**

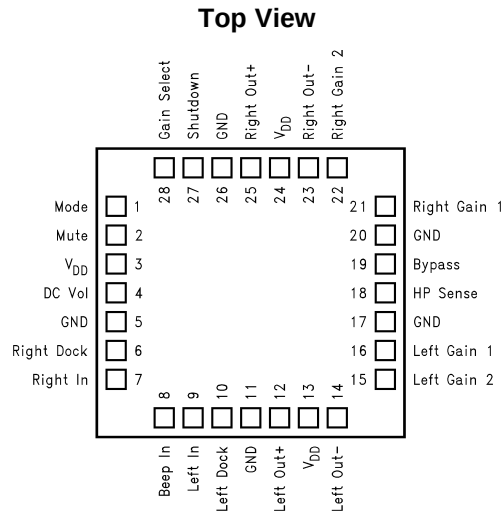

**Figure 2. WQFN Package**  
**See Package Number NJB0028A for Exposed-DAP WQFN**

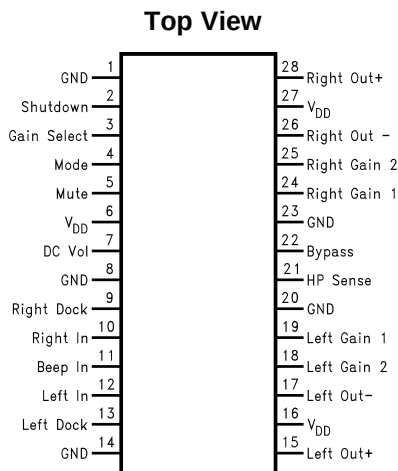

**Figure 3. TSSOP Package**  
See Package Number PW0028A for TSSOP  
See Package Number PWP0028A for Exposed-DAP TSSOP

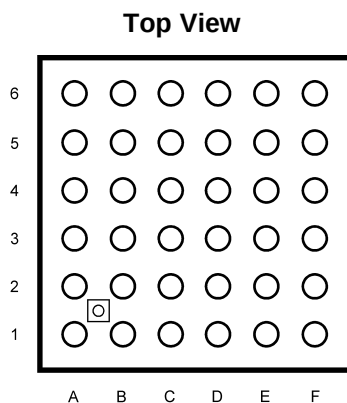


**Figure 4. 36 Bump DSBGA Package**  
See Package Number YZR0036AAA

**Table 2. 36 Bump DSBGA Pinout Table**

|                |          |              |                 |             |            |                 |
|----------------|----------|--------------|-----------------|-------------|------------|-----------------|
| 6              | NC       | Right Out -  | V <sub>DD</sub> | Right Out + | GND        | NC              |
| 5              | GND      | Right Gain 2 | Right Gain 1    | Gain Select | Shutdown   | Mode            |
| 4              | Bypass   | NC           | NC              | DC Vol      | Mute       | V <sub>DD</sub> |
| 3              | HP Sense | NC           | NC              | Beep In     | Right Dock | GND             |
| 2              | GND      | Left Gain 2  | Left Gain 1     | Left In     | Left Dock  | Right In        |
| 1              | NC       | Left Out -   | V <sub>DD</sub> | Left Out +  | GND        | NC              |
| Pin Designator | A        | B            | C               | D           | E          | F               |

## Connection Diagram

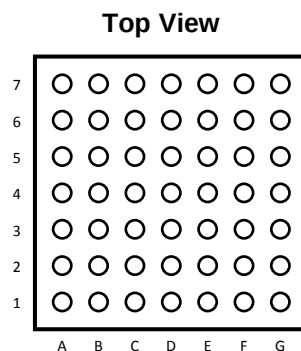

**Figure 5. 49 Bump CS-BGA Package**  
See Package Number NYC0049A

**Table 3. 49 Bump CS-BGA Pinout Table**

|                |             |              |        |        |            |             |             |
|----------------|-------------|--------------|--------|--------|------------|-------------|-------------|
| 7              | Right Out - | Right Gain 1 | GND    | Bypass | HP Sense   | GND         | Left Gain 1 |
| 6              | Right Out - | Right Gain 2 | GND    | GND    | GND        | Left Gain 2 | Left Out -  |
| 5              | VDD         | VDD          | GND    | GND    | GND        | Left Out -  | VDD         |
| 4              | Right Out + | Right Out +  | GND    | GND    | GND        | Left Out +  | VDD         |
| 3              | GND         | GND          | GND    | GND    | GND        | GND         | Left Out +  |
| 2              | Shutdown    | Gain Select  | VDD    | GND    | Right In   | Left In     | GND         |
| 1              | Mode        | Mute         | DC Vol | GND    | Right Dock | Beep In     | Left Dock   |
| Pin Designator | A           | B            | C      | D      | E          | F           | G           |



These devices have limited built-in ESD protection. The leads should be shorted together or the device placed in conductive foam during storage or handling to prevent electrostatic damage to the MOS gates.



## Absolute Maximum Ratings<sup>(1)(2)</sup>

|                                                             |                       |                       |                                |
|-------------------------------------------------------------|-----------------------|-----------------------|--------------------------------|
| Supply Voltage                                              |                       |                       | 6.0V                           |
| Storage Temperature                                         |                       |                       | -65°C to +150°C                |
| Input Voltage                                               |                       |                       | −0.3V to V <sub>DD</sub> +0.3V |
| Power Dissipation <sup>(3)</sup>                            |                       |                       | Internally limited             |
| ESD Susceptibility <sup>(4)</sup>                           |                       |                       | 2000V                          |
| ESD Susceptibility <sup>(5)</sup>                           |                       |                       | 200V                           |
| Junction Temperature                                        |                       |                       | 150°C                          |
| Soldering Information                                       | Small Outline Package | Vapor Phase (60 sec.) | 215°C                          |
|                                                             |                       | Infrared (15 sec.)    | 220°C                          |
| θ <sub>JC</sub> (typ)—NJB0028A                              |                       |                       | 3°C/W                          |
| θ <sub>JA</sub> (typ)—NJB0028A                              |                       |                       | 42°C/W                         |
| θ <sub>JC</sub> (typ)—PW0028A                               |                       |                       | 20°C/W                         |
| θ <sub>JA</sub> (typ)—PW0028A                               |                       |                       | 80°C/W                         |
| θ <sub>JC</sub> (typ)—PWP0028A                              |                       |                       | 2°C/W                          |
| θ <sub>JA</sub> (typ)—PWP0028A (exposed DAP) <sup>(6)</sup> |                       |                       | 41°C/W                         |
| θ <sub>JA</sub> (typ)—PWP0028A (exposed DAP) <sup>(7)</sup> |                       |                       | 54°C/W                         |
| θ <sub>JA</sub> (typ)—PWP0028A (exposed DAP) <sup>(8)</sup> |                       |                       | 59°C/W                         |
| θ <sub>JA</sub> (typ)—PWP0028A (exposed DAP) <sup>(9)</sup> |                       |                       | 93°C/W                         |
| θ <sub>JA</sub> (typ)—IYZR0036AAA                           |                       |                       | 100°C/W                        |
| θ <sub>JC</sub> (typ)—IYZR0036AAA <sup>(10)</sup>           |                       |                       | 65°C/W                         |
| θ <sub>JA</sub> (typ)—NYC0049A                              |                       |                       | 100°C/W                        |
| θ <sub>JC</sub> (typ)—NYC0049A <sup>(11)</sup>              |                       |                       | 54°C/W                         |

- (1) *Absolute Maximum Ratings* indicate limits beyond which damage to the device may occur. *Operating Ratings* indicate conditions for which the device is functional, but do not ensure specific performance limits. *Electrical Characteristics* state DC and AC electrical specifications under particular test conditions which ensure specific performance limits. This assumes that the device is within the Operating Ratings. Specifications are not ensured for parameters where no limit is given, however, the typical value is a good indication of device performance.
- (2) If Military/Aerospace specified devices are required, please contact the TI Sales Office/ Distributors for availability and specifications.
- (3) The maximum power dissipation must be derated at elevated temperatures and is dictated by T<sub>JMAX</sub>,  $\theta_{JA}$ , and the ambient temperature T<sub>A</sub>. The maximum allowable power dissipation is P<sub>DMAX</sub> = (T<sub>JMAX</sub> - T<sub>A</sub>)/ $\theta_{JA}$ . For the LM4838, T<sub>JMAX</sub> = 150°C, and the typical junction-to-ambient thermal resistance for each package can be found in the **Absolute Maximum Ratings** section above.
- (4) Human body model, 100pF discharged through a 1.5k $\Omega$  resistor.
- (5) Machine Model, 220pF – 240pF discharged through all pins.
- (6) The  $\theta_{JA}$  given is for an PWP0028A package whose exposed-DAP is soldered to a 2in<sup>2</sup> piece of 1 ounce printed circuit board copper on a bottom side layer through 21 8mil vias.
- (7) The  $\theta_{JA}$  given is for an PWP0028A package whose exposed-DAP is soldered to an exposed 2in<sup>2</sup> piece of 1 ounce printed circuit board copper.
- (8) The  $\theta_{JA}$  given is for an PWP0028A package whose exposed-DAP is soldered to an exposed 1in<sup>2</sup> piece of 1 ounce printed circuit board copper.
- (9) The  $\theta_{JA}$  given is for an PWP0028A package whose exposed-DAP is not soldered to any copper.
- (10) All bumps have the same thermal resistance and contribute equally when used to lower thermal resistance. The LM4838YZR demo board (views featured in the [Application Information](#) section) is a four layer board with two inner layers. The second inner layer is a V<sub>DD</sub> plane with the bottom outside layer a GND plane. The planes measure 1,900mils x 1,750mils (48.26mm x 44.45mm) and aid in spreading heat due to power dissipation within the IC.
- (11) All bumps have the same thermal resistance and contribute equally when used to lower thermal resistance. The LM4838NYC Demo Board is a four layer PC Board with 2 inner layers. The second inner layer and bottom outside layers are both grounded. The planes measure 3200 x 3700 mills and aid in spreading heat due to power dissipation within the IC.

## Operating Ratings

|                                                                           |  |                               |
|---------------------------------------------------------------------------|--|-------------------------------|
| Temperature Range<br>T <sub>MIN</sub> ≤ T <sub>A</sub> ≤ T <sub>MAX</sub> |  | -40°C ≤ T <sub>A</sub> ≤ 85°C |
| Supply Voltage                                                            |  | 2.7V ≤ V <sub>DD</sub> ≤ 5.5V |

## Electrical Characteristics for Entire IC<sup>(1)(2)</sup>

The following specifications apply for  $V_{DD} = 5V$  unless otherwise noted. Limits apply for  $T_A = 25^\circ C$ .

| Parameter |                                    | Test Conditions         | LM4838                 |                      | Units (Limits) |
|-----------|------------------------------------|-------------------------|------------------------|----------------------|----------------|
|           |                                    |                         | Typical <sup>(3)</sup> | Limit <sup>(4)</sup> |                |
| $V_{DD}$  | Supply Voltage                     |                         |                        | 2.7                  | V (min)        |
|           |                                    |                         |                        | 5.5                  | V (max)        |
| $I_{DD}$  | Quiescent Power Supply Current     | $V_{IN} = 0V, I_O = 0A$ | 15                     | 30                   | mA (max)       |
| $I_{SD}$  | Shutdown Current                   | $V_{shutdown} = V_{DD}$ | 0.7                    | 2.0                  | $\mu A$ (max)  |
| $V_{IH}$  | Headphone Sense High Input Voltage |                         |                        | 4                    | V (min)        |
| $V_{IL}$  | Headphone Sense Low Input Voltage  |                         |                        | 0.8                  | V (max)        |

- (1) All voltages are measured with respect to the ground pins, unless otherwise specified. All specifications are tested using the typical application as shown in [Figure 1](#).
- (2) *Absolute Maximum Ratings* indicate limits beyond which damage to the device may occur. *Operating Ratings* indicate conditions for which the device is functional, but do not ensure specific performance limits. *Electrical Characteristics* state DC and AC electrical specifications under particular test conditions which ensure specific performance limits. This assumes that the device is within the Operating Ratings. Specifications are not ensured for parameters where no limit is given, however, the typical value is a good indication of device performance.
- (3) Typicals are measured at  $25^\circ C$  and represent the parametric norm.
- (4) Limits are specified to TI's AOQL (Average Outgoing Quality Level). Datasheet min/max specification limits are ensured by design, test, or statistical analysis.

## Electrical Characteristics for Volume Attenuators<sup>(1)(2)</sup>

The following specifications apply for  $V_{DD} = 5V$ . Limits apply for  $T_A = 25^\circ C$ .

| Parameter   |                  | Test Conditions                             | LM4838                 |                      | Units (Limits) |
|-------------|------------------|---------------------------------------------|------------------------|----------------------|----------------|
|             |                  |                                             | Typical <sup>(3)</sup> | Limit <sup>(4)</sup> |                |
| $C_{RANGE}$ | Attenuator Range | Gain with $V_{DCVol} = 5V$ , No Load        |                        | $\pm 0.75$           | dB (max)       |
|             |                  | Attenuation with $V_{DCVol} = 0V$ (BM & SE) |                        | -75                  | dB (min)       |
| $A_M$       | Mute Attenuation | $V_{mute} = 5V$ , Bridged Mode (BM)         |                        | -78                  | dB (min)       |
|             |                  | $V_{mute} = 5V$ , Single-Ended Mode (SE)    |                        | -78                  | dB (min)       |

- (1) All voltages are measured with respect to the ground pins, unless otherwise specified. All specifications are tested using the typical application as shown in [Figure 1](#).
- (2) *Absolute Maximum Ratings* indicate limits beyond which damage to the device may occur. *Operating Ratings* indicate conditions for which the device is functional, but do not ensure specific performance limits. *Electrical Characteristics* state DC and AC electrical specifications under particular test conditions which ensure specific performance limits. This assumes that the device is within the Operating Ratings. Specifications are not ensured for parameters where no limit is given, however, the typical value is a good indication of device performance.
- (3) Typicals are measured at  $25^\circ C$  and represent the parametric norm.
- (4) Limits are specified to TI's AOQL (Average Outgoing Quality Level). Datasheet min/max specification limits are ensured by design, test, or statistical analysis.

## Electrical Characteristics for Single-Ended Mode Operation<sup>(1)(2)</sup>

The following specifications apply for  $V_{DD} = 5V$ . Limits apply for  $T_A = 25^\circ C$ .

| Parameter |              | Test Conditions                           | LM4838                 |                      | Units (Limits) |
|-----------|--------------|-------------------------------------------|------------------------|----------------------|----------------|
|           |              |                                           | Typical <sup>(3)</sup> | Limit <sup>(4)</sup> |                |
| $P_O$     | Output Power | THD = 1.0%; $f = 1kHz$ ; $R_L = 32\Omega$ | 85                     |                      | mW             |
|           |              | THD = 10%; $f = 1kHz$ ; $R_L = 32\Omega$  | 95                     |                      | mW             |

- (1) All voltages are measured with respect to the ground pins, unless otherwise specified. All specifications are tested using the typical application as shown in [Figure 1](#).
- (2) *Absolute Maximum Ratings* indicate limits beyond which damage to the device may occur. *Operating Ratings* indicate conditions for which the device is functional, but do not ensure specific performance limits. *Electrical Characteristics* state DC and AC electrical specifications under particular test conditions which ensure specific performance limits. This assumes that the device is within the Operating Ratings. Specifications are not ensured for parameters where no limit is given, however, the typical value is a good indication of device performance.
- (3) Typicals are measured at  $25^\circ C$  and represent the parametric norm.
- (4) Limits are specified to TI's AOQL (Average Outgoing Quality Level). Datasheet min/max specification limits are ensured by design, test, or statistical analysis.

## Electrical Characteristics for Single-Ended Mode Operation<sup>(1)(2)</sup> (continued)

The following specifications apply for  $V_{DD} = 5V$ . Limits apply for  $T_A = 25^\circ C$ .

| Parameter  |                                 | Test Conditions                                                    | LM4838                 |                      | Units (Limits) |
|------------|---------------------------------|--------------------------------------------------------------------|------------------------|----------------------|----------------|
|            |                                 |                                                                    | Typical <sup>(3)</sup> | Limit <sup>(4)</sup> |                |
| THD+N      | Total Harmonic Distortion+Noise | $V_{OUT} = 1V_{RMS}$ , $f=1kHz$ , $R_L = 10k\Omega$ , $A_{VD} = 1$ | 0.065                  |                      | %              |
| PSRR       | Power Supply Rejection Ratio    | $C_B = 1.0 \mu F$ , $f=120 Hz$ , $V_{RIPPLE} = 200 mV_{rms}$       | 58                     |                      | dB             |
| SNR        | Signal to Noise Ratio           | $P_{OUT}=75 mW$ , $R_L = 32\Omega$ , A-Wtd Filter                  | 102                    |                      | dB             |
| $X_{talk}$ | Channel Separation              | $f=1kHz$ , $C_B = 1.0 \mu F$                                       | 65                     |                      | dB             |

## Electrical Characteristics for Bridged Mode Operation<sup>(1)(2)</sup>

The following specifications apply for  $V_{DD} = 5V$ , unless otherwise noted. Limits apply for  $T_A = 25^\circ C$ .

| Parameter  |                                 | Test Conditions                                                                  | LM4838                 |                      | Units (Limits) |
|------------|---------------------------------|----------------------------------------------------------------------------------|------------------------|----------------------|----------------|
|            |                                 |                                                                                  | Typical <sup>(3)</sup> | Limit <sup>(4)</sup> |                |
| $V_{OS}$   | Output Offset Voltage           | $V_{IN} = 0V$ , No Load                                                          | 5                      | $\pm 50$             | mV (max)       |
| $P_O$      | Output Power                    | THD + N = 1.0%; $f=1kHz$ ; $R_L = 3\Omega$ <sup>(5)</sup>                        | 2.2                    |                      | W              |
|            |                                 | THD + N = 1.0%; $f=1kHz$ ; $R_L = 4\Omega$ <sup>(6)</sup>                        | 2                      |                      | W              |
|            |                                 | THD = 1% (max); $f = 1 kHz$ ; $R_L = 8\Omega$                                    | 1.1                    | 1.0                  | W (min)        |
|            |                                 | THD+N = 10%; $f = 1 kHz$ ; $R_L = 8\Omega$                                       | 1.5                    |                      | W              |
| THD+N      | Total Harmonic Distortion+Noise | $P_O = 1W$ , $20 Hz < f < 20 kHz$ , $R_L = 8\Omega$ , $A_{VD} = 2$               | 0.3                    |                      | %              |
|            |                                 | $P_O = 340 mW$ , $R_L = 32\Omega$                                                | 1.0                    |                      | %              |
| PSRR       | Power Supply Rejection Ratio    | $C_B = 1.0 \mu F$ , $f = 120 Hz$ , $V_{RIPPLE} = 200 mV_{rms}$ ; $R_L = 8\Omega$ | 74                     |                      | dB             |
| SNR        | Signal to Noise Ratio           | $V_{DD} = 5V$ , $P_{OUT} = 1.1W$ , $R_L = 8\Omega$ , A-Wtd Filter                | 93                     |                      | dB             |
| $X_{talk}$ | Channel Separation              | $f=1kHz$ , $C_B = 1.0 \mu F$                                                     | 70                     |                      | dB             |

- (1) All voltages are measured with respect to the ground pins, unless otherwise specified. All specifications are tested using the typical application as shown in [Figure 1](#).
- (2) *Absolute Maximum Ratings* indicate limits beyond which damage to the device may occur. *Operating Ratings* indicate conditions for which the device is functional, but do not ensure specific performance limits. *Electrical Characteristics* state DC and AC electrical specifications under particular test conditions which ensure specific performance limits. This assumes that the device is within the Operating Ratings. Specifications are not ensured for parameters where no limit is given, however, the typical value is a good indication of device performance.
- (3) Typicals are measured at  $25^\circ C$  and represent the parametric norm.
- (4) Limits are specified to TI's AOQL (Average Outgoing Quality Level). Datasheet min/max specification limits are ensured by design, test, or statistical analysis.
- (5) When driving  $3\Omega$  loads from a 5V supply the LM4838NJB and LM4838PWP must be mounted to the circuit board and forced-air cooled.
- (6) When driving  $4\Omega$  loads from a 5V supply the LM4838NJB, LM4838PWP, and LM4838NYC must be mounted to the circuit board.

## TYPICAL APPLICATION

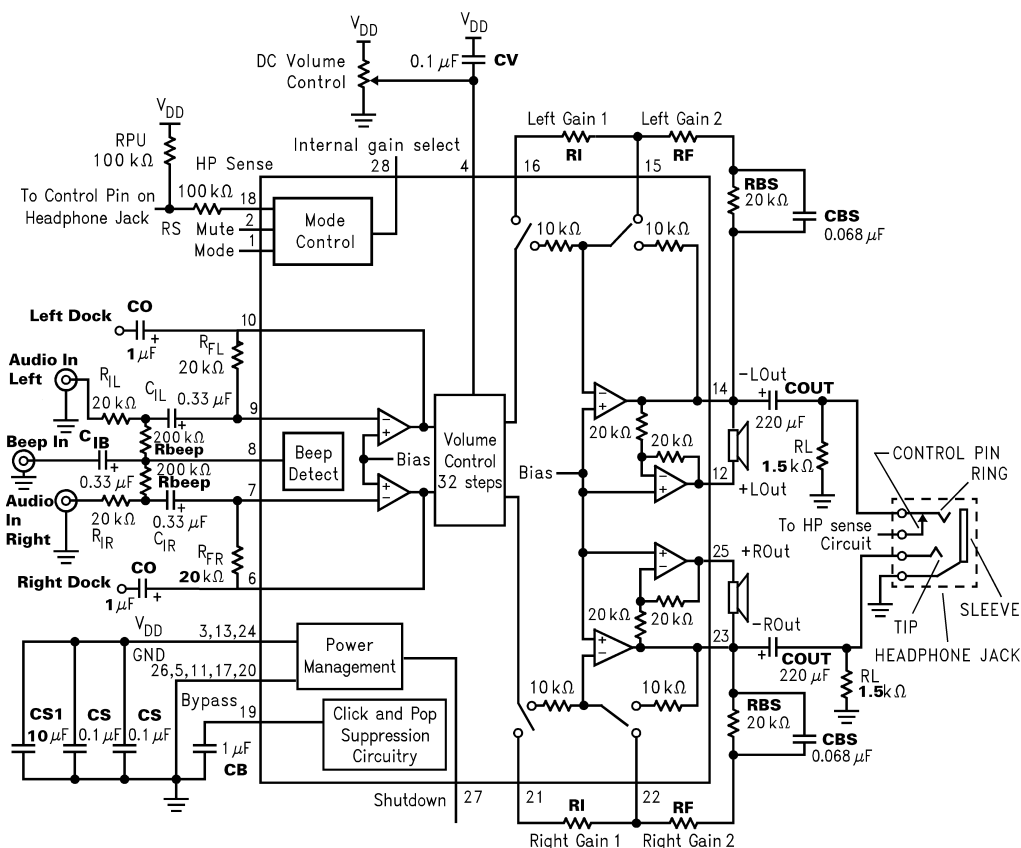


Figure 6. Typical Application Circuit (NJB0028A Package Pinout)

Truth Table for Logic Inputs<sup>(7)</sup>

| Gain Sel | Mode | Headphone Sense | Mute | Shutdown | Output Stage Set To | DC Volume  | Output Stage Configuration |
|----------|------|-----------------|------|----------|---------------------|------------|----------------------------|
| 0        | 0    | 0               | 0    | 0        | Internal Gain       | Fixed      | BTL                        |
| 0        | 0    | 1               | 0    | 0        | Internal Gain       | Fixed      | SE                         |
| 0        | 1    | 0               | 0    | 0        | Internal Gain       | Adjustable | BTL                        |
| 0        | 1    | 1               | 0    | 0        | Internal Gain       | Adjustable | SE                         |
| 1        | 0    | 0               | 0    | 0        | External Gain       | Fixed      | BTL                        |
| 1        | 0    | 1               | 0    | 0        | External Gain       | Fixed      | SE                         |
| 1        | 1    | 0               | 0    | 0        | External Gain       | Adjustable | BTL                        |
| 1        | 1    | 1               | 0    | 0        | External Gain       | Adjustable | SE                         |
| X        | X    | X               | 1    | 0        | Muted               | X          | Muted                      |
| X        | X    | X               | X    | 1        | Shutdown            | X          | X                          |

(7) If system beep is detected on the Beep In pin, the system beep will be passed through the bridged amplifier regardless of the logic of the Mute and HP sense pins.

## Typical Performance Characteristics PWP Specific Characteristics

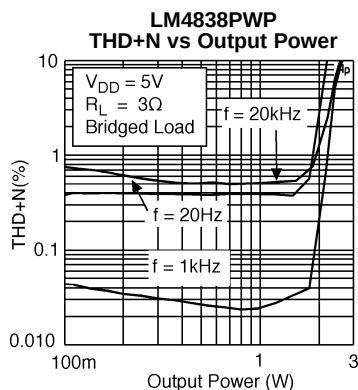


Figure 7.

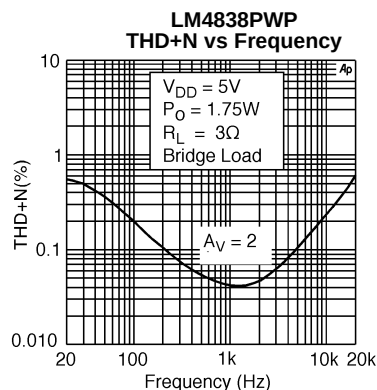


Figure 8.

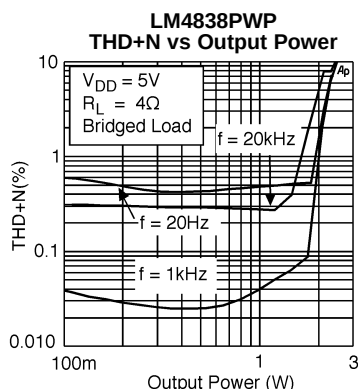


Figure 9.

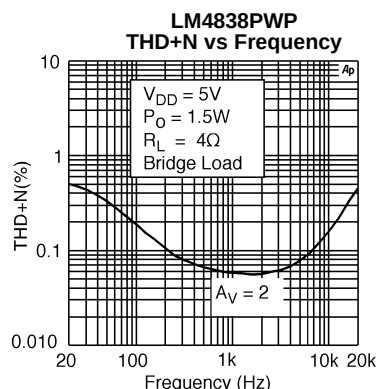


Figure 10.

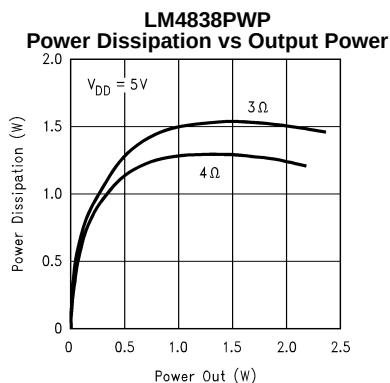


Figure 11.

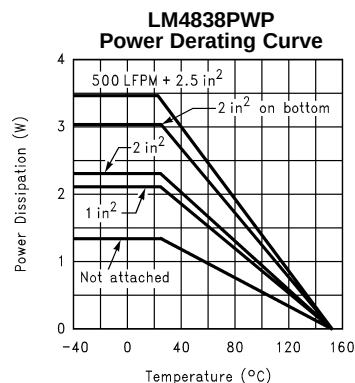


Figure 12.

These curves show the thermal dissipation ability of the LM4838PWP at different ambient temperatures given these conditions:

**500LFPM + 2in<sup>2</sup>:** The part is soldered to a 2in<sup>2</sup>, 1 oz. copper plane with 500 linear feet per minute of forced-air flow across it.

**2in<sup>2</sup>on bottom:** The part is soldered to a 2in<sup>2</sup>, 1oz. copper plane that is on the bottom side of the PC board through 21 8 mil vias.

**2in<sup>2</sup>:** The part is soldered to a 2in<sup>2</sup>, 1oz. copper plane.**1in<sup>2</sup>:** The part is soldered to a 1in<sup>2</sup>, 1oz. copper plane.

**Not Attached:** The part is not soldered down and is not forced-air cooled.

## Typical Performance Characteristics

### Non-PWP Specific Characteristics

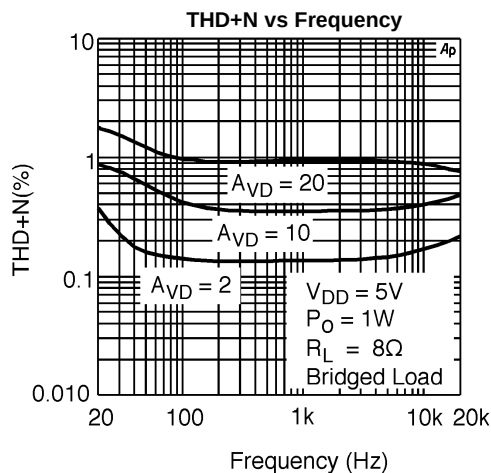


Figure 13.

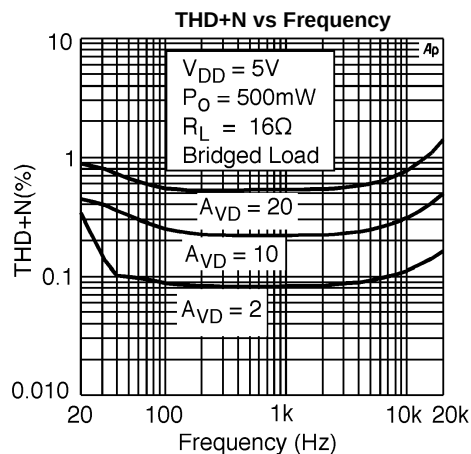


Figure 14.

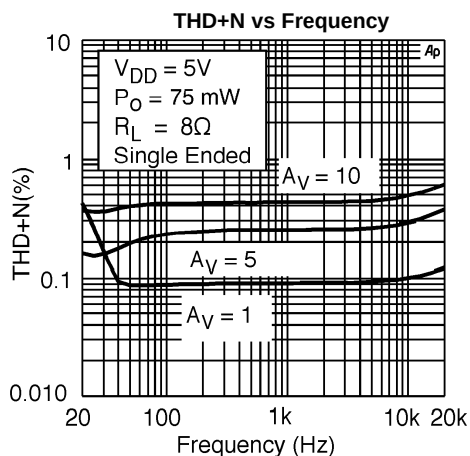


Figure 15.

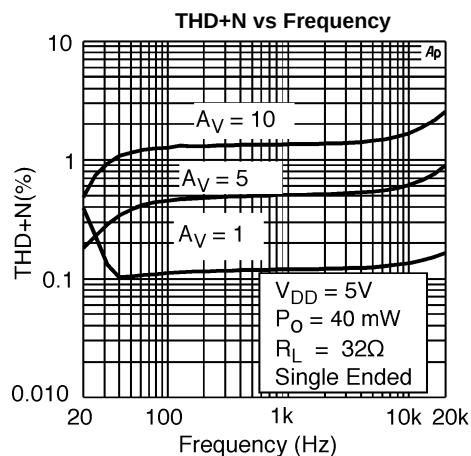


Figure 16.

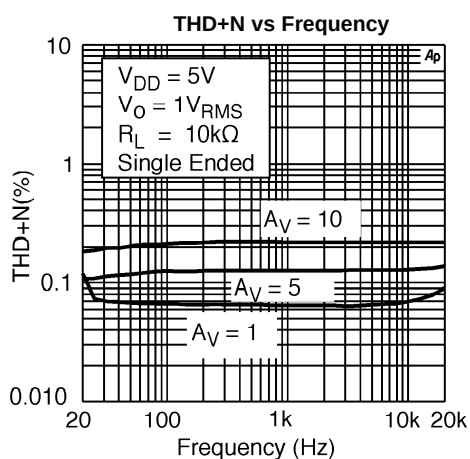


Figure 17.

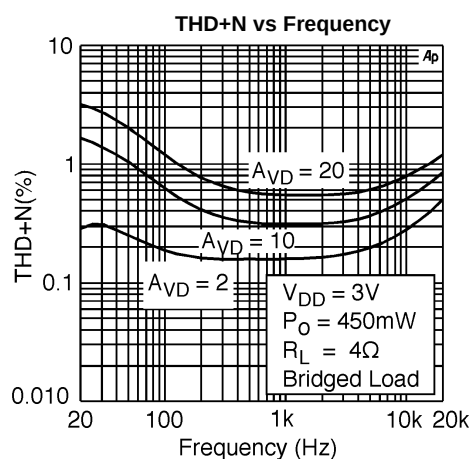


Figure 18.

## Typical Performance Characteristics

### Non-PWP Specific Characteristics (continued)

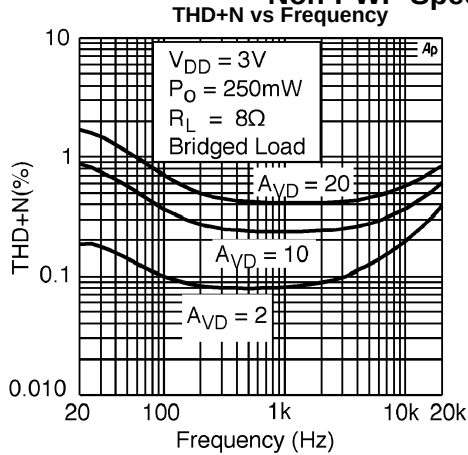


Figure 19.

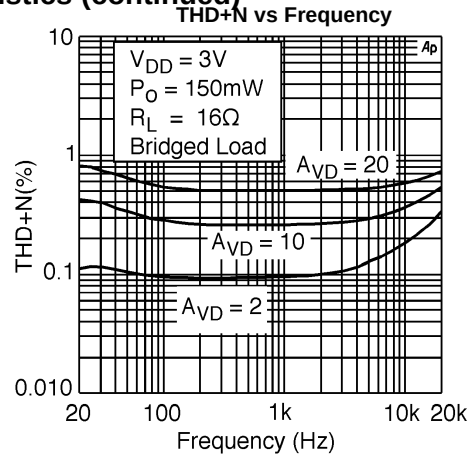


Figure 20.

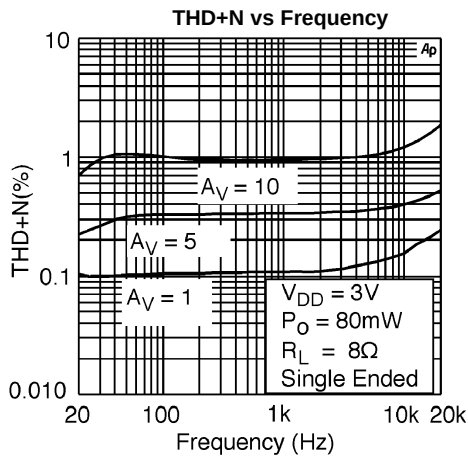


Figure 21.

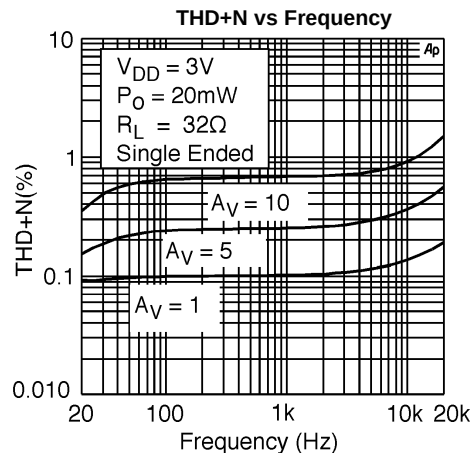


Figure 22.

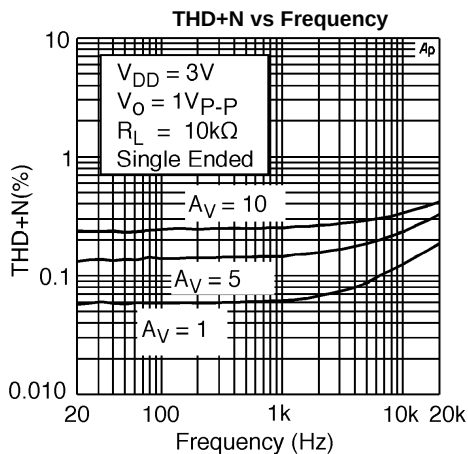


Figure 23.

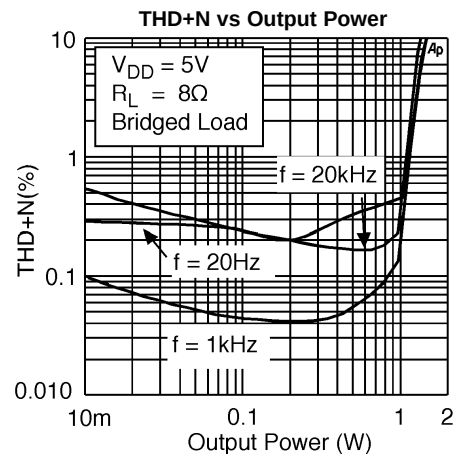


Figure 24.

## Typical Performance Characteristics

### Non-PWP Specific Characteristics (continued)

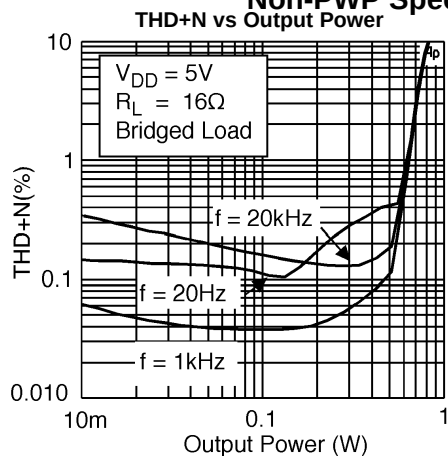


Figure 25.

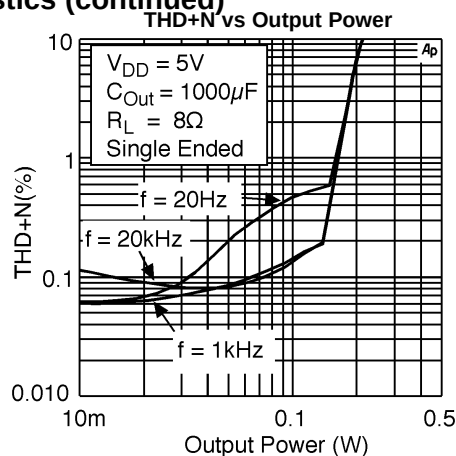


Figure 26.

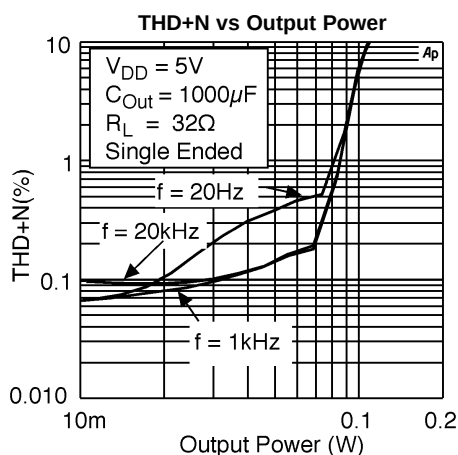


Figure 27.

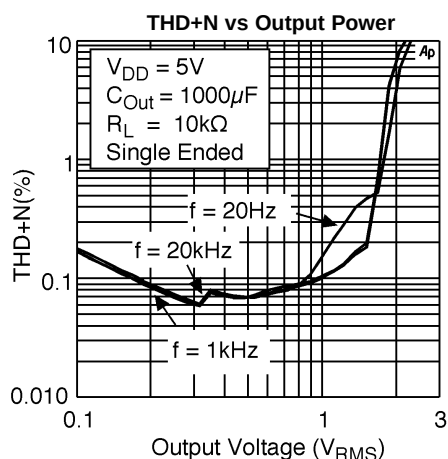


Figure 28.

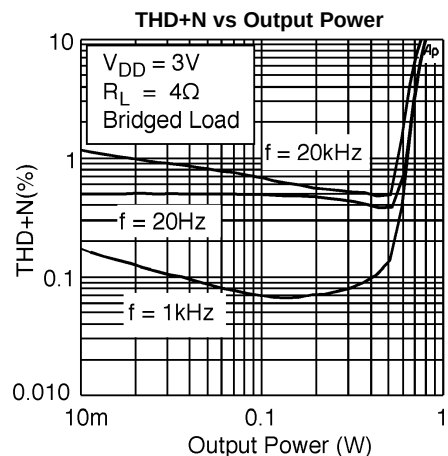


Figure 29.

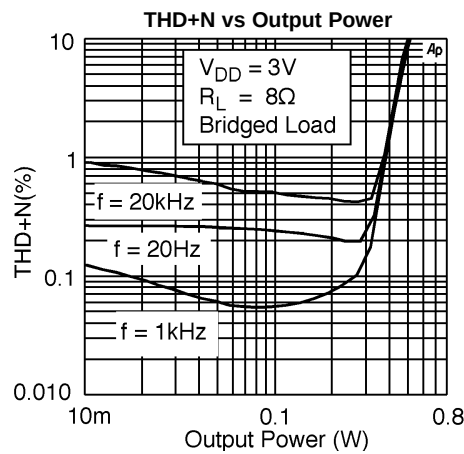


Figure 30.



## Typical Performance Characteristics

### Non-PWP Specific Characteristics (continued)

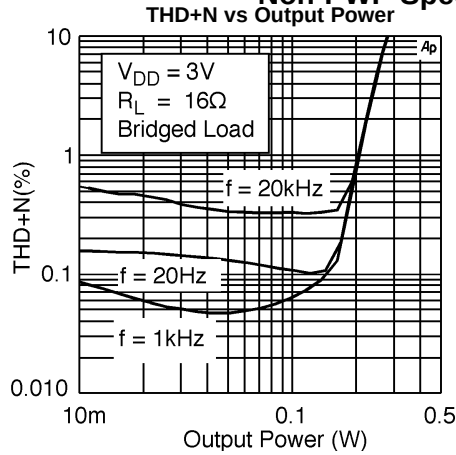


Figure 31.

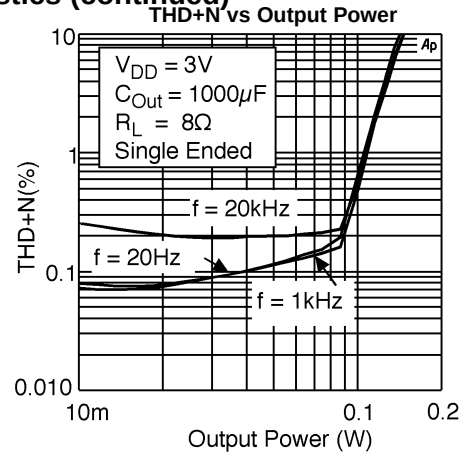


Figure 32.

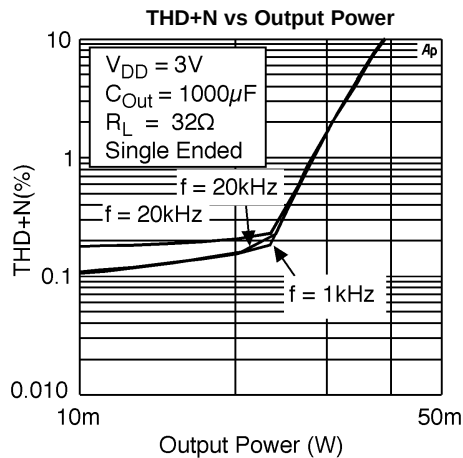


Figure 33.

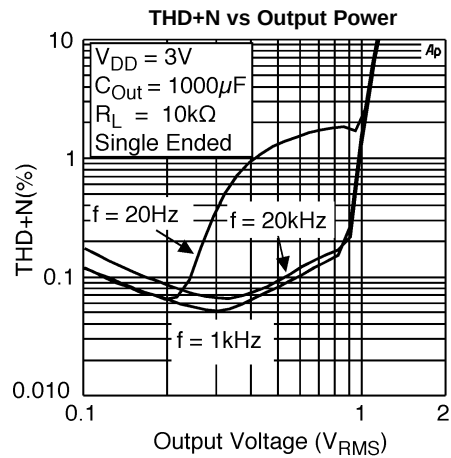


Figure 34.

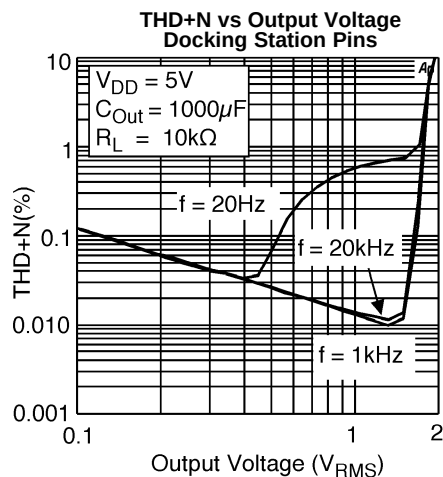


Figure 35.

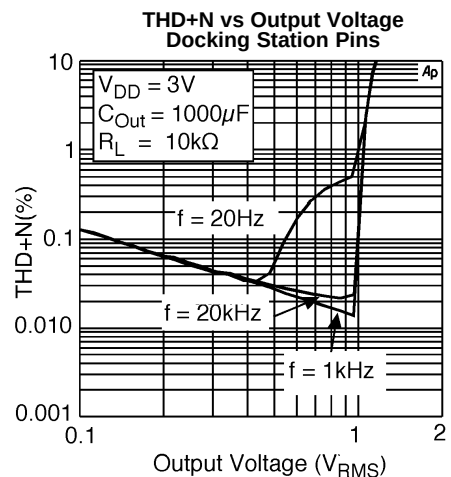


Figure 36.

## Typical Performance Characteristics

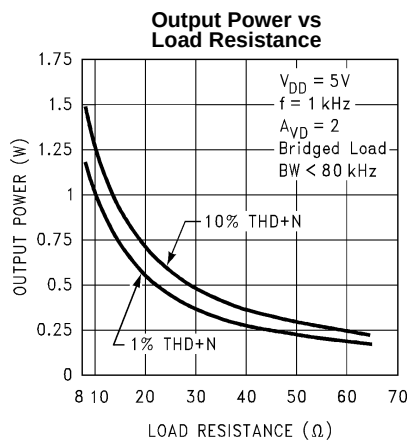


Figure 37.

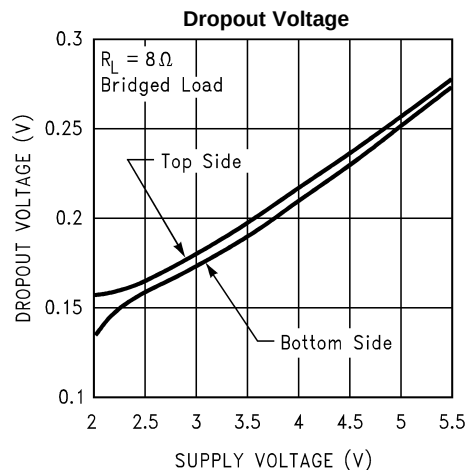


Figure 38.

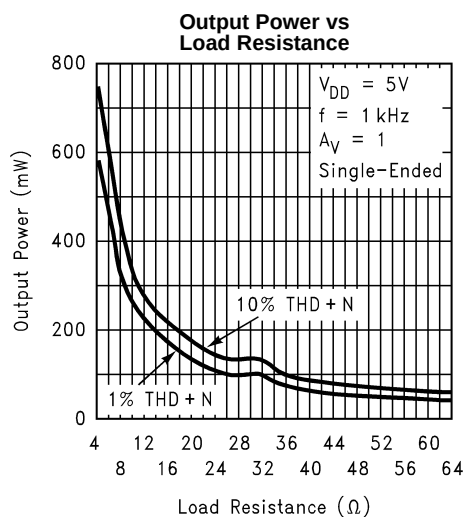


Figure 39.

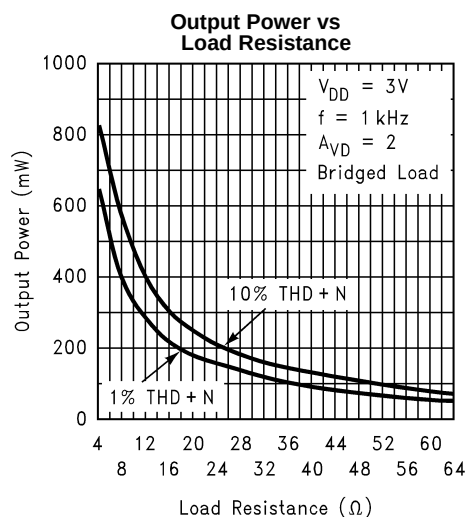


Figure 40.

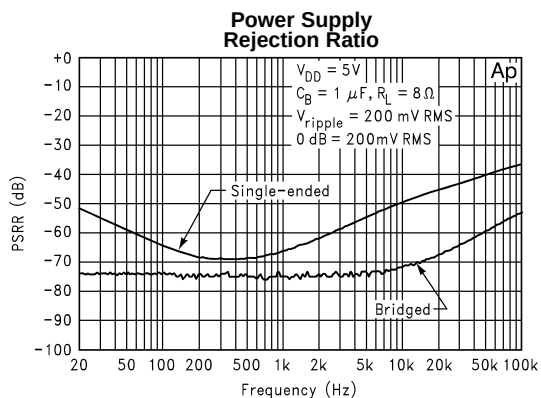


Figure 41.

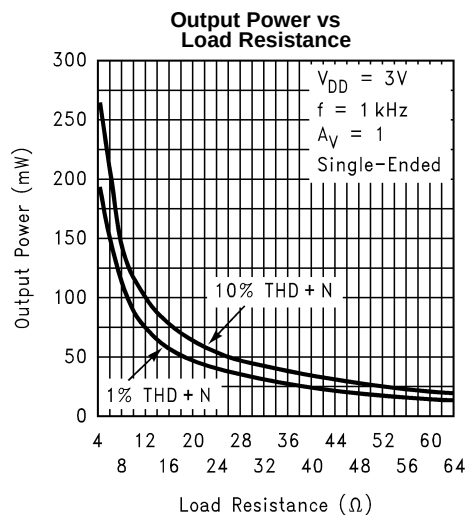


Figure 42.

## Typical Performance Characteristics (continued)

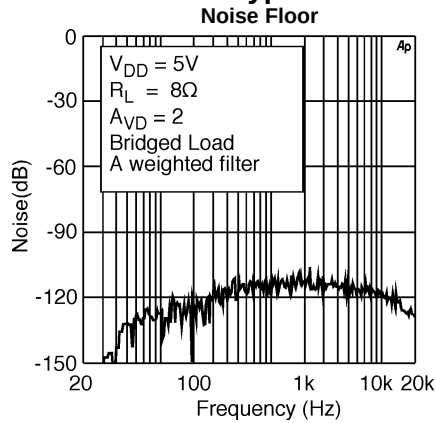


Figure 43.

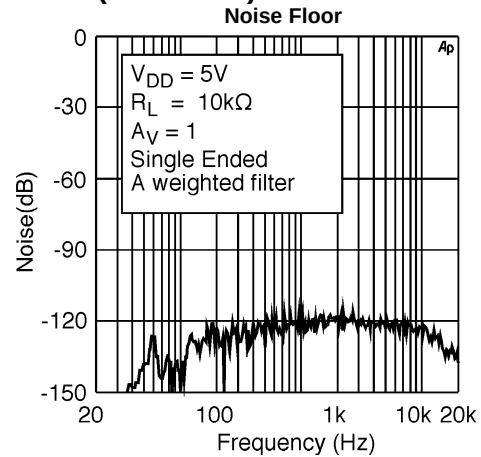


Figure 44.

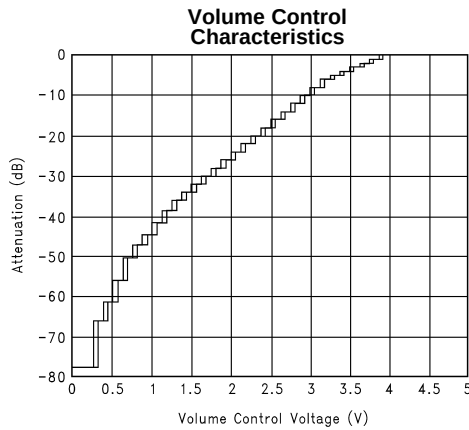


Figure 45.

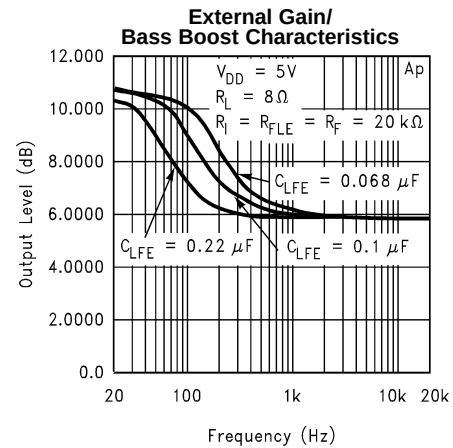


Figure 46.

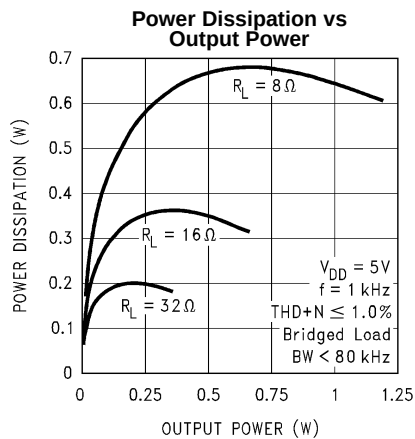


Figure 47.

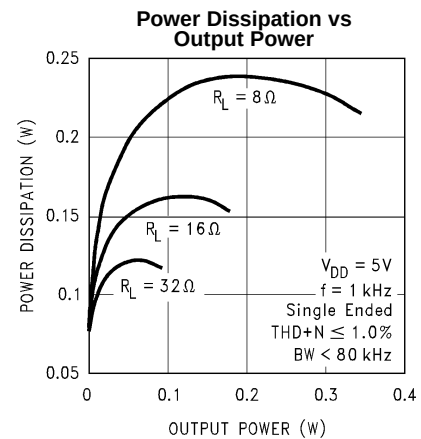


Figure 48.

## Typical Performance Characteristics (continued)

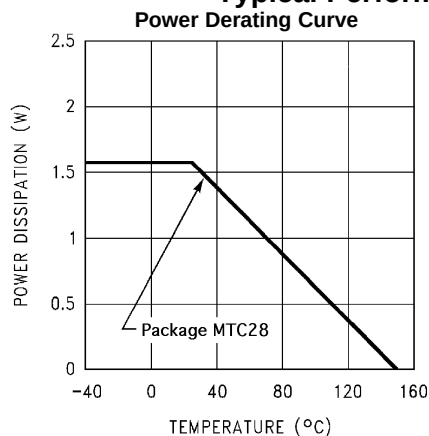


Figure 49.

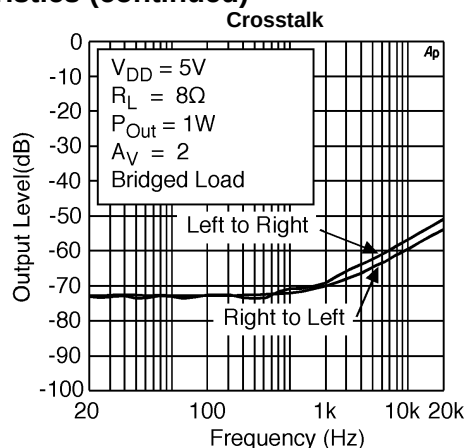


Figure 50.

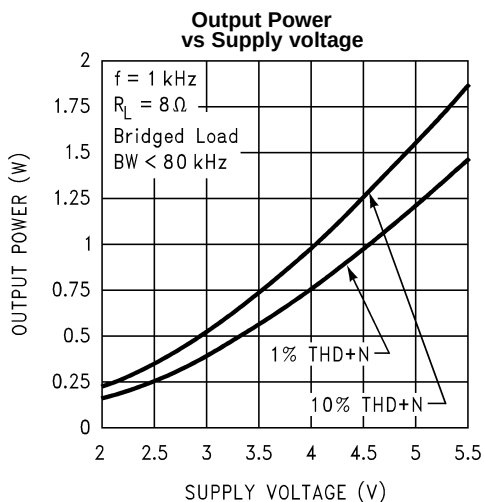


Figure 51.

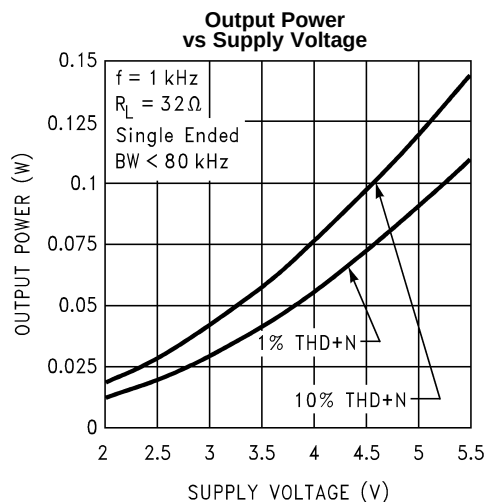


Figure 52.


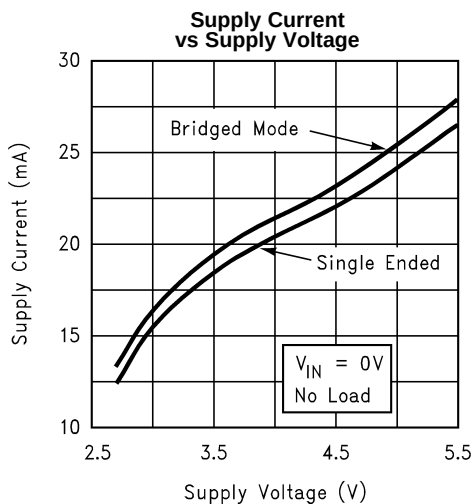


Figure 53.

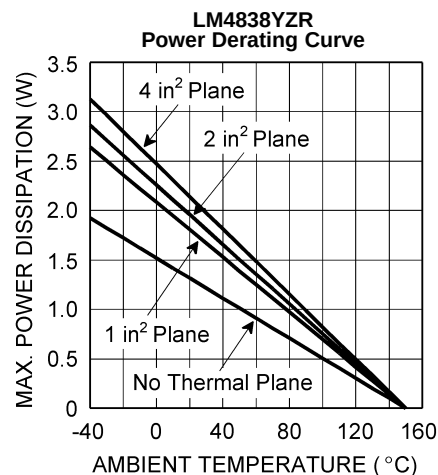

These curves show the thermal dissipation of the LM4838YZR at different ambient temperatures with a thermal plane of size shown on an outside PCB layer using 1oz. copper.

Figure 54.

## APPLICATION INFORMATION

### EXPOSED-DAP PACKAGE PCB MOUNTING CONSIDERATIONS

The LM4838's exposed-DAP (die attach paddle) packages (PWP, NJB) provide a low thermal resistance between the die and the PCB to which the part is mounted and soldered. This allows rapid heat transfer from the die to the surrounding PCB copper traces, ground plane and, finally, surrounding air. The result is a low voltage audio power amplifier that produces 2.1W at  $\leq 1\%$  THD with a  $4\Omega$  load. This high power is achieved through careful consideration of necessary thermal design. Failing to optimize thermal design may compromise the LM4838's high power performance and activate unwanted, though necessary, thermal shutdown protection.

The PWP and NJB packages must have their exposed DAPs soldered to a grounded copper pad on the PCB. The DAP's PCB copper pad is connected to a large grounded plane of continuous unbroken copper. This plane forms a thermal mass heat sink and radiation area. Place the heat sink area on either outside plane in the case of a two-sided PCB, or on an inner layer of a board with more than two layers. Connect the DAP copper pad to the inner layer or backside copper heat sink area with 32(4x8) (PWP) or 6(3x2) (NJB) vias. The via diameter should be 0.012in–0.013in with a 1.27mm pitch. Ensure efficient thermal conductivity by plating-through and solder-filling the vias.

Best thermal performance is achieved with the largest practical copper heat sink area. If the heatsink and amplifier share the same PCB layer, a nominal  $2.5\text{in}^2$  (min) area is necessary for 5V operation with a  $4\Omega$  load. Heatsink areas not placed on the same PCB layer as the LM4838 PWP and NJB packages should be  $5\text{in}^2$  (min) for the same supply voltage and load resistance. The last two area recommendations apply for  $25^\circ\text{C}$  ambient temperature. Increase the area to compensate for ambient temperatures above  $25^\circ\text{C}$ . In systems using cooling fans, the LM4838PWP can take advantage of forced air cooling. With an air flow rate of 450 linear-feet per minute and a  $2.5\text{in}^2$  exposed copper or  $5.0\text{in}^2$  inner layer copper plane heatsink, the LM4838PWP can continuously drive a  $3\Omega$  load to full power. The LM4838NJB achieves the same output power level without forced air cooling. In all circumstances and conditions, the junction temperature must be held below  $150^\circ\text{C}$  to prevent activating the LM4838's thermal shutdown protection. The LM4838's power de-rating curve in the [Typical Performance Characteristics](#) shows the maximum power dissipation versus temperature. Example PCB layouts for the exposed-DAP TSSOP and NJB packages are shown in the [Demonstration Board Layout](#) section. Further detailed and specific information concerning PCB layout, fabrication, and mounting an NJB (WQFN) package is available in TI's AN1187.

The YZR and NYC packages (LM4838YZR and LM4838NYC) thermals work in a similar way to the NJB and PWP packages in that a thermal plane increases the heat transfer from the die. The thermal plane can be any electrical potential but needs to be below the package to aid in the spreading the heat from the die out to surrounding PCB areas to reduce the thermal resistance of the DSBGA package. The thermal plane is most effective when placed on the top or first internal PCB layers. The traces connecting the bumps also contribute to spreading heat away from the die. The same recommendations for the size of the thermal plane as given above apply for the YZR and NYC packages, namely  $2.5\text{in}^2$  minimum for top layer thermal plane and  $5\text{in}^2$  minimum for internal or bottom layers.

### PCB LAYOUT AND SUPPLY REGULATION CONSIDERATIONS FOR DRIVING $3\Omega$ AND $4\Omega$ LOADS

Power dissipated by a load is a function of the voltage swing across the load and the load's impedance. As load impedance decreases, load dissipation becomes increasingly dependent on the interconnect (PCB trace and wire) resistance between the amplifier output pins and the load's connections. Residual trace resistance causes a voltage drop, which results in power dissipated in the trace and not in the load as desired. For example,  $0.1\Omega$  trace resistance reduces the output power dissipated by a  $4\Omega$  load from 2.1W to 2.0W. This problem of decreased load dissipation is exacerbated as load impedance decreases. Therefore, to maintain the highest load dissipation and widest output voltage swing, PCB traces that connect the output pins to a load must be as wide as possible.

Poor power supply regulation adversely affects maximum output power. A poorly regulated supply's output voltage decreases with increasing load current. Reduced supply voltage causes decreased headroom, output signal clipping, and reduced output power. Even with tightly regulated supplies, trace resistance creates the same effects as poor supply regulation. Therefore, making the power supply traces as wide as possible helps maintain full output voltage swing.

## BRIDGE CONFIGURATION EXPLANATION

As shown in [Figure 6](#), the LM4838 output stage consists of two pairs of operational amplifiers, forming a two-channel (channel A and channel B) stereo amplifier. (Though the following discusses channel A, it applies equally to channel B.)

[Figure 6](#) shows that the first amplifier's negative (-) output serves as the second amplifier's input. This results in both amplifiers producing signals identical in magnitude, but 180° out of phase. Taking advantage of this phase difference, a load is placed between -OUTA and +OUTA and driven differentially (commonly referred to as "bridge mode"). This results in a differential gain of

$$A_{VD} = 2 * (R_f/R_i) \quad (1)$$

Bridge mode amplifiers are different from single-ended amplifiers that drive loads connected between a single amplifier's output and ground. For a given supply voltage, bridge mode has a distinct advantage over the single-ended configuration: **its differential output doubles the voltage swing across the load.** This produces four times the output power when compared to a single-ended amplifier under the same conditions. This increase in attainable output power assumes that the amplifier is not current limited or that the output signal is not clipped. To ensure minimum output signal clipping when choosing an amplifier's closed-loop gain, refer to the [Audio Power Amplifier Design](#) section.

Another advantage of the differential bridge output is no net DC voltage across the load. This is accomplished by biasing channel A's and channel B's outputs at half-supply. This eliminates the coupling capacitor that single supply, single-ended amplifiers require. Eliminating an output coupling capacitor in a single-ended configuration forces a single-supply amplifier's half-supply bias voltage across the load. This increases internal IC power dissipation and may permanently damage loads such as speakers.

## POWER DISSIPATION

Power dissipation is a major concern when designing a successful single-ended or bridged amplifier. [Equation 2](#) states the maximum power dissipation point for a single-ended amplifier operating at a given supply voltage and driving a specified output load.

$$P_{DMAX} = (V_{DD})^2 / (2\pi^2 R_L) \quad \text{Single-Ended} \quad (2)$$

However, a direct consequence of the increased power delivered to the load by a bridge amplifier is higher internal power dissipation for the same conditions.

The LM4838 has two operational amplifiers per channel. The maximum internal power dissipation per channel operating in the bridge mode is four times that of a single-ended amplifier. From [Equation 3](#), assuming a 5V power supply and a 4Ω load, the maximum single channel power dissipation is 1.27W or 2.54W for stereo operation.

$$P_{DMAX} = 4 * (V_{DD})^2 / (2\pi^2 R_L) \quad \text{Bridge Mode} \quad (3)$$

The LM4838's power dissipation is twice that given by [Equation 2](#) or [Equation 3](#) when operating in the single-ended mode or bridge mode, respectively. Twice the maximum power dissipation point given by [Equation 3](#) must not exceed the power dissipation given by [Equation 4](#):

$$P_{DMAX}' = (T_{JMAX} - T_A) / \theta_{JA} \quad (4)$$

The LM4838's  $T_{JMAX} = 150^\circ\text{C}$ . In the NJB package soldered to a DAP pad that expands to a copper area of  $5\text{in}^2$  on a PCB, the LM4838's  $\theta_{JA}$  is  $20^\circ\text{C/W}$ . In the PWP package soldered to a DAP pad that expands to a copper area of  $2\text{in}^2$  on a PCB, the LM4838PWP's  $\theta_{JA}$  is  $41^\circ\text{C/W}$ . For the LM4838PW package,  $\theta_{JA} = 80^\circ\text{C/W}$ . At any given ambient temperature  $T_A$ , use [Equation 4](#) to find the maximum internal power dissipation supported by the IC packaging. Rearranging [Equation 4](#) and substituting  $P_{DMAX}$  for  $P_{DMAX}'$  results in [Equation 5](#). This equation gives the maximum ambient temperature that still allows maximum stereo power dissipation without violating the LM4838's maximum junction temperature.

$$T_A = T_{JMAX} - 2 * P_{DMAX} \theta_{JA} \quad (5)$$

For a typical application with a 5V power supply and an 4Ω load, the maximum ambient temperature that allows maximum stereo power dissipation without exceeding the maximum junction temperature is approximately  $99^\circ\text{C}$  for the NJB package and  $45^\circ\text{C}$  for the PWP package.

$$T_{JMAX} = P_{DMAX} \theta_{JA} + T_A \quad (6)$$

**Equation 6** gives the maximum junction temperature  $T_{JMAX}$ . If the result violates the LM4838's 150°C  $T_{JMAX}$ , reduce the maximum junction temperature by reducing the power supply voltage or increasing the load resistance. Further allowance should be made for increased ambient temperatures.

The above examples assume that a device is a surface mount part operating around the maximum power dissipation point. Since internal power dissipation is a function of output power, higher ambient temperatures are allowed as output power or duty cycle decreases.

If the result of **Equation 2** is greater than that of **Equation 3**, then decrease the supply voltage, increase the load impedance, or reduce the ambient temperature. If these measures are insufficient, a heat sink can be added to reduce  $\theta_{JA}$ . The heat sink can be created using additional copper area around the package, with connections to the ground pin(s), supply pin and amplifier output pins. External, solder attached SMT heatsinks such as the Thermalloy 7106D can also improve power dissipation. When adding a heat sink, the  $\theta_{JA}$  is the sum of  $\theta_{JC}$ ,  $\theta_{CS}$ , and  $\theta_{SA}$ . ( $\theta_{JC}$  is the junction-to-case thermal impedance,  $\theta_{CS}$  is the case-to-sink thermal impedance, and  $\theta_{SA}$  is the sink-to-ambient thermal impedance.) Refer to the **Typical Performance Characteristics** curves for power dissipation information at lower output power levels.

## POWER SUPPLY BYPASSING

As with any power amplifier, proper supply bypassing is critical for low noise performance and high power supply rejection. Applications that employ a 5V regulator typically use a 10  $\mu$ F in parallel with a 0.1  $\mu$ F filter capacitor to stabilize the regulator's output, reduce noise on the supply line, and improve the supply's transient response. However, their presence does not eliminate the need for a local 1.0 $\mu$ F tantalum bypass capacitance connected between the LM4838's supply pins and ground. Do not substitute a ceramic capacitor for the tantalum. Doing so may cause oscillation. Keep the length of leads and traces that connect capacitors between the LM4838's power supply pin and ground as short as possible. Connecting a 1 $\mu$ F capacitor,  $C_B$ , between the BYPASS pin and ground improves the internal bias voltage's stability and the amplifier's PSRR. The PSRR improvements increase as the BYPASS pin capacitor value increases. Too large a capacitor, however, increases turn-on time and can compromise the amplifier's click and pop performance. The selection of bypass capacitor values, especially  $C_B$ , depends on desired PSRR requirements, click and pop performance (as explained in the following section, **Selecting Proper External Components**), system cost, and size constraints.

## SELECTING PROPER EXTERNAL COMPONENTS

Optimizing the LM4838's performance requires properly selecting external components. Though the LM4838 operates well when using external components with wide tolerances, best performance is achieved by optimizing component values.

The LM4838 is unity-gain stable, giving a designer maximum design flexibility. The gain should be set to no more than a given application requires. This allows the amplifier to achieve minimum THD+N and maximum signal-to-noise ratio. These parameters are compromised as the closed-loop gain increases. However, low gain circuits demand input signals with greater voltage swings to achieve maximum output power. Fortunately, many signal sources such as audio CODECs have outputs of 1V<sub>RMS</sub> (2.83V<sub>P-P</sub>). Please refer to the **Audio Power Amplifier Design** section for more information on selecting the proper gain.

## INPUT CAPACITOR VALUE SELECTION

Amplifying the lowest audio frequencies requires a high value input coupling capacitor (0.33 $\mu$ F in **Figure 6**), but high value capacitors can be expensive and may compromise space efficiency in portable designs. In many cases, however, the speakers used in portable systems, whether internal or external, have little ability to reproduce signals below 150 Hz. Applications using speakers with this limited frequency response reap little improvement by using a large input capacitor.

Besides effecting system cost and size, the input coupling capacitor has an affect on the LM4838's click and pop performance. When the supply voltage is first applied, a transient (pop) is created as the charge on the input capacitor changes from zero to a quiescent state. The magnitude of the pop is directly proportional to the input capacitor's size. Higher value capacitors need more time to reach a quiescent DC voltage (usually  $V_{DD}/2$ ) when charged with a fixed current. The amplifier's output charges the input capacitor through the feedback resistor,  $R_f$ . Thus, pops can be minimized by selecting an input capacitor value that is no higher than necessary to meet the desired -6dB frequency.



As shown in [Figure 6](#), the input resistor ( $R_{IR}$ ,  $R_{IL} = 20k$ ) ( and the input capacitor ( $C_{IR}$ ,  $C_{IL} = 0.33\mu F$ ) produce a -6dB high pass filter cutoff frequency that is found using [Equation 7](#).

$$f_{-6\text{ dB}} = \frac{1}{2\pi R_{IN} C_1} \quad (7)$$

As an example when using a speaker with a low frequency limit of 150Hz, the input coupling capacitor, using [Equation 7](#), is 0.053 $\mu F$ . The 0.33 $\mu F$  input coupling capacitor shown in [Figure 6](#) allows the LM4838 to drive a high efficiency, full range speaker whose response extends below 30Hz.

## OPTIMIZING CLICK AND POP REDUCTION PERFORMANCE

The LM4838 contains circuitry that minimizes turn-on and shutdown transients or “clicks and pops”. For this discussion, turn-on refers to either applying the power supply voltage or when the shutdown mode is deactivated. While the power supply is ramping to its final value, the LM4838’s internal amplifiers are configured as unity gain buffers. An internal current source changes the voltage of the BYPASS pin in a controlled, linear manner. Ideally, the input and outputs track the voltage applied to the BYPASS pin. The gain of the internal amplifiers remains unity until the voltage on the BYPASS pin reaches  $1/2 V_{DD}$ . As soon as the voltage on the BYPASS pin is stable, the device becomes fully operational. Although the BYPASS pin current cannot be modified, changing the size of  $C_B$  alters the device’s turn-on time and the magnitude of “clicks and pops”. Increasing the value of  $C_B$  reduces the magnitude of turn-on pops. However, this presents a tradeoff: as the size of  $C_B$  increases, the turn-on time increases. There is a linear relationship between the size of  $C_B$  and the turn-on time. Here are some typical turn-on times for various values of  $C_B$ :

| $C_B$        | $T_{ON}$ |
|--------------|----------|
| 0.01 $\mu F$ | 2ms      |
| 0.1 $\mu F$  | 20ms     |
| 0.22 $\mu F$ | 44ms     |
| 0.47 $\mu F$ | 94ms     |
| 1.0 $\mu F$  | 200ms    |

## DOCKING STATION INTERFACE

Applications such as notebook computers can take advantage of a docking station to connect to external devices such as monitors or audio/visual equipment that sends or receives line level signals. The LM4838 has two outputs, Right Dock and Left Dock, which connect to outputs of the internal input amplifiers that drive the volume control inputs. These input amplifiers can drive loads of  $>1k\Omega$  (such as powered speakers) with a rail-to-rail signal. Since the output signal present on the RIGHT DOCK and LEFT DOCK pins is biased to  $V_{DD}/2$ , coupling capacitors should be connected in series with the load when using these outputs. Typical values for the output coupling capacitors are 0.33 $\mu F$  to 1.0 $\mu F$ . If polarized coupling capacitors are used, connect their “+” terminals to the respective output pin, see [Figure 6](#).

Since the DOCK outputs precede the internal volume control, the signal amplitude will be equal to the input signal’s magnitude and cannot be adjusted. However, the input amplifier’s closed-loop gain can be adjusted using external resistors. These 20k resistors ( $R_{FR}$ ,  $R_{FL}$ ) are shown in [Figure 6](#) and they set each input amplifier’s gain to -1. Use [Equation 7](#) to determine the input and feedback resistor values for a desired gain.

$$-A_{VR} = R_{FR}/R_{IR} \text{ and } -A_{VL} = R_{FL}/R_{IL} \quad (8)$$

Adjusting the input amplifier’s gain sets the minimum gain for that channel. Although the single ended output of the Bridge Output Amplifiers can be used to drive line level outputs, it is recommended that the R & L Dock Outputs simpler signal path be used for better performance.



## BEEP DETECT FUNCTION

Computers and notebooks produce a system “beep” signal that drives a small speaker. The speaker's auditory output signifies that the system requires user attention or input. To accommodate this system alert signal, the LM4838's beep input pin is a mono input that accepts the beep signal. Internal level detection circuitry at this input monitors the beep signal's magnitude. When a signal level greater than  $V_{DD}/2$  is detected on the BEEP IN pin, the bridge output amplifiers are enabled. The beep signal is amplified and applied to the load connected to the output amplifiers. A valid beep signal will be applied to the load even when MUTE is active. Use the input resistors connected between the BEEP IN pin and the stereo input pins to accommodate different beep signal amplitudes. These resistors ( $R_{BEEP}$ ) are shown as 200k $\Omega$  devices in [Figure 6](#). Use higher value resistors to reduce the gain applied to the beep signal. The resistors must be used to pass the beep signal to the stereo inputs. The BEEP IN pin is used only to detect the beep signal's magnitude: it does not pass the signal to the output amplifiers. The LM4838's shutdown mode must be deactivated before a system alert signal is applied to BEEP IN pin.

## MICRO-POWER SHUTDOWN

The voltage applied to the SHUTDOWN pin controls the LM4838's shutdown function. Activate micro-power shutdown by applying  $V_{DD}$  to the SHUTDOWN pin. When active, the LM4838's micro-power shutdown feature turns off the amplifier's bias circuitry, reducing the supply current. The logic threshold is typically  $V_{DD}/2$ . The low 0.7  $\mu$ A typical shutdown current is achieved by applying a voltage that is as near as  $V_{DD}$  as possible to the SHUTDOWN pin. A voltage that is less than  $V_{DD}$  may increase the shutdown current.

There are a few ways to control the micro-power shutdown. These include using a single-pole, single-throw switch, a microprocessor, or a microcontroller. When using a switch, connect an external 10k $\Omega$  pull-up resistor between the SHUTDOWN pin and  $V_{DD}$ . Connect the switch between the SHUTDOWN pin and ground. Select normal amplifier operation by closing the switch. Opening the switch connects the SHUTDOWN pin to  $V_{DD}$  through the pull-up resistor, activating micro-power shutdown. The switch and resistor ensure that the SHUTDOWN pin will not float. This prevents unwanted state changes. In a system with a microprocessor or a microcontroller, use a digital output to apply the control voltage to the SHUTDOWN pin. Driving the SHUTDOWN pin with active circuitry eliminates the need for a pull up resistor.

## MODE FUNCTION

The LM4838's MODE function has 2 states controlled by the voltage applied to the MODE pin. Mode 0, selected by applying 0V to the MODE pin, forces the LM4838 to effectively function as a “line-out,” unity-gain amplifier. Mode 1, which uses the internal DC controlled volume control is selected by applying  $V_{DD}$  to the MODE pin. This mode sets the amplifier's gain according to the DC voltage applied to the DC VOL CONTROL pin. Unanticipated gain behavior can be prevented by connecting the MODE pin to  $V_{DD}$  or ground. Note: Do not let the mode pin float.

## MUTE FUNCTION

The LM4838 mutes the amplifier and DOCK outputs when  $V_{DD}$  is applied to the MUTE pin. Even while muted, the LM4838 will amplify a system alert (beep) signal whose magnitude satisfies the BEEP DETECT circuitry. Applying 0V to the MUTE pin returns the LM4838 to normal, unmuted operation. Prevent unanticipated mute behavior by connecting the MUTE pin to  $V_{DD}$  or ground. Do not let the mute pin float.

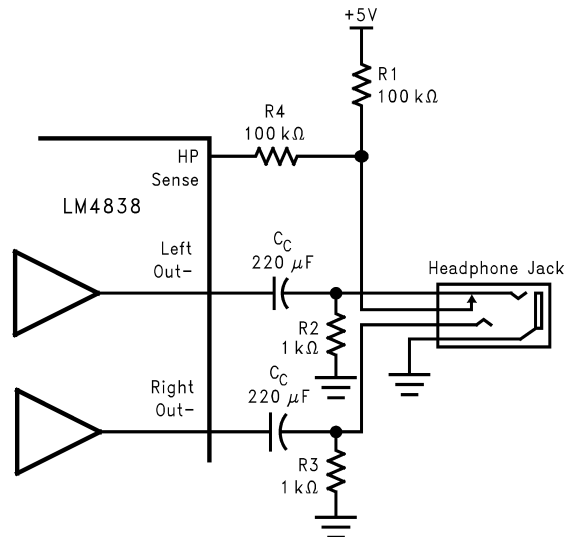


Figure 55. Headphone Sensing Circuit

### HP SENSE FUNCTION ( Head Phone In )

Applying a voltage between 4V and  $V_{DD}$  to the LM4838's HP-IN headphone control pin turns off the amps that drive the Left out "+" and Right out "+" pins. This action mutes a bridged-connected load. Quiescent current consumption is reduced when the IC is in this single-ended mode.

Figure 55 shows the implementation of the LM4838's headphone control function. With no headphones connected to the headphone jack, the R1-R2 voltage divider sets the voltage applied to the HP SENSE pin at approximately 50mV. This 50mV puts the LM4838 into bridged mode operation. The output coupling capacitor blocks the amplifier's half supply DC voltage, protecting the headphones.

The HP-IN threshold is set at 4V. While the LM4838 operates in bridged mode, the DC potential across the load is essentially 0V. Therefore, even in an ideal situation, the output swing cannot cause a false single-ended trigger. Connecting headphones to the headphone jack disconnects the headphone jack contact pin from R2 and allows R1 to pull the HP Sense pin up to  $V_{DD}$  through R4. This enables the headphone function, turns off both of the "+" output amplifiers, and mutes the bridged speaker. The remaining single-ended amplifiers then drive the headphones, whose impedance is in parallel with resistors R2 and R3. These resistors have negligible effect on the LM4838's output drive capability since the typical impedance of headphones is 32Ω.


Figure 55 also shows the suggested headphone jack electrical connections. The jack is designed to mate with a three-wire plug. The plug's tip and ring should each carry one of the two stereo output signals, whereas the sleeve should carry the ground return. A headphone jack with one control pin contact is sufficient to drive the HP-IN pin when connecting headphones.

A microprocessor or a switch can replace the headphone jack contact pin. When a microprocessor or switch applies a voltage greater than 4V to the HP-IN pin, a bridge-connected speaker is muted and the single ended output amplifiers 1A and 2A will drive a pair of headphones.

### GAIN SELECT FUNCTION (Bass Boost)

The LM4838 features selectable gain, using either internal or external feedback resistors. Either set of feedback resistors set the gain of the output amplifiers. The voltage applied to the GAIN SELECT pin controls which gain is selected. Applying  $V_{DD}$  to the GAIN SELECT pin selects the external gain mode. Applying 0V to the GAIN SELECT pin selects the internally set unity gain.

In some cases a designer may want to improve the low frequency response of the bridged amplifier or incorporate a bass boost feature. This bass boost can be useful in systems where speakers are housed in small enclosures. A resistor,  $R_{LFE}$ , and a capacitor,  $C_{LFE}$ , in parallel, can be placed in series with the feedback resistor of the bridged amplifier as seen in Figure 56.

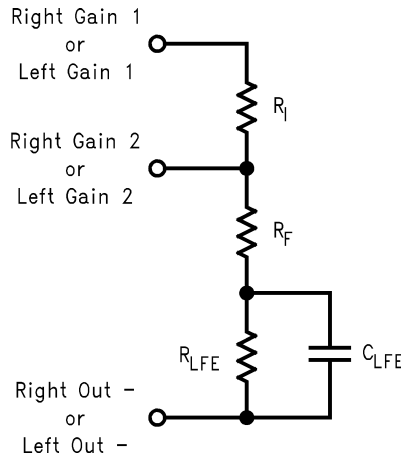

**Figure 56. Low Frequency Enhancement**

At low frequencies  $C_{LFE}$  is a virtual open circuit and at high frequencies, its nearly zero ohm impedance shorts  $R_{LFE}$ . The result is increased bridge-amplifier gain at low frequencies. The combination of  $R_{LFE}$  and  $C_{LFE}$  form a -6dB corner frequency at

$$f_c = 1/(2\pi R_{LFE} C_{LFE}) \quad (9)$$

The bridged-amplifier low frequency differential gain is:

$$A_{VD} = 2(R_F + R_{LFE}) / R_i \quad (10)$$

Using the component values shown in [Figure 1](#) ( $R_F = 20k\Omega$ ,  $R_{LFE} = 20k\Omega$ , and  $C_{LFE} = 0.068\mu F$ ), a first-order, -6dB pole is created at 120Hz. Assuming  $R_i = 20k\Omega$ , the low frequency differential gain is 4. The input ( $C_i$ ) and output ( $C_o$ ) capacitor values must be selected for a low frequency response that covers the range of frequencies affected by the desired bass-boost operation.

## DC VOLUME CONTROL

The LM4838 has an internal stereo volume control whose setting is a function of the DC voltage applied to the DC VOL CONTROL pin.

The LM4838 volume control consists of 31 steps that are individually selected by a variable DC voltage level on the volume control pin. The range of the steps, controlled by the DC voltage, are from 0dB - 78dB. Each gain step corresponds to a specific input voltage range, as shown in table 2.

To minimize the effect of noise on the volume control pin, which can affect the selected gain level, hysteresis has been implemented. The amount of hysteresis corresponds to half of the step width, as shown in Volume Control Characterization Graph (DS200133-40).

For highest accuracy, the voltage shown in the 'recommended voltage' column of the table is used to select a desired gain. This recommended voltage is exactly halfway between the two nearest transitions to the next highest or next lowest gain levels.

The gain levels are 1dB/step from 0dB to -6dB, 2dB/step from -6dB to -36dB, 3dB/step from -36dB to -47dB, 4dB/step from -47dB to -51dB, 5dB/step from -51dB to -66dB, and 12dB to the last step at -78dB.

## VOLUME CONTROL TABLE ( Table 2 )

| Gain (dB) | Voltage Range (% of Vdd) |         |             | Voltage Range (Vdd = 5) |       |             | Voltage Range (Vdd = 3) |       |             |
|-----------|--------------------------|---------|-------------|-------------------------|-------|-------------|-------------------------|-------|-------------|
|           | Low                      | High    | Recommended | Low                     | High  | Recommended | Low                     | High  | Recommended |
| 0         | 77.5%                    | 100.00% | 100.000%    | 3.875                   | 5.000 | 5.000       | 2.325                   | 3.000 | 3.000       |
| -1        | 75.0%                    | 78.5%   | 76.875%     | 3.750                   | 3.938 | 3.844       | 2.250                   | 2.363 | 2.306       |
| -2        | 72.5%                    | 76.25%  | 74.375%     | 3.625                   | 3.813 | 3.719       | 2.175                   | 2.288 | 2.231       |
| -3        | 70.0%                    | 73.75%  | 71.875%     | 3.500                   | 3.688 | 3.594       | 2.100                   | 2.213 | 2.156       |
| -4        | 67.5%                    | 71.25%  | 69.375%     | 3.375                   | 3.563 | 3.469       | 2.025                   | 2.138 | 2.081       |

| Gain (dB) | Voltage Range (% of Vdd) |        |             | Voltage Range (Vdd = 5) |       |             | Voltage Range (Vdd = 3) |       |             |
|-----------|--------------------------|--------|-------------|-------------------------|-------|-------------|-------------------------|-------|-------------|
|           | Low                      | High   | Recommended | Low                     | High  | Recommended | Low                     | High  | Recommended |
| -5        | 65.0%                    | 68.75% | 66.875%     | 3.250                   | 3.438 | 3.344       | 1.950                   | 2.063 | 2.006       |
| -6        | 62.5%                    | 66.25% | 64.375%     | 3.125                   | 3.313 | 3.219       | 1.875                   | 1.988 | 1.931       |
| -8        | 60.0%                    | 63.75% | 61.875%     | 3.000                   | 3.188 | 3.094       | 1.800                   | 1.913 | 1.856       |
| -10       | 57.5%                    | 61.25% | 59.375%     | 2.875                   | 3.063 | 2.969       | 1.725                   | 1.838 | 1.781       |
| -12       | 55.0%                    | 58.75% | 56.875%     | 2.750                   | 2.938 | 2.844       | 1.650                   | 1.763 | 1.706       |
| -14       | 52.5%                    | 56.25% | 54.375%     | 2.625                   | 2.813 | 2.719       | 1.575                   | 1.688 | 1.631       |
| -16       | 50.0%                    | 53.75% | 51.875%     | 2.500                   | 2.688 | 2.594       | 1.500                   | 1.613 | 1.556       |
| -18       | 47.5%                    | 51.25% | 49.375%     | 2.375                   | 2.563 | 2.469       | 1.425                   | 1.538 | 1.481       |
| -20       | 45.0%                    | 48.75% | 46.875%     | 2.250                   | 2.438 | 2.344       | 1.350                   | 1.463 | 1.406       |
| -22       | 42.5%                    | 46.25% | 44.375%     | 2.125                   | 2.313 | 2.219       | 1.275                   | 1.388 | 1.331       |
| -24       | 40.0%                    | 43.75% | 41.875%     | 2.000                   | 2.188 | 2.094       | 1.200                   | 1.313 | 1.256       |
| -26       | 37.5%                    | 41.25% | 39.375%     | 1.875                   | 2.063 | 1.969       | 1.125                   | 1.238 | 1.181       |
| -28       | 35.0%                    | 38.75% | 36.875%     | 1.750                   | 1.938 | 1.844       | 1.050                   | 1.163 | 1.106       |
| -30       | 32.5%                    | 36.25% | 34.375%     | 1.625                   | 1.813 | 1.719       | 0.975                   | 1.088 | 1.031       |
| -32       | 30.0%                    | 33.75% | 31.875%     | 1.500                   | 1.688 | 1.594       | 0.900                   | 1.013 | 0.956       |
| -34       | 27.5%                    | 31.25% | 29.375%     | 1.375                   | 1.563 | 1.469       | 0.825                   | 0.937 | 0.881       |
| -36       | 25.0%                    | 28.75% | 26.875%     | 1.250                   | 1.438 | 1.344       | 0.750                   | 0.862 | 0.806       |
| -39       | 22.5%                    | 26.25% | 24.375%     | 1.125                   | 1.313 | 1.219       | 0.675                   | 0.787 | 0.731       |
| -42       | 20.0%                    | 23.75% | 21.875%     | 1.000                   | 1.188 | 1.094       | 0.600                   | 0.712 | 0.656       |
| -45       | 17.5%                    | 21.25% | 19.375%     | 0.875                   | 1.063 | 0.969       | 0.525                   | 0.637 | 0.581       |
| -47       | 15.0%                    | 18.75% | 16.875%     | 0.750                   | 0.937 | 0.844       | 0.450                   | 0.562 | 0.506       |
| -51       | 12.5%                    | 16.25% | 14.375%     | 0.625                   | 0.812 | 0.719       | 0.375                   | 0.487 | 0.431       |
| -56       | 10.0%                    | 13.75% | 11.875%     | 0.500                   | 0.687 | 0.594       | 0.300                   | 0.412 | 0.356       |
| -61       | 7.5%                     | 11.25% | 9.375%      | 0.375                   | 0.562 | 0.469       | 0.225                   | 0.337 | 0.281       |
| -66       | 5.0%                     | 8.75%  | 6.875%      | 0.250                   | 0.437 | 0.344       | 0.150                   | 0.262 | 0.206       |
| -78       | 0.0%                     | 6.25%  | 0.000%      | 0.000                   | 0.312 | 0.000       | 0.000                   | 0.187 | 0.000       |

## AUDIO POWER AMPLIFIER DESIGN

### Audio Amplifier Design: Driving 1W into an 8Ω Load

The following are the desired operational parameters:

|                  |                         |
|------------------|-------------------------|
| Power Output:    | 1 W <sub>RMS</sub>      |
| Load Impedance:  | 8Ω                      |
| Input Level:     | 1 V <sub>RMS</sub>      |
| Input Impedance: | 20 kΩ                   |
| Bandwidth:       | 100 Hz–20 kHz ± 0.25 dB |

The design begins by specifying the minimum supply voltage necessary to obtain the specified output power. One way to find the minimum supply voltage is to use the Output Power vs Supply Voltage curve in the [Typical Performance Characteristics](#) section. Another way, using [Equation 10](#), is to calculate the peak output voltage necessary to achieve the desired output power for a given load impedance. To account for the amplifier's dropout voltage, two additional voltages, based on the Dropout Voltage vs Supply Voltage in the [Typical Performance Characteristics](#) curves, must be added to the result obtained by [Equation 10](#). The result is [Equation 11](#).

$$V_{\text{outpeak}} = \sqrt{(2R_L P_O)} \quad (11)$$

$$V_{DD} \geq (V_{\text{OUTPEAK}} + (V_{\text{ODTOP}} + V_{\text{ODBOT}})) \quad (12)$$

The Output Power vs Supply Voltage graph for an 8Ω load indicates a minimum supply voltage of 4.6V. This is easily met by the commonly used 5V supply voltage. The additional voltage creates the benefit of headroom, allowing the LM4838 to produce peak output power in excess of 1W without clipping or other audible distortion. The choice of supply voltage must also not create a situation that violates of maximum power dissipation as explained above in the [Power Dissipation](#) section.

After satisfying the LM4838's power dissipation requirements, the minimum differential gain needed to achieve 1W dissipation in an 8Ω load is found using [Equation 12](#).

$$A_{VD} \geq \sqrt{(P_O R_L)} / (V_{IN}) = V_{O_{rms}} / V_{I_{rms}} \quad (13)$$

Thus, a minimum overall gain of 2.83 allows the LM4838's to reach full output swing and maintain low noise and THD+N performance.

The last step in this design example is setting the amplifier's -6dB frequency bandwidth. To achieve the desired ±0.25dB pass band magnitude variation limit, the low frequency response must extend to at least one-fifth the lower bandwidth limit and the high frequency response must extend to at least five times the upper bandwidth limit. The gain variation for both response limits is 0.17dB, well within the ±0.25dB desired limit. The results are an

$$f_L = 100\text{Hz}/5 = 20\text{Hz} \quad (14)$$

and an

$$f_H = 20\text{kHz} \times 5 = 100\text{kHz} \quad (15)$$

As mentioned in the [Selecting Proper External Components](#) section,  $R_i$  (Right & Left) and  $C_i$  (Right & Left) create a highpass filter that sets the amplifier's lower bandpass frequency limit. Find the input coupling capacitor's value using [Equation 14](#).

$$C_i \geq 1/(2\pi R_i f_L) \quad (16)$$

The result is

$$1/(2\pi * 20\text{k}\Omega * 20\text{Hz}) = 0.397\mu\text{F} \quad (17)$$

Use a 0.39μF capacitor, the closest standard value.

The product of the desired high frequency cutoff (100kHz in this example) and the differential gain  $A_{VD}$ , determines the upper passband response limit. With  $A_{VD} = 3$  and  $f_H = 100\text{kHz}$ , the closed-loop gain bandwidth product (GBWP) is 300kHz. This is less than the LM4838's 3.5MHz GBWP. With this margin, the amplifier can be used in designs that require more differential gain while avoiding performance, restricting bandwidth limitations.

## Recommended Printed Circuit Board Layout

The following figures show the recommended PC board layouts that are optimized for the different package options of the LM4838 and associated external components. This circuit is designed for use with an external 5V supply and 4Ω speakers.

This circuit board is easy to use. Apply 5V and ground to the board's  $V_{DD}$  and GND pads, respectively. Connect 4Ω speakers between the board's -OUTA and +OUTA and OUTB and +OUTB pads.

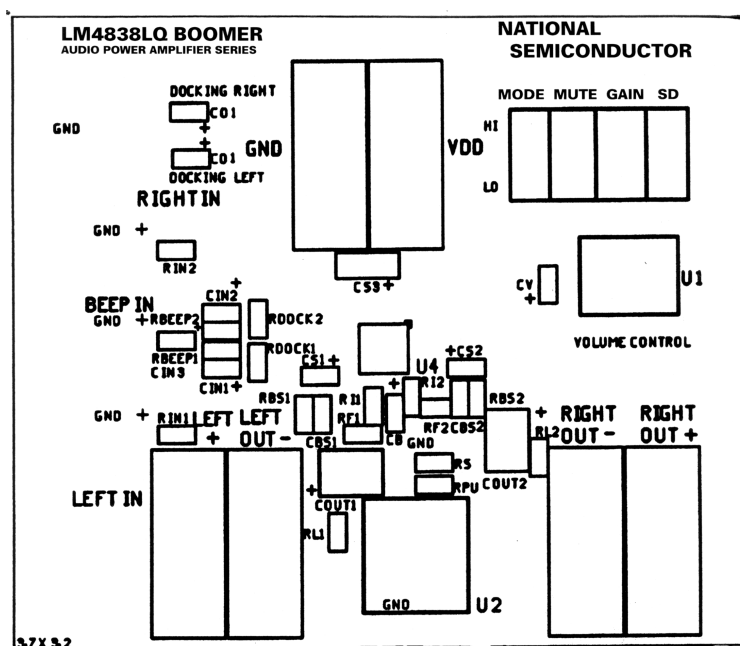


Figure 57. Recommended NJB PC Board Layout:  
Component-Side Silkscreen



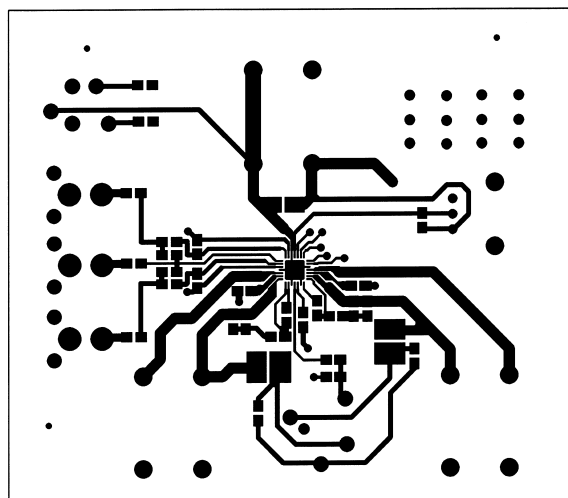



Figure 58. Recommended NJB PC Board Layout:  
Component-Side Layout

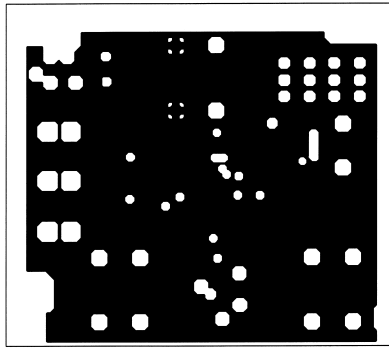

**Figure 59. Recommended NJB PC Board Layout:  
Upper Inner-Layer Layout**

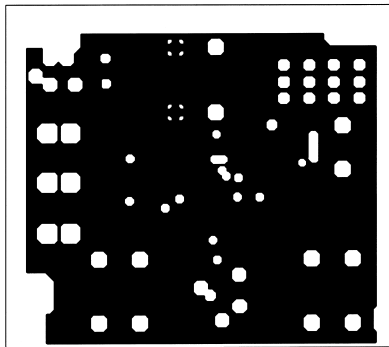

**Figure 60. Recommended NJB PC Board Layout:  
Lower Inner-Layer Layout**

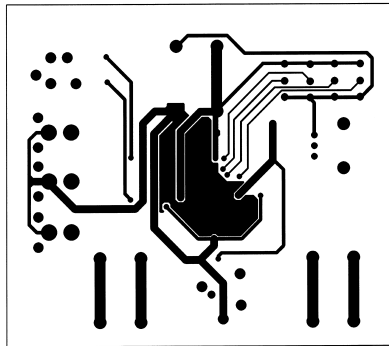


**Figure 61. Recommended NJB PC Board Layout:  
Bottom-Side Layout**

**Table 4. Analog Audio LM4838 NJB28 Eval Board  
Assembly Part Number: 980011368-100  
Revision: A1  
Bill of Material**


| Item | Part Number   | Part Description                            | Qty | Ref Designator             | Remark                |
|------|---------------|---------------------------------------------|-----|----------------------------|-----------------------|
| 1    | 551011368-001 | LM4838 Eval Board PCB etch 001              | 1   |                            |                       |
| 10   | 482911368-001 | LM4838 28L LLP                              | 1   | U4                         |                       |
| 20   | 151911368-001 | Cer Cap 0.068 $\mu$ F 50V 10% 1206          | 2   | CBS1, CBS2                 |                       |
| 25   | 152911368-001 | Tant Cap 0.1 $\mu$ F 10V 10% Size = A 3216  | 3   | CS1, CS2, CV               |                       |
| 26   | 152911368-002 | Tant Cap 0.33 $\mu$ F 10V 10% Size = A 3216 | 3   | Cin1, Cin2, Cin3           |                       |
| 27   | 152911368-003 | Tant Cap 1 $\mu$ F 16V 10% Size = A 3216    | 3   | CB, C01, C02               |                       |
| 28   | 152911368-004 | Tant Cap 10 $\mu$ F 10V 10% Size = C 6032   | 1   | CS3                        |                       |
| 29   | 152911368-005 | Tant Cap 220 $\mu$ F 16V 10% Size = D 7343  | 2   | Cout1, Cout2               |                       |
| 30   | 472911368-001 | Res 1.5K Ohm 1/8W 1% 1206                   | 2   | RL1, RL2                   |                       |
| 31   | 472911368-002 | Res 20k Ohm 1/8W 1% 1206                    | 10  | Rin1, Rin2, RF1, RF2       |                       |
|      |               |                                             |     | RI1, RI2, RBS1, RBS2       |                       |
|      |               |                                             |     | Rdock1, Rdock2             |                       |
| 32   | 472911368-003 | Res 100k Ohm 1/8W 1% 1206                   | 2   | RS, RPU                    |                       |
| 33   | 472911368-004 | Res 200k Ohm 1/16W 1% 0603                  | 2   | Rbeep1, Rbeep2             |                       |
| 40   | 131911368-001 | Stereo Headphone Jack W/ Switch             | 1   | U2                         | Mouser # 161-3500     |
| 41   | 131911368-002 | Slide Switch                                | 4   | Mode, Mute, Gain, SD       | Mouser # 10SP003      |
| 42   | 131911368-003 | Potentiometer                               | 1   | U1                         | Mouser # 317-290-100K |
| 43   | 131911368-004 | RCA Jack                                    | 3   | RightIn, BeepIn, LeftIn    | Mouser # 16PJ097      |
| 44   | 131911368-005 | Banana Jack, Black                          | 3   | GND, Right Out-, Left Out- | Mouser # ME164-6219   |
| 45   | 131911368-006 | Banana Jack, Red                            | 3   | Vdd, Right Out+, Left Out+ | Mouser # ME164-6218   |



## LM4838 PW & PWP Demo Board Artwork

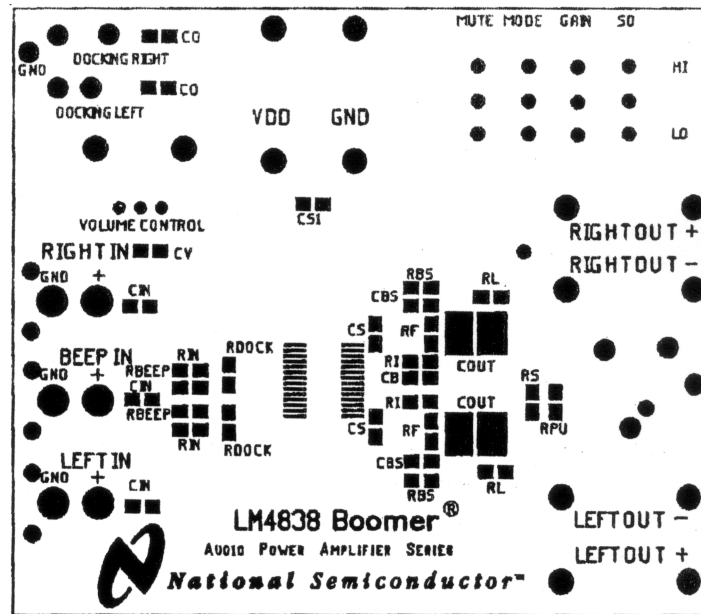

### Figure 62. Top Layer SilkScreen

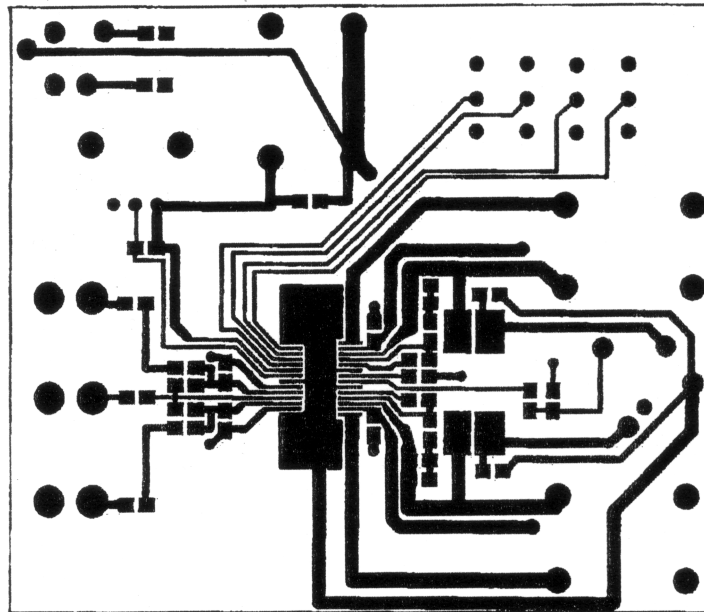

### Figure 63. Top Layer TSSOP

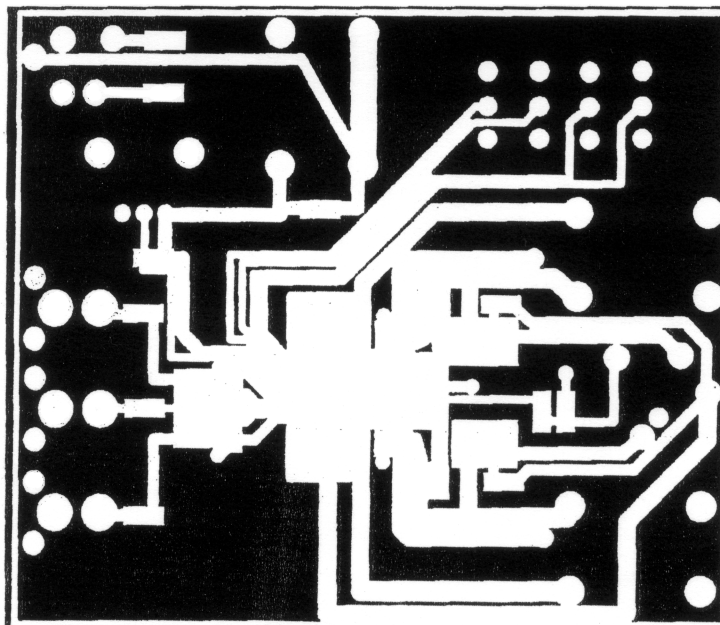


Figure 64. Inner Layer (2) LM4838 PW / PWP


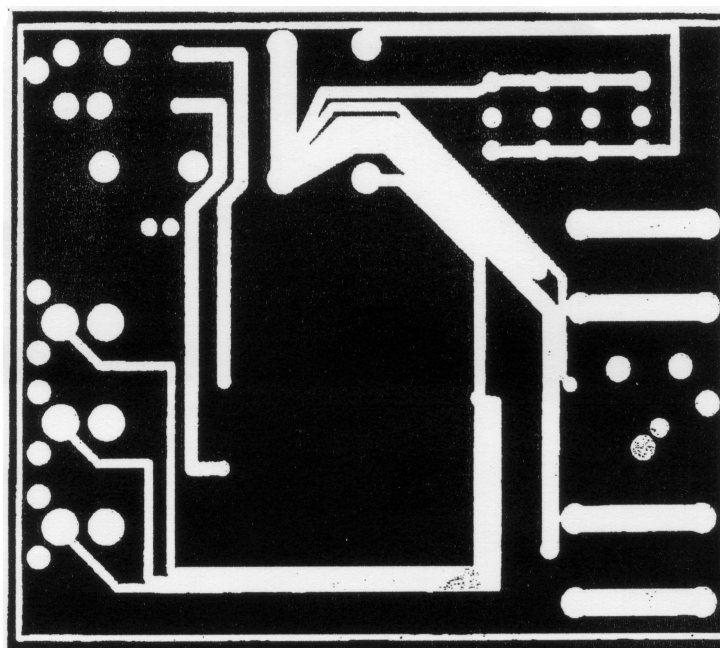


Figure 65. Inner Layer (3) LM4838 PW / PWP

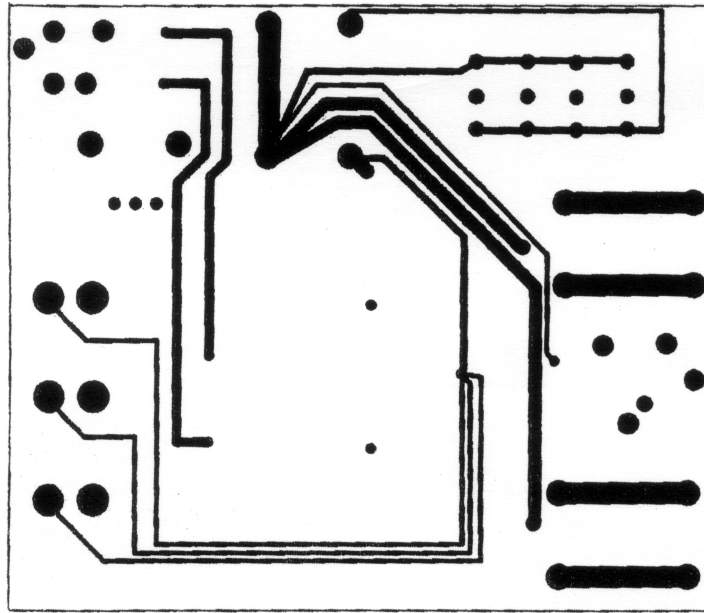

**Figure 66. Bottom Layer TSSOP**


**Table 5. Analog Audio LM4838 TSSOP Eval Board  
Assembly Part Number: 980011373-100  
Revision: A  
Bill of Material**

| Item | Part Number   | Part Description                            | Qty | Ref Designator                  | Remark            |
|------|---------------|---------------------------------------------|-----|---------------------------------|-------------------|
| 1    | 551011373-001 | LM4838 Eval Board PCB etch 001              | 1   |                                 |                   |
| 10   | 482911373-001 | LM4838 TSSOP                                | 1   |                                 |                   |
| 20   | 151911368-001 | Cer Cap 0.068 $\mu$ F 50V 10% 1206          | 2   | CBS                             |                   |
| 25   | 152911368-001 | Tant Cap 0.1 $\mu$ F 10V 10% Size = A 3216  | 3   | CS, CS, CV                      |                   |
| 26   | 152911368-002 | Tant Cap 0.33 $\mu$ F 10V 10% Size = A 3216 | 3   | CIN                             |                   |
| 27   | 152911368-003 | Tant Cap 1 $\mu$ F 16V 10% Size = A 3216    | 3   | CB, CO1, CO2                    |                   |
| 28   | 152911368-004 | Tant Cap 10 $\mu$ F 10V 10% Size = C 6032   | 1   | CS1                             |                   |
| 29   | 152911368-005 | Tant Cap 220 $\mu$ F 16V 10% Size = D 7343  | 2   | CoutL, R                        |                   |
| 30   | 472911368-001 | Res 1.5K Ohm 1/8W 1% 1206                   | 2   | RL                              |                   |
| 31   | 472911368-002 | Res 20K Ohm 1/8W 1% 1206                    | 10  | RIN(4), RF(2), RDOCK(2), RBS(2) |                   |
| 32   | 472911368-003 | Res 100K Ohm 1/8W 1% 1206                   | 2   | RPU, RS                         |                   |
| 33   | 472911368-004 | Res 200K Ohm 1/16W 1% 0603                  | 2   | RBEEP                           |                   |
| 40   | 131911368-001 | Stereo Headphone Jack W/ Switch             | 1   |                                 | Mouser # 161-3500 |
| 41   | 131911368-002 | Slide Switch                                | 4   | mute, mode, Gain, SD            | Mouser # 10SP003  |

**Table 5. Analog Audio LM4838 TSSOP Eval Board**  
**Assembly Part Number: 980011373-100**  
**Revision: A**  
**Bill of Material (continued)**

| Item | Part Number   | Part Description   | Qty | Ref Designator             | Remark                 |
|------|---------------|--------------------|-----|----------------------------|------------------------|
| 42   | 131911368-003 | Potentiometer      | 1   | Volume Control             | Mouser # 317-2090-100K |
| 43   | 131911368-004 | RCA Jack           | 3   | Right-In, Beep-In, Left-In | Mouser # 16PJ097       |
| 44   | 131911368-005 | Banana Jack, Black | 3   |                            | Mouser # ME164-6219    |
| 45   | 131911368-006 | Banana Jack, Red   | 3   |                            | Mouser # ME164-6218    |

## LM4838 YZR Demo Board Artwork

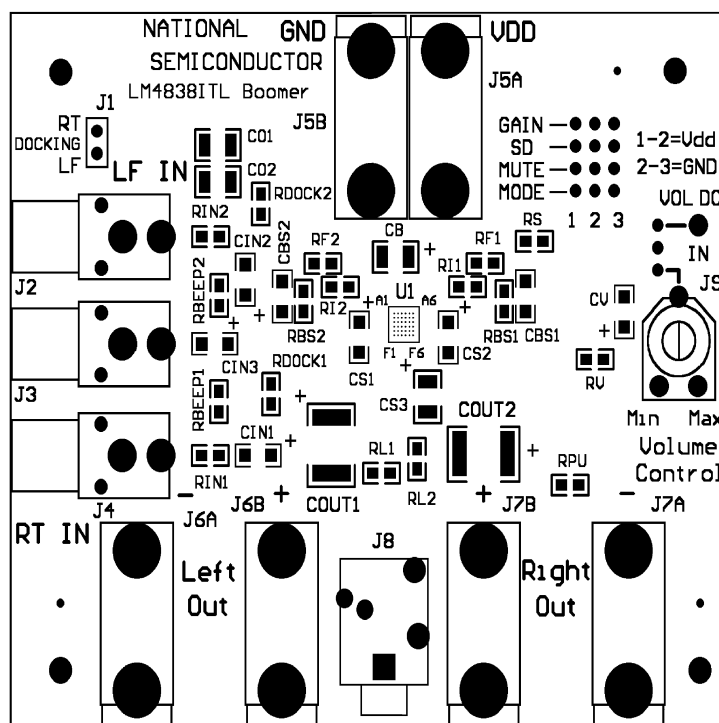

**Figure 67. LM4838 DSBGA Silk Screen**

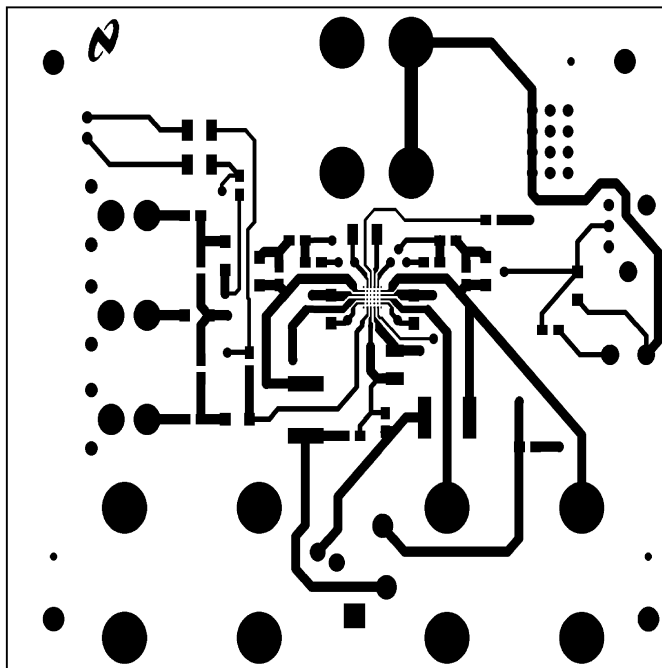


Figure 68. LM4838 DSBGA Top Layer

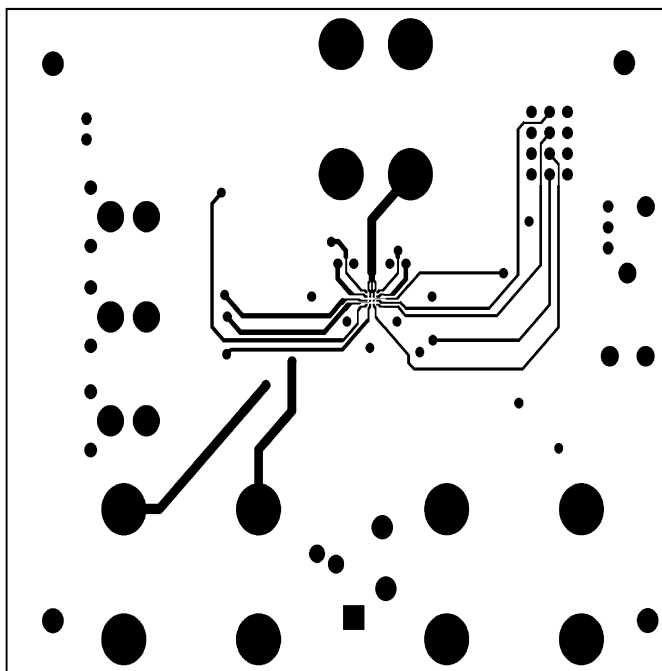


Figure 69. LM4838 DSBGA Upper Inner Layer

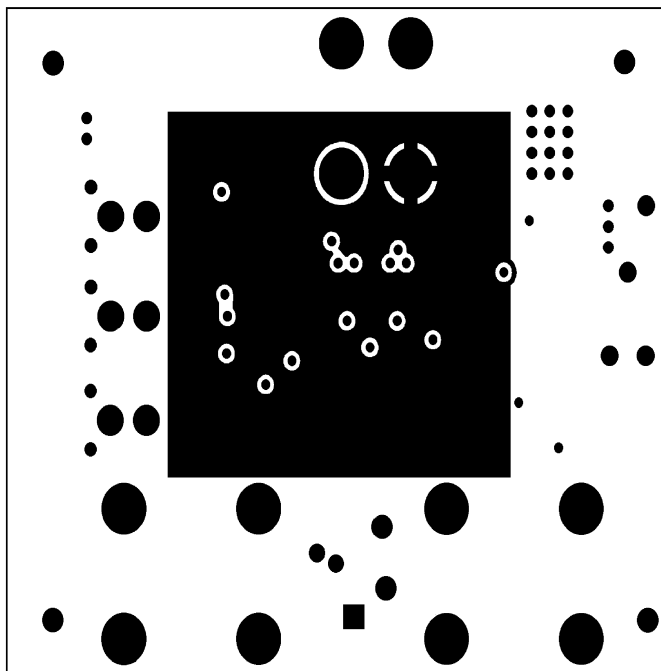


Figure 70. LM4838 DSBGA Lower Inner Layer

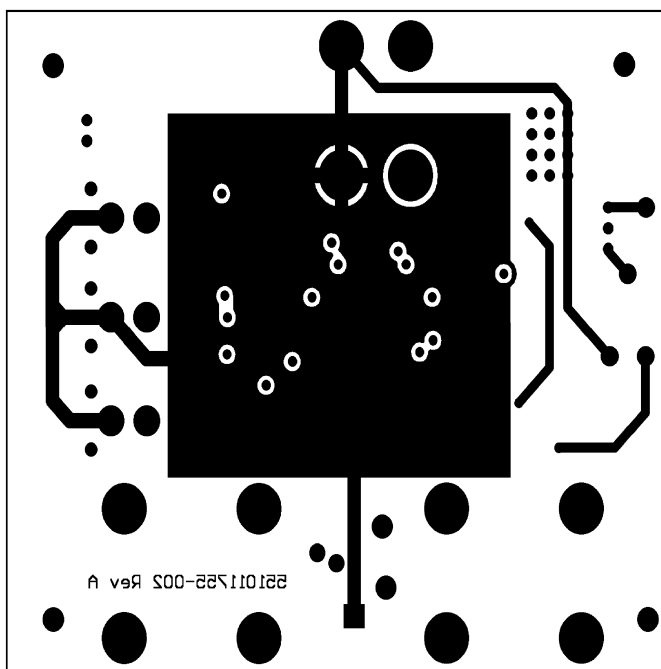


Figure 71. LM4838 DSBGA Bottom Layer

**Table 6. Analog Audio LM4838 YZR36 Board  
Bill of Material**

| Part Description $\mu\Omega$                           | Qty | Reference Designator                                          |
|--------------------------------------------------------|-----|---------------------------------------------------------------|
| LM4838 YZR36 Evaluation Board PCB                      | 1   | P/N: 551011755 - 002 rev A                                    |
| LM4838YZR                                              | 1   | U1                                                            |
| Ceramic Capacitor 0.068 $\mu$ F 50V 10%<br>Size = 1206 | 2   | CBS1, CBS2                                                    |
| Tantalum Capacitor 0.1 $\mu$ F 10V 10%<br>Size = 1206  | 3   | CS1, CS2, CV                                                  |
| Tantalum Capacitor 0.33 $\mu$ F 10V 10%<br>Size = 1206 | 3   | CIN1, CIN2, CIN3                                              |
| Tantalum Capacitor 1.0 $\mu$ F 16V 10%<br>Size = 1210  | 4   | CS3, CB, CO1, CO2                                             |
| Tantalum Capacitor 220 $\mu$ F 16V 10%<br>Size = 7343  | 2   | COUT1, COUT2                                                  |
| Resistor 1.5k $\Omega$ 1/10W 1%<br>Size = 0805         | 2   | RL1, RL2                                                      |
| Resistor 20k $\Omega$ 1/10W 1%<br>Size = 0805          | 10  | RIN1, RIN2, RF1, RF2, RI1, RI2, RBS1, RBS2,<br>RDOCK1, RDOCK2 |
| Resistor 100k $\Omega$ 1/10W 1%<br>Size = 0805         | 2   | RS, RPU                                                       |
| Resistor 120k $\Omega$ 1/10W 1%<br>Size = 0805         | 2   | RBEEP1, RBEEP2                                                |
| Resistor 1M $\Omega$ 1/10W 1%<br>Size = 0805           | 1   | RV                                                            |
| Jumper Header Vertical Mount<br>0.100" spacing         | 1   | J1 (Docking RT LF)                                            |
| RCA Jack PCB mount                                     | 3   | J2 (LeftIn), J3 (Beep In), J4 (Right In)                      |
| Banana Jack, Black                                     | 3   | J5B (GND), J6A (Right Out -), J7A (Left Out -)                |
| Banana Jack, Red                                       | 3   | J5A ( $V_{DD}$ ), J6B (Right Out +), J7B (Left Out +)         |
| Stereo Headphone Jack W/Switch                         | 1   | J8                                                            |
| Single Turn Potentiometer 100k $\Omega$ 20%            | 1   | J9                                                            |
| Jumper Header Vertical Mount<br>0.100" spacing 3x4     | 1   | Mute, SD, Gain, Mode                                          |
| Jumper Header Vertical Mount<br>0.100" spacing 1x3     | 1   | DC IN                                                         |

## REVISION HISTORY

| Changes from Revision E (March 2013) to Revision F         | Page               |
|------------------------------------------------------------|--------------------|
| • Changed layout of National Data Sheet to TI format ..... | <a href="#">35</a> |



PACKAGING INFORMATION

| Orderable part number | Status<br>(1) | Material type<br>(2) | Package   Pins    | Package qty   Carrier | RoHS<br>(3) | Lead finish/<br>Ball material<br>(4) | MSL rating/<br>Peak reflow<br>(5) | Op temp (°C) | Part marking<br>(6) |
|-----------------------|---------------|----------------------|-------------------|-----------------------|-------------|--------------------------------------|-----------------------------------|--------------|---------------------|
| LM4838MTEX/NOPB       | Active        | Production           | HTSSOP (PWP)   28 | 2500   LARGE T&R      | Yes         | SN                                   | Level-1-260C-UNLIM                | -40 to 85    | LM4838MTE           |
| LM4838MTEX/NOPB.A     | Active        | Production           | HTSSOP (PWP)   28 | 2500   LARGE T&R      | Yes         | SN                                   | Level-1-260C-UNLIM                | -40 to 85    | LM4838MTE           |


- <sup>(1)</sup> **Status:** For more details on status, see our [product life cycle](#).
- <sup>(2)</sup> **Material type:** When designated, preproduction parts are prototypes/experimental devices, and are not yet approved or released for full production. Testing and final process, including without limitation quality assurance, reliability performance testing, and/or process qualification, may not yet be complete, and this item is subject to further changes or possible discontinuation. If available for ordering, purchases will be subject to an additional waiver at checkout, and are intended for early internal evaluation purposes only. These items are sold without warranties of any kind.
- <sup>(3)</sup> **RoHS values:** Yes, No, RoHS Exempt. See the [TI RoHS Statement](#) for additional information and value definition.
- <sup>(4)</sup> **Lead finish/Ball material:** Parts may have multiple material finish options. Finish options are separated by a vertical ruled line. Lead finish/Ball material values may wrap to two lines if the finish value exceeds the maximum column width.
- <sup>(5)</sup> **MSL rating/Peak reflow:** The moisture sensitivity level ratings and peak solder (reflow) temperatures. In the event that a part has multiple moisture sensitivity ratings, only the lowest level per JEDEC standards is shown. Refer to the shipping label for the actual reflow temperature that will be used to mount the part to the printed circuit board.
- <sup>(6)</sup> **Part marking:** There may be an additional marking, which relates to the logo, the lot trace code information, or the environmental category of the part.

Multiple part markings will be inside parentheses. Only one part marking contained in parentheses and separated by a "~" will appear on a part. If a line is indented then it is a continuation of the previous line and the two combined represent the entire part marking for that device.

**Important Information and Disclaimer:**The information provided on this page represents TI's knowledge and belief as of the date that it is provided. TI bases its knowledge and belief on information provided by third parties, and makes no representation or warranty as to the accuracy of such information. Efforts are underway to better integrate information from third parties. TI has taken and continues to take reasonable steps to provide representative and accurate information but may not have conducted destructive testing or chemical analysis on incoming materials and chemicals. TI and TI suppliers consider certain information to be proprietary, and thus CAS numbers and other limited information may not be available for release.

In no event shall TI's liability arising out of such information exceed the total purchase price of the TI part(s) at issue in this document sold by TI to Customer on an annual basis.


## TAPE AND REEL INFORMATION

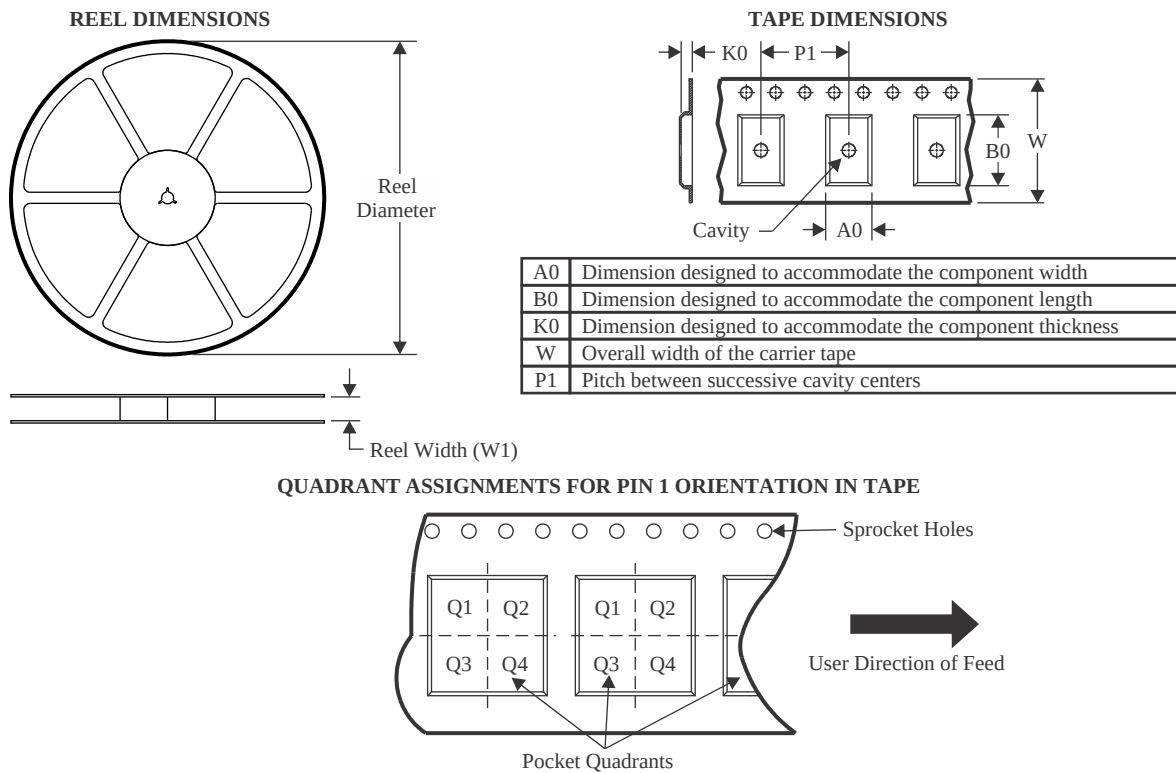

\*All dimensions are nominal


| Device          | Package Type | Package Drawing | Pins | SPQ  | Reel Diameter (mm) | Reel Width W1 (mm) | A0 (mm) | B0 (mm) | K0 (mm) | P1 (mm) | W (mm) | Pin1 Quadrant |
|-----------------|--------------|-----------------|------|------|--------------------|--------------------|---------|---------|---------|---------|--------|---------------|
| LM4838MTEX/NOPB | HTSSOP       | PWP             | 28   | 2500 | 330.0              | 16.4               | 6.95    | 10.0    | 1.7     | 8.0     | 16.0   | Q1            |

## TAPE AND REEL BOX DIMENSIONS

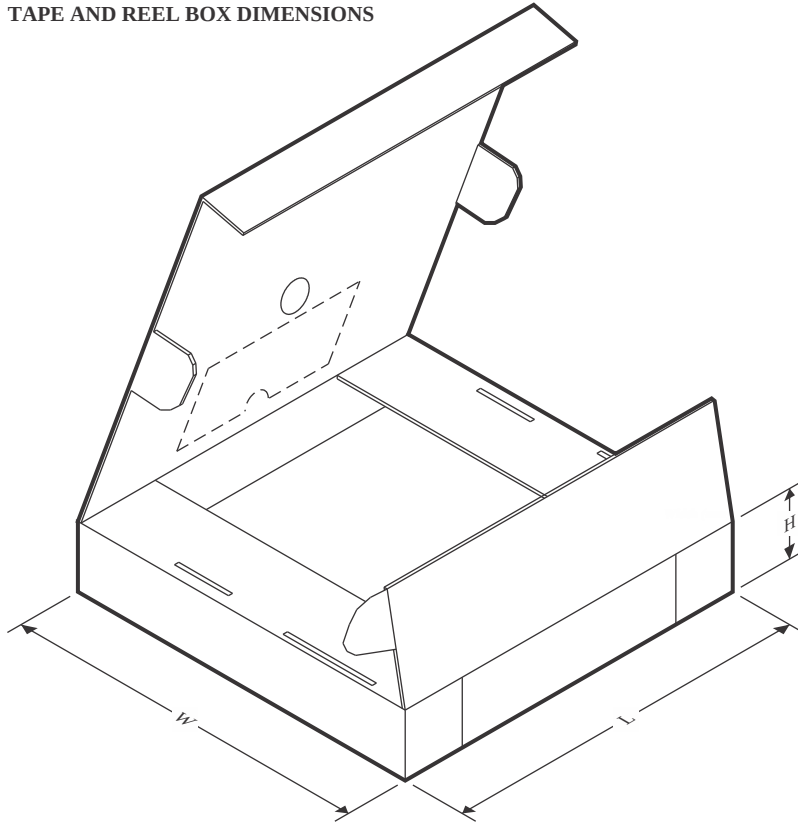

\*All dimensions are nominal

| Device          | Package Type | Package Drawing | Pins | SPQ  | Length (mm) | Width (mm) | Height (mm) |
|-----------------|--------------|-----------------|------|------|-------------|------------|-------------|
| LM4838MTEX/NOPB | HTSSOP       | PWP             | 28   | 2500 | 367.0       | 367.0      | 35.0        |

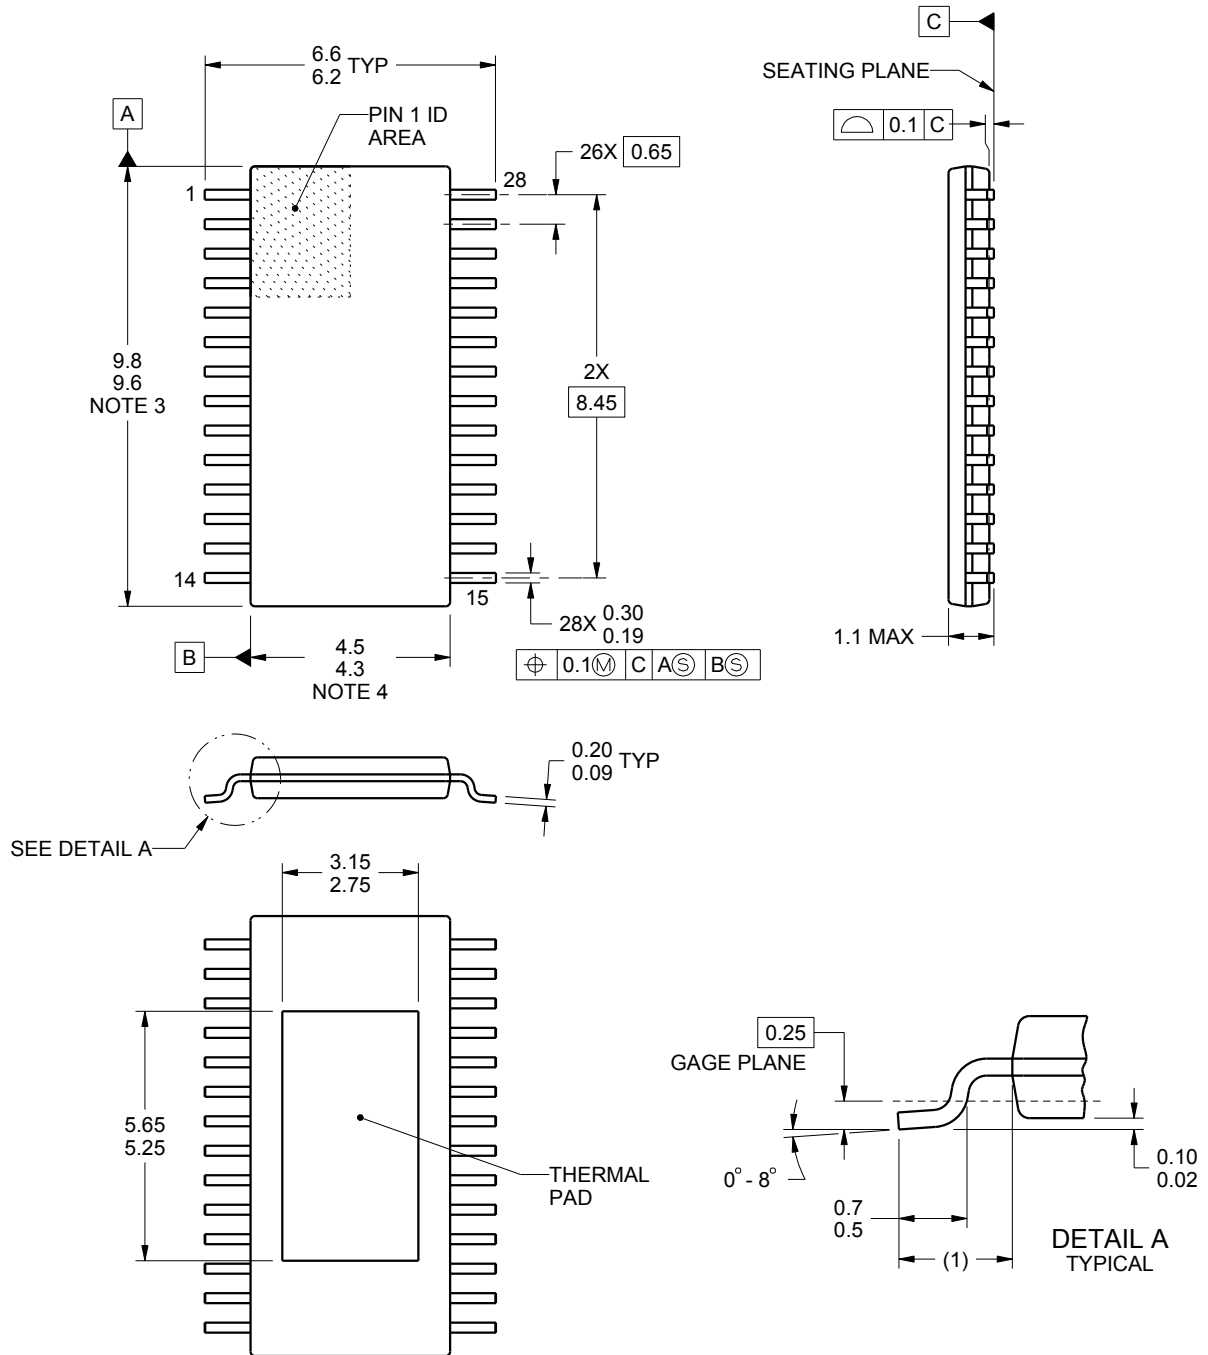

4214870/A 10/2014

## NOTES:

PowerPAD is a trademark of Texas Instruments.




1. All linear dimensions are in millimeters. Any dimensions in parenthesis are for reference only. Dimensioning and tolerancing per ASME Y14.5M.
2. This drawing is subject to change without notice.
3. This dimension does not include mold flash, protrusions, or gate burrs. Mold flash, protrusions, or gate burrs shall not exceed 0.15 mm, per side.
4. This dimension does not include interlead flash. Interlead flash shall not exceed 0.25 mm, per side.
5. Reference JEDEC registration MO-153, variation AET.

# EXAMPLE BOARD LAYOUT

PWP0028A

PowerPAD™ - 1.1 mm max height

PLASTIC SMALL OUTLINE

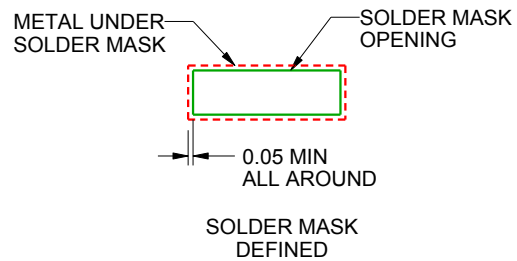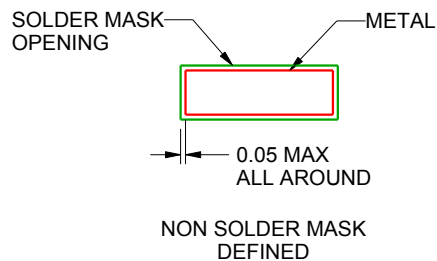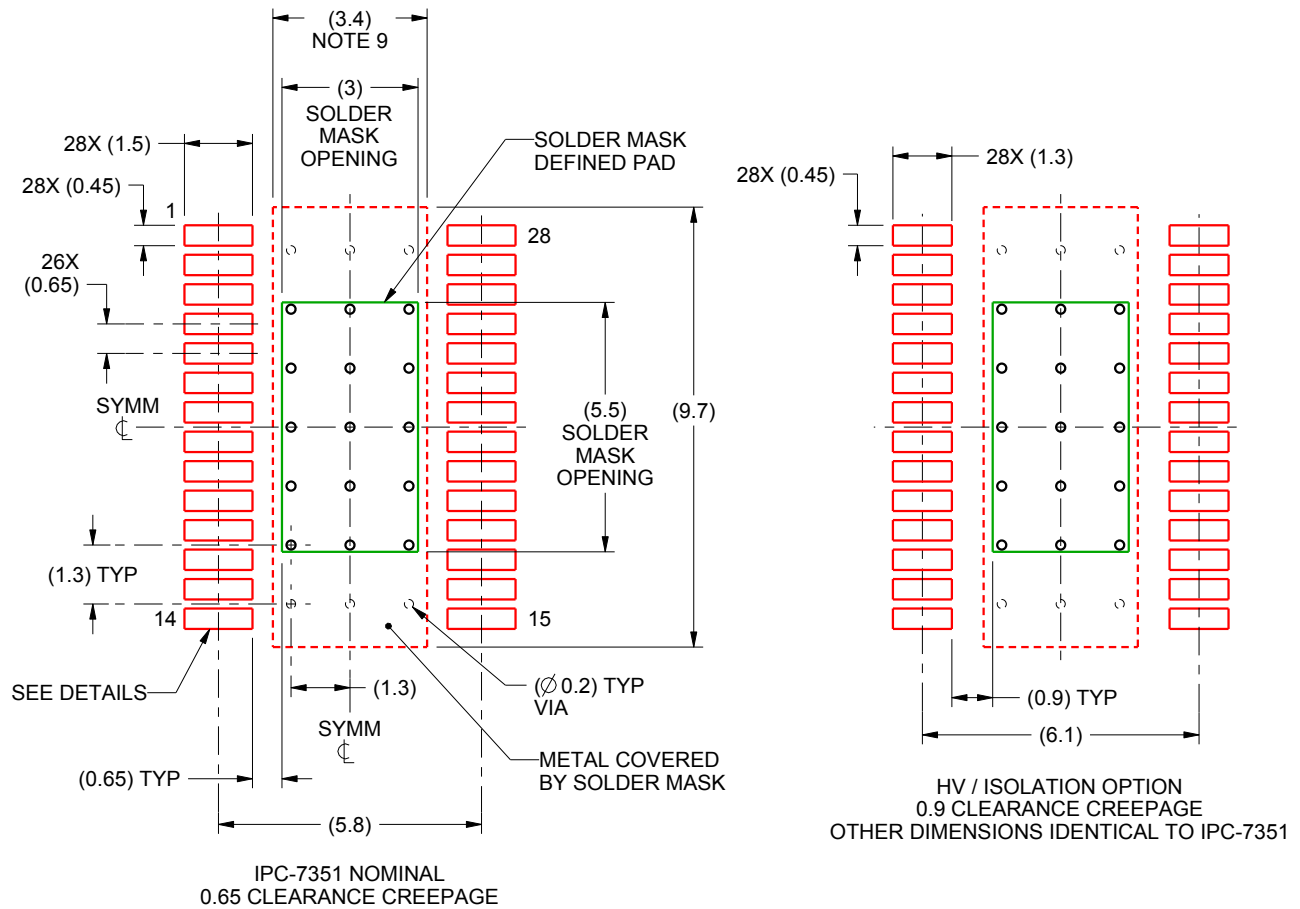

## SOLDER MASK DETAILS

4214870/A 10/2014

NOTES: (continued)


6. Publication IPC-7351 may have alternate designs.
7. Solder mask tolerances between and around signal pads can vary based on board fabrication site.
8. This package is designed to be soldered to a thermal pad on the board. For more information, see Texas Instruments literature numbers SLMA002 ([www.ti.com/lit/slma002](http://www.ti.com/lit/slma002)) and SLMA004 ([www.ti.com/lit/slma004](http://www.ti.com/lit/slma004)).
9. Size of metal pad may vary due to creepage requirement.

# EXAMPLE STENCIL DESIGN

PWP0028A

PowerPAD™ - 1.1 mm max height

PLASTIC SMALL OUTLINE

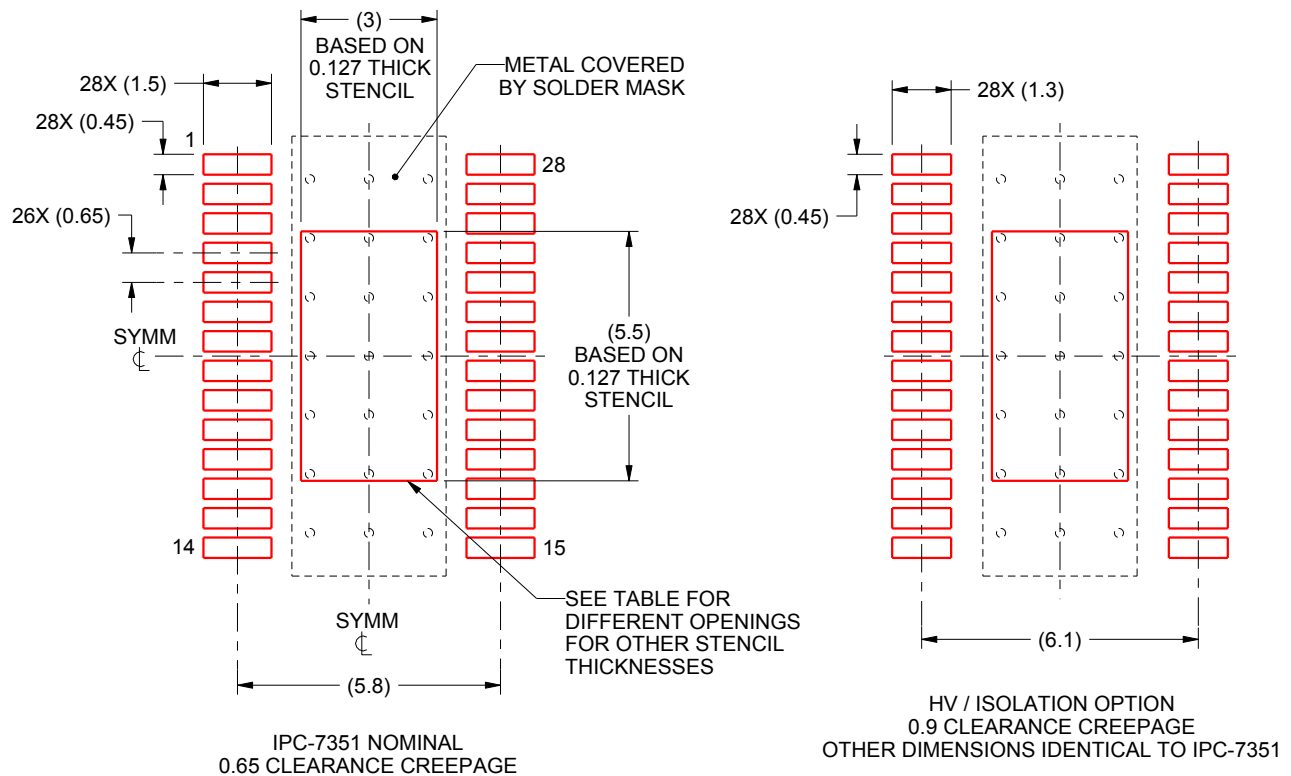

SOLDER PASTE EXAMPLE  
EXPOSED PAD  
100% PRINTED SOLDER COVERAGE AREA  
SCALE:6X

| STENCIL THICKNESS | SOLDER STENCIL OPENING |
|-------------------|------------------------|
| 0.1               | 3.55 X 6.37            |
| 0.127             | 3.0 X 5.5 (SHOWN)      |
| 0.152             | 2.88 X 5.16            |
| 0.178             | 2.66 X 4.77            |

4214870/A 10/2014

NOTES: (continued)

10. Laser cutting apertures with trapezoidal walls and rounded corners may offer better paste release. IPC-7525 may have alternate design recommendations.
11. Board assembly site may have different recommendations for stencil design.

## IMPORTANT NOTICE AND DISCLAIMER

TI PROVIDES TECHNICAL AND RELIABILITY DATA (INCLUDING DATA SHEETS), DESIGN RESOURCES (INCLUDING REFERENCE DESIGNS), APPLICATION OR OTHER DESIGN ADVICE, WEB TOOLS, SAFETY INFORMATION, AND OTHER RESOURCES "AS IS" AND WITH ALL FAULTS, AND DISCLAIMS ALL WARRANTIES, EXPRESS AND IMPLIED, INCLUDING WITHOUT LIMITATION ANY IMPLIED WARRANTIES OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE OR NON-INFRINGEMENT OF THIRD PARTY INTELLECTUAL PROPERTY RIGHTS.

These resources are intended for skilled developers designing with TI products. You are solely responsible for (1) selecting the appropriate TI products for your application, (2) designing, validating and testing your application, and (3) ensuring your application meets applicable standards, and any other safety, security, regulatory or other requirements.

These resources are subject to change without notice. TI grants you permission to use these resources only for development of an application that uses the TI products described in the resource. Other reproduction and display of these resources is prohibited. No license is granted to any other TI intellectual property right or to any third party intellectual property right. TI disclaims responsibility for, and you will fully indemnify TI and its representatives against, any claims, damages, costs, losses, and liabilities arising out of your use of these resources.

TI's products are provided subject to [TI's Terms of Sale](#) or other applicable terms available either on [ti.com](https://www.ti.com) or provided in conjunction with such TI products. TI's provision of these resources does not expand or otherwise alter TI's applicable warranties or warranty disclaimers for TI products.

TI objects to and rejects any additional or different terms you may have proposed.

Mailing Address: Texas Instruments, Post Office Box 655303, Dallas, Texas 75265  
Copyright © 2025, Texas Instruments Incorporated