
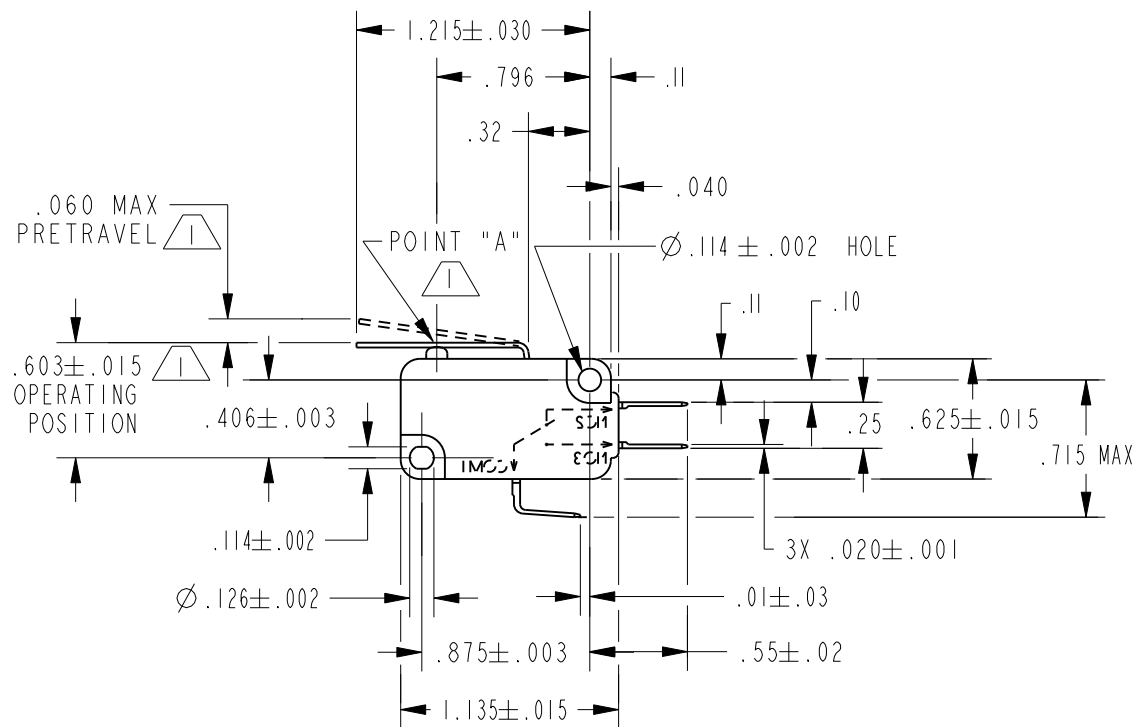


REV	DOCUMENT	CHANGED BY	CHECK
7	0041135	VS 26 JUN08	BLR



RELEASE NO : PR-17070	CATALOG LISTING V7-1C17D8-015-1
REPLACES : X87003-V7	CW-B1596

CHARACTERISTICS 		ELECTRICAL DATA		DESIGN UNITS: INCH TOLERANCES UNLESS NOTED:		DRAWN	JAF	01SEP99	Honeywell					
OPERATING FORCE ----- 150 GRAMS MAX		CONTACT ARRANGEMENT S P D T				CHECK	JAF	01SEP99						
RELEASE TRAVEL ----- .007 MIN		15.1A 1/2HP 125, <u>250</u>, 277 VAC 1/2A 125 VDC 1/4A 250 VDC; 5A 125 VAC "L"   L215		NO PLACES		X	±	-	THIS DRAWING COVERS A PROPRIETARY ITEM AND IS THE PROPERTY OF HONEYWELL. THIS DRAWING IS NOT TO BE COPIED OR USED WITHOUT THE PERMISSION OF HONEYWELL.					
RELEASE FORCE ----- 40 GRAMS MIN				ONE PLACE		.X	±	.030						
PRETRAVEL				TWO PLACE		.XX	±	.015						
DIFFERENTIAL TRAVEL ----- .002-.010				THREE PLACE		.XXX	±	.005						
OVERTRAVEL ----- .040 MIN		THIRD ANGLE PROJECTION 		ANGLES		X	±	-	INTERPRET PER ANSI Y14.5M-1982 OTHER HONEYWELL ENGINEERING STANDARDS MAY APPLY					
FREE POSITION				Pro/ENGINEER 2D										
				SIZE	TYPE	CAGE CODE	DRAWING NAME			REV				
				B	I	-	V7-1C17D8-015-1			7				
				SCALE		-				SHEET		I	OF	I