


DASH NO.	M CODE	MADE FROM
----------	--------	-----------

GSD

KN-59-122

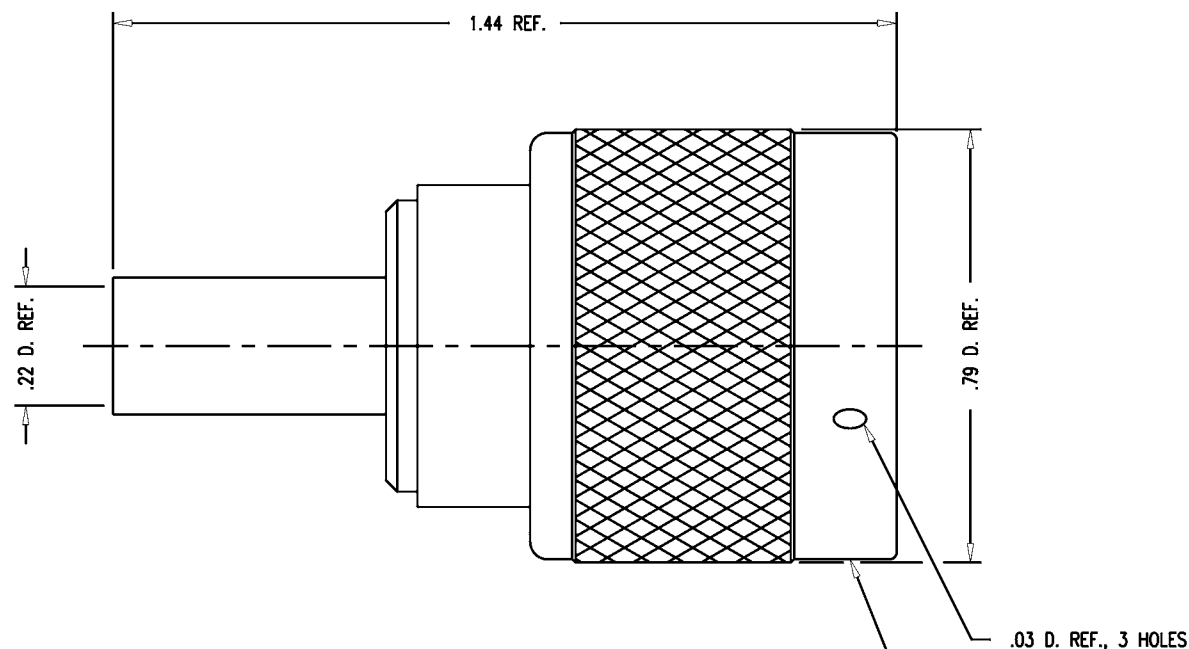

STAMP: KINGS KN-59-122

NOTES:

1. FOR USE WITH 55, 142 & RG-223 CABLE GROUPS.
2. FOR CABLING INSTRUCTIONS SEE CP-415.
3. FOR CABLE TRIMMING USE KTJ-65 & KTD-38.
4. FOR CRIMPING USE DIE KTH-2001.
5. FOR POSITIONING OF CENTER CONTACT USE KTP-5.
6. INTERFACE PER MIL-STD-348, FIG. 304-1.
7. MATERIALS:
 - INSULATOR: TEFLON, ASTM-D-1457
 - GASKET: SILICONE RUBBER, ZZ-R-765
 - K-GRIP SLEEVE: COM. BRONZE TUBE, ALLOY 220
 - OUTER CONTACT } PHOSPHOR BRONZE, QQ-B-750
 - C-RING }
 - ALL OTHER METAL PARTS: BRASS, QQ-B-626
8. FINISHES:
 - CENTER CONTACT: HARD GOLD PLATE, PER MIL-G-45204
 - OUTER CONTACT: SILVER PLATE, QQ-S-365
 - ALL OTHER METAL PARTS: KINGS TARNISH RESISTANT FINISH (TR-5)
9. ELECTRICAL CHARACTERISTICS:
 - NOMINAL IMPEDANCE: 50 OHMS
 - WORKING VOLTAGE: 1000 VRMS
 - FREQUENCY RANGE: DC TO 11 GHz.

REVISIONS

ISSUE	CHANGES
8	CN 33094 C REDRAWN WJM 06/07/91

WJM1121

SCALE 4:1

APPROX SURFACE AREA

USED ON

REF:

PLUG, N

DRAWN WJM	DATE 06/07/91
DESIGN LJ	DATE 06/11/91
APPR.	DATE

KINGS
ELECTRONICS CO., INC.
TUCKAHOE, NEW YORK 10707

KN-59-122

GSD