


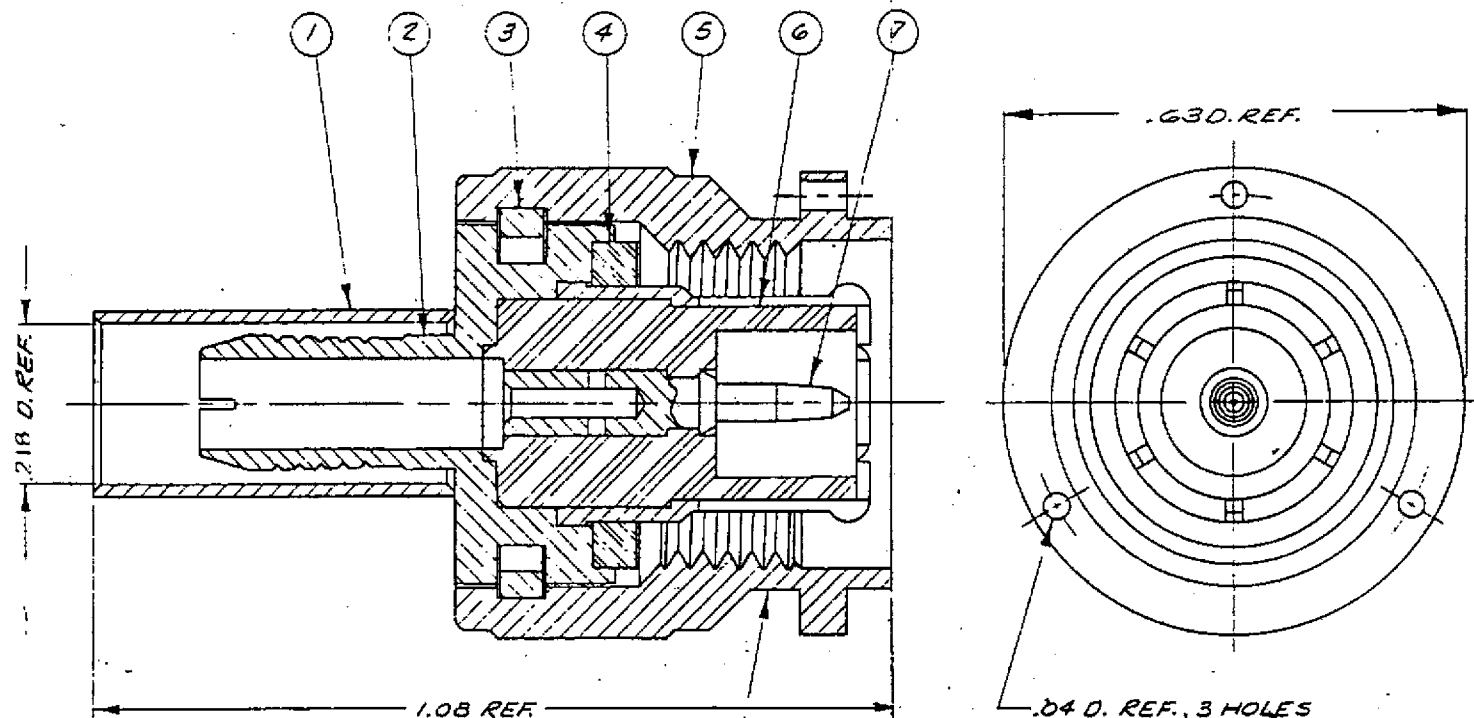

NOTES:

1. FOR USE WITH RG-55, 142 & 223/U CABLE GROUPS.
2. FOR CABLE TRIMMING USE KTJ-113 & KTD-166.
3. FOR CRIMPING USE DIE SIZE 01.
4. FOR CABLING INSTRUCTIONS SEE CP-465.

5. SAME AS KA-59-230 EXCEPT FINISH.
 6. CONTACT MUST BE SOLDERED ON RG-55 & 55B/U BUT MAY BE CRIMPED ON BALANCE OF CABLE GROUPS.

UNLESS OTHERWISE SPECIFIED:

1. TOLERANCES: FRACTIONS & 2 PLACE DECIMALS $\pm .010$
 3 PLACE DECIMALS $\pm .004$
 T. I. R. CONCENTRICITY OF ANY 2 DIAMETERS MAY NOT EXCEED HALF THE SUM OF THEIR TOLERANCES.
2. REMOVE ALL BURRS. BREAK SHARP EDGES .005 MAX.
3. NO FILLETS PERMITTED.
4. SURFACE ROUGHNESS 63 MICROINCHES RMS MAX.
5. ALL DIMENSIONS PRIOR TO PLATING.

7	1	BNC CRIMP CAPTIVE CONTACT M	1-601-22 MAG
6	1	INSULATOR	
5	1	COUPLING NUT	
4	1	GASKET	
3	1	C-RING	
2	1	BODY ASSEMBLY	
1	1	K-GRIP SLEEVE	1-4690-2M06
ITEM	REQ'D	DESCRIPTION	DRAWING NO.

REVISIONS

ISSUE	CHANGES
1	ER 11706
2	RESTRICTION REMOVED JIE 4 DEC 72
3	CN 12137A K 16 JUL 73
4	CN 12870A GB 11 JAN 74
5	CN 13585A JL 19 JUN 74
6	CN 28690C CHC 3 MAR 87
7	CN 35686A KVH 8/2/94

KA-59-263

MASTER
S-D

REF:

FINISH

SPEC:

MATL:

SPEC:

TNC PLUG

DRAWN 11/E DATE 17 NOV 72
 APPR. L1 DATE 4 DEC 72

KINGS ELECTRONICS
 40 HAMBLEDALE ROAD
 TUCKAHOE, N. Y. 10707

KA-59-263