



DASH NO.	M CODE	MADE FROM
----------	--------	-----------

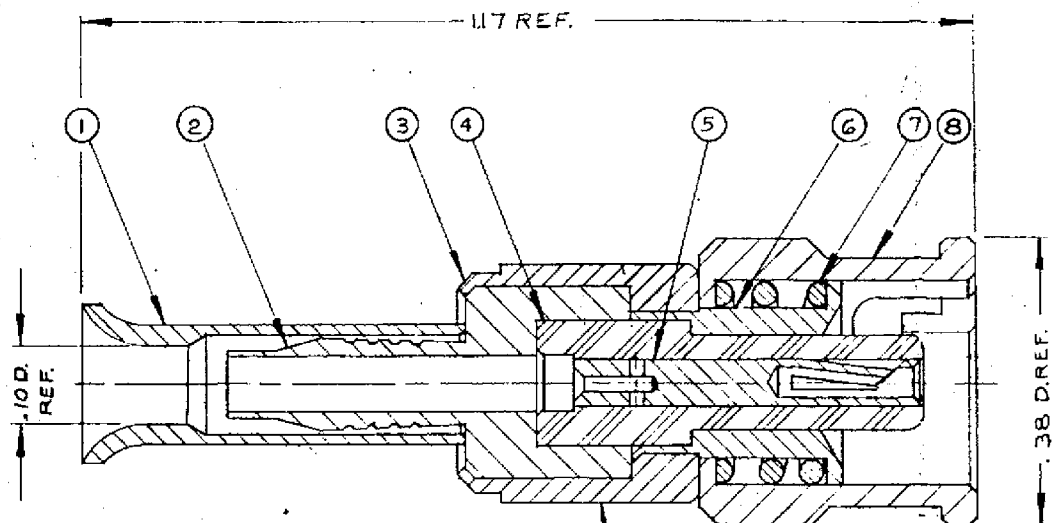

STAMP: KINGS KM-59-41

NOTES:

1. FOR USE WITH RAYCHEM 5026A1018 & 5026A1318 CABLE.
2. FOR CABLING INSTRUCTIONS SEE CP-438.
3. FOR CABLE TRIMMING USE KTJ-84 & KTD-216.
4. FOR CRIMPING USE DIE SIZE 22.
5. ITEMS ①, ②, ③ & ⑧ TO HAVE TR-5 FINISH.
6. MARK PACKAGE: KINGS KM-59-41
XXXX (DATE CODE).

UNLESS OTHERWISE SPECIFIED:

1. TOLERANCES: FRACTIONS & 2 PLACE DECIMALS $\pm .010$
3 PLACE DECIMALS $\pm .004$ ANGLES $\pm 0^{\circ} 30'$
2. REMOVE ALL BURRS, BREAK SHARP EDGES .005 MAX.
3. NO FILLETS PERMITTED.
4. SURFACE ROUGHNESS 63 MICROINCHES RMS MAX.
5. ALL DIMENSIONS PRIOR TO PLATING.

REVISIONS

ISSUE	CHANGES
3	CN 19206 E GMF 22 AUG 79 REDRAWN
4	CN 29822 C AJ 19 MAY 88
5	CN 31044 C M.Z.B. 8 AUG 89

KM-59-41

S-D

S-D

SCALE: 6:1

USED ON:

REF:

FINISH

SPEC. KER-10004

MATL

SPEC.

KM
PLUG

DRAWN GMF DATE 22 AUG 79

APPR. GIND DATE 22 AUG 79

KINGS ELECTRONICS
40 HARBLEDALE ROAD
TUCKAHOE, N. Y. 10707

S-D

KM-59-41