



**MCP73X23**  
**Lithium Iron Phosphate (LiFePO<sub>4</sub>)**  
**Battery Charger**  
**Evaluation Board**  
**User's Guide**

---

**Note the following details of the code protection feature on Microchip products:**

- Microchip products meet the specifications contained in their particular Microchip Data Sheet.
- Microchip believes that its family of products is secure when used in the intended manner, within operating specifications, and under normal conditions.
- Microchip values and aggressively protects its intellectual property rights. Attempts to breach the code protection features of Microchip product is strictly prohibited and may violate the Digital Millennium Copyright Act.
- Neither Microchip nor any other semiconductor manufacturer can guarantee the security of its code. Code protection does not mean that we are guaranteeing the product is "unbreakable" Code protection is constantly evolving. Microchip is committed to continuously improving the code protection features of our products.

---

This publication and the information herein may be used only with Microchip products, including to design, test, and integrate Microchip products with your application. Use of this information in any other manner violates these terms. Information regarding device applications is provided only for your convenience and may be superseded by updates. It is your responsibility to ensure that your application meets with your specifications. Contact your local Microchip sales office for additional support or, obtain additional support at <https://www.microchip.com/en-us/support/design-help/client-support-services>.

THIS INFORMATION IS PROVIDED BY MICROCHIP "AS IS". MICROCHIP MAKES NO REPRESENTATIONS OR WARRANTIES OF ANY KIND WHETHER EXPRESS OR IMPLIED, WRITTEN OR ORAL, STATUTORY OR OTHERWISE, RELATED TO THE INFORMATION INCLUDING BUT NOT LIMITED TO ANY IMPLIED WARRANTIES OF NON-INFRINGEMENT, MERCHANTABILITY, AND FITNESS FOR A PARTICULAR PURPOSE, OR WARRANTIES RELATED TO ITS CONDITION, QUALITY, OR PERFORMANCE.

IN NO EVENT WILL MICROCHIP BE LIABLE FOR ANY INDIRECT, SPECIAL, PUNITIVE, INCIDENTAL, OR CONSEQUENTIAL LOSS, DAMAGE, COST, OR EXPENSE OF ANY KIND WHATSOEVER RELATED TO THE INFORMATION OR ITS USE, HOWEVER CAUSED, EVEN IF MICROCHIP HAS BEEN ADVISED OF THE POSSIBILITY OR THE DAMAGES ARE FORESEEABLE. TO THE FULLEST EXTENT ALLOWED BY LAW, MICROCHIP'S TOTAL LIABILITY ON ALL CLAIMS IN ANY WAY RELATED TO THE INFORMATION OR ITS USE WILL NOT EXCEED THE AMOUNT OF FEES, IF ANY, THAT YOU HAVE PAID DIRECTLY TO MICROCHIP FOR THE INFORMATION.

Use of Microchip devices in life support and/or safety applications is entirely at the buyer's risk, and the buyer agrees to defend, indemnify and hold harmless Microchip from any and all damages, claims, suits, or expenses resulting from such use. No licenses are conveyed, implicitly or otherwise, under any Microchip intellectual property rights unless otherwise stated.

For information regarding Microchip's Quality Management Systems, please visit [www.microchip.com/quality](http://www.microchip.com/quality).

**Trademarks**

The Microchip name and logo, the Microchip logo, Adaptec, AVR, AVR logo, AVR Freaks, BesTime, BitCloud, CryptoMemory, CryptoRF, dsPIC, flexPWR, HELDO, IGLOO, JukeBlox, KeeLoq, Kleer, LANCheck, LinkMD, maxStylus, maxTouch, MediaLB, megaAVR, Microsemi, Microsemi logo, MOST, MOST logo, MPLAB, OptoLyzer, PIC, picoPower, PICSTART, PIC32 logo, PolarFire, Prochip Designer, QTouch, SAM-BA, SenGenuity, SpyNIC, SST, SST Logo, SuperFlash, Symmetricom, SyncServer, Tachyon, TimeSource, tinyAVR, UNI/O, Vectron, and XMEGA are registered trademarks of Microchip Technology Incorporated in the U.S.A. and other countries.

AgileSwitch, APT, ClockWorks, The Embedded Control Solutions Company, EtherSynch, Flashtec, Hyper Speed Control, HyperLight Load, Libero, motorBench, mTouch, Powermite 3, Precision Edge, ProASIC, ProASIC Plus, ProASIC Plus logo, Quiet-Wire, SmartFusion, SyncWorld, Temux, TimeCesium, TimeHub, TimePictra, TimeProvider, TrueTime, and ZL are registered trademarks of Microchip Technology Incorporated in the U.S.A.

Adjacent Key Suppression, AKS, Analog-for-the-Digital Age, Any Capacitor, AnyIn, AnyOut, Augmented Switching, BlueSky, BodyCom, Clockstudio, CodeGuard, CryptoAuthentication, CryptoAutomotive, CryptoCompanion, CryptoController, dsPICDEM, dsPICDEM.net, Dynamic Average Matching, DAM, ECAN, Espresso T1S, EtherGREEN, GridTime, IdealBridge, In-Circuit Serial Programming, ICSP, INICnet, Intelligent Paralleling, IntelliMOS, Inter-Chip Connectivity, JitterBlocker, Knob-on-Display, KoD, maxCrypto, maxView, memBrain, Mindi, MiWi, MPASM, MPF, MPLAB Certified logo, MPLIB, MPLINK, MultiTRAK, NetDetach, Omniscient Code Generation, PICDEM, PICDEM.net, PICkit, PICtail, PowerSmart, PureSilicon, QMatrix, REAL ICE, Ripple Blocker, RTAX, RTG4, SAM-ICE, Serial Quad I/O, simpleMAP, SimpliPHY, SmartBuffer, SmartHLS, SMART-I.S., storClad, SQI, SuperSwitcher, SuperSwitcher II, Switchtec, SynchroPHY, Total Endurance, Trusted Time, TSHARC, USBCheck, VariSense, VectorBlox, VeriPHY, ViewSpan, WiperLock, XpressConnect, and ZENA are trademarks of Microchip Technology Incorporated in the U.S.A. and other countries.

SQTP is a service mark of Microchip Technology Incorporated in the U.S.A.

The Adaptec logo, Frequency on Demand, Silicon Storage Technology, and Symmcom are registered trademarks of Microchip Technology Inc. in other countries.

GestIC is a registered trademark of Microchip Technology Germany II GmbH & Co. KG, a subsidiary of Microchip Technology Inc., in other countries.

All other trademarks mentioned herein are property of their respective companies.

© 2009-2023, Microchip Technology Incorporated and its subsidiaries.

All Rights Reserved.

ISBN: 978-1-6683-2933-7



# MCP73X23 LITHIUM IRON PHOSPHATE BATTERY CHARGER EVALUATION BOARD USER'S GUIDE

## Table of Contents

|                                                                                            |           |
|--------------------------------------------------------------------------------------------|-----------|
| <b>Preface</b>                                                                             | <b>5</b>  |
| Introduction                                                                               | 5         |
| Document Layout                                                                            | 5         |
| Conventions Used in this Guide                                                             | 6         |
| Recommended Reading                                                                        | 7         |
| The Microchip Website                                                                      | 7         |
| Customer Support                                                                           | 7         |
| Document Revision History                                                                  | 7         |
| <b>Chapter 1. Product Overview</b>                                                         |           |
| 1.1 Introduction                                                                           | 9         |
| 1.2 What is the MCP73X23 Lithium Iron Phosphate Battery Charger Evaluation Board?          | 10        |
| 1.3 What the MCP73X23 Lithium Iron Phosphate Battery Charger Evaluation Board Kit Includes | 10        |
| <b>Chapter 2. Installation and Operation</b>                                               |           |
| 2.1 Introduction                                                                           | 11        |
| 2.2 Features                                                                               | 11        |
| 2.3 Getting Started                                                                        | 12        |
| <b>Appendix A. Schematic and Layouts</b>                                                   |           |
| A.1 Introduction                                                                           | 15        |
| A.2 Board – Schematic                                                                      | 16        |
| A.3 Board – Top Layer                                                                      | 17        |
| A.4 Board – Top Metal Layer                                                                | 17        |
| A.5 Board – Bottom Layer                                                                   | 17        |
| <b>Appendix B. Bill of Materials (BOM)</b>                                                 | <b>19</b> |
| <b>Worldwide Sales and Service</b>                                                         | <b>20</b> |

**NOTES:**



# MCP73X23 LITHIUM IRON PHOSPHATE BATTERY CHARGER EVALUATION BOARD USER'S GUIDE

## Preface

### NOTICE TO CUSTOMERS

All documentation becomes dated, and this manual is no exception. Microchip tools and documentation are constantly evolving to meet customer needs, so some actual dialogs and/or tool descriptions may differ from those in this document. Please refer to our website ([www.microchip.com](http://www.microchip.com)) to obtain the latest documentation available.

Documents are identified with a “DS” number. This number is located on the bottom of each page, in front of the page number. The numbering convention for the DS number is “DSXXXXXXXXA”, where “XXXXXXXX” is the document number and “A” is the revision level of the document.

For the most up-to-date information on development tools, see the MPLAB® IDE online help. Select the Help menu, and then Topics to open a list of available online help files.

## INTRODUCTION

This chapter contains general information that will be useful to know before using the MCP73X23 Lithium Iron Phosphate Battery Charger Evaluation Board. Items discussed in this chapter include:

- [Document Layout](#)
- [Conventions Used in this Guide](#)
- [Recommended Reading](#)
- [The Microchip Website](#)
- [Customer Support](#)
- [Document Revision History](#)

## DOCUMENT LAYOUT

This document describes how to use the MCP73X23 Lithium Iron Phosphate Battery Charger Evaluation Board as a development tool. The manual layout is as follows:

- **Chapter 1. “Product Overview”** – Important information about the MCP73X23 Lithium Iron Phosphate Battery Charger Evaluation Board.
- **Chapter 2. “Installation and Operation”** – Includes instructions on how to get started with the MCP73X23 Lithium Iron Phosphate Battery Charger Evaluation Board and a description of each function.
- **Appendix A. “Schematic and Layouts”** – Shows the schematic and layout diagrams for the MCP73X23 Lithium Iron Phosphate Battery Charger Evaluation Board.
- **Appendix B. “Bill of Materials (BOM)”** – Lists the parts used to build the MCP73X23 Lithium Iron Phosphate Battery Charger Evaluation Board.

## CONVENTIONS USED IN THIS GUIDE

This manual uses the following documentation conventions:

### DOCUMENTATION CONVENTIONS

| Description                                      | Represents                                                                                          | Examples                                                    |
|--------------------------------------------------|-----------------------------------------------------------------------------------------------------|-------------------------------------------------------------|
| <b>Arial font:</b>                               |                                                                                                     |                                                             |
| Italic characters                                | Referenced books                                                                                    | <i>MPLAB® IDE User's Guide</i>                              |
|                                                  | Emphasized text                                                                                     | ...is the <i>only</i> compiler...                           |
| Initial caps                                     | A window                                                                                            | the Output window                                           |
|                                                  | A dialog                                                                                            | the Settings dialog                                         |
|                                                  | A menu selection                                                                                    | select Enable Programmer                                    |
| Quotes                                           | A field name in a window or dialog                                                                  | "Save project before build"                                 |
| Underlined, italic text with right angle bracket | A menu path                                                                                         | <u><i>File&gt;Save</i></u>                                  |
| Bold characters                                  | A dialog button                                                                                     | Click <b>OK</b>                                             |
|                                                  | A tab                                                                                               | Click the <b>Power</b> tab                                  |
| N'Rnnnn                                          | A number in verilog format, where N is the total number of digits, R is the radix and n is a digit. | 4'b0010, 2'hF1                                              |
| Text in angle brackets < >                       | A key on the keyboard                                                                               | Press <Enter>, <F1>                                         |
| <b>Courier New font:</b>                         |                                                                                                     |                                                             |
| Plain Courier New                                | Sample source code                                                                                  | #define START                                               |
|                                                  | Filenames                                                                                           | autoexec.bat                                                |
|                                                  | File paths                                                                                          | c:\mcc18\h                                                  |
|                                                  | Keywords                                                                                            | _asm, _endasm, static                                       |
|                                                  | Command-line options                                                                                | -Opa+, -Opa-                                                |
|                                                  | Bit values                                                                                          | 0, 1                                                        |
|                                                  | Constants                                                                                           | 0xFF, 'A'                                                   |
| Italic Courier New                               | A variable argument                                                                                 | <i>file.o</i> , where <i>file</i> can be any valid filename |
| Square brackets [ ]                              | Optional arguments                                                                                  | mcc18 [options] <i>file</i> [options]                       |
| Curly brackets and pipe character: {   }         | Choice of mutually exclusive arguments; an OR selection                                             | errorlevel {0 1}                                            |
| Ellipses...                                      | Replaces repeated text                                                                              | var_name [, var_name...]                                    |
|                                                  | Represents code supplied by user                                                                    | void main (void)<br>{ ...<br>}                              |

## RECOMMENDED READING

This user's guide describes how to use the MCP73X23 Lithium Iron Phosphate Battery Charger Evaluation Board. Another useful document is listed below. The following Microchip document is available and recommended as a supplemental reference resource.

- **MCP73123/223 Data Sheet, “*Lithium Iron Phosphate (LiFePO<sub>4</sub>) Battery Charge Management Controller with Input Overvoltage Protection*”, DS20002191**

This data sheet provides detailed information regarding the MCP73123/223 product family.

## THE MICROCHIP WEBSITE

Microchip provides online support via our website at [www.microchip.com](http://www.microchip.com). This website is used as a means to make files and information easily available to customers. Accessible by using your favorite Internet browser, the website contains the following information:

- **Product Support** – Data sheets and errata, application notes and sample programs, design resources, user's guides and hardware support documents, latest software releases and archived software
- **General Technical Support** – Frequently Asked Questions (FAQs), technical support requests, online discussion groups, Microchip consultant program member listing
- **Business of Microchip** – Product selector and ordering guides, latest Microchip press releases, listing of seminars and events, listings of Microchip sales offices, distributors and factory representatives

## CUSTOMER SUPPORT

Users of Microchip products can receive assistance through several channels:

- Distributor or Representative
- Local Sales Office
- Field Application Engineer (FAE)
- Technical Support

Customers should contact their distributor, representative or field application engineer (FAE) for support. Local sales offices are also available to help customers. A listing of sales offices and locations is included in the back of this document.

Technical support is available through the website at:  
<http://www.microchip.com/support>.

## DOCUMENT REVISION HISTORY

### Revision B (August 2023)

- Updated Table 2-2.
- Minor edits for grammar.

### Revision A (July 2009)

- Initial Release of this Document.

**NOTES:**




## Chapter 1. Product Overview

### 1.1 INTRODUCTION

The MCP73123/223 product family is highly integrated linear charge management controllers for lithium iron phosphate ( $\text{LiFePO}_4$ ) batteries. The MCP73123/223 product family operates with minimum external components, which is ideal for use in space-limited and cost-effective applications. The maximum 18V rated input over voltage protection and battery short circuit protection offer designers a secondary protection in addition to the Li-Ion battery protection circuit.

This chapter provides an overview of the MCP73X23 Lithium Iron Phosphate Battery Charger Evaluation Board and covers the following topics:

- [What is the MCP73X23 Lithium Iron Phosphate Battery Charger Evaluation Board?](#)
- [What the MCP73X23 Lithium Iron Phosphate Battery Charger Evaluation Board Kit Includes](#)

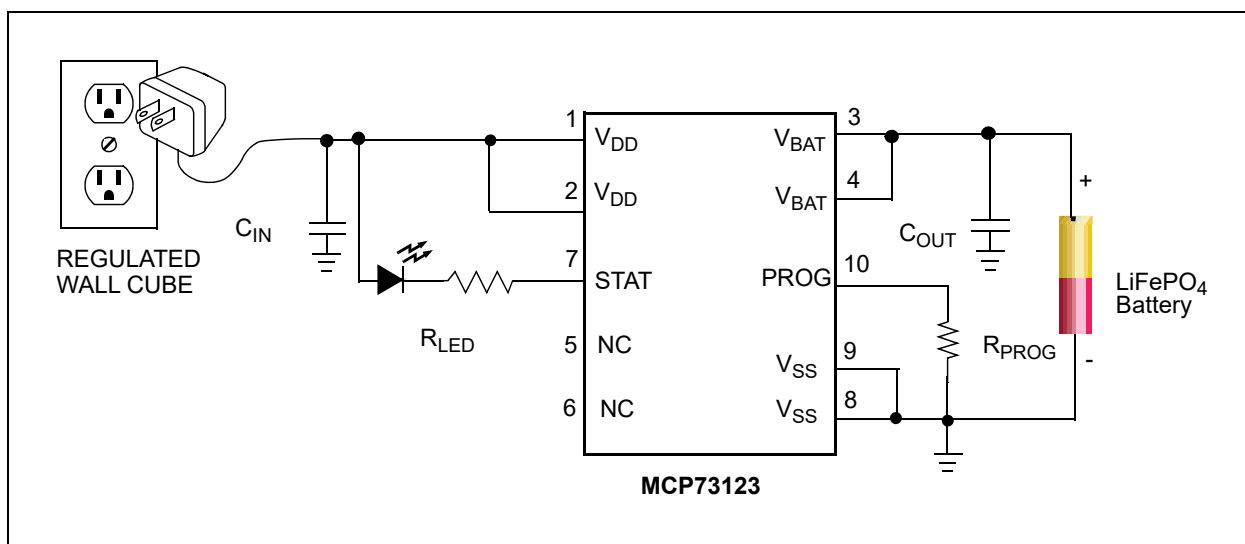

**FIGURE 1-1:** MCP73123 Typical Application.

### 1.2 WHAT IS THE MCP73X23 LITHIUM IRON PHOSPHATE BATTERY CHARGER EVALUATION BOARD?

The MCP73X23 Lithium Iron Phosphate Battery Charger Evaluation Board demonstrates the features of Microchip's MCP73123 and MCP73223 "**Lithium Iron Phosphate (LiFePO<sub>4</sub>) Battery Charge Management Controller with Input Overvoltage Protection**".

The MCP73X23 Lithium Iron Phosphate Battery Charger Evaluation Board is designed with two independent circuits. The MCP73123 is designed to charge a single-cell LiFePO<sub>4</sub> battery, while the MCP73223 charges a dual-cell LiFePO<sub>4</sub> battery. Both circuits offer two different fast charging currents. The default value of fast charging current is 500 mA and when PROG via is tied to ground, the two parallel resistors output 1000 mA fast charging current to a battery pack. One blue LED status output allows the user to learn if the MCP73123/223 is in charging state or not.

**Note:** Please refer to [Table 2-2](#) for Charge Status Outputs and [Table 2-1](#) for Fast Charge Current vs. Resistor Lookup Table.

The MCP73X23 Lithium Iron Phosphate Battery Charger Evaluation Board comes with installed MCP73123 and MCP73223 devices in 3 mm x 3 mm DFN packages. The factory preset battery regulation voltage is 3.6V for the MCP73123 and 7.2V for the MCP73223 with 10% precondition current, 10% termination current set point, automatic recharge and 6.5V over voltage protection threshold voltage.

The MCP73X23 Lithium Iron Phosphate Battery Charger Evaluation Board is designed to observe the performance and features of Microchip's MCP73123 and MCP73223. Circuits can also be implemented into suitable applications without extra work.

### 1.3 WHAT THE MCP73X23 LITHIUM IRON PHOSPHATE BATTERY CHARGER EVALUATION BOARD KIT INCLUDES

The MCP73X23 Lithium Iron Phosphate Battery Charger Evaluation Board kit includes:

- MCP73X23 Lithium Iron Phosphate Battery Charger Evaluation Board, 102-00262
- Important Information Sheet.



# MCP73X23 LITHIUM IRON PHOSPHATE BATTERY CHARGER EVALUATION BOARD USER'S GUIDE

---

## Chapter 2. Installation and Operation

---

### 2.1 INTRODUCTION

The MCP73123/223 is a highly integrated Li-Ion battery charge management controller for use in space-limited and cost-sensitive applications. The MCP73123/223 provides specific charge algorithms for Lithium Iron Phosphate batteries to achieve optimal capacity and safety in the shortest charging time possible. Along with its small physical size, the low number of external components makes the MCP73123/223 ideally suitable for low-cost and small-capacity (less than 2000 mAh) LiFePO<sub>4</sub> battery applications. It will take longer time to complete a charge cycle for larger capacity LiFe-PO<sub>4</sub> battery packs.

The absolute maximum voltage, up to 18V over voltage protection, allows the use of MCP73123/223 in harsh environments, such as low cost ac-dc adapter.

The MCP73123/223 employs a constant current / constant voltage (CC-CV) charge algorithm and 3.6V per cell voltage regulations. The fast charge, constant current value is set with one external resistor from 130 mA to 1100 mA. The MCP73123/223 also limits the charge current based on die temperature during high power or high ambient conditions. This thermal regulation optimizes the charge cycle time while maintaining device reliability.

The PROG pin of the MCP73123/223 also serves as enable pin. When high impedance (typ. 200 k $\Omega$ ) is applied, the MCP73123/223 will be in standby mode.

Typical applications for the reference design are Toys, Power Tools, Uninterrupt Power Supply, Backup Power Storage and applications in wider temperature range than typical Li-Ion batteries.

### 2.2 FEATURES

The MCP73X23 Lithium Iron Phosphate Battery Charger Evaluation Board has the following features:

- Input Over Voltage Protection:
  - 6.5V for the MCP73123,
  - 13V for the MCP73223
- Charge Regulation Voltage:
  - 3.6V for the MCP73123,
  - 7.2V for the MCP73223
- 10% Preconditioning of Deeply Depleted Cells
- 32-Minute Preconditioning Timer
- 6-Hour Safety Timer
- 10% Automatic Charge Termination
- 500 mA and 1000 mA Preset Fast Charge Current
- Automatic Recharge
- Thermal Regulation
- One Blue LED Charge Status Indicator For Each Circuit
- Pre-installed MCP73123 and MCP73223 Devices

## 2.3 GETTING STARTED

The MCP73X23 Lithium Iron Phosphate Battery Charger Evaluation Board is fully assembled and tested for charging LiFePO<sub>4</sub> batteries.

### 2.3.1 Power Input and Output Connection

#### 2.3.1.1 POWERING THE MCP73X23 LITHIUM IRON PHOSPHATE BATTERY CHARGER EVALUATION BOARD


1. Connect the positive battery terminal to V<sub>BAT+</sub> and negative battery terminal to V<sub>BAT-</sub>.
2. Connect the DC power supply Negative Terminal to V<sub>SS</sub>.
3. Connect the DC power supply Positive Terminal to V<sub>DD</sub>.
4. It should initiate the battery charging cycle when the power source is present and V<sub>BAT</sub> is below recharge threshold. For example, When V<sub>REG</sub> is 3.6V, V<sub>BAT</sub> needs to be lower than 3.42V to initiate the charge cycle.

**Note 1:** The MCP73123 circuit is designed to charge one-cell LiFePO<sub>4</sub> battery and the MCP73223 circuit is designed to charge two-cell LiFePO<sub>4</sub> battery.


**2:** The LiFePO<sub>4</sub> battery can be replaced with test circuit or electronic load that can sink current with DC power supply. Refer to [Figure 2-3](#).

5. The charging status table is available on Table 2-2.
6. The fast charge current is preset at 500 mA and can be increased to 1A by connecting PROG via to ground.

**Note:** Fast Charge Current can be programmed with various resistors based on [Figure 2-2](#) and Table 2-2.

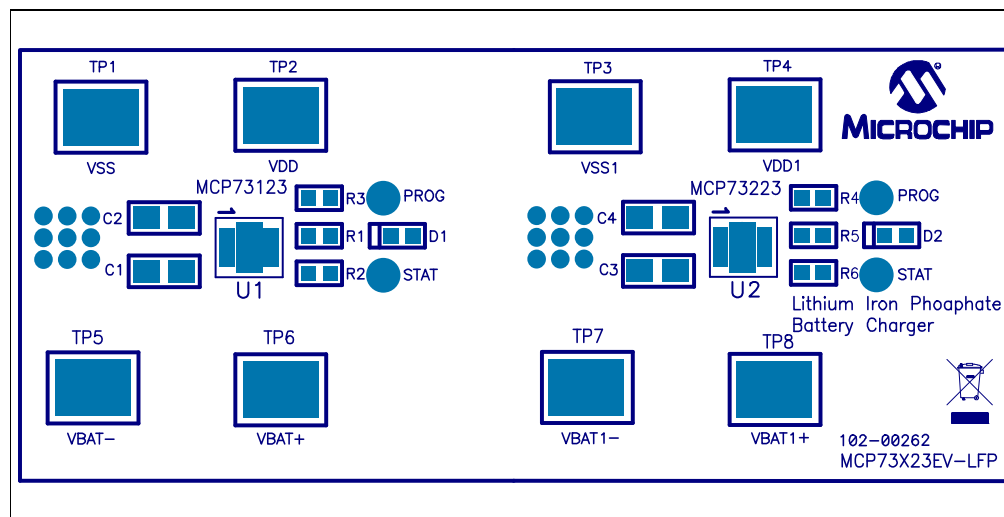


**FIGURE 2-1:** Board Top Assembly.

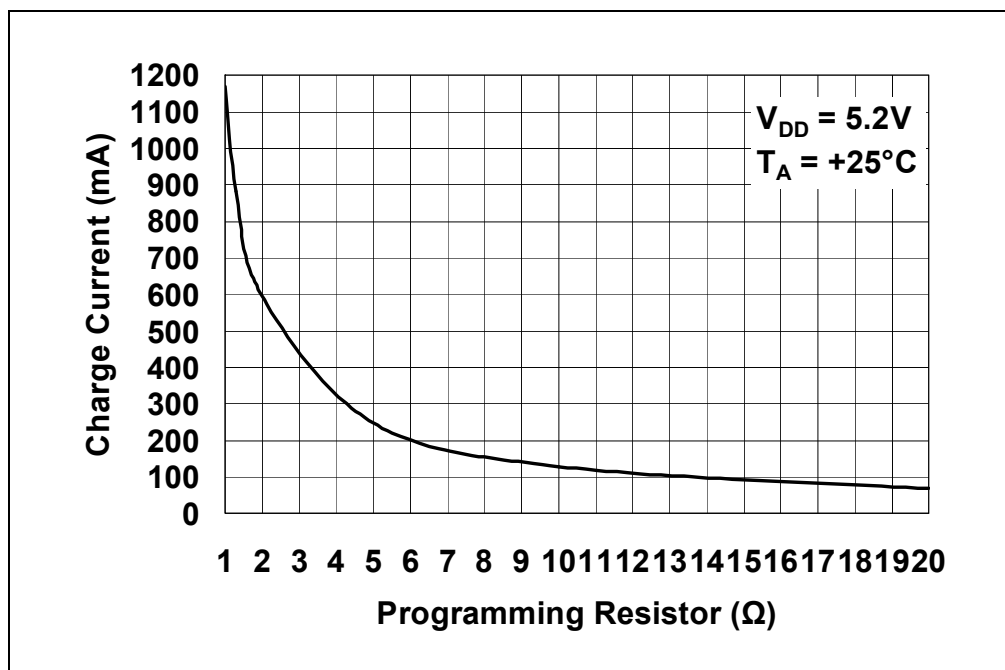

**FIGURE 2-2:** MCP73123/223 Charge Current ( $I_{OUT}$ ) vs. Programming Resistor ( $R_{PROG}$ ).

**TABLE 2-1: MCP73123/223 RESISTOR LOOKUP TABLE**

| Charge Current (mA) | Recommended E96 Resistor ( $\Omega$ ) | Recommended E24 Resistor ( $\Omega$ ) |
|---------------------|---------------------------------------|---------------------------------------|
| 130                 | 10k                                   | 10k                                   |
| 150                 | 8.45k                                 | 8.20k                                 |
| 200                 | 6.20k                                 | 6.20k                                 |
| 250                 | 4.99k                                 | 5.10k                                 |
| 300                 | 4.02k                                 | 3.90k                                 |
| 350                 | 3.40k                                 | 3.30k                                 |
| 400                 | 3.00k                                 | 3.00k                                 |
| 450                 | 2.61k                                 | 2.70k                                 |
| 500                 | 2.32k                                 | 2.37k                                 |
| 550                 | 2.10k                                 | 2.20k                                 |
| 600                 | 1.91k                                 | 2.00k                                 |
| 650                 | 1.78k                                 | 1.80k                                 |
| 700                 | 1.62k                                 | 1.60k                                 |
| 750                 | 1.50k                                 | 1.50k                                 |
| 800                 | 1.40k                                 | 1.50k                                 |
| 850                 | 1.33k                                 | 1.30k                                 |
| 900                 | 1.24k                                 | 1.20k                                 |
| 950                 | 1.18k                                 | 1.20k                                 |
| 1000                | 1.10k                                 | 1.10k                                 |
| 1100                | 1.00k                                 | 1.00k                                 |

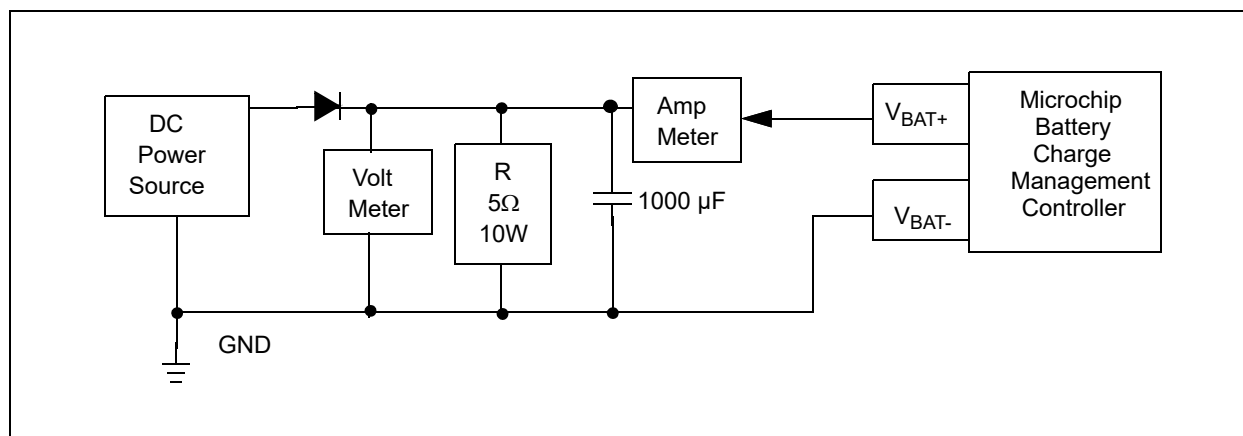

**FIGURE 2-3:** Simulated Battery Load for MCP73123/223.

**TABLE 2-2: MCP73123/223 CHARGE STATUS OUTPUTS**

| CHARGE CYCLE STATE           | STAT                                                   |
|------------------------------|--------------------------------------------------------|
| Shutdown                     | Hi-Z                                                   |
| Standby                      | Hi-Z                                                   |
| Preconditioning              | L                                                      |
| Constant Current Fast Charge | L                                                      |
| Constant Voltage             | L                                                      |
| Charge Complete - Standby    | Hi-Z                                                   |
| Temperature Fault            | 1.6 second 50% D.C. Flashing (Type 2)<br>Hi-Z (Type 1) |
| Timer Fault                  | 1.6 second 50% D.C. Flashing (Type 2)<br>Hi-Z (Type 1) |
| Preconditioning Timer Fault  | 1.6 second 50% D.C. Flashing (Type 2)<br>Hi-Z (Type 1) |



# MCP73X23 LITHIUM IRON PHOSPHATE BATTERY CHARGER EVALUATION BOARD USER'S GUIDE

---

## Appendix A. Schematic and Layouts


---

### A.1 INTRODUCTION

This appendix contains the following schematic and layouts for the MCP73X23 Lithium Iron Phosphate Battery Charger Evaluation Board:


- [Board – Schematic](#)
- [Board – Top Layer](#)
- [Board – Top Metal Layer](#)
- [Board – Bottom Layer](#)

A.2 BOARD – SCHEMATIC

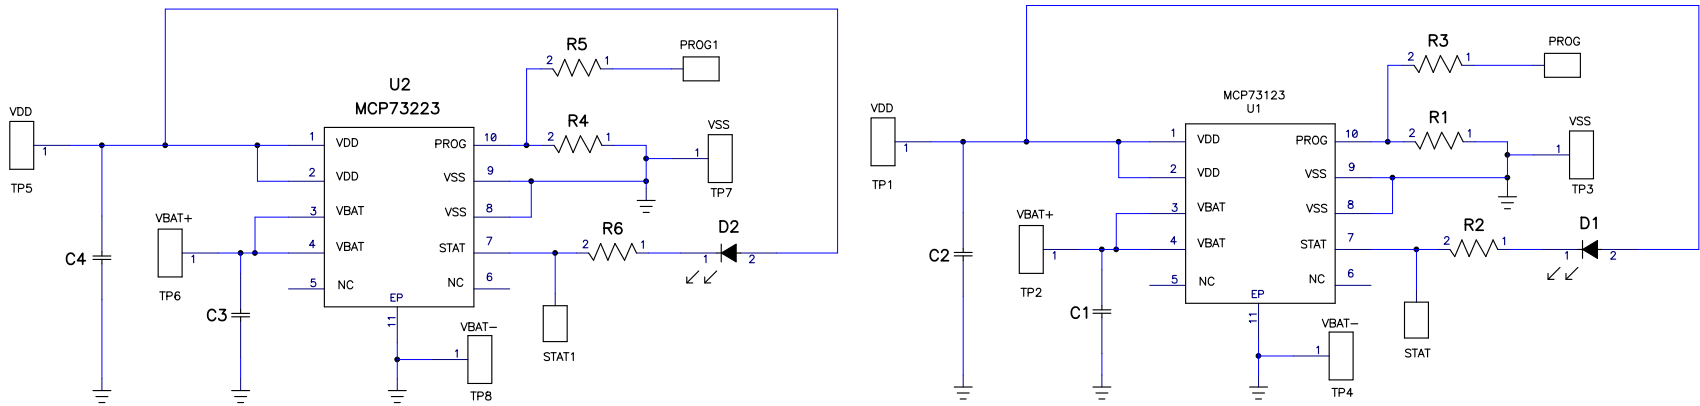





## A.3 BOARD – TOP LAYER

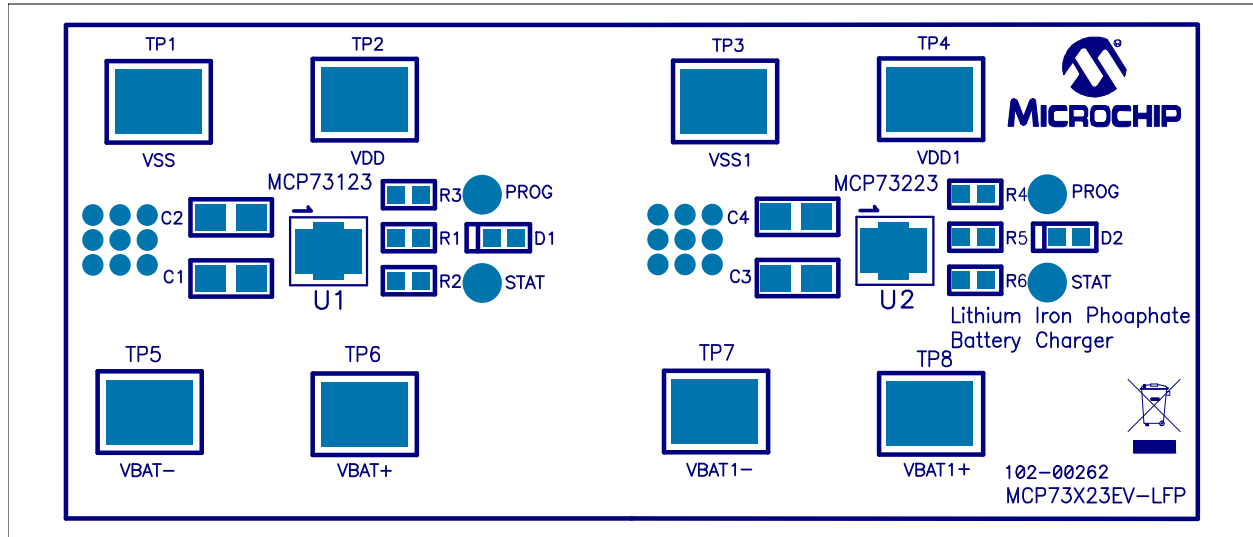

## A.4 BOARD – TOP METAL LAYER

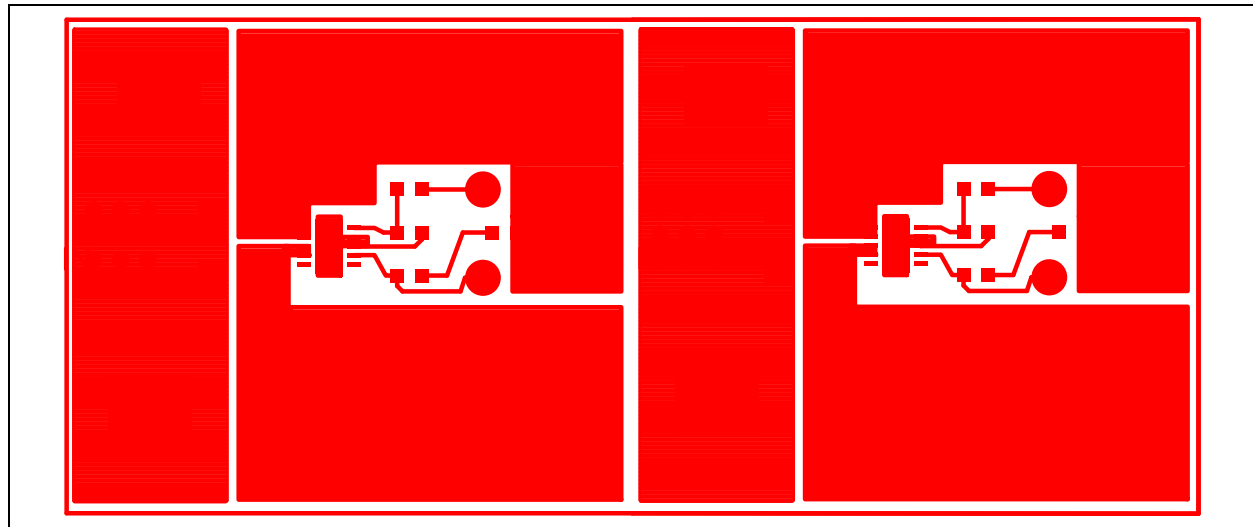

## A.5 BOARD – BOTTOM LAYER

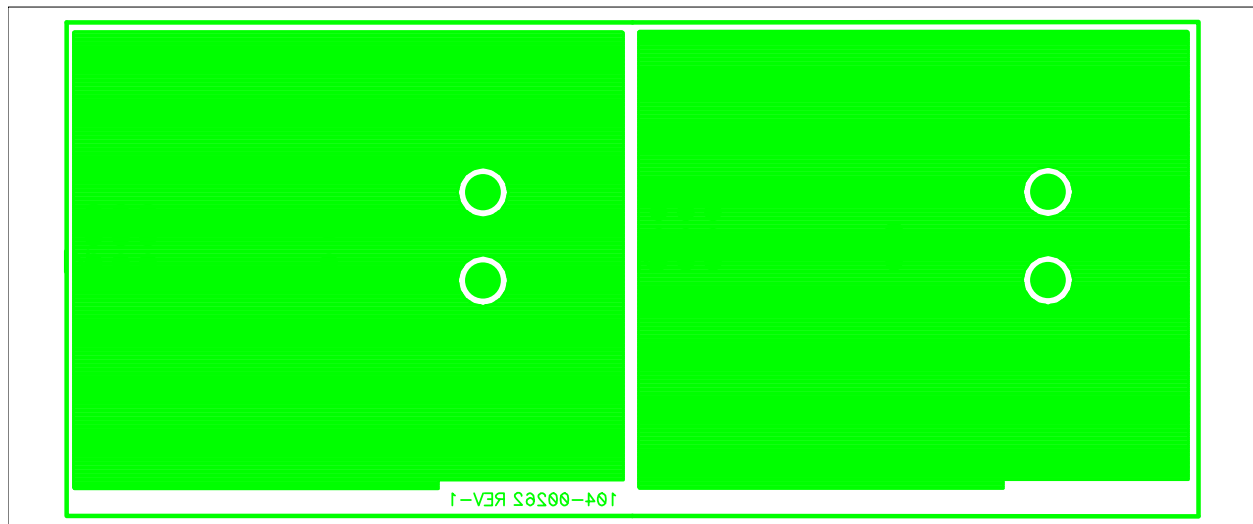

NOTES:



# MCP73X23 LITHIUM IRON PHOSPHATE BATTERY CHARGER EVALUATION BOARD USER'S GUIDE

## Appendix B. Bill of Materials (BOM)

**TABLE B-1: BILL OF MATERIALS**

| Qty | Reference                              | Description                                                 | Manufacturer              | Part Number            |
|-----|----------------------------------------|-------------------------------------------------------------|---------------------------|------------------------|
| 4   | Bump                                   | BUMPON HEMISPHERE .44X.20 WHITE                             | 3M                        | SJ5003-9-ND            |
| 4   | C1, C2, C3, C4                         | CAP CERAMIC 4.7 $\mu$ F 25V X5R 1206                        | TDK                       | C2012X5R1E475M         |
| 2   | D1, D2                                 | Blue Water Clear 0603 SMD LED                               | Para Light USA            | L-C191LBCT-U1          |
| 1   | PCB                                    | RoHS Compliant Bare PCB, MCP73X23 Evaluation Board          | Microchip Technology Inc. | <b>104-00262</b>       |
| 4   | R1, R3, R4, R5                         | RES 2.37K OHM 1/10W 1% 0603 SMD                             | Panasonic® - ECG          | ERJ-3EKF2371V          |
| 2   | R2, R6                                 | RES 1K OHM 1/10W 1% 0603 SMD                                | Panasonic - ECG           | ERJ-3EKF1001V          |
| 8   | TP1, TP2, TP3, TP4, TP5, TP6, TP7, TP8 | PC Test Point Compact SMT                                   | Keystone Electronics®     | 5016                   |
| 1   | U1                                     | Single-Cell Lithium Iron Phosphate Battery Charger with OVP | Microchip Technology Inc. | <b>MCP73123-22S/MF</b> |
| 1   | U2                                     | Dual-Cell Lithium Iron Phosphate Battery Charger with OVP   | Microchip Technology Inc. | <b>MCP73223-C2S/MF</b> |

**Note 1:** The components listed in this Bill of Materials are representative of the PCB assembly. The released BOM used in manufacturing uses all RoHS-compliant components.

## Worldwide Sales and Service

### AMERICAS

**Corporate Office**  
2355 West Chandler Blvd.  
Chandler, AZ 85224-6199  
Tel: 480-792-7200  
Fax: 480-792-7277  
Technical Support:  
<http://www.microchip.com/support>  
Web Address:  
[www.microchip.com](http://www.microchip.com)

**Atlanta**  
Duluth, GA  
Tel: 678-957-9614  
Fax: 678-957-1455

**Austin, TX**  
Tel: 512-257-3370

**Boston**  
Westborough, MA  
Tel: 774-760-0087  
Fax: 774-760-0088

**Chicago**  
Itasca, IL  
Tel: 630-285-0071  
Fax: 630-285-0075

**Dallas**  
Addison, TX  
Tel: 972-818-7423  
Fax: 972-818-2924

**Detroit**  
Novi, MI  
Tel: 248-848-4000

**Houston, TX**  
Tel: 281-894-5983

**Indianapolis**  
Noblesville, IN  
Tel: 317-773-8323  
Fax: 317-773-5453  
Tel: 317-536-2380

**Los Angeles**  
Mission Viejo, CA  
Tel: 949-462-9523  
Fax: 949-462-9608  
Tel: 951-273-7800

**Raleigh, NC**  
Tel: 919-844-7510

**New York, NY**  
Tel: 631-435-6000

**San Jose, CA**  
Tel: 408-735-9110  
Tel: 408-436-4270

**Canada - Toronto**  
Tel: 905-695-1980  
Fax: 905-695-2078

### ASIA/PACIFIC

**Australia - Sydney**  
Tel: 61-2-9868-6733

**China - Beijing**  
Tel: 86-10-8569-7000

**China - Chengdu**  
Tel: 86-28-8665-5511

**China - Chongqing**  
Tel: 86-23-8980-9588

**China - Dongguan**  
Tel: 86-769-8702-9880

**China - Guangzhou**  
Tel: 86-20-8755-8029

**China - Hangzhou**  
Tel: 86-571-8792-8115

**China - Hong Kong SAR**  
Tel: 852-2943-5100

**China - Nanjing**  
Tel: 86-25-8473-2460

**China - Qingdao**  
Tel: 86-532-8502-7355

**China - Shanghai**  
Tel: 86-21-3326-8000

**China - Shenyang**  
Tel: 86-24-2334-2829

**China - Shenzhen**  
Tel: 86-755-8864-2200

**China - Suzhou**  
Tel: 86-186-6233-1526

**China - Wuhan**  
Tel: 86-27-5980-5300

**China - Xian**  
Tel: 86-29-8833-7252

**China - Xiamen**  
Tel: 86-592-2388138

**China - Zhuhai**  
Tel: 86-756-3210040

### ASIA/PACIFIC

**India - Bangalore**  
Tel: 91-80-3090-4444

**India - New Delhi**  
Tel: 91-11-4160-8631

**India - Pune**  
Tel: 91-20-4121-0141

**Japan - Osaka**  
Tel: 81-6-6152-7160

**Japan - Tokyo**  
Tel: 81-3-6880-3770

**Korea - Daegu**  
Tel: 82-53-744-4301

**Korea - Seoul**  
Tel: 82-2-554-7200

**Malaysia - Kuala Lumpur**  
Tel: 60-3-7651-7906

**Malaysia - Penang**  
Tel: 60-4-227-8870

**Philippines - Manila**  
Tel: 63-2-634-9065

**Singapore**  
Tel: 65-6334-8870

**Taiwan - Hsin Chu**  
Tel: 886-3-577-8366

**Taiwan - Kaohsiung**  
Tel: 886-7-213-7830

**Taiwan - Taipei**  
Tel: 886-2-2508-8600

**Thailand - Bangkok**  
Tel: 66-2-694-1351

**Vietnam - Ho Chi Minh**  
Tel: 84-28-5448-2100

### EUROPE

**Austria - Wels**  
Tel: 43-7242-2244-39  
Fax: 43-7242-2244-393

**Denmark - Copenhagen**  
Tel: 45-4485-5910  
Fax: 45-4485-2829

**Finland - Espoo**  
Tel: 358-9-4520-820

**France - Paris**  
Tel: 33-1-69-53-63-20  
Fax: 33-1-69-30-90-79

**Germany - Garching**  
Tel: 49-8931-9700

**Germany - Haan**  
Tel: 49-2129-3766400

**Germany - Heilbronn**  
Tel: 49-7131-72400

**Germany - Karlsruhe**  
Tel: 49-721-625370

**Germany - Munich**  
Tel: 49-89-627-144-0  
Fax: 49-89-627-144-44

**Germany - Rosenheim**  
Tel: 49-8031-354-560

**Israel - Ra'anana**  
Tel: 972-9-744-7705

**Italy - Milan**  
Tel: 39-0331-742611  
Fax: 39-0331-466781

**Italy - Padova**  
Tel: 39-049-7625286

**Netherlands - Drunen**  
Tel: 31-416-690399  
Fax: 31-416-690340

**Norway - Trondheim**  
Tel: 47-7288-4388

**Poland - Warsaw**  
Tel: 48-22-3325737

**Romania - Bucharest**  
Tel: 40-21-407-87-50

**Spain - Madrid**  
Tel: 34-91-708-08-90  
Fax: 34-91-708-08-91

**Sweden - Gothenberg**  
Tel: 46-31-704-60-40

**Sweden - Stockholm**  
Tel: 46-8-5090-4654

**UK - Wokingham**  
Tel: 44-118-921-5800  
Fax: 44-118-921-5820