



MCP39F511
Smart Plug Reference Kit
User's Guide

Note the following details of the code protection feature on Microchip devices:

- Microchip products meet the specification contained in their particular Microchip Data Sheet.
- Microchip believes that its family of products is one of the most secure families of its kind on the market today, when used in the intended manner and under normal conditions.
- There are dishonest and possibly illegal methods used to breach the code protection feature. All of these methods, to our knowledge, require using the Microchip products in a manner outside the operating specifications contained in Microchip's Data Sheets. Most likely, the person doing so is engaged in theft of intellectual property.
- Microchip is willing to work with the customer who is concerned about the integrity of their code.
- Neither Microchip nor any other semiconductor manufacturer can guarantee the security of their code. Code protection does not mean that we are guaranteeing the product as "unbreakable."

Code protection is constantly evolving. We at Microchip are committed to continuously improving the code protection features of our products. Attempts to break Microchip's code protection feature may be a violation of the Digital Millennium Copyright Act. If such acts allow unauthorized access to your software or other copyrighted work, you may have a right to sue for relief under that Act.

Information contained in this publication regarding device applications and the like is provided only for your convenience and may be superseded by updates. It is your responsibility to ensure that your application meets with your specifications. MICROCHIP MAKES NO REPRESENTATIONS OR WARRANTIES OF ANY KIND WHETHER EXPRESS OR IMPLIED, WRITTEN OR ORAL, STATUTORY OR OTHERWISE, RELATED TO THE INFORMATION, INCLUDING BUT NOT LIMITED TO ITS CONDITION, QUALITY, PERFORMANCE, MERCHANTABILITY OR FITNESS FOR PURPOSE. Microchip disclaims all liability arising from this information and its use. Use of Microchip devices in life support and/or safety applications is entirely at the buyer's risk, and the buyer agrees to defend, indemnify and hold harmless Microchip from any and all damages, claims, suits, or expenses resulting from such use. No licenses are conveyed, implicitly or otherwise, under any Microchip intellectual property rights unless otherwise stated.

Microchip received ISO/TS-16949:2009 certification for its worldwide headquarters, design and wafer fabrication facilities in Chandler and Tempe, Arizona; Gresham, Oregon and design centers in California and India. The Company's quality system processes and procedures are for its PIC® MCUs and dsPIC® DSCs, KEELoQ® code hopping devices, Serial EEPROMs, microperipherals, nonvolatile memory and analog products. In addition, Microchip's quality system for the design and manufacture of development systems is ISO 9001:2000 certified.

**QUALITY MANAGEMENT SYSTEM
CERTIFIED BY DNV
= ISO/TS 16949 =**

Trademarks

The Microchip name and logo, the Microchip logo, AnyRate, AVR, AVR logo, AVR Freaks, BeaconThings, BitCloud, CryptoMemory, CryptoRF, dsPIC, FlashFlex, flexPWR, Helder, JukeBlox, KEELoQ, KEELoQ logo, Klear, LANCheck, LINK MD, maxStylus, maxTouch, MediaLB, megaAVR, MOST, MOST logo, MPLAB, OptoLyzer, PIC, picoPower, PICSTART, PIC32 logo, Prochip Designer, QTouch, RightTouch, SAM-BA, SpyNIC, SST, SST Logo, SuperFlash, tinyAVR, UNI/O, and XMEGA are registered trademarks of Microchip Technology Incorporated in the U.S.A. and other countries.

ClockWorks, The Embedded Control Solutions Company, EtherSynch, Hyper Speed Control, HyperLight Load, IntelliMOS, mTouch, Precision Edge, and Quiet-Wire are registered trademarks of Microchip Technology Incorporated in the U.S.A.

Adjacent Key Suppression, AKS, Analog-for-the-Digital Age, Any Capacitor, AnyIn, AnyOut, BodyCom, chipKIT, chipKIT logo, CodeGuard, CryptoAuthentication, CryptoCompanion, CryptoController, dsPICDEM, dsPICDEM.net, Dynamic Average Matching, DAM, ECAN, EtherGREEN, In-Circuit Serial Programming, ICSP, Inter-Chip Connectivity, JitterBlocker, KlearNet, KlearNet logo, Mindi, MiWi, motorBench, MPASM, MPF, MPLAB Certified logo, MPLIB, MPLINK, MultiTRAK, NetDetach, Omniscient Code Generation, PICDEM, PICDEM.net, PICKit, PICtail, PureSilicon, QMatrix, RightTouch logo, REAL ICE, Ripple Blocker, SAM-ICE, Serial Quad I/O, SMART-I.S., SQI, SuperSwitcher, SuperSwitcher II, Total Endurance, TSHARC, USBCheck, VariSense, ViewSpan, WiperLock, Wireless DNA, and ZENA are trademarks of Microchip Technology Incorporated in the U.S.A. and other countries.

SQTP is a service mark of Microchip Technology Incorporated in the U.S.A.

Silicon Storage Technology is a registered trademark of Microchip Technology Inc. in other countries.

GestIC is a registered trademark of Microchip Technology Germany II GmbH & Co. KG, a subsidiary of Microchip Technology Inc., in other countries.

All other trademarks mentioned herein are property of their respective companies.

© 2017, Microchip Technology Incorporated, All Rights Reserved.
ISBN: 978-1-5224-2114-6

Object of Declaration: MCP39F511 Smart Plug Reference Kit


EU Declaration of Conformity

This declaration of conformity is issued by the manufacturer.

The development/evaluation tool is designed to be used for research and development in a laboratory environment. This development/evaluation tool is not a Finished Appliance, nor is it intended for incorporation into Finished Appliances that are made commercially available as single functional units to end users under EU EMC Directive 2004/108/EC and as supported by the European Commission's Guide for the EMC Directive 2004/108/EC (8th February 2010).

This development/evaluation tool complies with EU RoHS2 Directive 2011/65/EU.

This development/evaluation tool, when incorporating wireless and radio-telecom functionality, is in compliance with the essential requirement and other relevant provisions of the R&TTE Directive 1999/5/EC and the FCC rules as stated in the declaration of conformity provided in the module datasheet and the module product page available at www.microchip.com. For information regarding the exclusive, limited warranties applicable to Microchip products, please see Microchip's standard terms and conditions of sale, which are printed on our sales documentation and available at www.microchip.com. Signed for and on behalf of Microchip Technology Inc. at Chandler, Arizona, USA.

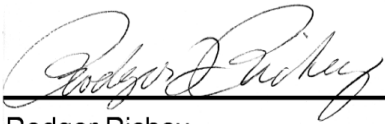

Rodger Richey
Director of Development Tools



Date

NOTES:

Table of Contents

Preface	7
Introduction	7
Document Layout	7
Conventions Used in this Guide	8
Warranty Registration	8
Recommended Reading	9
The Microchip Web Site	9
Product Change Notification Service	9
Customer Support	9
Document Revision History	10
Chapter 1. Product Overview	
1.1 Introduction	11
1.2 Characteristics	11
1.3 System overview	11
1.3.1 North American Plug Board	12
1.3.2 Relay	13
1.3.3 Status LEDs	13
1.3.4 Power Board	13
1.3.5 BTLE MCU Board	14
1.4 What Does the MCP39F511 Smart Plug Reference Kit Kit Contain?	16
Chapter 2. Installation and Operation	
2.1 Overview	17
2.2 Wireless Commands	18
Chapter 3. Meter Calibration	
3.1 Overview	19
3.2 Step-by-Step Calibration Procedure using the GUI	19
Chapter 4. Android Application	
4.1 Overview	21
Appendix A. Schematic and Layouts	
A.1 Introduction	25
A.2 North American Plug Module Board - Schematic	26
A.3 North American Plug Module Board - Top View	27
A.4 North American Plug Module Board - Bottom View	28
A.5 Power Module Board - Schematic	29
A.6 Power Module Board - Top View	30
A.7 Power Module Board - Bottom View	31

MCP39F511 Smart Plug Reference Kit User’s Guide

A.8 BTLE MCU Module Board - Schematic 32

A.9 BTLE MCU Module Board - Top View 33

A.10 BTLE MCU Module Board - Bottom View 34

Appendix B. Bill of Materials (BOM)

Appendix C. Accuracy Data

Worldwide Sales and Service41

Preface

NOTICE TO CUSTOMERS

All documentation becomes dated, and this manual is no exception. Microchip tools and documentation are constantly evolving to meet customer needs, so some actual dialogs and/or tool descriptions may differ from those in this document. Please refer to our web site (www.microchip.com) to obtain the latest documentation available.

Documents are identified with a “DS” number. This number is located on the bottom of each page, in front of the page number. The numbering convention for the DS number is “DSXXXXXXXXA”, where “XXXXXXXX” is the document number and “A” is the revision level of the document.

For the most up-to-date information on development tools, see the MPLAB® IDE online help. Select the Help menu, and then Topics, to open a list of available online help files.

INTRODUCTION

This chapter contains general information that will be useful to know before using the MCP39F511 Smart Plug Reference Kit. Items discussed in this chapter include:

- [Document Layout](#)
- [Conventions Used in this Guide](#)
- [Recommended Reading](#)
- [The Microchip Web Site](#)
- [Customer Support](#)
- [Document Revision History](#)

DOCUMENT LAYOUT

This document describes how to use the MCP39F511 Smart Plug Reference Kit as a development tool to emulate and debug firmware on a target board. The manual layout is as follows:

- **Chapter 1. “Product Overview”** – Important information about the MCP39F511 Smart Plug Reference Kit.
- **Chapter 2. “Installation and Operation”** – Includes instructions on how the MCP39F511 Smart Plug Reference Kit works.
- **Chapter 3. “Meter Calibration”** - Describes the steps for meter calibration.
- **Chapter 4. “Android Application”** - Presents the Android application.
- **Appendix A. “Schematic and Layouts”** – Shows the schematic and layout diagrams for the MCP39F511 Smart Plug Reference Kit.
- **Appendix B. “Bill of Materials (BOM)”** – Lists the parts used to build the MCP39F511 Smart Plug Reference Kit.
- **Appendix C. “Accuracy Data”** – Lists accuracy data for the MCP39F511 Smart Plug Reference Kit.

CONVENTIONS USED IN THIS GUIDE

This manual uses the following documentation conventions:

DOCUMENTATION CONVENTIONS

Description	Represents	Examples
Arial font:		
Italic characters	Referenced books	<i>MPLAB® IDE User's Guide</i>
	Emphasized text	...is the <i>only</i> compiler...
Initial caps	A window	the Output window
	A dialog	the Settings dialog
	A menu selection	select Enable Programmer
Quotes	A field name in a window or dialog	"Save project before build"
Underlined, italic text with right angle bracket	A menu path	<u><i>File>Save</i></u>
Bold characters	A dialog button	Click OK
	A tab	Click the Power tab
N'Rnnnn	A number in verilog format, where N is the total number of digits, R is the radix and n is a digit.	4'b0010, 2'hF1
Text in angle brackets < >	A key on the keyboard	Press <Enter>, <F1>
Courier New font:		
Plain Courier New	Sample source code	#define START
	Filenames	autoexec.bat
	File paths	c:\mcc18\h
	Keywords	_asm, _endasm, static
	Command-line options	-Opa+, -Opa-
	Bit values	0, 1
	Constants	0xFF, 'A'
Italic Courier New	A variable argument	<i>file.o</i> , where <i>file</i> can be any valid filename
Square brackets []	Optional arguments	mcc18 [options] <i>file</i> [options]
Curly brackets and pipe character: { }	Choice of mutually exclusive arguments; an OR selection	errorlevel {0 1}
Ellipses...	Replaces repeated text	var_name [, var_name...]
	Represents code supplied by user	void main (void) { ... }

RECOMMENDED READING

This user's guide describes how to use the MCP39F511 Smart Plug Reference Kit. Other useful documents are listed below. The following Microchip document is available and recommended as a supplemental reference resource:

MCP39F511 Data Sheet – “Power-Monitoring IC with Calculation and Energy Accumulation” (DS20005393B)

This data sheet provides detailed information regarding the power-monitoring device.

PIC24FJ64GA104 Family Data Sheet – “28/44-Pin, 16-Bit General Purpose Flash Microcontrollers with nanoWatt XLP Technology” (DS39951C)

This data sheet provides detailed information regarding the MCU.

RN4020 Data Sheet – “Bluetooth® Low Energy Module” (DS50002279B)

This data sheet provides detailed information regarding the BTLE module.

THE MICROCHIP WEB SITE

Microchip provides online support via our web site at www.microchip.com. This web site is used as a means to make files and information easily available to customers. Accessible by using your favorite Internet browser, the web site contains the following information:

- **Product Support** – Data sheets and errata, application notes and sample programs, design resources, user's guides and hardware support documents, latest software releases and archived software
- **General Technical Support** – Frequently Asked Questions (FAQs), technical support requests, online discussion groups, Microchip consultant program member listing
- **Business of Microchip** – Product selector and ordering guides, latest Microchip press releases, listing of seminars and events, listings of Microchip sales offices, distributors and factory representatives

PRODUCT CHANGE NOTIFICATION SERVICE

Microchip's customer notification service helps keep customers current on Microchip products. Subscribers will receive e-mail notifications whenever there are changes, updates, revisions or errata related to a specified product family or development tool of interest.

To register, access the Microchip web site at www.microchip.com, click on **Product Change Notification** and follow the registration instructions.

CUSTOMER SUPPORT

Users of Microchip products can receive assistance through several channels:

- Distributor or Representative
- Local Sales Office
- Field Application Engineer (FAE)
- Technical Support

Customers should contact their distributor, representative or field application engineer (FAE) for support. Local sales offices are also available to help customers. A listing of sales offices and locations is included in the back of this document.

Technical support is available through the web site at:
<http://www.microchip.com/support>.

DOCUMENT REVISION HISTORY

Revision A (August 2017)

- Initial Release of this Document.

Chapter 1. Product Overview

1.1 INTRODUCTION

The MCP39F511 Smart Plug is a fully functional power meter capable of transmitting its data over a Bluetooth® interface to an Android phone or tablet.

The free Android application for the MCP39F511 Smart Plug can be found on the Google Play Store under "Microchip Smart Plug".

The system calculates the real-time values of the RMS current, RMS voltage, frequency, active, reactive and apparent power, power factor and also the energy consumption.

The MCP39F511 Smart Plug allows remote power control to save energy when the user turns an unused device off, instead of keeping it in stand-by (still consuming power).

It also offers an easy way of monitoring the electrical behavior of home devices and appliances, allowing early detection of malfunctions if an overpower or overcurrent event is observed.

The MCP39F511 Smart Plug is designed to stand between the wall outlet and any electronic device that the user wants to control and monitor remotely.

1.2 CHARACTERISTICS

- Nominal input voltage: 120V/230V [RMS]
- Nominal frequency: 50/60 Hz
- Latching relay for loads up to 10A [RMS]
- Wireless reporting of all power and energy quantities
- Factory calibrated
- BTLE range up to 100m
- Two LEDs for status indication
- Button for turning the wireless module OFF



FIGURE 1-1: MCP39F511 Smart Plug Picture (North American Version).

1.3 SYSTEM OVERVIEW

The MCP39F511 Smart Plug is assembled out of three PCBs.

The North American plug board is used as support for the other two boards, the power board and the BTLE MCU board, which are mounted vertically.

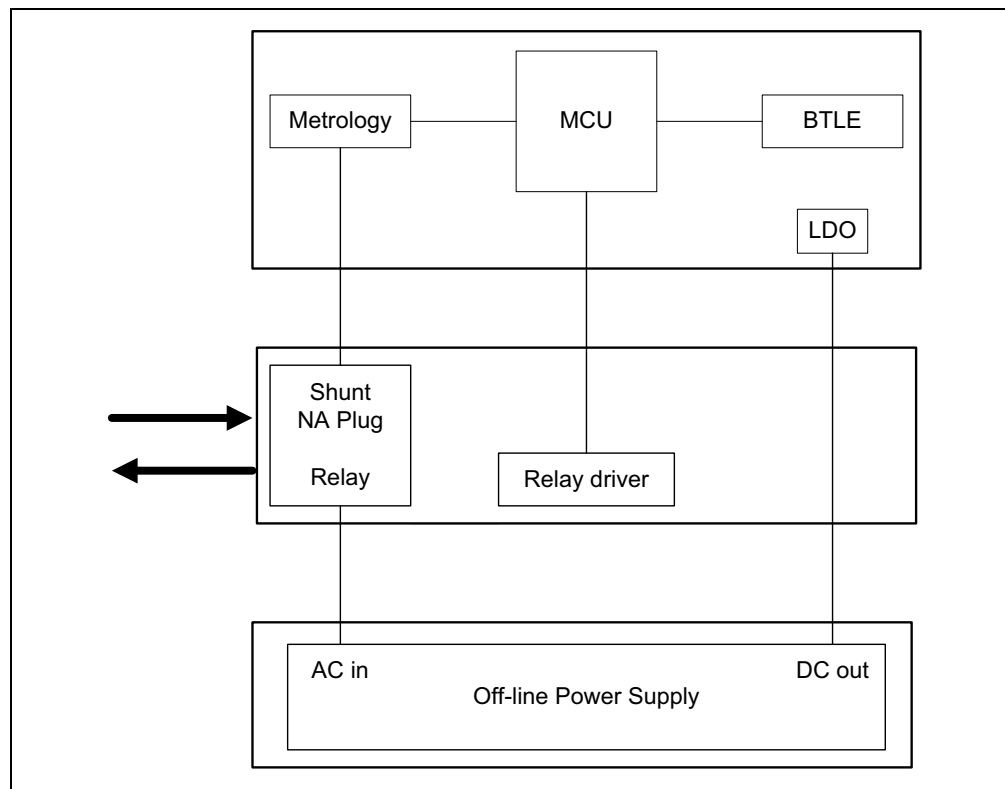


FIGURE 1-2: Block Diagram.

1.3.1 North American plug board

The North American plug board contains the output socket, the relay, the relay driver and the two LEDs.

A shunt resistor is used as a current sensor for the current channel and two high-voltage resistors, which are part of the resistive divider, provide the voltage input for the voltage channel.

The North American plug board is connected to the BTLE MCU board through two 90-degree male headers (3-pin and 6-pin) as shown next, soldered directly on both PCBs.

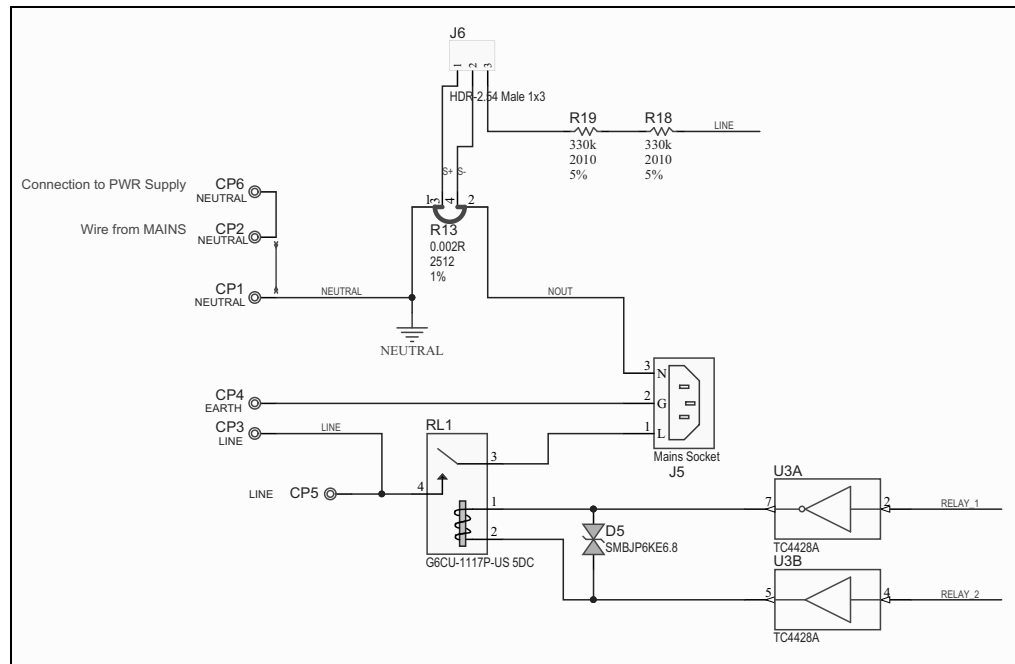


FIGURE 1-3: Metrology Sensing.

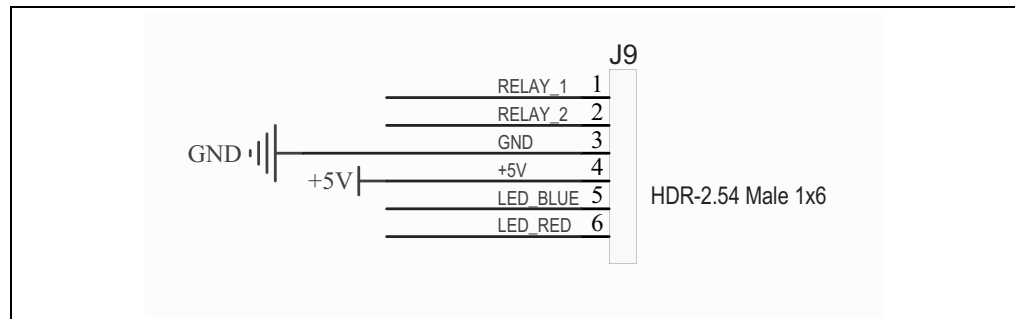


FIGURE 1-4: Digital Signals Connector.

1.3.2 Relay

The relay is a latching-type relay, which offers the advantage that it consumes no power in either ON or OFF state, but only during the transition between states.

This is a very important feature for a device like the MCP39F511 Smart Plug.

1.3.3 Status LEDs

The RED LED shows the status of the relay (it is off when the relay state is OFF).

The BLUE LED shows the status of the BTLE module (it is off when the BTLE module is turned OFF).


When the BTLE module is ON, but the connection to the Android application is not made, the BLUE LED emits a short light pulse every 5 seconds.

The BLUE LED is solidly lit as long as the Bluetooth® connection is maintained.

1.3.4 Power Board

The power board contains the AC-to-DC converter used as the power supply for the entire system.

CH 30011-0201



1151

1. *Journal of the American Medical Association*, 1997; 278: 1019-1024.



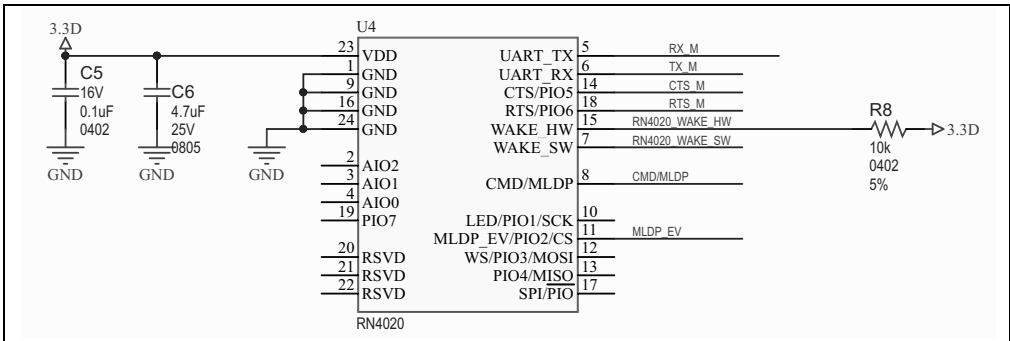


FIGURE 1-10: RN4020.

The BTLE module sends the data via a wireless connection and the information is displayed on the Android phone or tablet.

1.4 WHAT DOES THE MCP39F511 SMART PLUG REFERENCE KIT CONTAIN?

This MCP39F511 Smart Plug Reference Kit includes:

- The MCP39F511 Smart Plug Unit (ADM00642)
- Information Sheet

Chapter 2. Installation and Operation

2.1 OVERVIEW

The MCU is the heart of the system, expanding the power monitoring functionality over wireless connectivity.

When the application is in Meter State or Energy State, it asks for new data once every second.

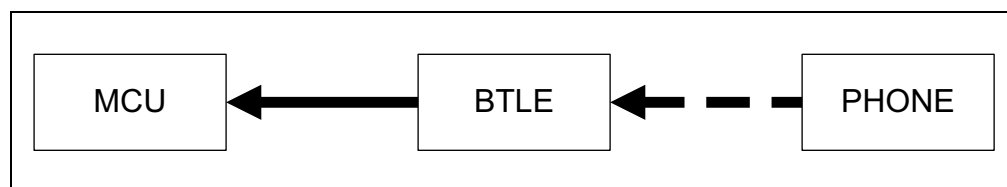


FIGURE 2-1: *The User Asks For Data.*

The MCU receives the request via wireless and sends a read command frame to the MCP39F511 power monitoring IC on the UART1 interface.

In Meter State, the MCU requests the reading of 24 bytes, starting from address 0x0006 (Voltage RMS register).

In Energy State, the MCU requests the reading of 32 bytes, starting from address 0x001E (Import Active Energy Counter).

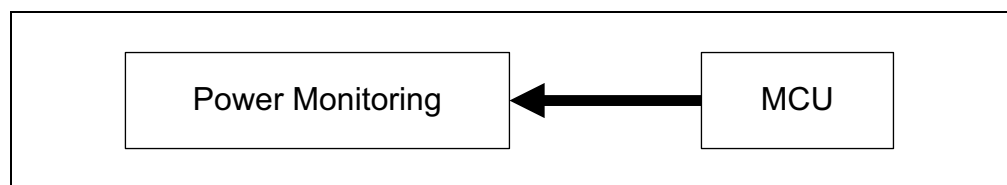


FIGURE 2-2: *MCU Interrogates the Power Monitoring IC.*

In response, MCP39F511 power-monitoring IC sends back the values of the internal registers containing the results of the calculations (performed every four line cycles in a continuous loop).

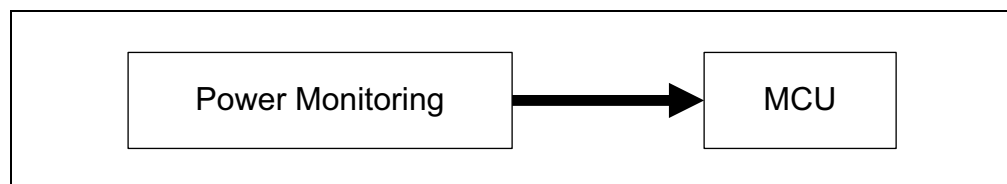


FIGURE 2-3: *Power Monitoring IC Responds to MCU Interrogation*

The MCU sends the requested data to the BTLE module on the UART2 interface.

The data is then wirelessly sent by the BTLE module and displayed in real time on the screen.

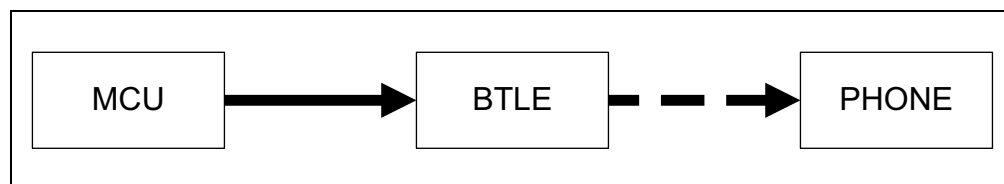


FIGURE 2-4: The Requested Data Is Sent Back to the Phone.

2.2 WIRELESS COMMANDS

Each command sent to the MCP39F511 Smart Plug by the application contains two bytes.

After receiving, decoding and executing the command, the MCU sends back one byte in response and the application displays a confirmation message.

TABLE 2-1: WIRELESSES COMMANDS

Command Group (Byte 1)	Command Group (Byte 2)	Reply
Relay commands		
0x10	0x11 – Relay ON	0x1 1 – if relay is correctly set or no reply if the command fails
	0x12 – Relay OFF	0x1 2 – if relay is correctly set or no reply if the command fails
Calibration Commands		
0x20	0x21 - Frequency calibration and gains calibration at PF = 1	0x20 - Calibration successful
		0x28 - Set range command failed
		0x29 - Frequency calibration failed
		0x2A - Gain calibration failed
	0x22 - Reactive power calibration at PF = 0.5	0x2D - Save to flash command failed
Data Request Commands		
0x30	0x31 – Read meter state	30-byte reply: 0x31, 0xFE, No of data bytes (27), 27 bytes of data representing the measured values of the voltage, current, frequency, active power, reactive power, apparent power and power factor
	0x32 – Read energy state	38-byte reply: 0x32, 0xFE, No of data bytes(35), 35 bytes of data representing the energy counters
	0x34 – Reset energy counters	0x34 – counters reset

Chapter 3. Meter Calibration

3.1 OVERVIEW

The MCP39F511 Smart Plug is factory-calibrated, so no calibration is required.

The calibration is done by connecting the MCP39F511 power-monitoring IC to a PC via an isolated UART to USB adapter, and using the MCP39F511 Power Monitor Utility provided free of charge on the Microchip website.

The J2 connector provides all the necessary signals for this operation.

Once the MCP39F511 Smart Plug is assembled, it is harder to gain external access to the UART signals of the MCP39F511 power monitoring IC, because the MCU is already connected on the same UART pins.

The solution is to place the MCU in reset by pulling the MCLR pin down, which causes the internal UART port pins to be kept in high impedance.

This is done by placing a header with MCLR and GND pins shorted on the ICSP connector (J1).

The calibration is performed with lab grade equipment capable of generating an accurate high voltage and simulating a current load at 50/60 Hz.

After calibration, the MCU is released from reset by removing the header placed on J1.

3.2 STEP BY STEP CALIBRATION PROCEDURE USING THE GUI

- Apply the calibration AC voltage, without a load.
- Wait for a computational cycle (a minimum of 80 ms).
- Manually adjust the AC offset registers (current, active power and reactive power) for minimal offset values.
- Apply the calibration load current, PF = 1. A calibration load current of 1/3 of the maximum current is suggested.
- Wait for a computational cycle (a minimum of 80 ms).
- Press the Calibrate Gains button; this sets the range and target values, then performs the frequency, voltage, current and active power-gain calibration.
- Change the power factor to 0.5.
- Wait for a computational cycle (a minimum of 80 ms).
- Press the Calibrate Phase button; this calibrates the phase compensation coefficient.
- Wait for a computational cycle (a minimum of 80 ms).
- Press the Calibrate Reactive button; this calibrates the reactive power gain.
- Press the Save to Flash button.

Note: The default calibration values are:

- Voltage = 220V
- Current = 5A
- Frequency = 50 Hz

NOTES:

Chapter 4. Android Application

4.1 OVERVIEW

The Android App is free to download and can be found on the Google Play Store:

<https://play.google.com/store/apps/details?id=com.microchip.smartplug>

The first time you run the application, you will be prompted to accept the License Agreement.

Press **Accept** to agree with the terms to start using the application.

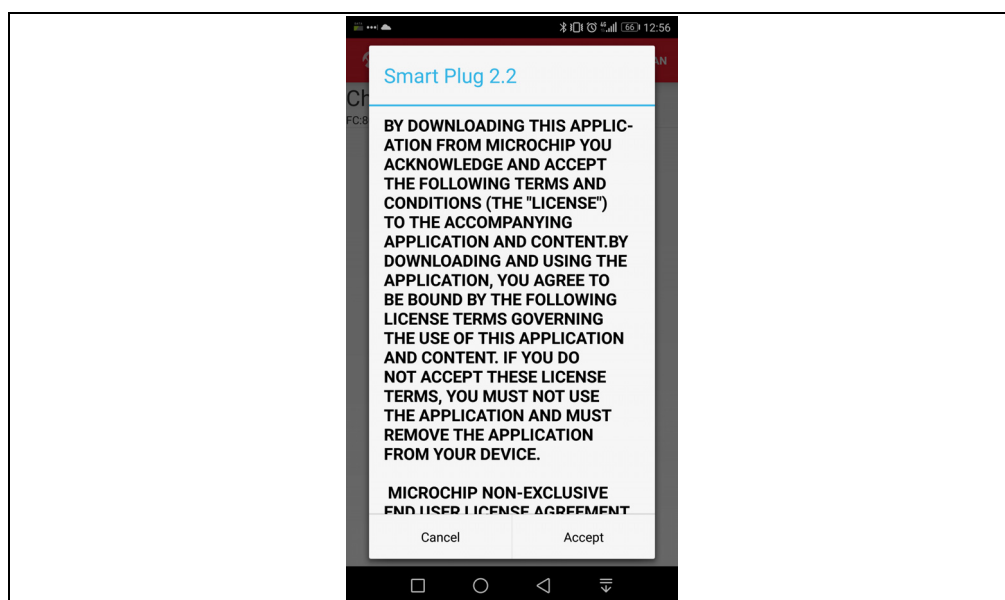


FIGURE 4-1: License Agreement.

The application needs permission to use the device's Bluetooth® and also the Location. For Android 7 and higher, the Bluetooth® scan will not find any devices unless the Location permission is granted.

The first screen shown is the device list.

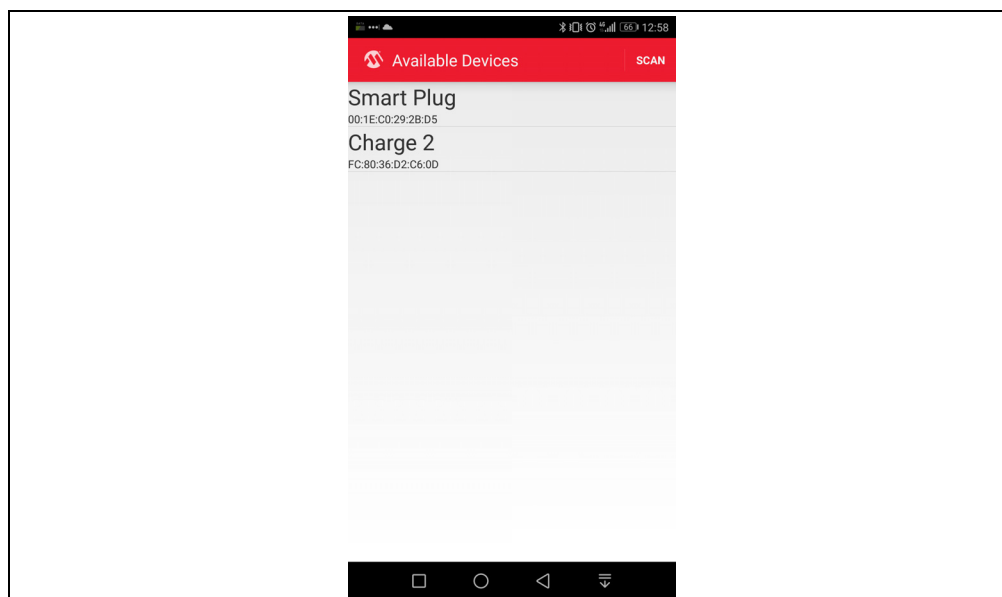


FIGURE 4-2: Device List.

The application scans for available Bluetooth® devices and displays them.

Touching the **Scan** button starts the search process again and updates the list.

Select the Smart Plug from the list to connect to it.

Once the connection is established, the blue light on the MCP39F511 Smart Plug will light up and the Meter State screen will be shown.

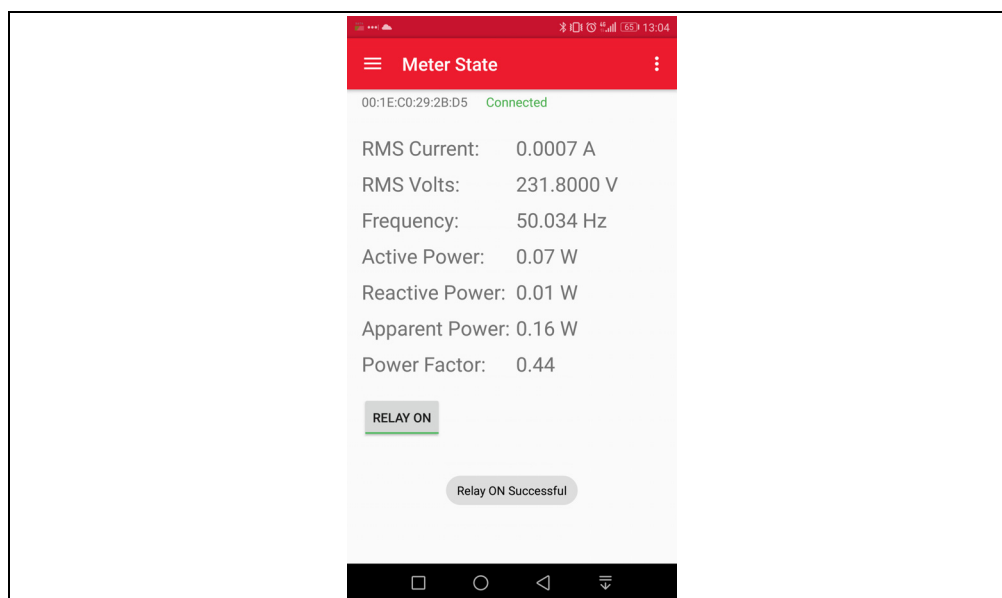


FIGURE 4-3: Meter State (No Load).

The Meter State screen contains information about the current consumption, voltage, frequency, active power, reactive power, apparent power and power factor value read from the meter and allows controlling the power output at a touch of a button using the onboard relay.

Switching the relay off cuts the power to any electrical device that is plugged in.

The result of the operation will briefly be displayed on screen.

The side menu allows access to the Energy State, where the total energy consumption is displayed.

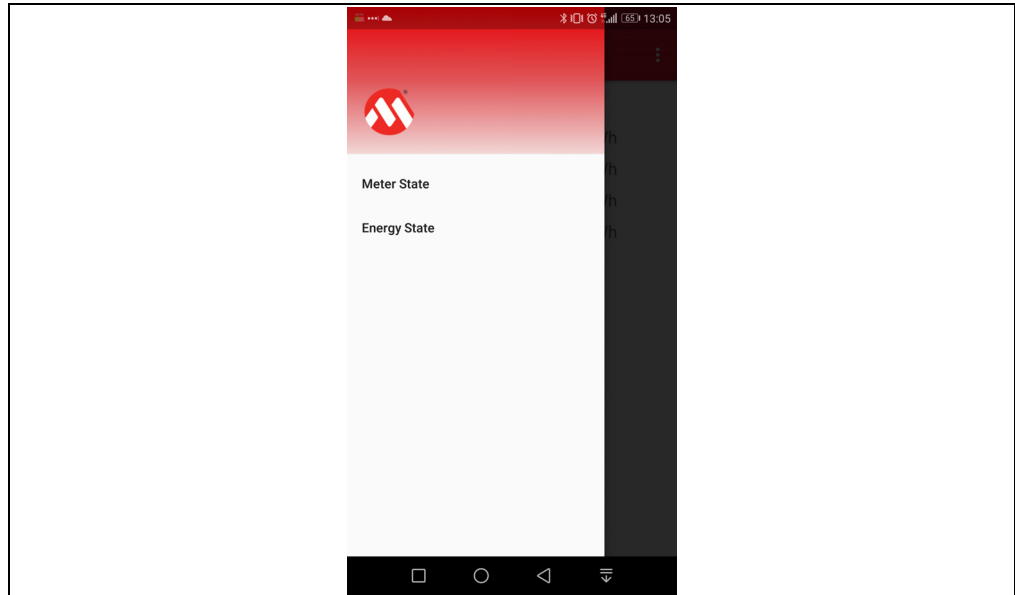


FIGURE 4-4: Side Menu.

The user has the option of resetting the energy counters, a useful feature for monitoring the energy consumption of a different consumer.

The energy-counting feature is turned on by default after resetting the counters.

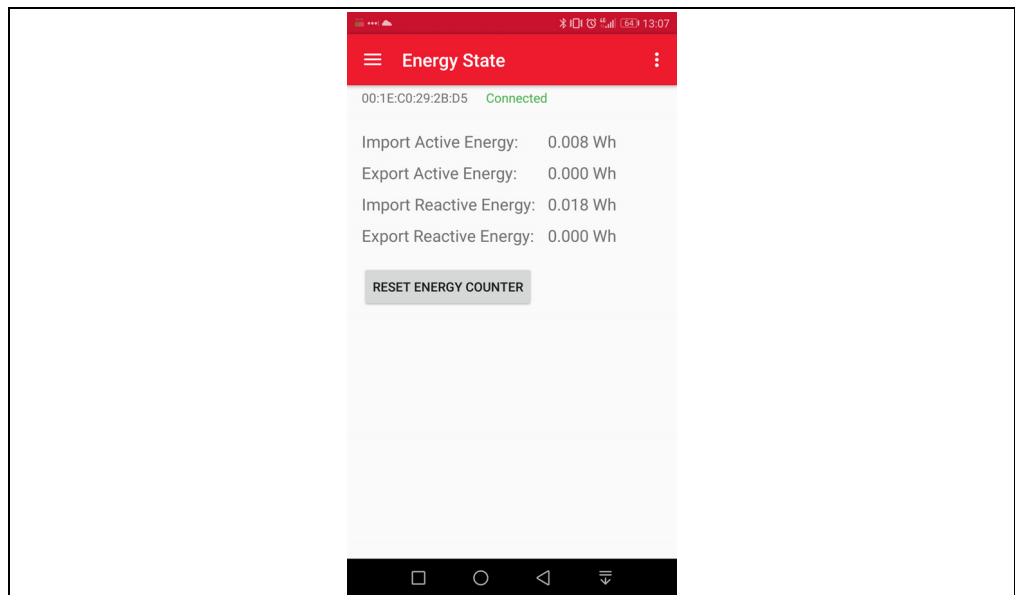


FIGURE 4-5: Energy State.

The side menu allows accessing the calibration menu.

Pressing the Microchip Logo five times in rapid succession (within a 3-second interval) will display the calibration screen.

Pressing the **Calibrate PF 1** button should be done after applying the appropriate voltage and current calibration signals at PF = 1.

This operation allows the calibration of the frequency, current, voltage and active power gains.

After changing the PF to 0.5, pressing the **Calibrate PF 0.5** button allows the calibration of the reactive power gain.

The new gain coefficients are saved to flash automatically after a successful calibration.

Disclaimer: The calibration procedure is irreversible and should only be carried out by trained personnel with the appropriate calibration equipment.

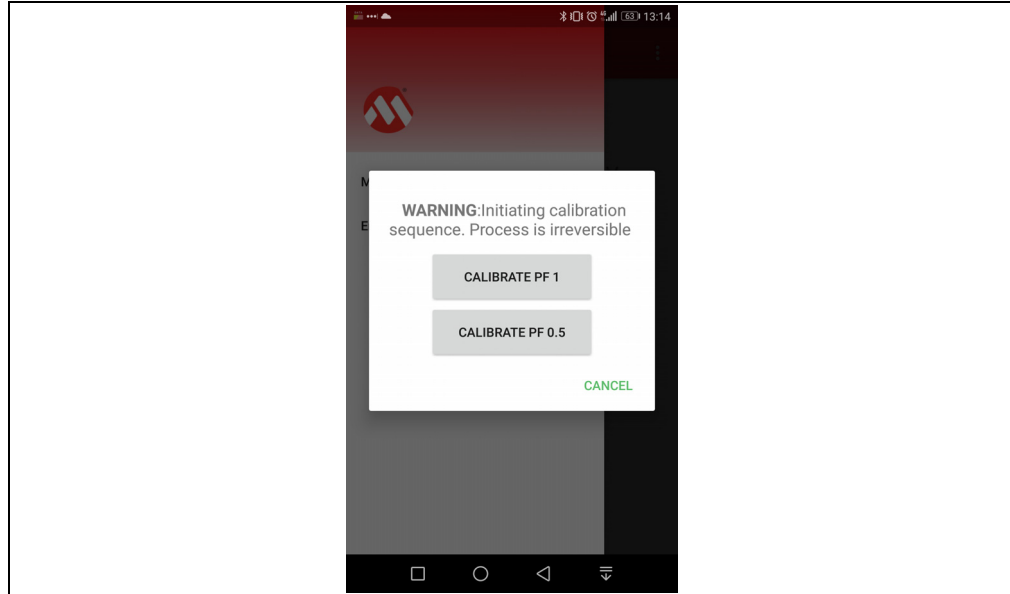


FIGURE 4-6: Calibration Menu.

To disconnect from the MCP39F511 Smart Plug, press the back button until you return to the Scan screen, or select **Disconnect** from the top-right menu on any of the screens.

The firmware, schematics and the layout files can be found on the MCP39F511 Smart Plug web page at www.microchip.com/smartplug.



Appendix A. Schematic and Layouts

A.1 INTRODUCTION


This appendix contains the following schematics and layouts for the MCP39F511 Smart Plug revision 3 boards:

- [North American Plug Module Board - Schematic](#)
- [North American Plug Module Board - Top View](#)
- [North American Plug Module Board - Bottom View](#)
- [Power Module Board - Schematic](#)
- [Power Module Board - Top View](#)
- [Power Module Board - Bottom View](#)
- [BTLE MCU Module Board - Schematic](#)
- [BTLE MCU Module Board - Top View](#)
- [BTLE MCU Module Board - Bottom View](#)

A.2 NORTH AMERICAN PLUG MODULE BOARD - SCHEMATIC






50mm - Wire 0.75mm² - LINE
50mm - Wire 0.5mm² - NEUTRAL
(for power supply connection)




40mm - Wire 0.5mm² - EARTH

40mm - Wire 0.75mm² - NEUTRAL

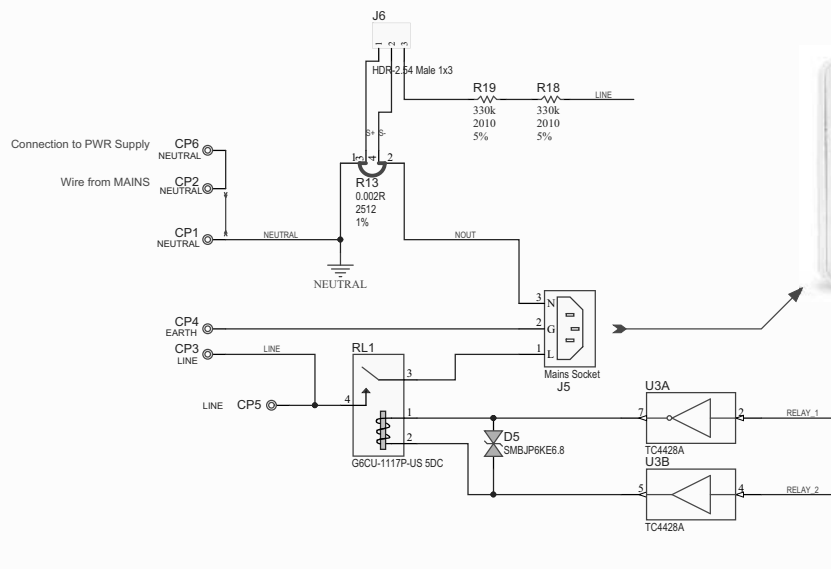


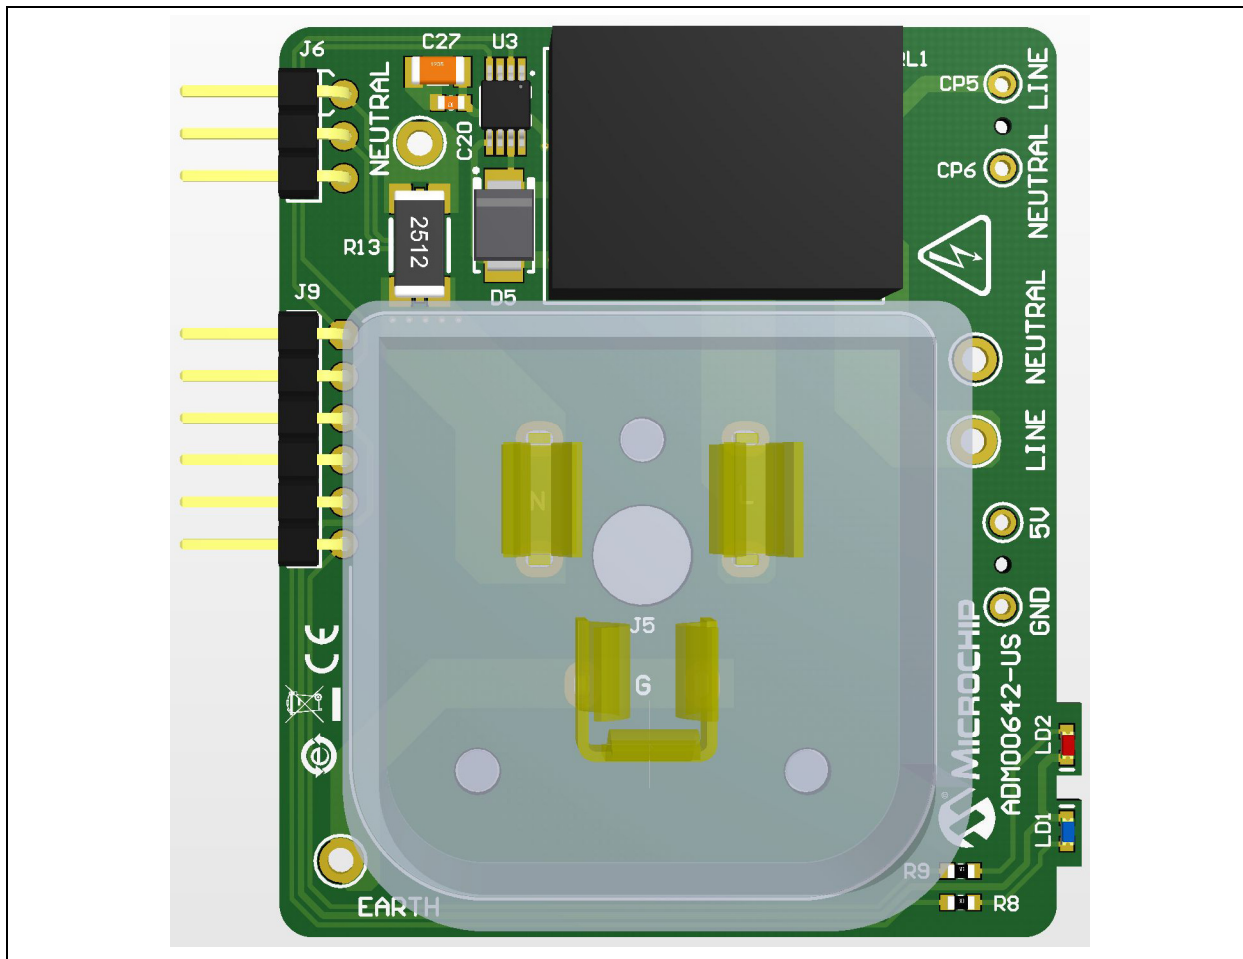A.3 NORTH AMERICAN PLUG MODULE BOARD - TOP VIEW

A.4 NORTH AMERICAN PLUG MODULE BOARD - BOTTOM VIEW

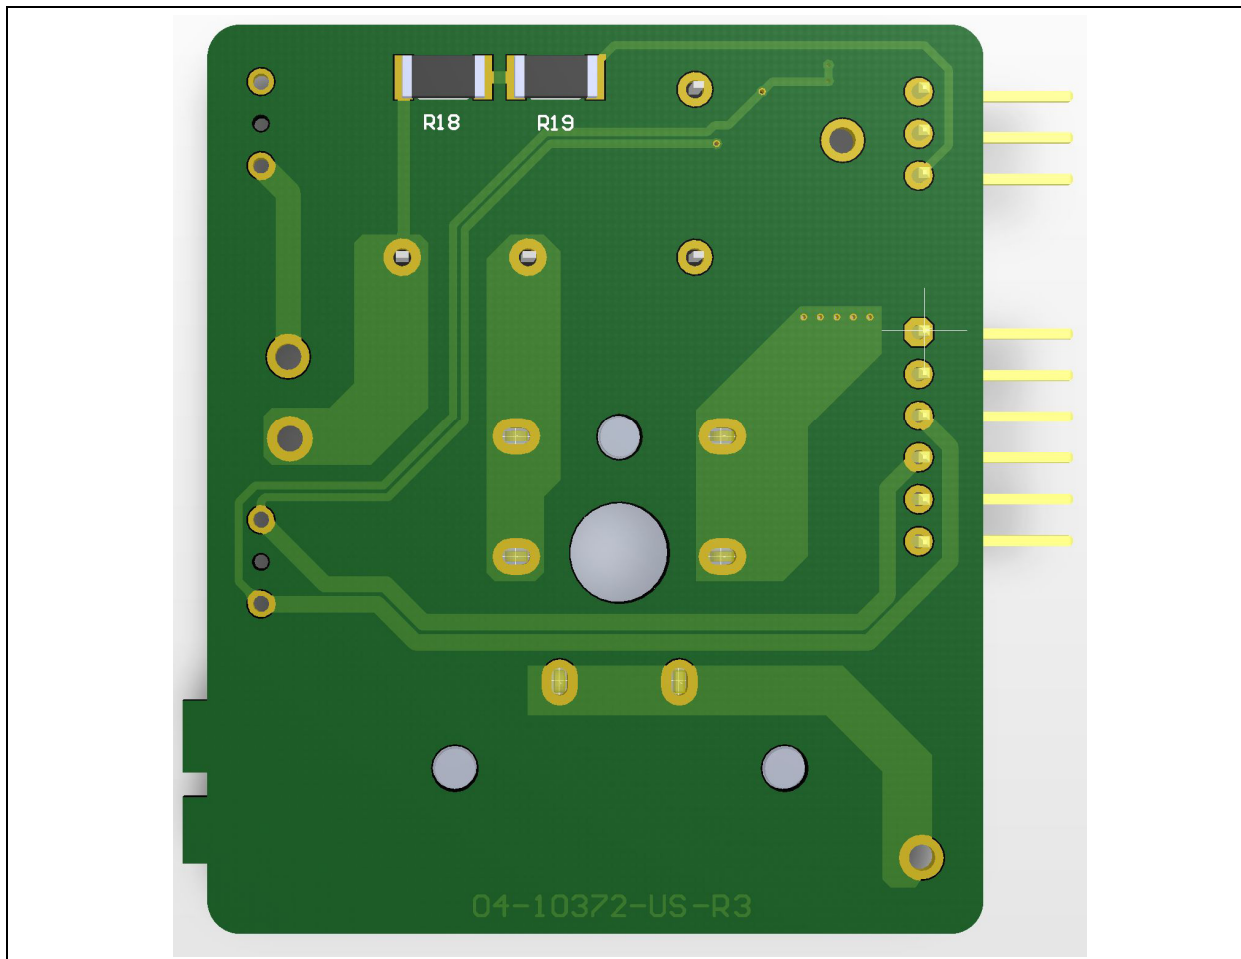


A.5 POWER MODULE BOARD - SCHEMATIC

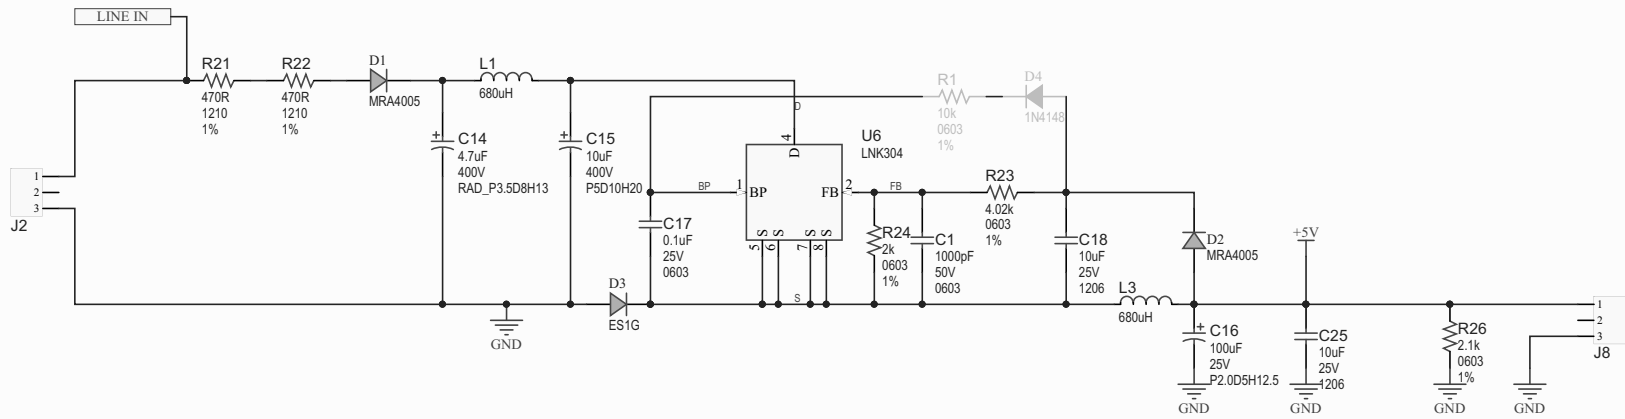


J2 and J8 are 3 pin Headers with the middle pin removed.


A.6 POWER MODULE BOARD - TOP VIEW

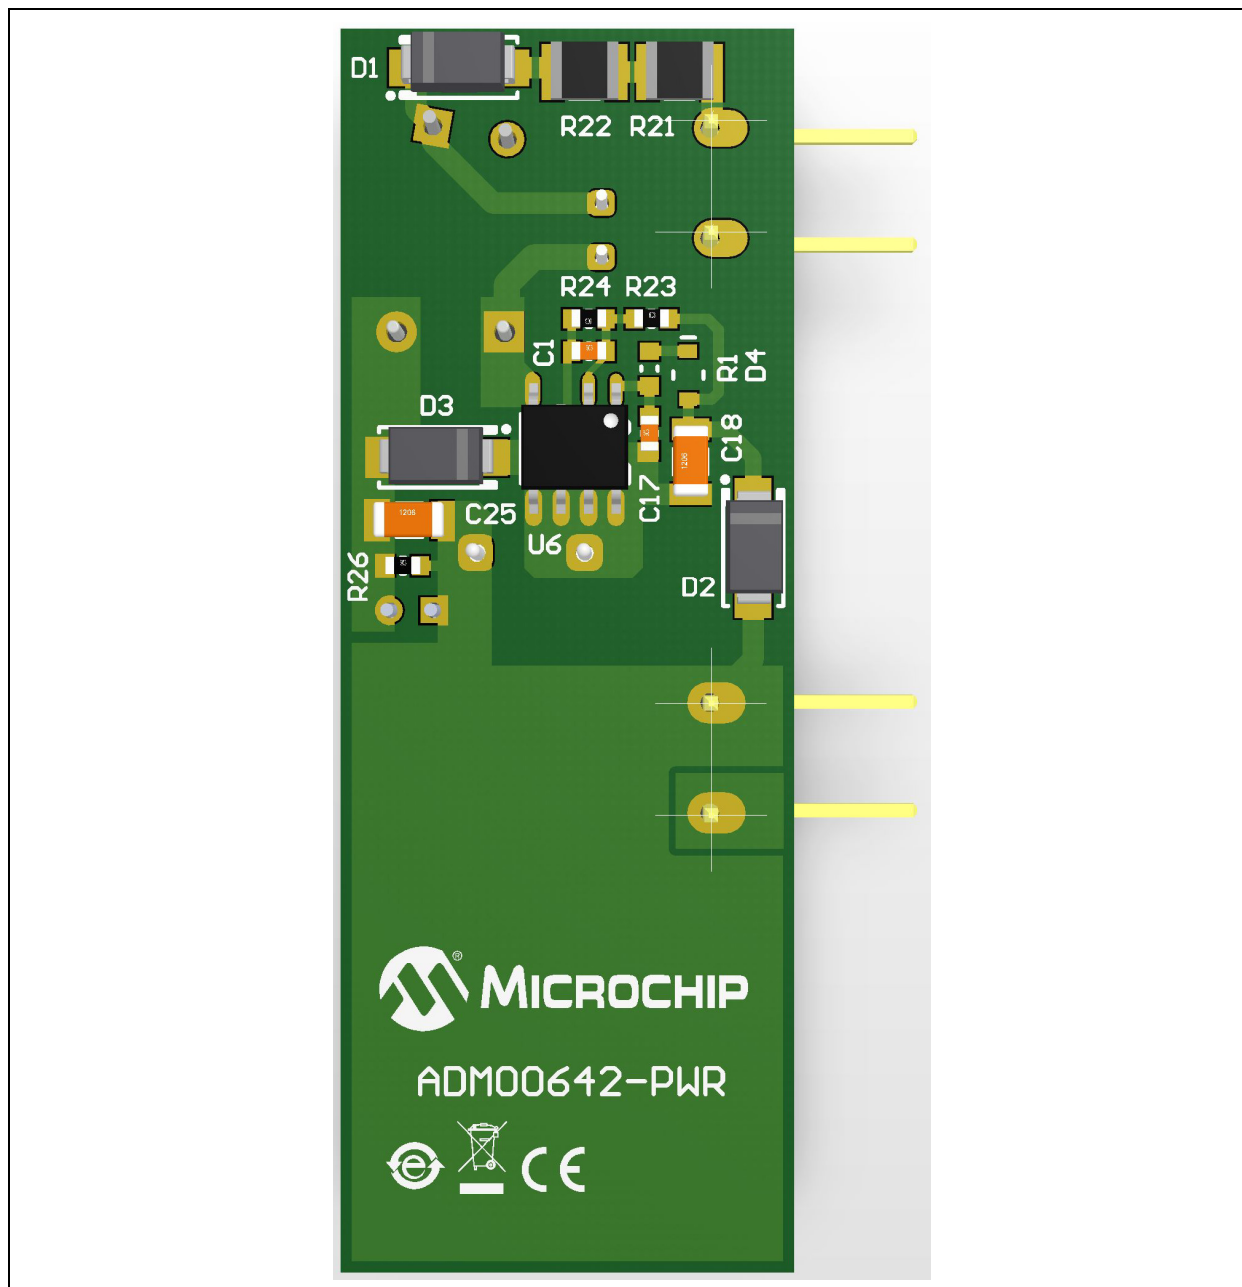


A.7 POWER MODULE BOARD - BOTTOM VIEW

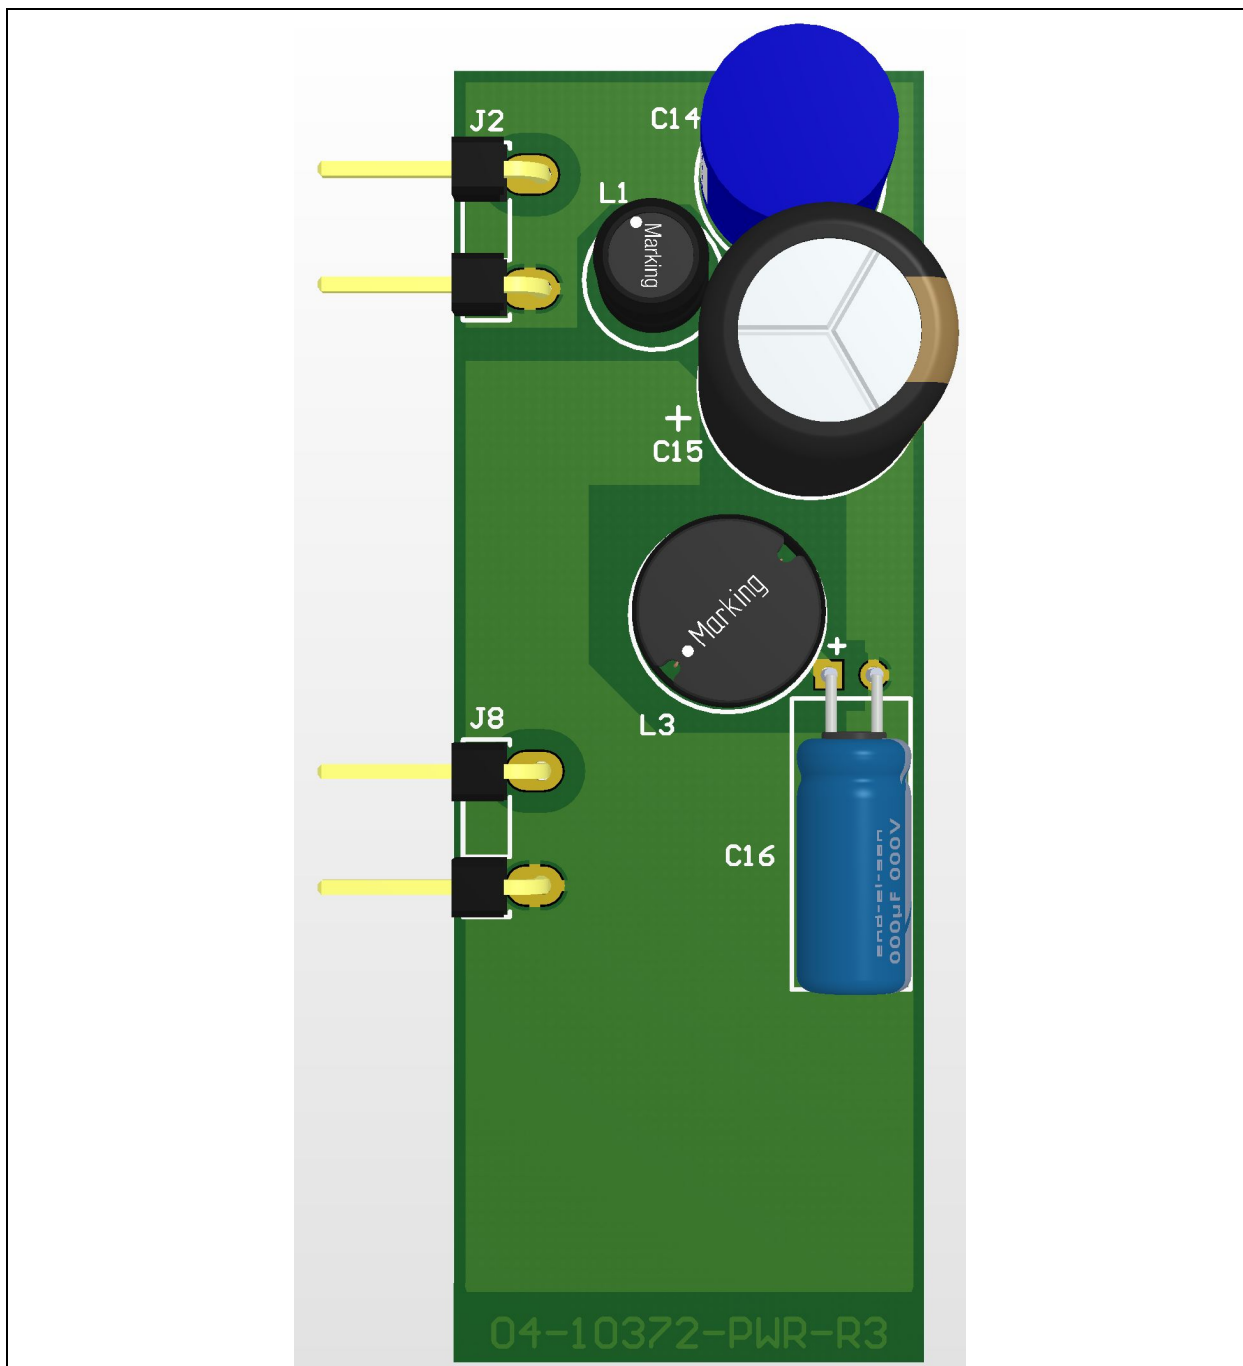


A.8 BTLE MCU MODULE BOARD - SCHEMATIC

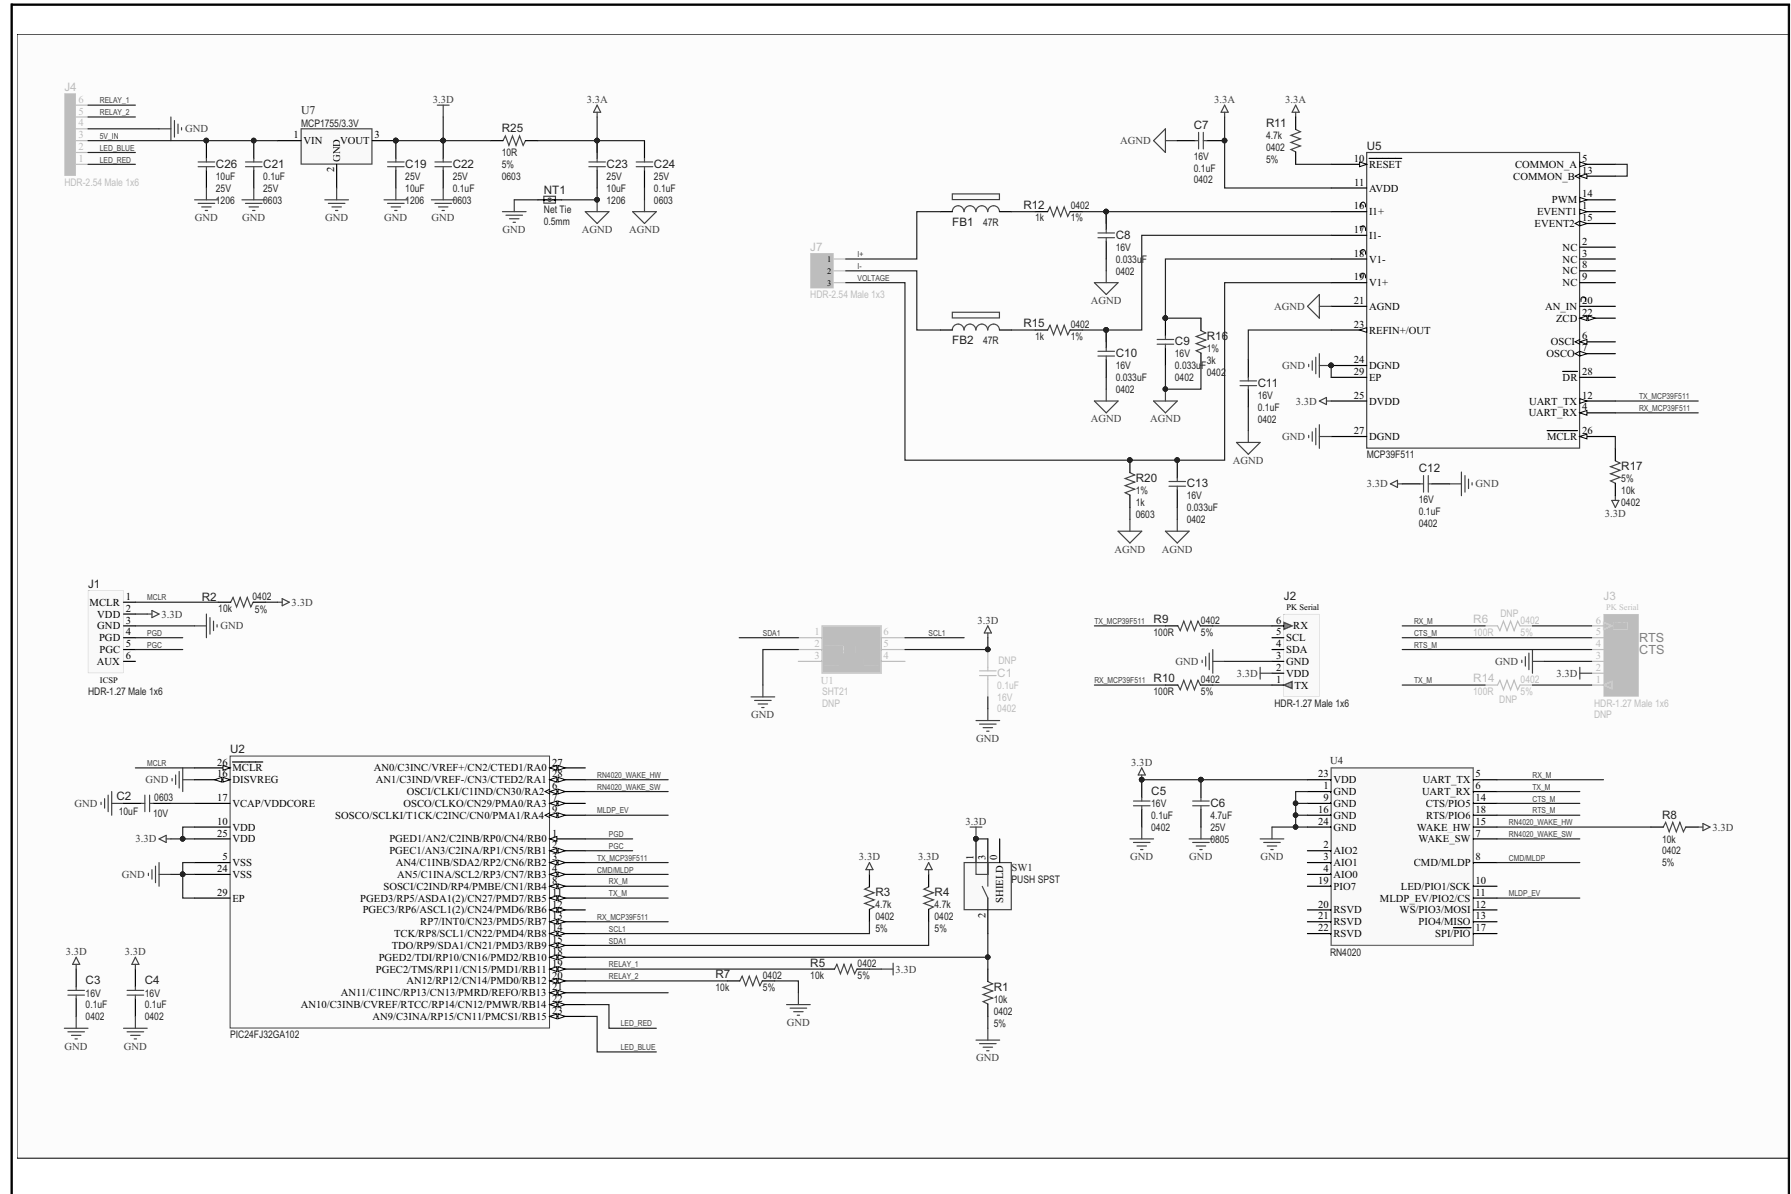

A.9 BTLE MCU MODULE BOARD - TOP VIEW

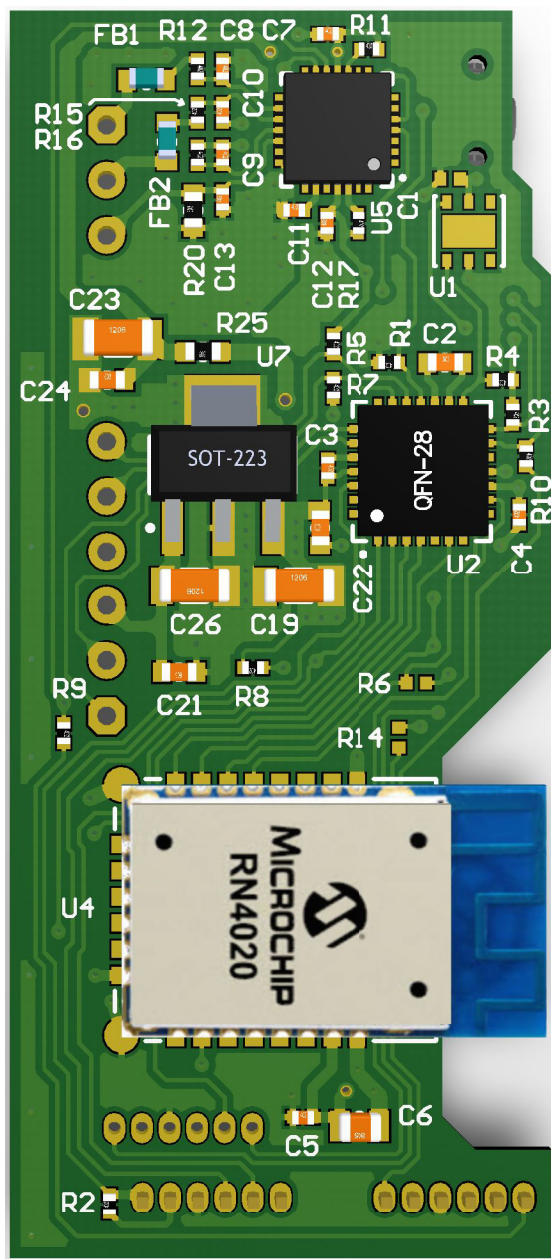

A.10 BTLE MCU MODULE BOARD - BOTTOM VIEW

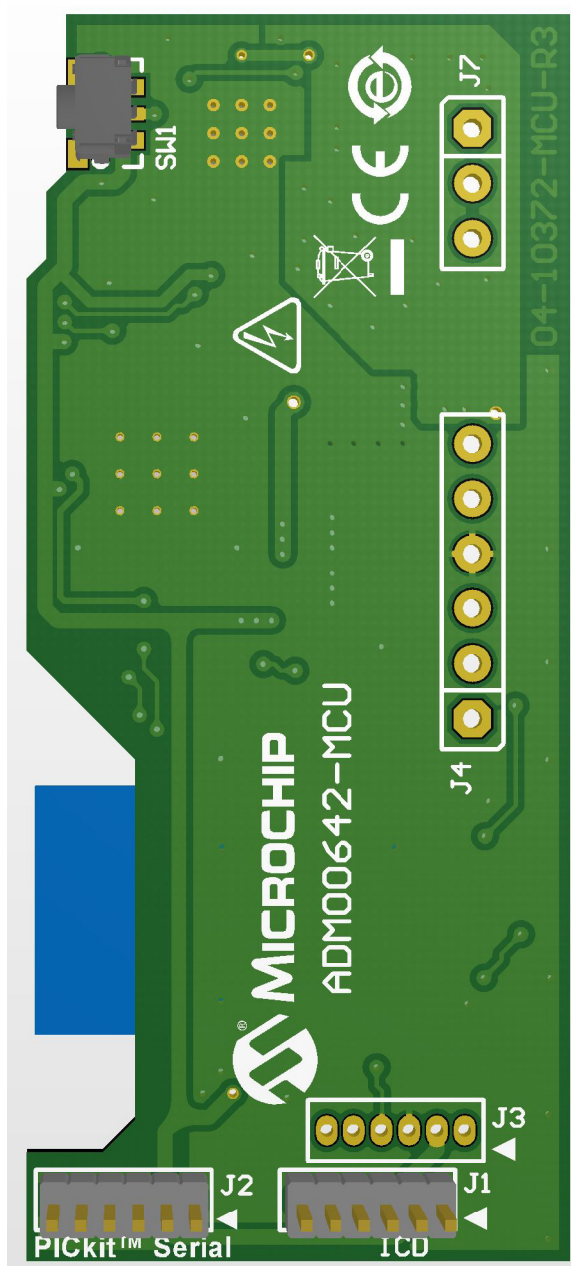

Appendix B. Bill of Materials (BOM)

TABLE B-1: BILL OF MATERIALS (BOM)⁽¹⁾ - NORTH AMERICAN PLUG MODULE BOARD (ADM00642-US)

Qty.	Reference	Description	Manufacturer	Part Number
1	C20	CAP CER 0.1uF 25V 10% X7R SMD 0603	Murata Electronics®	GRM188R71E104KA01D
1	C27	CAP CER 4.7uF 25V 10% X5R SMD 1206	TDK Corporation	C3216X5R1E475K
1	D5	DIO TVS SMBJP6KE6.8CA 5.8V 600W DO-214AA_SMB	Micro Commercial Components	SMBJP6KE6.8CA-TP
1	J5	Enclosure Aolaisite CZ660-US	Shenzhen Aolaisite Plastic Electronics Co., Ltd.	CZ660-US
1	J6	CON HDR-2.54 Male 1x3 Gold 5.84MH TH R/A	Samtec, Inc.	TSW-103-08-F-S-RA
1	J9	CON HDR-2.54 Male 1x6 Gold 5.84MH TH R/A	FCI	68016-106HLF
1	LD1	DIO LED BLUE 3.2V 20mA 140mcd Clear SMD 0603	Dialight Corporation	598-8091-107F
1	LD2	DIO LED RED 1.95V 30mA 700mcd Clear SMD 0603	Kingbright Electronic Co., Ltd.	APTD1608SURCK
1	PCB	North American Plug Module Printed Circuit Board	Microchip Technology Inc.	04-10372-US-R3
2	R8, R9	RES TKF 1k 1% 1/10W SMD 0603	Panasonic® - BSG	ERJ-3EKF1001V
1	R13	RES SHUNT MF 0.002R 1% 2W 2512	Stackpole Electronics, Inc.	CSNL2512FT2L00
2	R18, R19	RES TKF 330k 5% 1/2W SMD 2010	ROHM Semiconductor	MCR50JZHJ334
1	RL1	RELAY POWER SPST-NO LATCHING 5V 10A 250VAC TH	OMRON Corporation	G6CU-1117P-US 5DC
1	U3	MCHP ANALOG FET DRIVER Dual-Non/Inverting TC4428AE-UA713 MSOP-8	Microchip Technology Inc.	TC4428AEUA713

Note 1: The components listed in this Bill of Materials are representative of the PCB assembly. The released BOM used in manufacturing uses all RoHS-compliant components.

TABLE B-2: BILL OF MATERIALS (BOM)⁽¹⁾ - POWER MODULE BOARD (ADM00642-PWR)

Qty.	Reference	Description	Manufacturer	Part Number
1	C1	CAP CER 1000pF 50V 10% X7R SMD 0603	Cal-Chip Electronics Inc.	GMC10X7R102K50NTL_F
1	C14	CAP ALU 4.7uF 400V 20% RAD_P3.5D8H13	Nichicon Corporation	UVC2G4R7MPD1TD
1	C15	CAP ALU 10uF 400V 20% TH P5D10H20	Panasonic® - ECG	EEU-EE2G100

Note 1: The components listed in this Bill of Materials are representative of the PCB assembly. The released BOM used in manufacturing uses all RoHS-compliant components.

MCP39F511 Smart Plug Reference Kit User's Guide

TABLE B-2: BILL OF MATERIALS (BOM)⁽¹⁾ (CONTINUED)- POWER MODULE BOARD

Qty.	Reference	Description	Manufacturer	Part Number
1	C16	CAP ALU 100uF 25V 20% RAD P2.0D5H12.5	Rubycon Corporation	25PX100MEFC5X11
1	C17	CAP CER 0.1uF 25V 10% X7R SMD 0603	Murata Electronics®	GRM188R71E104KA01D
1	C18	CAP CER 10uF 25V 10% X7R SMD 1206	Taiyo Yuden Co., Ltd.	TMK316B7106KL-TD
1	C25	CAP CER 10uF 25V 10% X7R SMD 1206	Murata Electronics North America, Inc.	GRM31CR71E106KA12L
2	D1, D2	DIO RECT MRA4005 1.1V 1A 600V DO-214AC_SMA	ON Semiconductor®	MRA4005T3G
1	D3	DIO RECT ES1G 1.25V 1A 400V SMD DO-214AC_SMA	Diodes Incorporated®	ES1G-13-F
2	J2, J8	CON HDR-2.54 Male 1x3 Gold 5.84MH TH R/A	Samtec, Inc.	TSW-103-08-F-S-RA
1	L1	INDUCTOR 680uH 250mA10% TH P2.5D6H8.5	Würth Elektronik	7447462681
1	L3	INDUCTOR 680uH 330mA 10% TH RAD P5D8.5H5.5	Würth Elektronik	7447412681
1	PCB	Power Module Printed Circuit Board	Microchip Technology Inc.	104-10372-PWR-R3
2	R21, R22	RES TKF 470R 1% 1/2W SMD 1210	Vishay/Dale	CRCW1210470RFKEA
1	R23	RES TKF 4.02K 1% 1/10W SMD 0603	Stackpole Electronics, Inc.	RMCF0603FT4K02
1	R24	RES TKF 2k 1% 1/10W SMD 0603	Panasonic® - ECG	ERJ-3EKF2001V
1	R26	RES TKF 2.1k 1% 1/10W SMD 0603	Panasonic® - ECG	ERJ-3EKF2101V
1	U6	IC SWITCHER LNK304 SO-8C	Power Integrations™	LNK304DG-TL

Note 1: The components listed in this Bill of Materials are representative of the PCB assembly. The released BOM used in manufacturing uses all RoHS-compliant components.

TABLE B-3: BILL OF MATERIALS (BOM)⁽¹⁾ - BTLE MCU MODULE (ADM00642-MCU)

Qty.	Reference	Description	Manufacturer	Part Number
1	C2	CAP CER 10uF 10V 20% X5R SMD 0603	Panasonic® - ECG	ECJ-1VB1A106M
6	C3, C4, C5, C7, C11, C12	CAP CER 0.1uF 16V 10% X7R SMD 0402	Murata Electronics®	GRM155R71C104KA88D
1	C6	CAP CER 4.7uF 25V 10% X7R SMD 0805	TDK Corporation	C2012X7R1E475K125AB
4	C8, C9, C10, C13	CAP CER 0.033uF 16V 10% X7R SMD 0402	TDK Corporation	CGA2B2X7R1C333K050B A
3	C19, C23, C26	CAP CER 10uF 25V 10% X7R SMD 1206	Murata Electronics North America, Inc.	GRM31CR71E106KA12L
3	C21, C22, C24	CAP CER 0.1uF 25V 10% X7R SMD 0603	Murata Electronics®	GRM188R71E104KA01D

Note 1: The components listed in this Bill of Materials are representative of the PCB assembly. The released BOM used in manufacturing uses all RoHS-compliant components.

TABLE B-3: BILL OF MATERIALS (BOM)⁽¹⁾ (CONTINUED)- BTLE MCU MODULE

Qty.	Reference	Description	Manufacturer	Part Number
2	FB1, FB2	FERRITE 47R@100MHz 500mA SMD 0603	Laird-Signal Integrity Products	LI0603E470R-10
2	J1, J2	CON HDR-1.27 Male 1x6 Gold 3MHTH VERT	Sullins Connector Solutions	GRPB061VWVN-RC
1	PCB	Bluetooth Module Printed Circuit Board	Microchip Technology Inc.	04-10372-MCU-R3
6	R1, R2, R5, R7, R8, R17	RES TKF 10k 5% 1/10W SMD 0402	Panasonic® - ECG	ERJ-2GEJ103X
3	R3, R4, R11	RES TKF 4.7k 5% 1/10W SMD 0402	Panasonic® - ECG	ERJ-2GEJ472X
2	R9, R10	RES TKF 100R 5% 1/16W SMD 0402	Yageo Corporation	RC0402JR-07100RL
2	R12, R15	RES TKF 1k 1% 1/10W SMD 0402	Panasonic® - ECG	ERJ-2RKF1001X
1	R16	RES SMD 3K 1% 1/10W 0402	Panasonic® - ECG	ERJ-2RKF3001X
1	R20	RES TKF 1k 1% 1/10W SMD 0603	Panasonic® - ECG	ERJ-3EKF1001V
1	R25	RES TKF 10R 5% 1/10W SMD 0603	Panasonic® - ECG	ERJ-3GEJ100V
1	SW1	SWITCH PUSH SPST-NO 12V 0.05A TL3340 SMD	E-Switch®, Inc.	TL3340AF160QG
1	U2	MCHP MCU 16-BIT 32MHz 32KB 8KB PIC24FJ32GA102-I/ML QFN-28	Microchip Technology Inc.	PIC24FJ32GA102-I/ML
1	U4	MCHP RF BLUETOOTH 4.0 RN4020-V/RM MODULE-24	Microchip Technology Inc.	RN4020-V/RM
1	U5	MCHP ANALOG ENERGY MEASUREMENT 4000:1 MCP39F511-E/MQ QFN-28	Microchip Technology Inc.	MCP39F511-E/MQ
1	U7	MCHP ANALOG LDO 3.3V MCP1755ST-3302E/DB SOT-223-3	Microchip Technology Inc.	MCP1755ST-3302E/DB

Note 1: The components listed in this Bill of Materials are representative of the PCB assembly. The released BOM used in manufacturing uses all RoHS-compliant components.

NOTES:

Appendix C. Accuracy Data

TABLE C-1: RMS CURRENT (AT 120V, 60Hz)

Applied Current [A]	Measured Current [A]	Error in %
10	9.9971	-0.029
5	5.0015	0.03
2	1.9999	-0.005
1	0.9995	-0.05
0.5	0.4997	-0.06
0.2	0.1995	-0.25
0.1	0.0997	-0.3
0.05	0.0494	-1.2

TABLE C-2: ACTIVE POWER (AT 120V, 60 Hz, PF = 1)

Expected Power (W)	Measured Active Power [W]	Error in %
1200	1197.62	-0.198333333
600	599.25	-0.125
240	239.83	-0.070833333
120	119.95	-0.041666667
60	59.97	-0.05
24	23.97	-0.125
12	11.98	-0.166666667
6	5.97	-0.5

TABLE C-3: ACTIVE POWER (AT 120V, 60 Hz, PF = 0.5)

Expected Power (W)	Measured Active Power [W]	Error in %
600	597.11	-0.481666667
300	299.26	-0.246666667
120	119.84	-0.133333333
60	59.95	-0.083333333
30	29.97	-0.1
12	11.97	-0.25
6	5.98	-0.333333333
3	2.98	-0.666666667

TABLE C-4: ENERGY COUNTING (AT 220V, 50 Hz)

Expected (Wh)	Measured [Wh]	Error in %
10000	10016.858	0.16858
1000	1003.648	0.3648
100	100.226	0.226
10	10.035	0.35
1	1.002	0.2

NOTES:

Worldwide Sales and Service

AMERICAS

Corporate Office
2355 West Chandler Blvd.
Chandler, AZ 85224-6199
Tel: 480-792-7200
Fax: 480-792-7277
Technical Support:
<http://www.microchip.com/support>
Web Address:
www.microchip.com

Atlanta
Duluth, GA
Tel: 678-957-9614
Fax: 678-957-1455

Austin, TX
Tel: 512-257-3370

Boston
Westborough, MA
Tel: 774-760-0087
Fax: 774-760-0088

Chicago
Itasca, IL
Tel: 630-285-0071
Fax: 630-285-0075

Dallas
Addison, TX
Tel: 972-818-7423
Fax: 972-818-2924

Detroit
Novi, MI
Tel: 248-848-4000

Houston, TX
Tel: 281-894-5983

Indianapolis
Noblesville, IN
Tel: 317-773-8323
Fax: 317-773-5453
Tel: 317-536-2380

Los Angeles
Mission Viejo, CA
Tel: 949-462-9523
Fax: 949-462-9608
Tel: 951-273-7800

Raleigh, NC
Tel: 919-844-7510

New York, NY
Tel: 631-435-6000

San Jose, CA
Tel: 408-735-9110
Tel: 408-436-4270

Canada - Toronto
Tel: 905-695-1980
Fax: 905-695-2078

ASIA/PACIFIC

Asia Pacific Office
Suites 3707-14, 37th Floor
Tower 6, The Gateway
Harbour City, Kowloon

Hong Kong
Tel: 852-2943-5100
Fax: 852-2401-3431

Australia - Sydney
Tel: 61-2-9868-6733
Fax: 61-2-9868-6755

China - Beijing
Tel: 86-10-8569-7000
Fax: 86-10-8528-2104

China - Chengdu
Tel: 86-28-8665-5511
Fax: 86-28-8665-7889

China - Chongqing
Tel: 86-23-8980-9588
Fax: 86-23-8980-9500

China - Dongguan
Tel: 86-769-8702-9880

China - Guangzhou
Tel: 86-20-8755-8029

China - Hangzhou
Tel: 86-571-8792-8115
Fax: 86-571-8792-8116

China - Hong Kong SAR
Tel: 852-2943-5100
Fax: 852-2401-3431

China - Nanjing
Tel: 86-25-8473-2460
Fax: 86-25-8473-2470

China - Qingdao
Tel: 86-532-8502-7355
Fax: 86-532-8502-7205

China - Shanghai
Tel: 86-21-3326-8000
Fax: 86-21-3326-8021

China - Shenyang
Tel: 86-24-2334-2829
Fax: 86-24-2334-2393

China - Shenzhen
Tel: 86-755-8864-2200
Fax: 86-755-8203-1760

China - Wuhan
Tel: 86-27-5980-5300
Fax: 86-27-5980-5118

China - Xian
Tel: 86-29-8833-7252
Fax: 86-29-8833-7256

ASIA/PACIFIC

China - Xiamen
Tel: 86-592-2388138
Fax: 86-592-2388130

China - Zhuhai
Tel: 86-756-3210040
Fax: 86-756-3210049

India - Bangalore
Tel: 91-80-3090-4444
Fax: 91-80-3090-4123

India - New Delhi
Tel: 91-11-4160-8631
Fax: 91-11-4160-8632

India - Pune
Tel: 91-20-3019-1500

Japan - Osaka
Tel: 81-6-6152-7160
Fax: 81-6-6152-9310

Japan - Tokyo
Tel: 81-3-6880-3770
Fax: 81-3-6880-3771

Korea - Daegu
Tel: 82-53-744-4301
Fax: 82-53-744-4302

Korea - Seoul
Tel: 82-2-554-7200
Fax: 82-2-558-5932 or
82-2-558-5934

Malaysia - Kuala Lumpur
Tel: 60-3-6201-9857
Fax: 60-3-6201-9859

Malaysia - Penang
Tel: 60-4-227-8870
Fax: 60-4-227-4068

Philippines - Manila
Tel: 63-2-634-9065
Fax: 63-2-634-9069

Singapore
Tel: 65-6334-8870
Fax: 65-6334-8850

Taiwan - Hsin Chu
Tel: 886-3-5778-366
Fax: 886-3-5770-955

Taiwan - Kaohsiung
Tel: 886-7-213-7830

Taiwan - Taipei
Tel: 886-2-2508-8600
Fax: 886-2-2508-0102

Thailand - Bangkok
Tel: 66-2-694-1351
Fax: 66-2-694-1350

EUROPE

Austria - Wels
Tel: 43-7242-2244-39
Fax: 43-7242-2244-393

Denmark - Copenhagen
Tel: 45-4450-2828
Fax: 45-4485-2829

Finland - Espoo
Tel: 358-9-4520-820

France - Paris
Tel: 33-1-69-53-63-20
Fax: 33-1-69-30-90-79

France - Saint Cloud
Tel: 33-1-30-60-70-00

Germany - Garching
Tel: 49-8931-9700

Germany - Haan
Tel: 49-2129-3766400

Germany - Heilbronn
Tel: 49-7131-67-3636

Germany - Karlsruhe
Tel: 49-721-625370

Germany - Munich
Tel: 49-89-627-144-0
Fax: 49-89-627-144-44

Germany - Rosenheim
Tel: 49-8031-354-560

Israel - Ra'anana
Tel: 972-9-744-7705

Italy - Milan
Tel: 39-0331-742611
Fax: 39-0331-466781

Italy - Padova
Tel: 39-049-7625286

Netherlands - Drunen
Tel: 31-416-690399
Fax: 31-416-690340

Norway - Trondheim
Tel: 47-7289-7561

Poland - Warsaw
Tel: 48-22-3325737

Romania - Bucharest
Tel: 40-21-407-87-50

Spain - Madrid
Tel: 34-91-708-08-90
Fax: 34-91-708-08-91

Sweden - Gothenberg
Tel: 46-31-704-60-40

Sweden - Stockholm
Tel: 46-8-5090-4654

UK - Wokingham
Tel: 44-118-921-5800
Fax: 44-118-921-5820