


SD

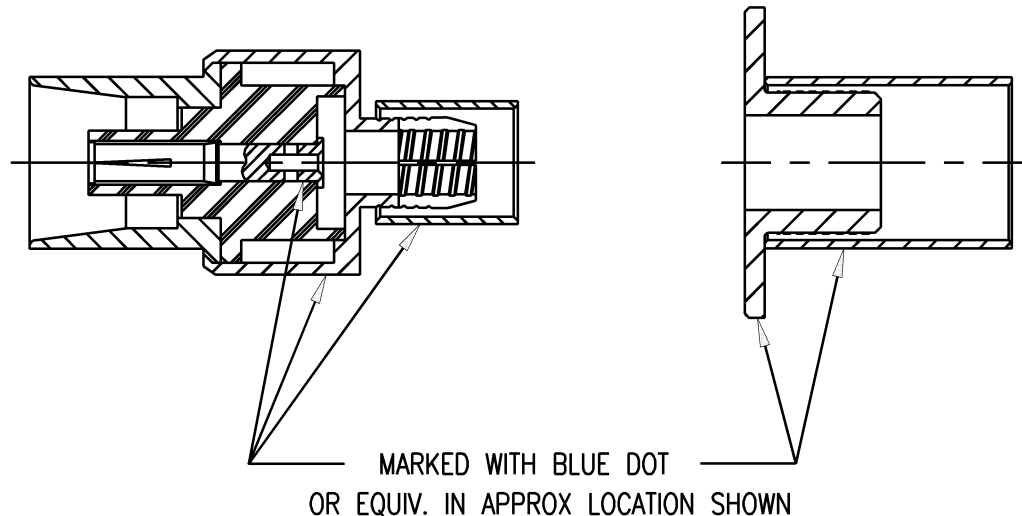

NOTES:

1. FOR USE WITH 730 CABLE GROUP (BELDEN 9267, BIW 100690C-G20, MOHAWK M80248 & GEPCO/COMMScope 7811, 7812 & 7814 CABLE).
2. FOR CABLING INSTRUCTIONS SEE 3-651.
3. USE CRIMPING TOOL KTH-1000 AND DIE KTH-2251 FOR CRIMPING OF SLEEVES AND CONTACT. TWO SEPARATE DIES KTH-2252 AND KTH-2002 MAY ALSO BE USED.
4. MATERIALS:
INSULATOR: TEFLON, ASTM-D-4894
K-GRIP SLEEVES: COM BRONZE, ASTM-B-135
CENTER CONTACT: BER. COPPER, ASTM-B196
ALL OTHER METAL PARTS: BRASS, ASTM-B16
5. FINISHES:
CENTER CONTACT: HARD GOLD PLATE, PER MIL-G-45204
ALL OTHER METAL PARTS: KINGS TARNISH RESISTANT NICKEL FINISH (TR-5)
6. ELECTRICAL CHARACTERISTICS:
NOMINAL IMPEDANCE: 75 OHMS
FREQUENCY RANGE: DC-1 GHz

SD

7708-15

REVISIONS

ISSUE

CHANGES

0

ER 37486

KH 11/07/97

7708-15A

SCALE 2:1

APPROX SURFACE AREA

USED ON 7703-11

REF:

RETRO-FIT ASSY

DRAWN	KH	DATE	11/07/97
DESIGN	LI	DATE	11/10/97
APPR.	FDH	DATE	11/25/97

KINGS
ELECTRONICS CO., INC.
TUCKAHOE, NEW YORK 10707

7708-15