

Interfacing AT24CXX Serial EEPROMs with AT89LP Microcontrollers

Features

- Examples Routine to Read/Write Atmel AT24CXX Serial EEPROMs
- Assembly Source Provided
- Applicable to any AT89LP Microcontroller without TWI

1. Introduction

Serial memory devices offer significant advantages over parallel devices in applications where lower data transfer rates are acceptable. In addition to requiring less board space, serial devices allow microcontroller I/O pins to be conserved. This is especially valuable when adding external memory to low-pin count microcontrollers such as the Atmel® AT89LP2052 and AT89LP4052.

This application note presents a suite of software routines which may be incorporated into a user's application to allow an AT89LP microcontroller to read and write AT24CXX serial EEPROMs. The software supports all members of the AT24CXX family, and may easily be modified for compatibility with any of the Atmel 8051-code compatible microcontrollers.

2. Hardware

A typical interconnection between an AT89LP microcontroller and an AT24CXX serial EEPROM is shown in [Figure 3-1](#). As indicated in [Figure 3-1](#), up to eight members of the AT24CXX family may share the bus, utilizing the same two microcontroller I/O pins. Each device on the bus must have its address inputs (A0, A1, A2) hard-wired to a unique address. In [Figure 3-1](#), the first device recognizes address zero (A0, A1, A2 tied low), while the eighth recognizes address seven (A0, A1, A2 tied high). Not all members of the AT24CXX family recognize all three address inputs, limiting the number of some devices which may be present to less than eight. The exact number of devices of each type which may share the bus is shown in [Table 2-1](#).

Table 2-1. Atmel 2-Wire Serial EEPROM Family

Device	Size (Bytes)	Page Size (Bytes)	Max Per Bus	Addresses Used
AT24C11	1K	4	1	None
AT24C01A	1K	8	8	A0, A1, A2
AT24C02	2K	8	8	A0, A1, A2
AT24C04	4K	16	4	A1, A2
AT24C08A	8K	16	2	A2
AT24C16A	16K	16	1	None
AT24C164	16K	16	8	A0, A1, A2
AT24C32A	32K	32	8	A0, A1, A2
AT24C64A	64K	32	8	A0, A1, A2



**8051 Flash
Microcontroller**

Application Note



Table 2-1. Atmel 2-Wire Serial EEPROM Family

AT24C128	128K	64	4	A0, A1
AT24C128B	128K	64	8	A0, A1, A2
AT24C256	256K	64	4	A0, A1
AT24C256B	256K	64	8	A0, A1, A2
AT24C512	512K	128	4	A0, A1
AT24C512B	512K	128	8	A0, A1, A2
AT24C1024	1M	256	2	A1

3. Bi-directional Data Transfer Protocol


The Bi-directional Data Transfer Protocol utilized by the AT24CXX family allows a number of compatible devices to share a common 2-wire bus. The bus consists of a serial clock (SCL) line and a serial data (SDA) line. The clock is generated by the bus master and data is transmitted serially on the data line, most significant bit first, synchronized to the clock. The protocol supports bi-directional data transfers in 8-bit bytes.

In this application, the microcontroller serves as the bus master, initiating all data transfers and generating the clock which regulates the flow of data. The serial devices present on the bus are considered slaves, accepting or sending data in response to orders from the master.

The bus master initiates a data transfer by generating a start condition on the bus. This is followed by transmission of a byte containing the device address of the intended recipient. The device address consists of a 4-bit fixed portion and a 3-bit programmable portion. The fixed portion must match the value hard-wired into the slave, while the programmable portion allows the master to select between a maximum of eight slaves of similar type on the bus.

The AT24CXX serial EEPROMs respond to device addresses with a fixed portion equal to “1010” and a programmable portion matching the address inputs (A0, A1, A2). Not all members of the AT24CXX family examine all three address inputs; [Figure 3-1](#) shows which of the three address inputs are valid for each member of the family.

Figure 3-1. Typical Circuit Configuration

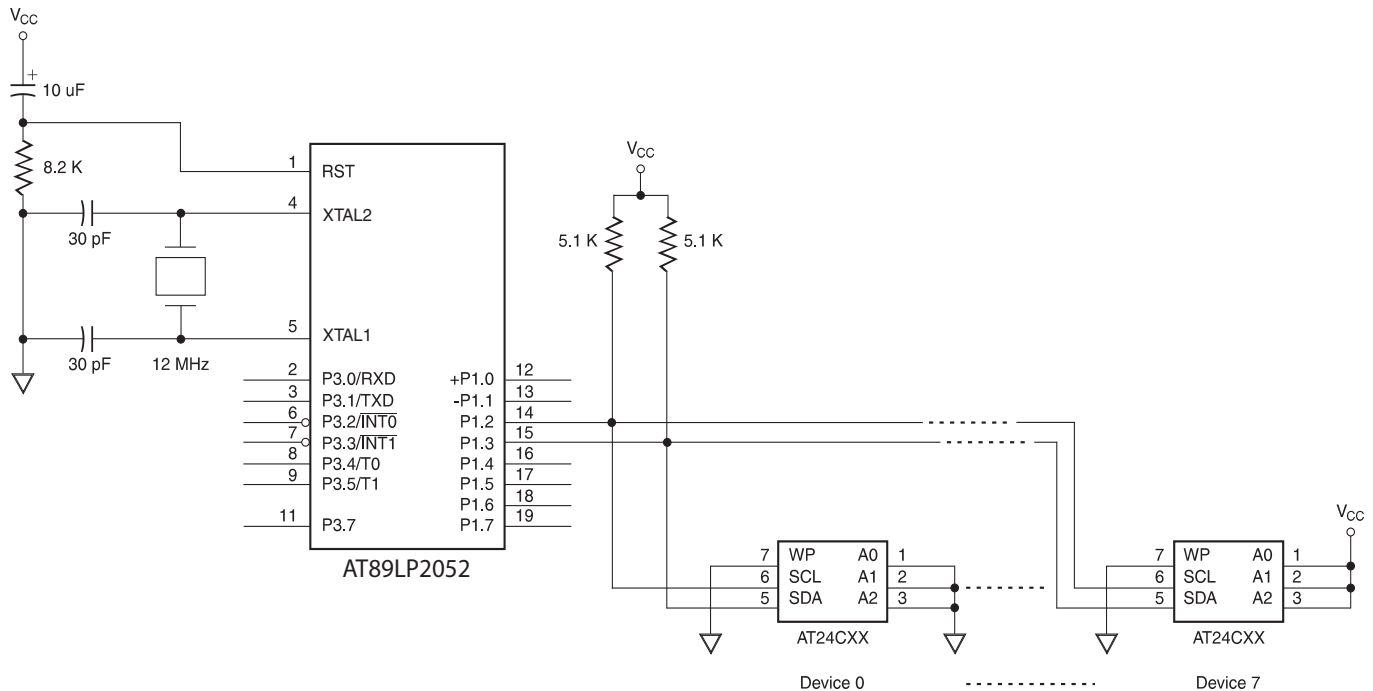

The eighth bit in the device address byte specifies a write or read operation. After the eighth bit is transmitted, the master releases the data line and generates a ninth clock. If a slave has recognized the transmitted device address, it will respond to the ninth clock by generating an acknowledge condition on the data line. A slave which is busy when addressed may not generate an acknowledge. This is true for the AT24CXX when a write operation is in progress.

Following receipt of the slave's address acknowledgment, the master continues with the data transfer. If a write operation has been ordered, the master transmits the remaining data, with the slave acknowledging receipt of each byte. If the master has ordered a read operation, it releases the data line and clocks in data sent by the slave. After each byte is received, the master generates an acknowledge condition on the bus. The acknowledge is omitted following receipt of the last byte. The master terminates all operations by generating a stop condition on the bus. The master may also abort a data transfer at any time by generating a stop condition.

Refer to the AT24CXX family datasheets for detailed information on AT24CXX device operation and Bi-directional Data Transfer Protocol bus timing.

The software for this application may be obtained by downloading from the Atmel Web Site.

**Atmel Corporation**

2325 Orchard Parkway
San Jose, CA 95131
USA

Tel: (+1) (408) 441-0311

Fax: (+1) (408) 487-2600

www.atmel.com

8051@atmel.com

Atmel Asia Limited

Unit 01-5 & 16, 19F
BEA Tower, Millennium City 5
418 Kwun Tong Road
Kwun Tong, Kowloon
HONG KONG

Tel: (+852) 2245-6100

Fax: (+852) 2722-1369

Atmel Munich GmbH

Business Campus
Packring 4
D-85748 Garching b. Munich
GERMANY

Tel: (+49) 89-31970-0

Fax: (+49) 89-3194621

Atmel Japan

9F, Tonetsu Shinkawa Bldg.
1-24-8 Shinkawa
Chuo-ku, Tokyo 104-0033
JAPAN

Tel: (+81) (3) 3523-3551

Fax: (+81) (3) 3523-7581

© 2010 Atmel Corporation. All rights reserved.

Atmel®, Atmel logo and combinations thereof, and others are registered trademarks or trademarks of Atmel Corporation or its subsidiaries. Other terms and product names may be trademarks of others.

Disclaimer: The information in this document is provided in connection with Atmel products. No license, express or implied, by estoppel or otherwise, to any intellectual property right is granted by this document or in connection with the sale of Atmel products. EXCEPT AS SET FORTH IN ATMEL'S TERMS AND CONDITIONS OF SALE LOCATED ON ATMEL'S WEB SITE, ATMEL ASSUMES NO LIABILITY WHATSOEVER AND DISCLAIMS ANY EXPRESS, IMPLIED OR STATUTORY WARRANTY RELATING TO ITS PRODUCTS INCLUDING, BUT NOT LIMITED TO, THE IMPLIED WARRANTY OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE, OR NON-INFRINGEMENT. IN NO EVENT SHALL ATMEL BE LIABLE FOR ANY DIRECT, INDIRECT, CONSEQUENTIAL, PUNITIVE, SPECIAL OR INCIDENTAL DAMAGES (INCLUDING, WITHOUT LIMITATION, DAMAGES FOR LOSS OF PROFITS, BUSINESS INTERRUPTION, OR LOSS OF INFORMATION) ARISING OUT OF THE USE OR INABILITY TO USE THIS DOCUMENT, EVEN IF ATMEL HAS BEEN ADVISED OF THE POSSIBILITY OF SUCH DAMAGES. Atmel makes no representations or warranties with respect to the accuracy or completeness of the contents of this document and reserves the right to make changes to specifications and product descriptions at any time without notice. Atmel does not make any commitment to update the information contained herein. Unless specifically provided otherwise, Atmel products are not suitable for, and shall not be used in, automotive applications. Atmel's products are not intended, authorized, or warranted for use as components in applications intended to support or sustain life.