
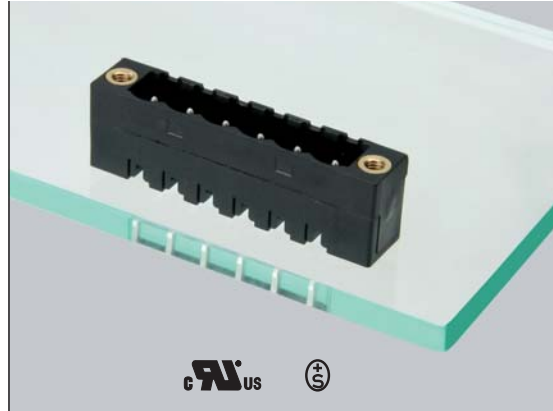


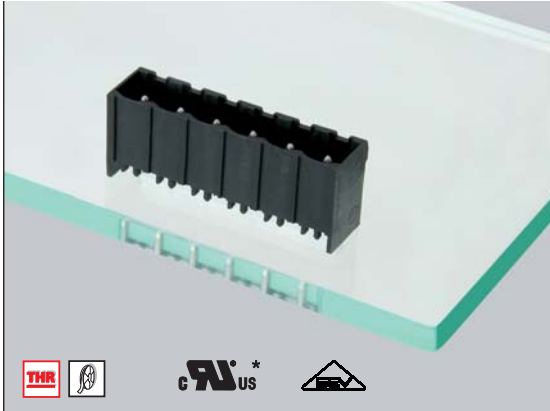

Terminal blocks

to Type 177

-  **ASP045** page 49
-  **Type 313** page 96
-  **Type 314** page 96
-  **Type 349** page 94
-  **Type 350** page 94

to Type 335

-  **Type 351** page 95

Accessories

for **Type 177** and **Type 335**
Coding set
 700024 page 206

Note for Type 177

Packaging for automated processing is available on demand. Please do not hesitate to contact us.

Type 177

Header, centerline 5 mm / 0.197 inches, vertical mounting, designed for THR, optional Tape on Reel packaging for automated processing, square contact pins 1 mm / 0.039 inches, codable

Technical Data



250 V / 4 kV / 10 A

Insulation co-ordination according to EN 60664-1

Clearance and creepage distances min. 4 mm

Insulating material class CTI 600

Overvoltage category III III II

Pollution degree 3 2 2

Rated voltage 320 800 800

Rated test voltage 4 6 4

Protection category according to IEC 529

IP00

Solder pin dimension 1.0 x 1.0 mm

Recommended pc board hole dia.

Ø 1.5 mm


Solder pin length 3.25 mm

Pole size 2 - 12

Color black

Dimensions in mm

1 mm = 0.0394 in.

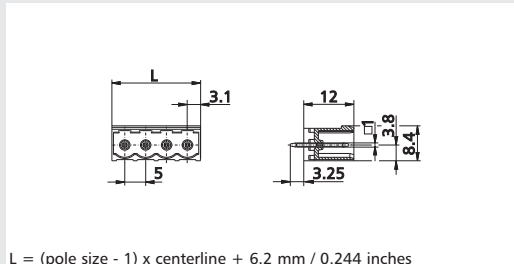

$L = (\text{pole size} - 1) \times \text{centerline} + 6.2 \text{ mm} / 0.244 \text{ inches}$

Part numbers (P/N)

(information: page 110)

Complete the part number by adding the pole size.

Type 177

centerline 5 mm / 0.197 inches

P/N 311771

	02	03	04	05	06	07	08
09	10	11	12				

* approval pending

 Standard pole sizes

 Available on demand. Minimum order quantity 5000 pieces per item.

Type 335

Header, centerline 5 mm / 0.197 inches, vertical mounting, square contact pins 1 mm / 0.039 inches, mounting flange, codable

Technical Data

UL US V / A

300 / 15



400 V / 4 kV / 10 A

Insulation co-ordination according to EN 60664-1

Clearance and creepage distances min. 4 mm

Insulating material class CTI 600

Overvoltage category III III II

Pollution degree 3 2 2

Rated voltage 320 800 800

Rated test voltage 4 6 4

Protection category according to IEC 529

IP00

Solder pin dimension 1.0 x 1.0 mm

Recommended pc board hole dia.

Ø 1.5 mm


Solder pin length 3.25 mm

Pole size 2 - 24

Color black

Dimensions in mm

1 mm = 0.0394 in.

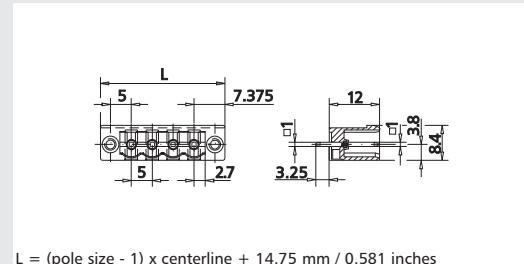

$L = (\text{pole size} - 1) \times \text{centerline} + 14.75 \text{ mm} / 0.581 \text{ inches}$

Part numbers (P/N)

(information: page 110)

Complete the part number by adding the pole size.

Type 335

centerline 5 mm / 0.197 inches

P/N 313351

	02	03	04	05	06	07	08
09	10	11	12	13	14	15	16
17	18	19	20	21	22	23	24

Type 335

centerline 10 mm / 0.394 inches

P/N 313352

	02	03	04	05	06	07	08
09	10	11	12				

 Standard pole sizes

 Available on demand. Minimum order quantity 5000 pieces per item.