


DASH NO.	M CODE	MADE FROM
----------	--------	-----------

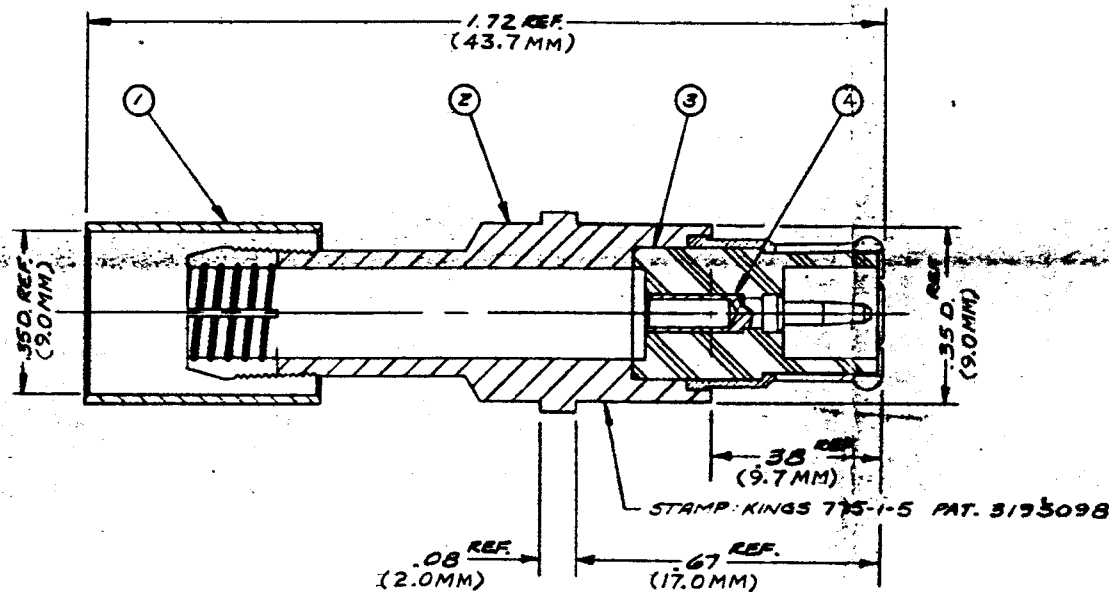

NOTES:

1. FOR USE WITH RG-212/U CABLE.
2. FOR CRIMPING USE DIE SIZE 10.
3. FOR CABLING INSTRUCTIONS SEE CP-5421.
4. ITEM (4) TO BE SUPPLIED UNASSEMBLED.

UNLESS OTHERWISE SPECIFIED:

1. TOLERANCES: FRACTIONS & 2 PLACE DECIMALS $\pm .010$
- 2 PLACE DECIMALS $\pm .004$ ANGLES $\pm 0^{\circ}30'$
3. I. R. CONCENTRICITY OF ANY 2 DIAMETERS MAY NOT EXCEED HALF THE SUM OF THEIR TOLERANCES

2. REMOVE ALL BURRS, BREAK SHARP EDGES .005 MAX.
3. NO FILLETS PERMITTED
4. SURFACE ROUGHNESS 63 MICROINCHES RMS MAX.
5. ALL DIMENSIONS PRIOR TO PLATING
6. ALL PLATING IN ACCORDANCE WITH KER 10004

(SHEET 1 OF 2)

775-1-5

S-D

REVISIONS

ISSUE	CHANGES
0	CR 19542 MJB 25 AUG 79

S-D

SCALE 4:1

WAS: E-6479

USED ON:

REF NAVAL UNDERWATER
SYSTEMS SKB-55262 A

BNC PUSH-ON PLUG

Drawn MJB DATE 26 JUL 79

Appr GINO DATE 16 AUG 79

KINGS
ELECTRONICS CO., INC.
Baltimore, MD 21144

775-1-5
(SHEET 1 OF 2)

S-D