

SERIES 63Q

High Resolution, 20mm

FEATURES

- Miniature Size, 20mm (0.787") Diameter
- Resolutions up to 1024 Lines per Revolution
- Single Ended and Differential Outputs
- 1 Billion Rotational Life Cycles
- Conductive Carbon Fiber Housing
- IP 50 Sealing
- High Noise Immunity
- Low Supply Current Requirements

APPLICATIONS

- Steer by Wire
- Fractional Horse Power Motors
- Machine Tool Controls
- Material Handling
- Flow Meters




DESCRIPTION

The Series 63Q is intended for applications requiring high performance, high-resolution digital feedback in a very small package. It provides the resolution of larger encoder packages but in a package only 20mm (0.787") in diameter. Outputs can be configured in either single ended, open collector or internal pull-up resistor, or with an industrial standard RS422A differential line driver. The

sensing scheme also embodies a much simplified encoder design, which ultimately results in longer service life, and less down time due to feedback device failure. The encoder housing is constructed of a conductive carbon fiber composite that provides the EMI shielding of an all metal housing and the performance of a lightweight robust assembly.

DIMENSIONS In inches (and millimeters)

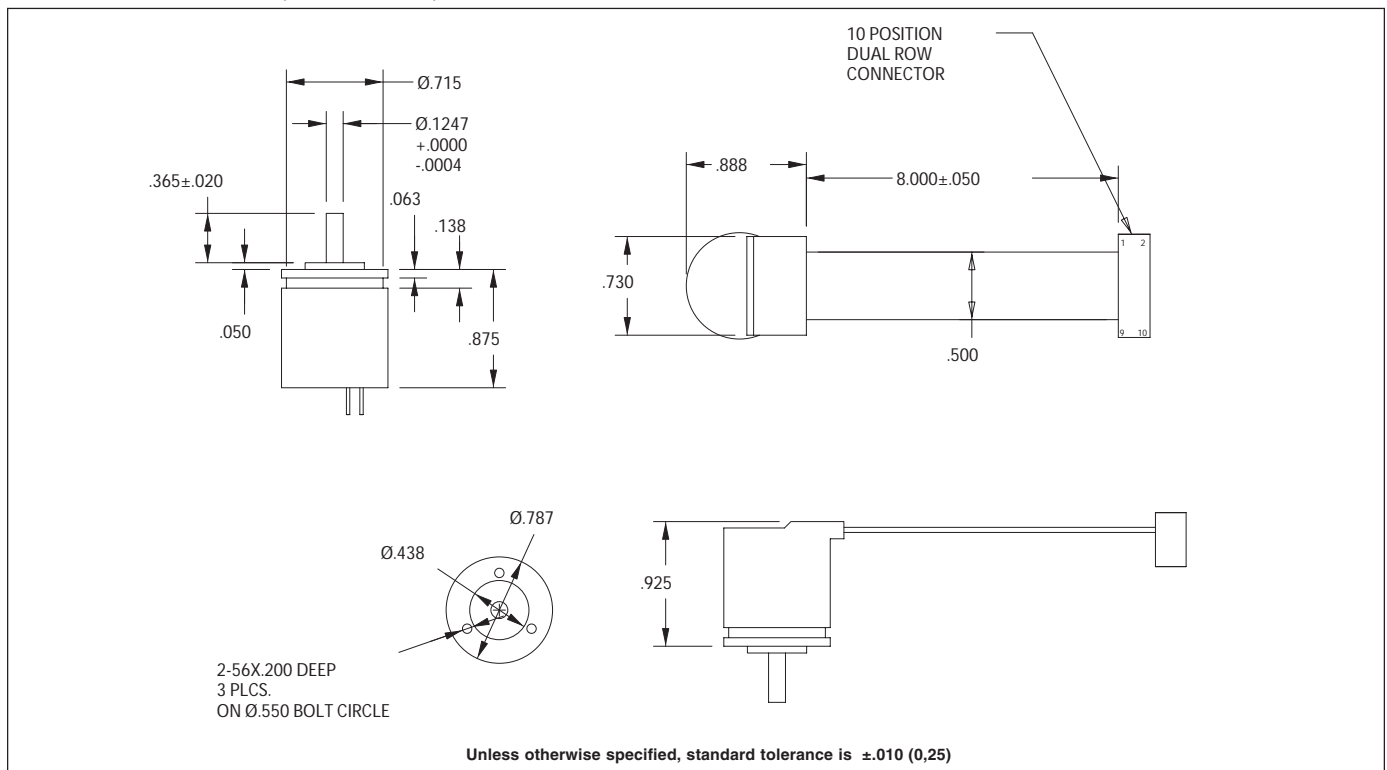


PIN WIRING, CIRCUITRY, AND WAVEFORM STANDARD

Pin Wiring



Pin #1	Common
Pin #2	+Vdc
Pin #3	Z
Pin #4	Z'
Pin #5	B
Pin #6	B'
Pin #7	A
Pin #8	A'
Pin #9	N/C
Pin #10	Case

Waveforms

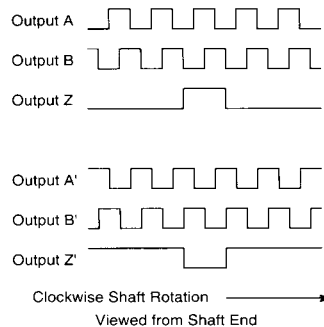

Output Circuits

TTL Output

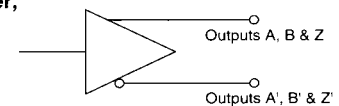RS422A Line Driver,
OL7272 5-26VDC
Line Driver

SPECIFICATIONS

Electrical Ratings

Input Voltage: 5.0 \pm 5% Vdc or 5-26 Vdc

Input Current Requirements: 100 mA maximum output option 1 and 2, 50 mA maximum output option 3; plus interface loads

Ripple Current: 2% peak-to-peak @ 5 Vdc

Output Circuits: AM26LS31 RS422A line driver, OL7272 line driver, TTL

Logic Output Characteristics:

Output Type: Quadrature with channel A leading channel B for CW rotation with ungated index pulse true over A and B high

Frequency Response: 200 kHz

Symmetry: 180° \pm 10% typical

Minimum Edge Separation: 54 electrical degrees

Mechanical Ratings

Maximum Shaft Speed: 8,000 RPM

Shaft Diameter: 0.125" (3,175)

Shaft Material: Stainless steel

Bearings: Radial ball bearing, R2 type

Radial Shaft Load: 2 lbs maximum

Axial Shaft Load: 1 lbs maximum

Housing: Carbon fiber composite (case ground via connector)

Housing Volume Resistivity: 10⁻² ohm-cm
Termination: Two rows of 5 pins on 0.100" centers. 8" ten conductor ribbon cable with 2x5 connector

Mounting: Servo

Moment of Inertia: 9.5x10⁻⁶ oz-in-sec²

Acceleration: 1x10⁵ radians per second²

Environmental Ratings

Operating Temperature Range: 0 to 70°C typical; -20°C to 100°C optional (contact Grayhill for more information)

Storage Temperature Range: -40°C to 125°C

Relative Humidity: 98% non-condensing


Vibration: 20G's @ 50-500 CPS

Mechanical Shock: 50G @ 11mS duration

OPTIONS

Contact Grayhill for custom terminations, resolutions, mounting configurations, shaft couplings and configurations, and absolute positioning up to 256 positions.

ORDERING INFORMATION

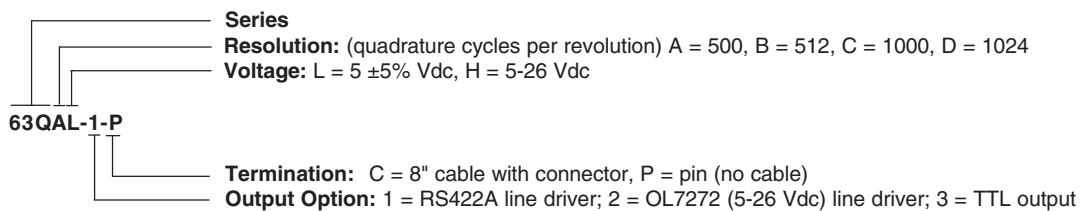

Available from your local Grayhill Component Distributor. For prices and discounts, contact a local Sales Office, an authorized local Distributor, or Grayhill.