



EVB-LAN9500A-LC

Evaluation Board

User's Guide

Note the following details of the code protection feature on Microchip devices:

- Microchip products meet the specification contained in their particular Microchip Data Sheet.
- Microchip believes that its family of products is one of the most secure families of its kind on the market today, when used in the intended manner and under normal conditions.
- There are dishonest and possibly illegal methods used to breach the code protection feature. All of these methods, to our knowledge, require using the Microchip products in a manner outside the operating specifications contained in Microchip's Data Sheets. Most likely, the person doing so is engaged in theft of intellectual property.
- Microchip is willing to work with the customer who is concerned about the integrity of their code.
- Neither Microchip nor any other semiconductor manufacturer can guarantee the security of their code. Code protection does not mean that we are guaranteeing the product as "unbreakable."

Code protection is constantly evolving. We at Microchip are committed to continuously improving the code protection features of our products. Attempts to break Microchip's code protection feature may be a violation of the Digital Millennium Copyright Act. If such acts allow unauthorized access to your software or other copyrighted work, you may have a right to sue for relief under that Act.

Information contained in this publication regarding device applications and the like is provided only for your convenience and may be superseded by updates. It is your responsibility to ensure that your application meets with your specifications. MICROCHIP MAKES NO REPRESENTATIONS OR WARRANTIES OF ANY KIND WHETHER EXPRESS OR IMPLIED, WRITTEN OR ORAL, STATUTORY OR OTHERWISE, RELATED TO THE INFORMATION, INCLUDING BUT NOT LIMITED TO ITS CONDITION, QUALITY, PERFORMANCE, MERCHANTABILITY OR FITNESS FOR PURPOSE. Microchip disclaims all liability arising from this information and its use. Use of Microchip devices in life support and/or safety applications is entirely at the buyer's risk, and the buyer agrees to defend, indemnify and hold harmless Microchip from any and all damages, claims, suits, or expenses resulting from such use. No licenses are conveyed, implicitly or otherwise, under any Microchip intellectual property rights unless otherwise stated.

Trademarks

The Microchip name and logo, the Microchip logo, AnyRate, AVR, AVR logo, AVR Freaks, BitCloud, chipKIT, chipKIT logo, CryptoMemory, CryptoRF, dsPIC, FlashFlex, flexPWR, Helder, JukeBlox, KeeLoq, Klear, LANCheck, LINK MD, maXStylus, maXTouch, MediaLB, megaAVR, MOST, MOST logo, MPLAB, OptoLyzer, PIC, picoPower, PICSTART, PIC32 logo, Prochip Designer, QTouch, SAM-BA, SpyNIC, SST, SST Logo, SuperFlash, tinyAVR, UNI/O, and XMEGA are registered trademarks of Microchip Technology Incorporated in the U.S.A. and other countries.

ClockWorks, The Embedded Control Solutions Company, EtherSynch, Hyper Speed Control, HyperLight Load, IntelliMOS, mTouch, Precision Edge, and Quiet-Wire are registered trademarks of Microchip Technology Incorporated in the U.S.A.

Adjacent Key Suppression, AKS, Analog-for-the-Digital Age, Any Capacitor, AnyIn, AnyOut, BodyCom, CodeGuard, CryptoAuthentication, CryptoAutomotive, CryptoCompanion, CryptoController, dsPICDEM, dsPICDEM.net, Dynamic Average Matching, DAM, ECAN, EtherGREEN, In-Circuit Serial Programming, ICSP, INICnet, Inter-Chip Connectivity, JitterBlocker, KlearNet, KlearNet logo, memBrain, Mindi, MiWi, motorBench, MPASM, MPF, MPLAB Certified logo, MPLIB, MPLINK, MultiTRAK, NetDetach, Omniscient Code Generation, PICDEM, PICDEM.net, PICkit, PICtail, PowerSmart, PureSilicon, QMatrix, REAL ICE, Ripple Blocker, SAM-ICE, Serial Quad I/O, SMART-I.S., SQI, SuperSwitcher, SuperSwitcher II, Total Endurance, TSHARC, USBCheck, VariSense, ViewSpan, WiperLock, Wireless DNA, and ZENA are trademarks of Microchip Technology Incorporated in the U.S.A. and other countries.

SQTP is a service mark of Microchip Technology Incorporated in the U.S.A.

Silicon Storage Technology is a registered trademark of Microchip Technology Inc. in other countries.

GestIC is a registered trademark of Microchip Technology Germany II GmbH & Co. KG, a subsidiary of Microchip Technology Inc., in other countries.

All other trademarks mentioned herein are property of their respective companies.

© 2018, Microchip Technology Incorporated, All Rights Reserved.

ISBN: 978-1-5224-3524-2

QUALITY MANAGEMENT SYSTEM
CERTIFIED BY DNV
= ISO/TS 16949 =

Microchip received ISO/TS-16949:2009 certification for its worldwide headquarters, design and wafer fabrication facilities in Chandler and Tempe, Arizona; Gresham, Oregon and design centers in California and India. The Company's quality system processes and procedures are for its PIC® MCUs and dsPIC® DSCs, KEELoq® code hopping devices, Serial EEPROMs, microperipherals, nonvolatile memory and analog products. In addition, Microchip's quality system for the design and manufacture of development systems is ISO 9001:2000 certified.

Table of Contents

Preface	5
Introduction.....	5
Document Layout	5
Conventions Used in this Guide	6
The Microchip Web Site	7
Development Systems Customer Change Notification Service	7
Customer Support	8
Document Revision History	8
 Chapter 1. Overview	
1.1 Introduction	9
1.2 References	10
 Chapter 2. Getting Started	
2.1 Board Details	11
2.1.1 Configuration	11
2.1.2 Mechanicals	12
 Appendix A. EVB-LAN9500A-LC Evaluation Board	
A.1 Introduction	13
 Appendix B. Schematics	
B.1 Introduction	15
 Appendix C. Bill of Materials	
C.1 Introduction	17
 Worldwide Sales and Service	18

NOTES:

Preface

NOTICE TO CUSTOMERS

All documentation becomes dated, and this manual is no exception. Microchip tools and documentation are constantly evolving to meet customer needs, so some actual dialogs and/or tool descriptions may differ from those in this document. Please refer to our web site (www.microchip.com) to obtain the latest documentation available.

Documents are identified with a “DS” number. This number is located on the bottom of each page, in front of the page number. The numbering convention for the DS number is “DSXXXXA”, where “XXXX” is the document number and “A” is the revision level of the document.

For the most up-to-date information on development tools, see the MPLAB® IDE online help. Select the Help menu, and then Topics to open a list of available online help files.

INTRODUCTION

This chapter contains general information that will be useful to know before using the EVB-LAN9500A-LC Evaluation Board. Items discussed in this chapter include:

- [Document Layout](#)
- [Conventions Used in this Guide](#)
- [The Microchip Web Site](#)
- [Development Systems Customer Change Notification Service](#)
- [Customer Support](#)
- [Document Revision History](#)

DOCUMENT LAYOUT

This document describes how to use the EVB-LAN9500A-LC Evaluation Board as a high-performance and low-cost USB/Ethernet connectivity solution.

The manual layout is as follows:

- **Chapter 1. “Overview”** – Shows a brief description of the EVB-LAN9500A-LC Evaluation Board.
- **Chapter 2. “Getting Started”** – Includes information about the EVB-LAN9500A-LC Evaluation Board.
- **Appendix A. “EVB-LAN9500A-LC Evaluation Board”** – This appendix shows the EVB-LAN9500A-LC Evaluation Board.
- **Appendix B. “Schematics”** – This appendix shows the EVB-LAN9500A-LC Evaluation Board schematic.
- **Appendix C. “Bill of Materials”** – This appendix includes the EVB-LAN9500A-LC Evaluation Board Bill of Materials (BOM).

CONVENTIONS USED IN THIS GUIDE

This manual uses the following documentation conventions:

DOCUMENTATION CONVENTIONS

Description	Represents	Examples
Arial font:		
Italic characters	Referenced books	<i>MPLAB® IDE User's Guide</i>
	Emphasized text	...is the <i>only</i> compiler...
Initial caps	A window	the Output window
	A dialog	the Settings dialog
	A menu selection	select Enable Programmer
Quotes	A field name in a window or dialog	"Save project before build"
Underlined, italic text with right angle bracket	A menu path	<u><i>File>Save</i></u>
Bold characters	A dialog button	Click OK
	A tab	Click the Power tab
N'Rnnnn	A number in verilog format, where N is the total number of digits, R is the radix and n is a digit.	4'b0010, 2'hF1
Text in angle brackets < >	A key on the keyboard	Press <Enter>, <F1>
Courier New font:		
Plain Courier New	Sample source code	<code>#define START</code>
	Filenames	<code>autoexec.bat</code>
	File paths	<code>c:\mcc18\h</code>
	Keywords	<code>_asm, _endasm, static</code>
	Command-line options	<code>-Opa+, -Opa-</code>
	Bit values	<code>0, 1</code>
	Constants	<code>0xFF, 'A'</code>
Italic Courier New	A variable argument	<i>file.o</i> , where <i>file</i> can be any valid filename
Square brackets []	Optional arguments	<code>mcc18 [options] file [options]</code>
Curly brackets and pipe character: { }	Choice of mutually exclusive arguments; an OR selection	<code>errorlevel {0 1}</code>
Ellipses...	Replaces repeated text	<code>var_name [, var_name...]</code>
	Represents code supplied by user	<code>void main (void) { ... }</code>

THE MICROCHIP WEB SITE

Microchip provides online support via our web site at www.microchip.com. This web site is used as a means to make files and information easily available to customers. Accessible by using your favorite Internet browser, the web site contains the following information:

- **Product Support** – Data sheets and errata, application notes and sample programs, design resources, user's guides and hardware support documents, latest software releases and archived software
- **General Technical Support** – Frequently Asked Questions (FAQs), technical support requests, online discussion groups, Microchip consultant program member listing
- **Business of Microchip** – Product selector and ordering guides, latest Microchip press releases, listing of seminars and events, listings of Microchip sales offices, distributors and factory representatives

DEVELOPMENT SYSTEMS CUSTOMER CHANGE NOTIFICATION SERVICE

Microchip's customer notification service helps keep customers current on Microchip products. Subscribers will receive e-mail notification whenever there are changes, updates, revisions or errata related to a specified product family or development tool of interest.

To register, access the Microchip web site at www.microchip.com, click on Customer Change Notification and follow the registration instructions.

The Development Systems product group categories are:

- **Compilers** – The latest information on Microchip C compilers, assemblers, linkers and other language tools. These include all MPLAB C compilers; all MPLAB assemblers (including MPASM assembler); all MPLAB linkers (including MPLINK object linker); and all MPLAB librarians (including MPLIB object librarian).
- **Emulators** – The latest information on Microchip in-circuit emulators. This includes the MPLAB REAL ICE and MPLAB ICE 2000 in-circuit emulators.
- **In-Circuit Debuggers** – The latest information on the Microchip in-circuit debuggers. This includes MPLAB ICD 3 in-circuit debuggers and PICkit 3 debug express.
- **MPLAB IDE** – The latest information on Microchip MPLAB IDE, the Windows Integrated Development Environment for development systems tools. This list is focused on the MPLAB IDE, MPLAB IDE Project Manager, MPLAB Editor and MPLAB SIM simulator, as well as general editing and debugging features.
- **Programmers** – The latest information on Microchip programmers. These include production programmers such as MPLAB REAL ICE in-circuit emulator, MPLAB ICD 3 in-circuit debugger and MPLAB PM3 device programmers. Also included are nonproduction development programmers such as PICSTART Plus and PIC-kit 2 and 3.

CUSTOMER SUPPORT

Users of Microchip products can receive assistance through several channels:

- Distributor or Representative
- Local Sales Office
- Field Application Engineer (FAE)
- Technical Support

Customers should contact their distributor, representative or field application engineer (FAE) for support. Local sales offices are also available to help customers. A listing of sales offices and locations is included in the back of this document.

Technical support is available through the web site at:

<http://www.microchip.com/support>

DOCUMENT REVISION HISTORY

Revisions	Section/Figure/Entry	Correction
DS50002241B (09-12-18)	Figure 2-1 and Figure A-1	Updated and made changes to the board.
	Figure 2-2	Updated the figure.
	Figure B-1	Updated the schematics diagram.
	Table C-1	Updated the Bill of Materials section.
	Section 1.2 "References"	Moved the References section to Chapter 1 and removed the Appendix D. References section.
	All	Made minor text changes throughout.
DS50002241A (01-18-14)	Initial release	

Chapter 1. Overview

1.1 INTRODUCTION

The LAN9500A is a high-performance, small form factor solution for USB to 10/100 Ethernet port bridging. With applications ranging from embedded systems, set-top boxes, and PVRs, to USB port replicators, USB to Ethernet adapters, PC docking stations, and test instrumentation, the LAN9500A is targeted as a high-performance and low-cost USB/Ethernet connectivity solution.

The LAN9500A contains an integrated 10/100 Ethernet PHY, USB PHY, Hi-Speed USB 2.0 device controller, 10/100 Ethernet MAC, TAP controller, EEPROM controller, and a FIFO controller with a total of 30 KB of internal packet buffering. The LAN9500A complies with the IEEE 802.3 (full/half-duplex 10BASE-T and 100BASE-TX) Ethernet protocol and USB 2.0 specification, enabling compatibility with industry standard Fast Ethernet and USB 2.0 applications.


The EVB-LAN9500A-LC is an evaluation board that utilizes the LAN9500A to provide a fully-functional, bus-powered USB to Ethernet interface. The EVB-LAN9500A-LC provides fully-integrated Ethernet and USB ports via the on-board RJ45 and USB Type-A connectors. The on-board 256x8 EEPROM is used to load the EVB-LAN9500A-LC's USB configuration parameters and MAC address.

LAN95xx software drivers are available for Windows® XP, Windows Vista, Mac® OS X, Linux®, and Windows CE. Additional manufacturing and diagnostic tools are available for debugging and external EEPROM configuration. For complete details, refer to the *LAN95xx Software User Manual*.

Note: For additional support about the EVB-LAN9500A-LC, contact Microchip's Embedded Solution Engineer (ESE) or refer to Microchip's LANCheck Online Design Review.

A simplified block diagram of the EVB-LAN9500A-LC is illustrated in [Figure 1-1](#).

FIGURE 1-1: EVB-LAN9500A-LC BLOCK DIAGRAM

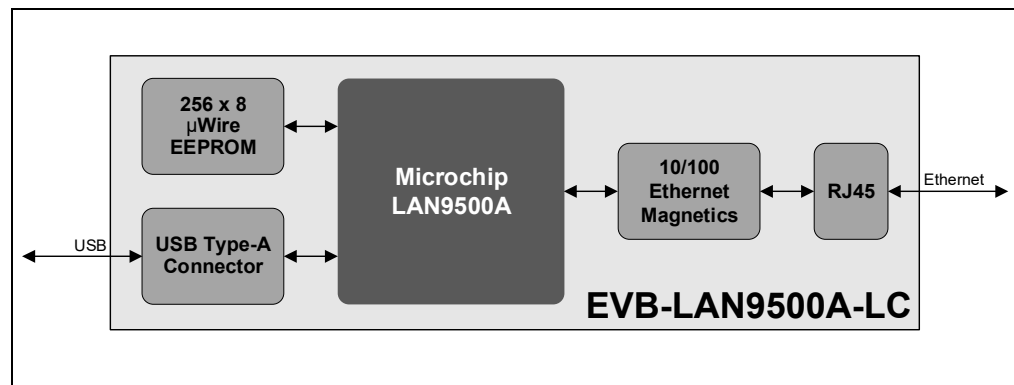

1.2 REFERENCES

Concepts and materials available in the following documents may be helpful when reading this document. Visit www.microchip.com for the latest documentation.

- *LAN9500A Data Sheet*
- *AN 8.13 Suggested Magnetics*
- *EVB-LAN9500A-LC Evaluation Board Schematic*
- *LAN95xx Software User Manual*

Chapter 2. Getting Started

2.1 BOARD DETAILS


This section includes the following EVB-LAN9500A-LC board details:

- [Configuration](#)
- [Mechanicals](#)

2.1.1 Configuration

The following sub-sections describe the various board features including LEDs, test points, and system connections. A top view of the EVB-LAN9500A-LC is shown in [Figure 2-1](#).

FIGURE 2-1: EVB-LAN9500A-LC TOP VIEW

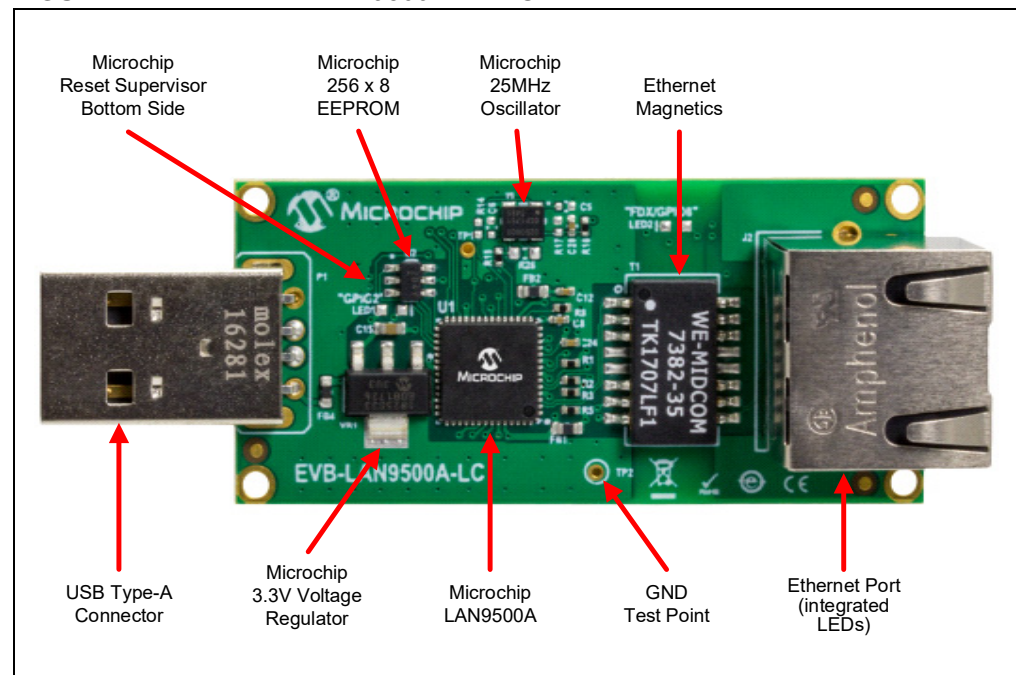

2.1.1.1 LEDS

Table 2-1 describes the EVB-LAN9500A-LC LEDs.

TABLE 2-1: LEDS

References	Color	Indication
J2	Green	Ethernet Link/Activity Solid: Link established Blinking: Link activity OFF: No link
	Yellow	Ethernet Speed ON: 100BASE-TX OFF: 10BASE-T

2.1.1.2 TEST POINTS

Table 2-2 describes the EVB-LAN9500A-LC test point.

TABLE 2-2: TEST POINTS

Test Point	Description	Connection
TP2	Single Pin Gold Post GND Test Point	GND

2.1.1.3 SYSTEM CONNECTIONS

Table 2-3 describes the EVB-LAN9500A-LC system connections.


TABLE 2-3: SYSTEM CONNECTIONS

Plug/Header	Description	Part
P1	USB Type-A Plug	Molex [®] 48037-0001
J2	RJ45 with Integrated LEDs	Amphenol [®] RJHSE-5281

2.1.2 Mechanicals

Figure 2-2 shows the EVB-LAN9500A-LC mechanical dimensions in detail.

FIGURE 2-2: EVB-LAN9500A-LC MECHANICALS

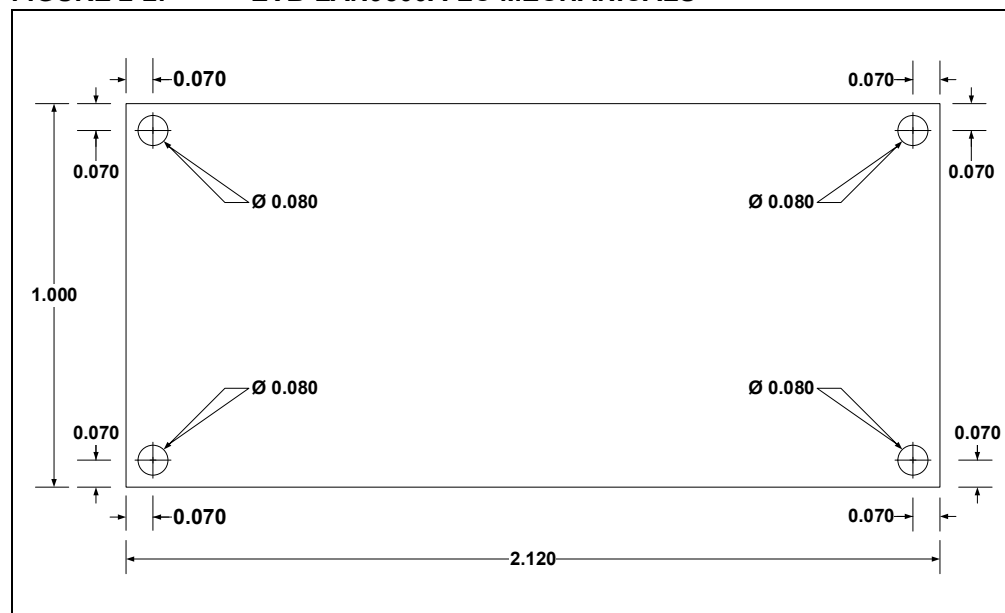


Appendix A. EVB-LAN9500A-LC Evaluation Board

A.1 INTRODUCTION

This appendix shows the EVB-LAN9500A-LC Evaluation Board.

FIGURE A-1: EVB-LAN9500A-LC EVALUATION BOARD

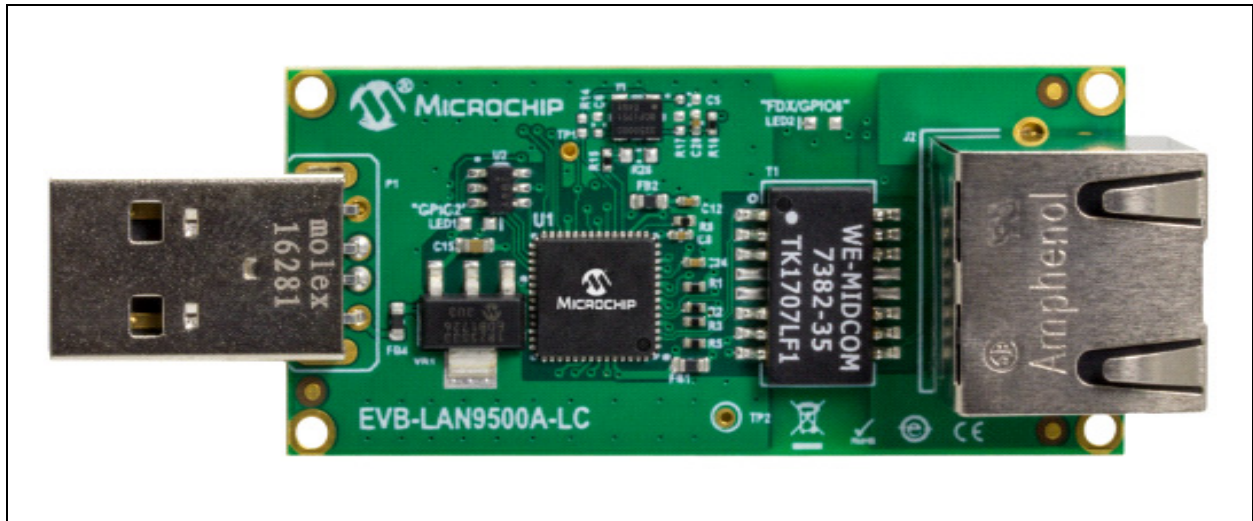


NOTES:

Appendix B. Schematics

B.1 INTRODUCTION

This appendix shows the EVB-LAN9500A-LC Evaluation Board schematic.

FIGURE B-1: EVB-LAN9500A-LC EVALUATION BOARD SCHEMATIC

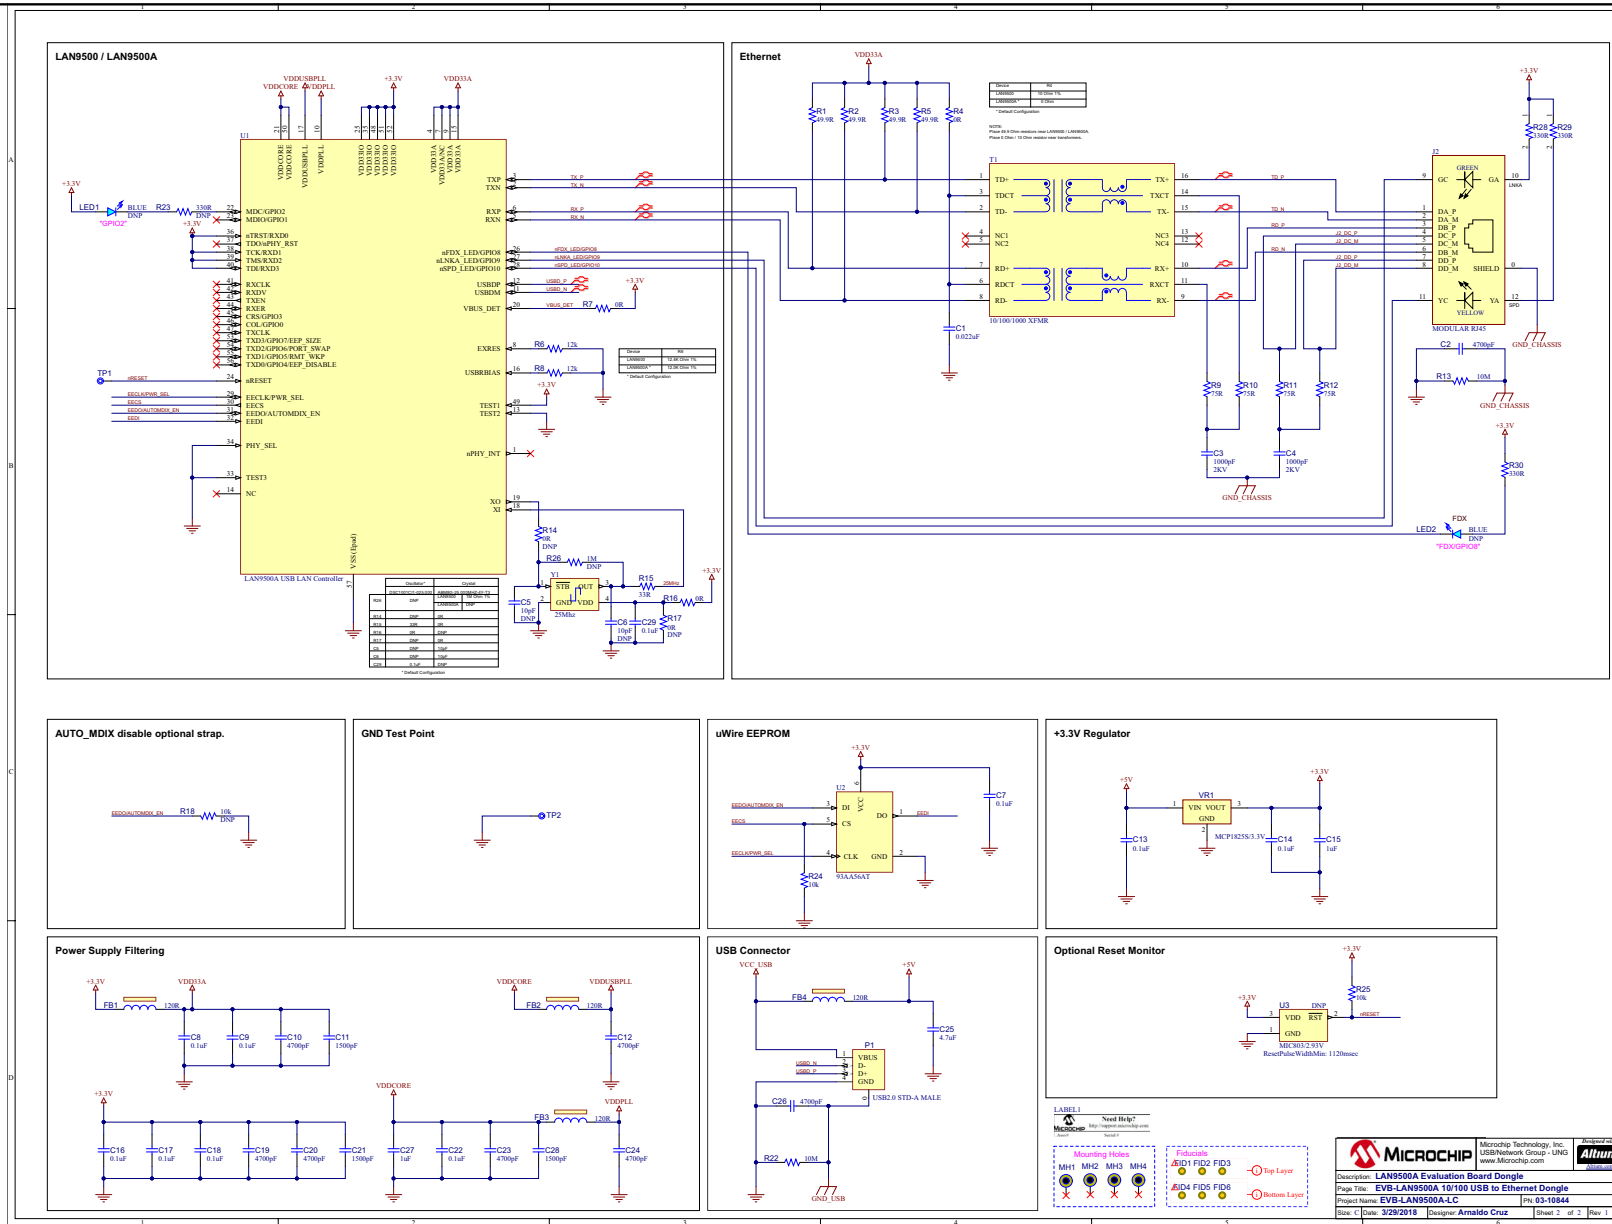

Appendix C. Bill of Materials

C.1 INTRODUCTION

This appendix includes the EVB-LAN9500A-LC Evaluation Board Bill of Materials (BOM).

TABLE C-1: EVB-LAN9500A-LC EVALUATION BOARD BILL OF MATERIALS

Item	Qty	Designator	Value	Manufacturer	Part Number
1	1	C1	0.022uF	Panasonic	ECJ-2VB1H223K
2	8	C2, C10, C12, C19, C20, C23, C24, C26	4700pF	Murata Electronics	GRM155R71H472KA01J
3	2	C3, C4	1000pF	Johanson Dielectrics Inc	202R18W102KV4E
4	2	C5, C6	10pF	Murata	GRM1555C1H100JZ01D
5	10	C7, C8, C9, C13, C14, C16, C17, C18, C22, C29	0.1uF	Murata	GRM155R71C104KA88D
6	3	C11, C21, C28	1500pF	TDK Corporation	CGA2B2X7R1H152K050B A
7	2	C15, C27	1uF	AVX	0603YD105KAT2A
8	1	C25	4.7uF	TDK Corporation	C1608X5R1C475K080AC
9	4	FB1, FB2, FB3, FB4	120R	TDK Corporation	MMZ1608B121CTAH0
10	1	J2	MODULAR RJ45	Amphenol	RJHSE-5381
11	2	LED1, LED2	BLUE	Lite-On	LTST-C193TBKT-5A
12	1	P1	USB2.0 STD-A MALE	Molex Inc	480370001
13	4	R1, R2, R3, R5	49.9R	Rohm Semiconductor	MCR01MRTF49R9
14	3	R4, R7, R16	0R	Yageo	RC0402JR-070RL
15	2	R6, R8	12k	Rohm Semiconductor	MCR01MZPF1202
16	4	R9, R10, R11, R12	75R	Yageo	RC0402FR-0775RL
17	2	R13, R22	10M	Vishay	CRCW060310M0FKEA
18	2	R14, R17	0R	Yageo	RC0402JR-070RL
19	1	R15	33R	Rohm Semiconductor	MCR01MRTF33R0
20	1	R18	10k	Panasonic	ERJ-2RKF1002X
21	1	R23	330R	Yageo	RC0402FR-07330RL
22	2	R24, R25	10k	Panasonic	ERJ-2RKF1002X
23	1	R26	1M	Panasonic	ERJ-3EKF1004V
24	3	R28, R29, R30	330R	Yageo	RC0402FR-07330RL
25	1	T1	10/100/1000 XFMR	Würth Electronics Inc.	749020100/749020100A
26	1	U1	LAN9500A USB-LAN	Microchip Technology	LAN9500AI-ABZJ-TR
27	1	U2	93AA56AT	Microchip Technology	93AA56AT-I/OT
28	1	U3	MIC803/2.93V	Microchip Technology	MIC803-29D4VM3-TR
29	1	VR1	MCP1825S/3.3V	Microchip	MCP1825ST-3302E/DB
30	1	Y1	25Mhz	Microchip Technology	DSC1001CI1-025.0000

Note 1: Parts in gray rows are not fitted.

Worldwide Sales and Service

AMERICAS

Corporate Office
2355 West Chandler Blvd.
Chandler, AZ 85224-6199
Tel: 480-792-7200
Fax: 480-792-7277
Technical Support:
<http://www.microchip.com/support>
Web Address:
www.microchip.com

Atlanta
Duluth, GA
Tel: 678-957-9614
Fax: 678-957-1455

Austin, TX
Tel: 512-257-3370

Boston
Westborough, MA
Tel: 774-760-0087
Fax: 774-760-0088

Chicago
Itasca, IL
Tel: 630-285-0071
Fax: 630-285-0075

Dallas
Addison, TX
Tel: 972-818-7423
Fax: 972-818-2924

Detroit
Novi, MI
Tel: 248-848-4000

Houston, TX
Tel: 281-894-5983

Indianapolis
Noblesville, IN
Tel: 317-773-8323
Fax: 317-773-5453
Tel: 317-536-2380

Los Angeles
Mission Viejo, CA
Tel: 949-462-9523
Fax: 949-462-9608
Tel: 951-273-7800

Raleigh, NC
Tel: 919-844-7510

New York, NY
Tel: 631-435-6000

San Jose, CA
Tel: 408-735-9110
Tel: 408-436-4270

Canada - Toronto
Tel: 905-695-1980
Fax: 905-695-2078

ASIA/PACIFIC

Australia - Sydney
Tel: 61-2-9868-6733

China - Beijing
Tel: 86-10-8569-7000

China - Chengdu
Tel: 86-28-8665-5511

China - Chongqing
Tel: 86-23-8980-9588

China - Dongguan
Tel: 86-769-8702-9880

China - Guangzhou
Tel: 86-20-8755-8029

China - Hangzhou
Tel: 86-571-8792-8115

China - Hong Kong SAR
Tel: 852-2943-5100

China - Nanjing
Tel: 86-25-8473-2460

China - Qingdao
Tel: 86-532-8502-7355

China - Shanghai
Tel: 86-21-3326-8000

China - Shenyang
Tel: 86-24-2334-2829

China - Shenzhen
Tel: 86-755-8864-2200

China - Suzhou
Tel: 86-186-6233-1526

China - Wuhan
Tel: 86-27-5980-5300

China - Xian
Tel: 86-29-8833-7252

China - Xiamen
Tel: 86-592-2388138

China - Zhuhai
Tel: 86-756-3210040

ASIA/PACIFIC

India - Bangalore
Tel: 91-80-3090-4444

India - New Delhi
Tel: 91-11-4160-8631

India - Pune
Tel: 91-20-4121-0141

Japan - Osaka
Tel: 81-6-6152-7160

Japan - Tokyo
Tel: 81-3-6880-3770

Korea - Daegu
Tel: 82-53-744-4301

Korea - Seoul
Tel: 82-2-554-7200

Malaysia - Kuala Lumpur
Tel: 60-3-7651-7906

Malaysia - Penang
Tel: 60-4-227-8870

Philippines - Manila
Tel: 63-2-634-9065

Singapore
Tel: 65-6334-8870

Taiwan - Hsin Chu
Tel: 886-3-577-8366

Taiwan - Kaohsiung
Tel: 886-7-213-7830

Taiwan - Taipei
Tel: 886-2-2508-8600

Thailand - Bangkok
Tel: 66-2-694-1351

Vietnam - Ho Chi Minh
Tel: 84-28-5448-2100

EUROPE

Austria - Wels
Tel: 43-7242-2244-39
Fax: 43-7242-2244-393

Denmark - Copenhagen
Tel: 45-4450-2828
Fax: 45-4485-2829

Finland - Espoo
Tel: 358-9-4520-820

France - Paris
Tel: 33-1-69-53-63-20
Fax: 33-1-69-30-90-79

Germany - Garching
Tel: 49-8931-9700

Germany - Haan
Tel: 49-2129-3766400

Germany - Heilbronn
Tel: 49-7131-67-3636

Germany - Karlsruhe
Tel: 49-721-625370

Germany - Munich
Tel: 49-89-627-144-0
Fax: 49-89-627-144-44

Germany - Rosenheim
Tel: 49-8031-354-560

Israel - Ra'anana
Tel: 972-9-744-7705

Italy - Milan
Tel: 39-0331-742611
Fax: 39-0331-466781

Italy - Padova
Tel: 39-049-7625286

Netherlands - Drunen
Tel: 31-416-690399
Fax: 31-416-690340

Norway - Trondheim
Tel: 47-7288-4388

Poland - Warsaw
Tel: 48-22-3325737

Romania - Bucharest
Tel: 40-21-407-87-50

Spain - Madrid
Tel: 34-91-708-08-90
Fax: 34-91-708-08-91

Sweden - Gothenberg
Tel: 46-31-704-60-40

Sweden - Stockholm
Tel: 46-8-5090-4654

UK - Wokingham
Tel: 44-118-921-5800
Fax: 44-118-921-5820