

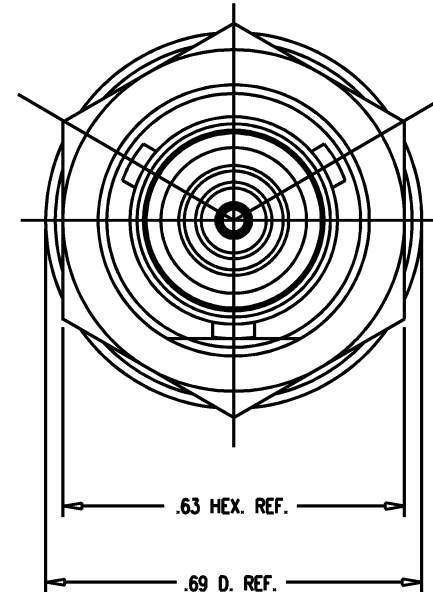


GSD

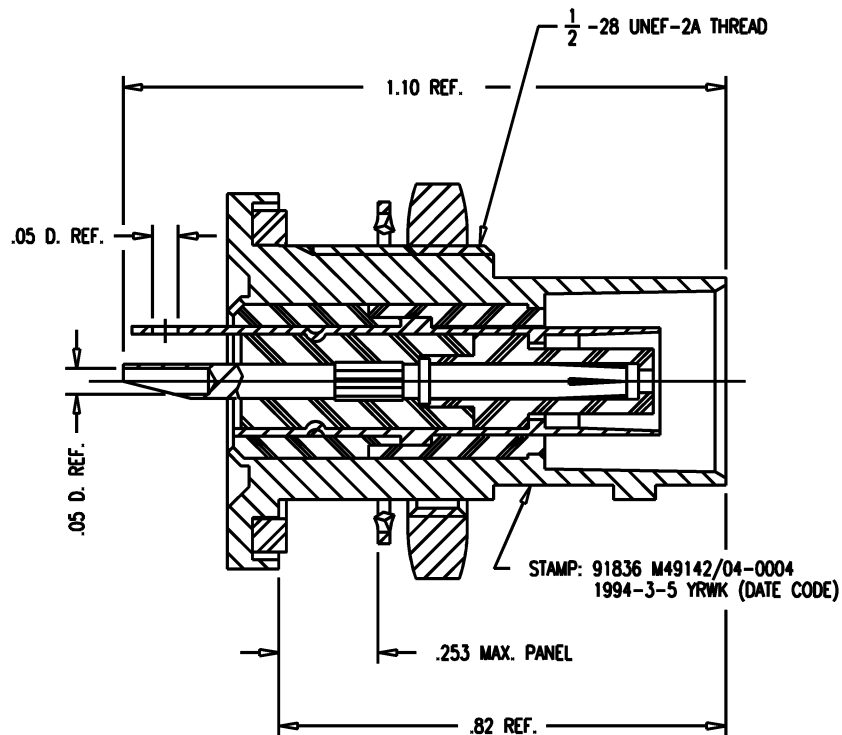

NOTES:

1. INTERFACE, PER MIL-STD-348, FIG. 201-2.
2. MATERIALS:
INSULATORS: TEFLON, ASTM-D-4894
CENTER CONTACT: BER. COPPER, ASTM-B-196
LOCKWASHER: PHOSPHOR BRONZE, ASTM-B-103
GASKET: SILICONE RUBBER, ZZ-R-765
ALL OTHER METAL PARTS: BRASS, ASTM-B16
3. FINISHES:
CENTER CONTACT: HARD GOLD PLATE, PER MIL-G-45204
ALL OTHER METAL PARTS: SILVER PLATE, QQ-S-365
4. ELECTRICAL CHARACTERISTICS:
WORKING VOLTAGE: 400 VRMS
FREQUENCY RANGE: DC TO 500 MHz.

REVISIONS

ISSUE	CHANGES
2	CN 31433 C KH 05/14/90
3	CN 32735 A WJM 12/06/90
4	CN 36666 C KH 11/14/95
5	CN 37318 D KH 04/21/97
6	CN 37953 C JPK 12/06/99

M49142/04-0004

199435S

SCALE 4:1

APPROX SURFACE AREA

1994-3-5

USED ON

REF:

RECEPTACLE, BULKHEAD,
(3 STUD) TRB

DRAWN	WJM	DATE	10/03/90
DESIGN	CT	DATE	10/04/90
APPR.	JT	DATE	10/04/90

KINGS
ELECTRONICS CO., INC.
ROCK HILL, SOUTH CAROLINA 29730

M49142/04-0004

GSD