



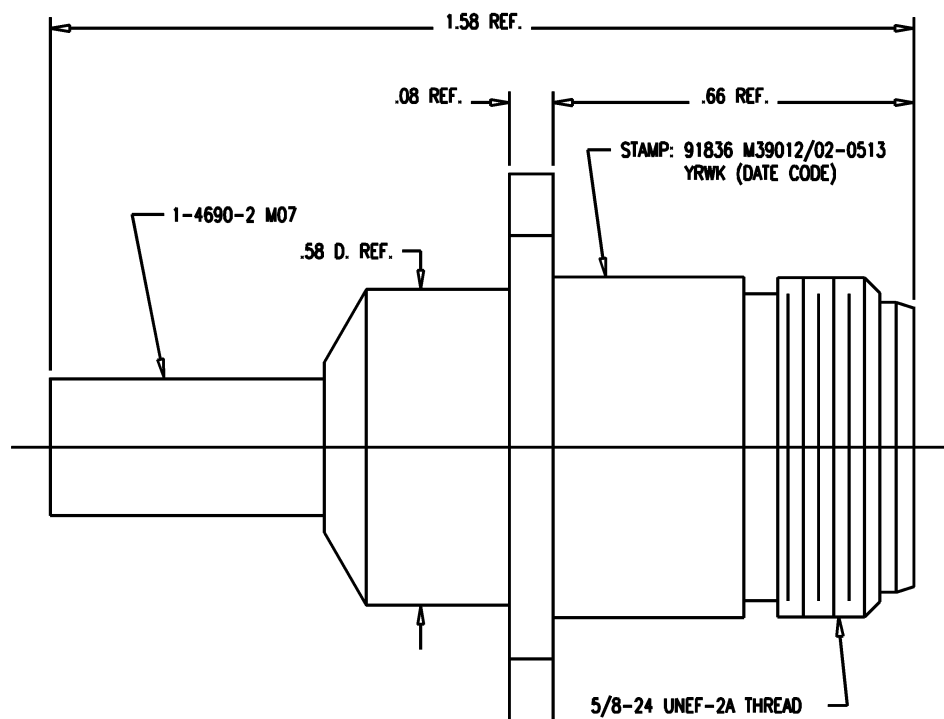

NOTES:

1. FOR USE WITH RG-142, 223, & 400/U CABLE GROUPS.
2. FOR CABLING INSTRUCTIONS SEE CP-489.
3. FOR CABLE TRIMMING USE KTJ-162 & KTD-208.
4. FOR FORMING USE CRIMP DIE SIZE 42.
5. INTERFACE PER MIL-STD-348, FIG. 304-2.
6. FOR USE WITH .22 MAX PANEL.
7. CENTER CONTACT (1-534-81 MD9) SUPPLIED UNASSEMBLED.
8. MARK PACKAGE: 91836 M39012/02-0513 YRWK (DATE CODE)
9. MATERIALS:
INSULATOR: TEFLON, ASTM-D-1457
K-GRIP SLEEVE: BRASS, ASTM-B16, H02
CENTER CONTACT: BER. COP., ASTM-B-196
ALL OTHER PARTS: BRASS, ASTM-B16
10. FINISHES:
CENTER CONTACT: GOLD PLATE PER MIL-45204
ALL OTHER METAL PARTS: KINGS TARNISH RESISTANT FINISH (TR-5)
11. ELECTRICAL CHARACTERISTICS:
NOMINAL IMPEDANCE: 50 OHMS
VOLTAGE RATING: 1000 VRMS
FREQUENCY RANGE: DC TO 11 GHz

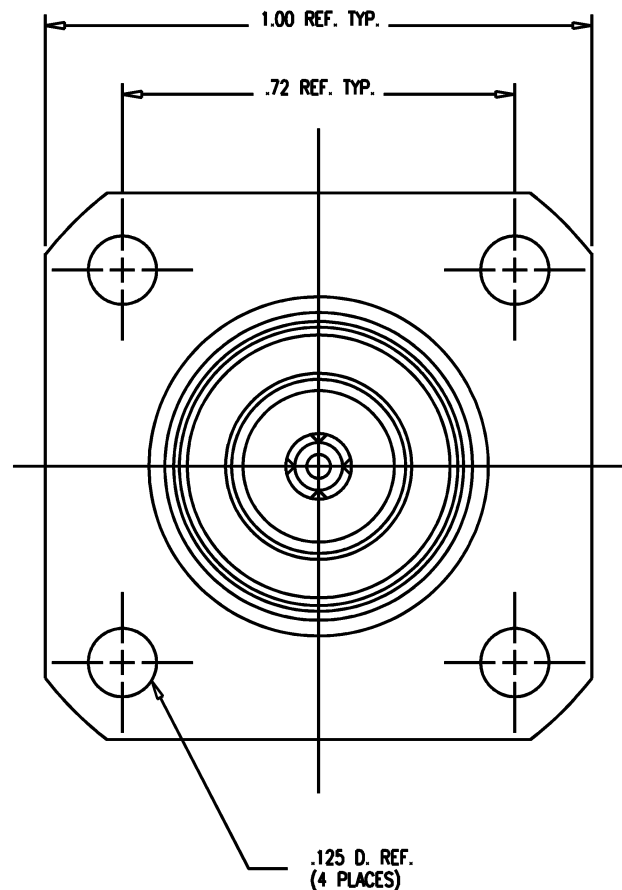

GSD

GSD

M39012/02-0513

REVISIONS

ISSUE	CHANGES
9	CN 37859 E REDRAWN TML 07/20/99

KN19148S

SCALE	4:1
APPROX SURFACE AREA	KN-19-148
USED ON	
REF:	
JACK, PANEL, N	
DRAWN	AMD
DATE	05/01/87
DESIGN	
DATE	
APPR.	MJB
DATE	05/07/87
KINGS ELECTRONICS CO., INC. ROCK HILL, SOUTH CAROLINA 29730	
M39012/02-0513	