


DASH NO.	M CODE	MADE FROM
----------	--------	-----------

GSD

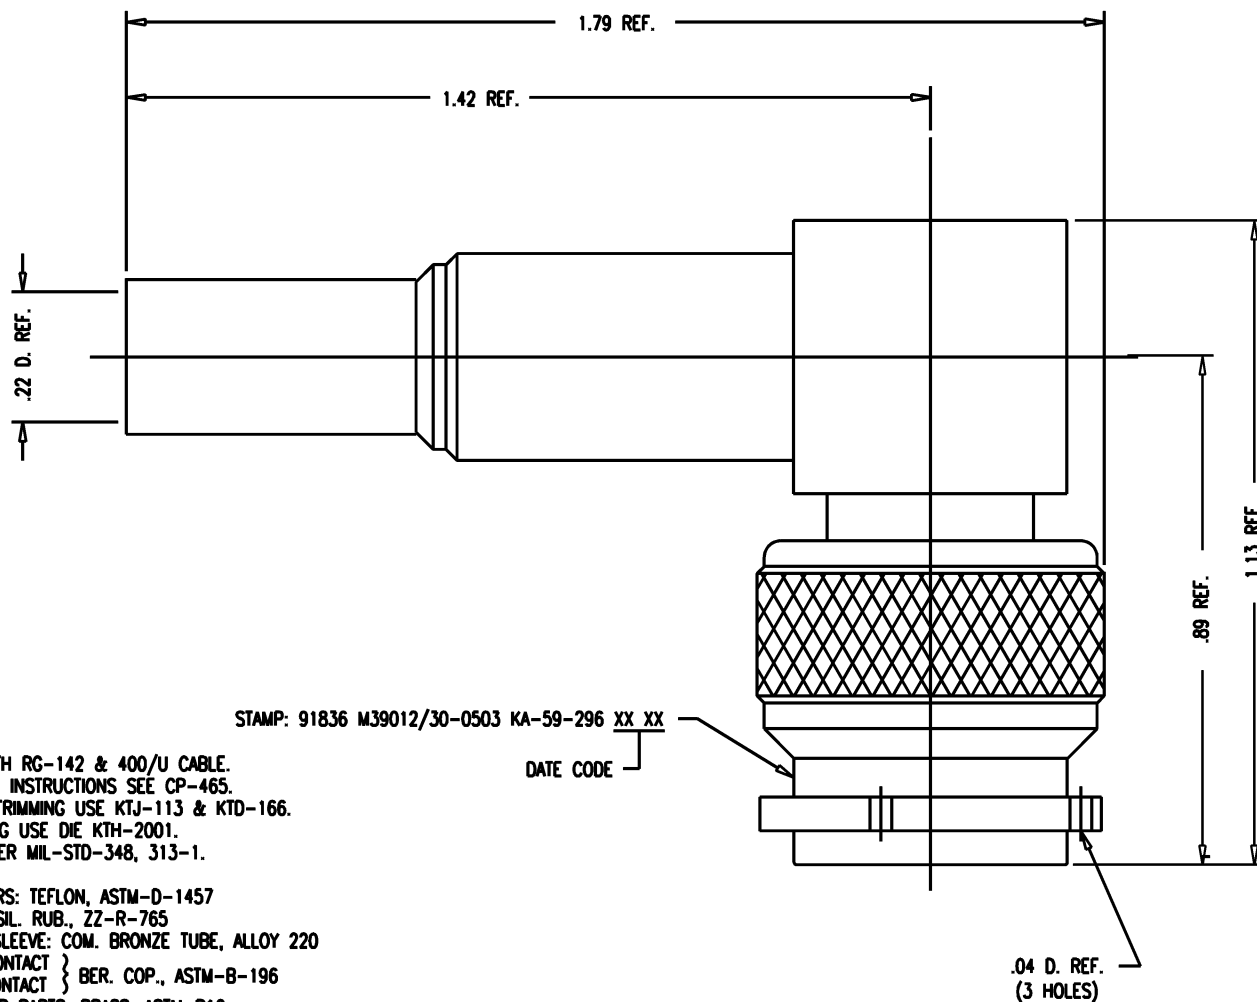

NOTES:

1. FOR USE WITH RG-142 & 400/U CABLE.
2. FOR CABLING INSTRUCTIONS SEE CP-465.
3. FOR CABLE TRIMMING USE KTJ-113 & KTD-166.
4. FOR CRIMPING USE DIE KTH-2001.
5. INTERFACE PER MIL-STD-348, 313-1.
6. MATERIALS:
INSULATORS: TEFLON, ASTM-D-1457
GASKET: SIL. RUB., ZZ-R-765
K-GRIP SLEEVE: COM. BRONZE TUBE, ALLOY 220
OUTER CONTACT }
CRIMP CONTACT } BER. COP., ASTM-B-196
ALL OTHER PARTS: BRASS, ASTM-B16
7. FINISHES:
CENTER CONTACTS: HARD GOLD PLT. PER MIL-G-45204
ALL OTHER METAL PARTS: SILVER PLT. PER QQ-S-365
8. ELECTRICAL CHARACTERISTICS:
NOMINAL IMPEDANCE: 50 OHMS
VOLTAGE RATING: 500 VRMS
FREQUENCY RANGE: DC TO 11 GHz

STAMP: 91836 M39012/30-0503 KA-59-296 XX XX

DATE CODE

.04 D. REF.
(3 HOLES)

M39012/30-0503

REVISIONS

ISSUE	CHANGES
7	CN 28193 A CHC 5 AUG 86
8	CN 32302 A LNM 20 JUN 90
9	CN 32931 E WJM 03/28/91
10	CN 34058 C JCA 09/02/92
11	CN 34481 C JCA 05/12/93
12	CN 38244 C BDH 03/12/01

JCA0400

SCALE 4:1

APPROX SURFACE AREA

KA-59-296

USED ON

REF:

PLUG, ANGLE, TNC

DRAWN	JCA	DATE	12 MAR 90
DESIGN	MJB	DATE	20 MAR 90
APPR.		DATE	

KINGS
ELECTRONICS CO., INC.
ROCK HILL, SOUTH CAROLINA 29730

M39012/30-0503

GSD