




DELTA P/N : SIL520 Series

Mechanical dimensions

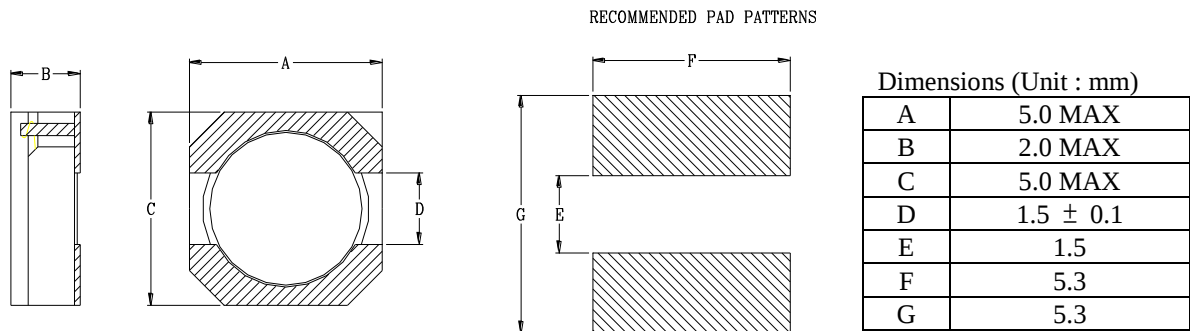

Electrical Characteristics @25°C , 100KHz, 0.1V

Delta P/N	L ¹ (uH)	DCR (mΩ) MAX	I _{rated} ² (Adc)
SIL520-1R0	1.0	35	2.9
SIL520-2R2	2.2	60	1.9
SIL520A-2R2	2.2	65	2.4
SIL520A-2R7	2.7	65	1.7
SIL520-3R3	3.3	80	1.5
SIL520A-3R3	3.3	85	2.0
SIL520-3R9	3.9	90	1.4
SIL520-4R7	4.7	110	1.3
SIL520A-4R7	4.7	125	1.5
SIL520B-4R7	4.7	130	1.9
SIL520-5R6	5.6	120	1.2
SIL520-6R8	6.8	145	1.05
SIL520-8R2	8.2	160	1.0
SIL520-100	10	200	0.61
SIL520-120	12	210	0.56
SIL520-150	15	240	0.50
SIL520-180	18	338	0.48
SIL520-220	22	397	0.41
SIL520-270	27	441	0.35
SIL520-330	33	690	0.32
SIL520-390	39	709	0.30
SIL520-470	47	922	0.28
SIL520-560	56	1080	0.26
SIL520-680	68	1300	0.24
SIL520-820	82	1560	0.22
SIL520-101	100	1730	0.20
SIL520-121	120	2390	0.18
SIL520-151	150	2670	0.15
SIL520-181	180	4000	0.14

1. Tolerance of inductance : ±30% .
2. I_{rated} is the DC current which cause the inductance drop less than 35% of it's nominal inductance without current and the surface temperature of the part increase less than 45 °C .
3. Operating temperature: -40°C to 125°C (Self-temperature rise included).