

6

5

4







3

2

1

APPROVED: _____

DATE: _____ TITLE: _____

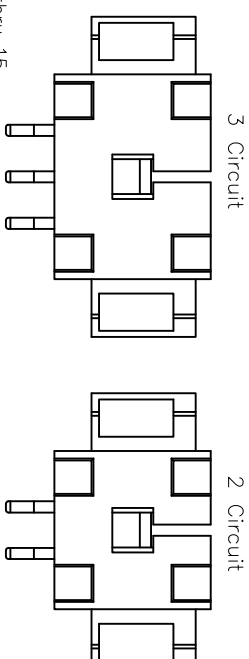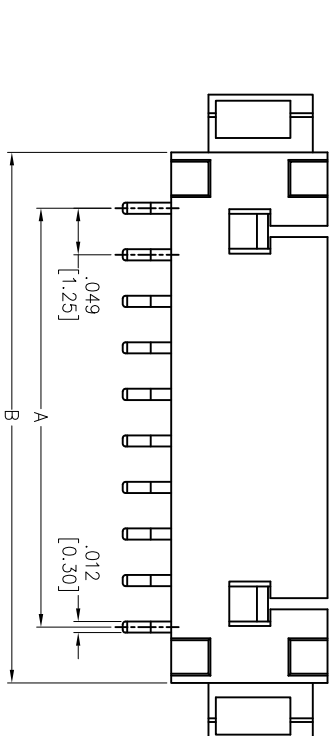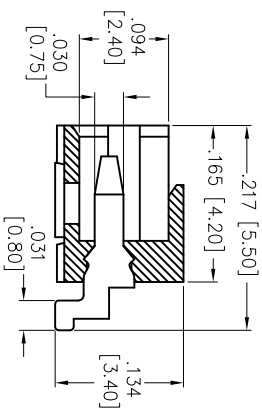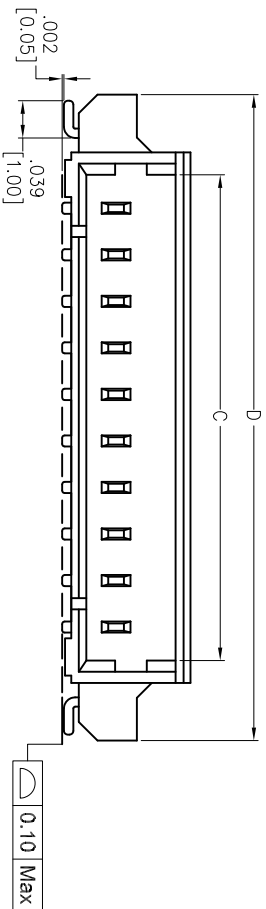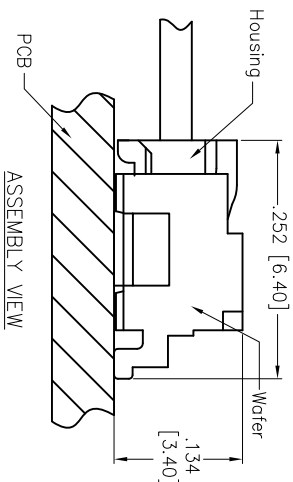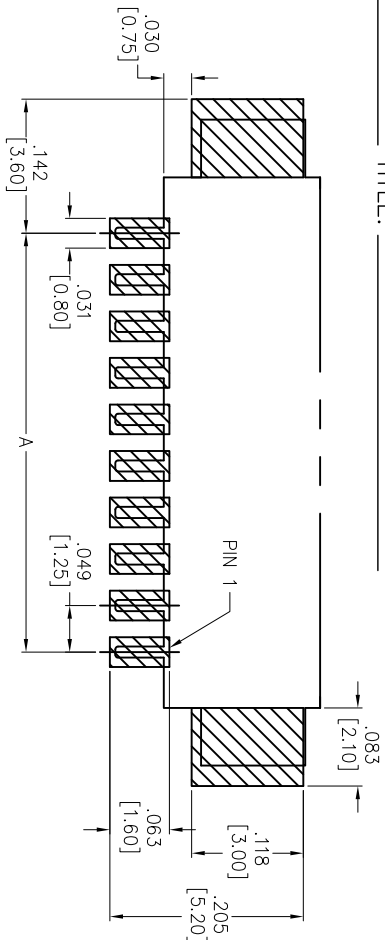

SPECIFICATIONS:

Material:

Insulator: Hi-Temp Thermoplastic, rated UL 94V-0

Insulator color: Natural

Contacts: Brass

Solder noli: Brass

Plating:

Tin over Nickel underplate overall

Electrical:

Current rating: 1 Amps max

Contact resistance: 20 mohms max

Insulation resistance: 100 Mohms min

Dielectric withstanding voltage: 250 VAC for 1 minute

Temperature Rating:

Operating temperature: -40°C to +85°C

Environmental:

Lead free, RoHS compliant.

Rev	AWO #	Description	Date	Appr
-		RELEASED	3/19/07	
A		REDRAWN	11/18/13	KM/TW
B		REDRAWN	2/10/15	HR/NP
C		REVISED SPEC.	7/15/15	HR/YC

Positions: .02 thru 15
A= .049 [1.25] x No. of Spaces
B= .049 [1.25] x No. of Spaces + .118 [3.00]
C= .049 [1.25] x No. of Spaces + .071 [1.80]
D= .049 [1.25] x No. of Spaces + .230 [5.85]

ADAM TECH

909 Railway Avenue, Union, NJ 07083

Phone: 908-687-5000 Fax: 908-687-5710

MX 1.25mm WAFER 90° SMT

UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE INCHES [MM] TOLERANCES: EXCEPT AS NOTED INCHES Holes				DATE			
.X	± .10	ØX	± .10	.X	± .10	ØX	± .10
.XX	± .020	ØXX	± .015	.XX	± .015	ØXX	± .010
.XXX	± .015	ØXXX	± .010	.XXX	± .015	ØXXX	± .010
APPROVALS				DATE			
DRAWN				01/17/07			
CHECKED							
APPROVED							
SIZE				PART NO.			
X				125SH-B-XX-TR-SMT			
REF: S00124T				SCALE: NTS			
				SHEET 1 OF 1			

