
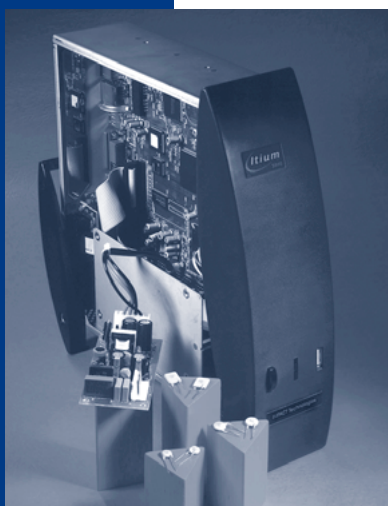


PolySwitch LVR Series Resettable Protection Devices

LVR Line Voltage Series of PolySwitch devices for AC line voltage applications

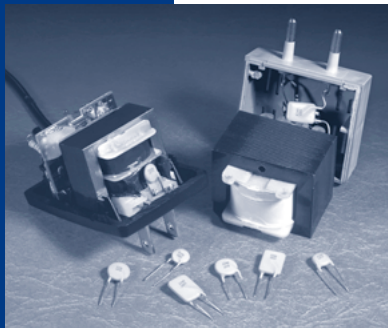

Raychem Circuit Protection, a unit of Tyco Electronics Corporation, introduces the LVR series of PolySwitch® resettable devices. Designed for use in line voltage applications, the LVR series PPTC (polymeric positive temperature coefficient) devices are rated at 240V_{AC}, permitting maximum voltages of up to 265V_{AC}, and are available in hold currents from 50 to 550mA.

The LVR series extends the proven PolySwitch technology of resettable overcurrent protection into higher voltage applications. When installed in proximity to potential heat generating components such as magnetics, FETs, or power resistors, the thermally active devices can help protect against both overcurrent and overtemperature faults in power supplies, transformers and control circuits.

The properties of the LVR device can offer distinct benefits in transformer protection designs. The surface temperature of the LVR device in the high resistance state is well within the range of most transformer winding insulation ratings. This low temperature operation, combined with small size, low resistance and good thermal shock tolerance, can allow the LVR device to be mounted in direct contact with the transformer windings for a faster response to potential fault conditions.

Benefits:

- Helps reduce warranty, service and repair costs
- Helps provide overcurrent and overtemperature protection
- Low surface temperature in high resistance state helps provide an effective solution for protection of transformer windings
- Assists in meeting regulatory requirements
- Compatible with high-volume electronics assembly

Features:

- Maximum operating voltage of 240V_{AC}
- Maximum interrupt voltage of 265V_{AC}
- Hold currents from 50mA – 550mA
- UL, CSA, and TÜV (IEC) recognized
- Solid-state: able to withstand mechanical shock and thermal stress
- Low off state resistance

Target Applications:

- Cell phone chargers
- Appliance (range, washing machine, HVAC) control boards
- Cordless phone and answering machine power supplies
- Metering, industrial control boards
- Switching power supplies
- Transformers
- Lighting dimmers, ballasts
- AC Motors

Electrical Characteristics (at 20° C)

Part number	Hold current (A)	Voltage rating (V _{AC})	Max. interrupt voltage (V _{AC})	Max. interrupt current 135V _{AC} /240V _{AC} (A)	Current ratings (A)		Max. time-to-trip		Resistance (Ω)		Post-trip resistance standard trip (Ω)	Typical power dissipation in the tripped state (W)
					Hold	Trip	Current (A)	T-T (s)	Min.	Max.		
LVR005	0.05	240	265	20/1.0	0.05	0.12	0.25	15.0	18.5	31.00	65.0	0.7
LVR008	0.08	240	265	20/1.2	0.08	0.19	0.40	15.0	7.4	12.00	26.0	0.8
LVR012	0.12	240	265	20/1.2	0.12	0.30	0.60	15.0	3.0	6.50	12.0	1.0
LVR016	0.16	240	265	20/2.0	0.16	0.37	0.80	15.0	2.5	4.10	7.8	1.4
LVR025	0.25	240	265	20/3.5	0.25	0.56	1.25	18.5	1.3	2.10	3.8	1.5
LVR033	0.33	240	265	20/4.5	0.33	0.74	1.25	18.5	0.83	1.24	2.6	1.7
LVR040	0.40	240	265	20/5.5	0.40	0.90	2.00	26.0	0.6	0.97	1.9	2.0
LVR055	0.55	240	265	20/5.5	0.55	1.40	2.75	26.0	0.45	0.73	1.45	3.4

Product Notes:

1. A PTC device is not a fuse—it is a nonlinear thermistor that limits current. Under a fault condition all PTC devices go into a high resistance state but not open circuit so hazardous voltage may be present at PTC locations.
2. The devices are intended for protection against occasional overcurrent or overtemperature fault conditions and should not be used when repeated fault conditions or prolonged trip events are anticipated.
3. For complete information and applications limitations, please visit us at www.circuitprotection.com/lvr/

Figure A




Figure B




Figure C





Figure D




Dimensions in millimeters (inches)


Part number	Fig.	Min.	Max.	Min.	Max.	Min.	Max.	Min.	Max.	Min.	Max.
LVR005S	A	--	8.3 (0.33)	--	10.7 (0.43)	4.3 (0.17)	5.8 (0.23)	7.6 (0.30)	--	--	3.8 (0.15)
LVR005K	C	--	8.3 (0.33)	--	12.9 (0.51)	4.3 (0.17)	5.8 (0.23)	7.6 (0.30)	--	--	3.8 (0.15)
LVR008S	A	--	8.3 (0.33)	--	10.7 (0.43)	4.3 (0.17)	5.8 (0.23)	7.6 (0.30)	--	--	3.8 (0.15)
LVR008K	C	--	8.3 (0.33)	--	12.9 (0.51)	4.3 (0.17)	5.8 (0.23)	7.6 (0.30)	--	--	3.8 (0.15)
LVR012S	A	--	8.3 (0.33)	--	10.7 (0.43)	4.3 (0.17)	5.8 (0.23)	7.6 (0.30)	--	--	3.8 (0.15)
LVR012K	C	--	8.3 (0.33)	--	12.9 (0.51)	4.3 (0.17)	5.8 (0.23)	7.6 (0.30)	--	--	3.8 (0.15)
LVR016S	A	--	9.9 (0.39)	--	12.5 (0.50)	4.3 (0.17)	5.8 (0.23)	7.6 (0.30)	--	--	3.8 (0.15)
LVR016K	C	--	9.9 (0.39)	--	13.8 (0.54)	4.3 (0.17)	5.8 (0.23)	7.6 (0.30)	--	--	3.8 (0.15)
LVR025S	B	--	9.6 (0.38)	--	17.4 (0.69)	4.3 (0.17)	5.8 (0.23)	7.6 (0.30)	--	--	3.8 (0.15)
LVR025K	D	--	9.6 (0.38)	--	18.8 (0.74)	4.3 (0.17)	5.8 (0.23)	7.6 (0.30)	--	--	3.8 (0.15)
LVR033S	B	--	11.4 (0.45)	--	16.5 (0.65)	4.3 (0.17)	5.8 (0.23)	7.6 (0.30)	--	--	3.8 (0.15)
LVR033K	D	--	11.4 (0.45)	--	19.0 (0.75)	4.3 (0.17)	5.8 (0.23)	7.6 (0.30)	--	--	3.8 (0.15)
LVR040S	B	--	11.5 (0.46)	--	19.5 (0.77)	4.3 (0.17)	5.8 (0.23)	7.6 (0.30)	--	--	3.8 (0.15)
LVR040K	D	--	11.5 (0.46)	--	20.9 (0.82)	4.3 (0.17)	5.8 (0.23)	7.6 (0.30)	--	--	3.8 (0.15)
LVR055S	B	--	14.0 (0.55)	--	21.7 (0.85)	4.3 (0.17)	5.8 (0.23)	7.6 (0.30)	--	--	3.8 (0.15)
LVR055K	D	--	14.0 (0.55)	--	21.7 (0.85)	4.3 (0.17)	5.8 (0.23)	7.6 (0.30)	--	--	3.8 (0.15)

Installation Notes: LVR parts are not recommended for reflow soldering. Installation where the LVR part is constrained may inhibit proper device function. Visit our web site or contact your local representative for additional information.

Typical Time-to-Trip Characteristics

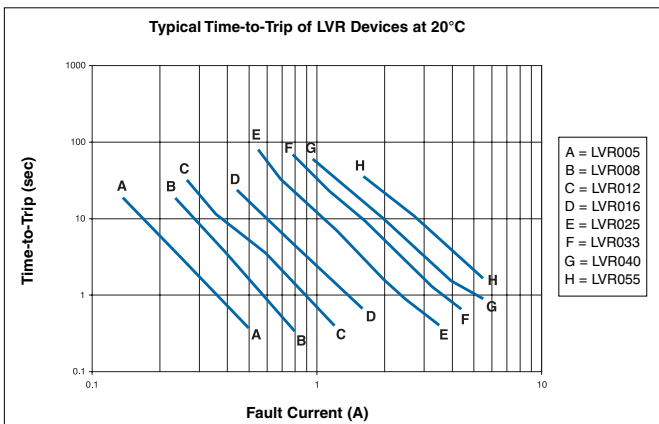

Thermal Derating Curve

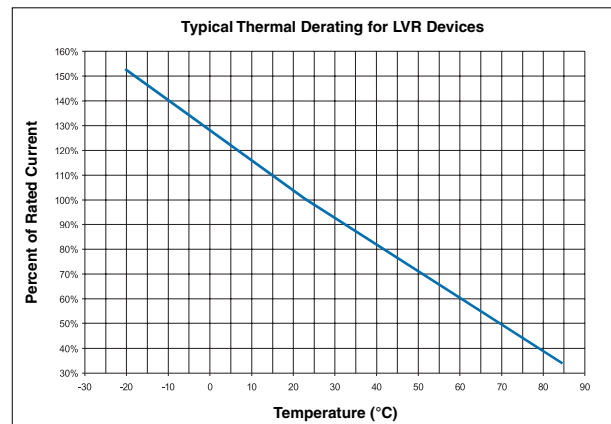

Worldwide Headquarters

308 Constitution Drive, MS R21/2A
Menlo Park, CA USA 94025-1164
Tel (800) 227-7040
(650) 361-6900
Fax (650) 361-2508

Japan

Tel 81-44-900-5110
Fax 81-44-900-5140

Asia Pacific

Tel 852-2738-3401
Fax 852-2735-1185

Europe

Tel 32-16-351321
Fax 32-16-351319

www.circuitprotection.com/lvr/
www.circuitprotection.com.hk (Chinese)
www.raychem.co.jp/polyswitch (Japanese)

PolySwitch, SiBar, miniSMD, and nanoSMD are trademarks of Tyco Electronics Corporation.

All information, including illustrations, is believed to be reliable. Users, however, should independently evaluate the suitability of each product for their application. Tyco Electronics makes no warranties as to the accuracy or completeness of the information, and disclaims any liability regarding its use. Tyco Electronics' only obligations are those in the Company's Standard Terms and Conditions of Sale for this product, and in no case will Tyco Electronics be liable for any incidental, indirect, or consequential damages arising from the sale, resale, use, or misuse of the product. Specifications are subject to change without notice. In addition, Tyco Electronics reserves the right to make changes-without notification to Buyer-to materials or processing that do not affect compliance with any applicable specification.

AMEYA360

Components Supply Platform

Authorized Distribution Brand :



Website :

Welcome to visit www.ameya360.com

Contact Us :

➤ Address :

401 Building No.5, JiuGe Business Center, Lane 2301, Yishan Rd
Minhang District, Shanghai , China

➤ Sales :

Direct +86 (21) 6401-6692
Email amall@ameya360.com
QQ 800077892
Skype ameyasales1 ameyasales2

➤ Customer Service :

Email service@ameya360.com

➤ Partnership :

Tel +86 (21) 64016692-8333
Email mkt@ameya360.com