


Relays, Contactors & Switches > Switches > Pushbutton Switches

AV22 SPM 5A MOVE RING LED YELLOW 24V

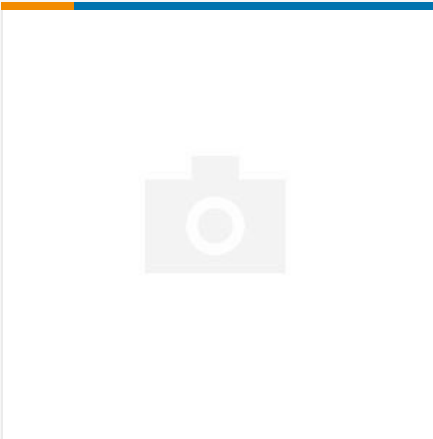

Alcoswitch | Alcoswitch AV

TE Part # **AV2210E524Q04**
TE Internal #: **1-2213772-1**

Configuration (Pole-Throw) : **Single Pole - Single Throw**

Number of Actuators : **Single**

Actuator Profile : **Flush**

Bushing Style : **Threaded**

Illuminated : **Yes**

[Similar Products](#)

ORDER SAMPLES

Compatible Parts & Tooling

DOCUMENTSFEATURESPRODUCT COMPLIANCE

Product Drawings	AV22 SPM 5A MOVE RING LED YELLOW 24V AV22 SPM 5A MOVE RING LED YELLOW 24V English
CAD Files	3D PDF 3D_CVM_CVM_1-2213772-1_A.pdf 3D Customer View Model ENG_CVM_CVM_1-2213772-1_A.2d_dxf.zip English ENG_CVM_CVM_1-2213772-1_A.3d_igs.zip English ENG_CVM_CVM_1-2213772-1_A.3d_stp.zip English
Catalog Pages/Data Sheets	ENG_DS_1-1773878-3_Alcoswitch_AntiVandal_0517.pdf English
Agency Approvals	UL Report ENG_AAD_UL_E46765_20030916__A.pdf English
Please review product documents or contact us for the latest agency approval information. Please Note: Use the Product Drawing for all design activity.	

SHOP OUR DISTRIBUTORS

North America

[See all price breaks](#)

Distributor	1	10,000	Buy
DIGI-KEY ELECTRONICS	\$16.910	\$12.459	Visit Site
98 in stock			
NEWARK ELEMENT14	\$19.990	\$13.170	Visit Site
51 in stock			

We are here to help!

Get in touch with our product experts.

CHAT WITH US

EMAIL US

CALL US

Please give us feedback:
Did you find what you need on this page?

YES

Feedback



Product Type Features	Dust Proof : Yes Illuminated : Yes Actuator Style : Round Product Type : Switch Switch Type : Pushbutton
Configuration Features	Configuration (Pole-Throw) : Single Pole - Single Throw Number of Actuators : Single Snap Action : Without Support Bracket : Without Tactile : No Operating Function : Momentary Detent Style : Audible ESD Grounding Terminal : Without
Electrical Characteristics	Voltage Rating (VAC): 250
Body Features	Case Material : PBT Actuator Profile : Flush Bushing Style : Threaded
Contact Features	Contact Current Rating (A): 5 Switch Contact Plating Material : Silver
Termination Features	Termination Type : Wire Lugs
Mechanical Attachment	Mounting Type : Panel Mounting Angle : Vertical
Housing Features	Process Sealed : Yes
Dimensions	Bushing Length (in): 22
Statement of Compliance	Statement of Compliance pdf



Pushbutton Switches
(705)

ABOUT TE CONNECTIVITY

- Our Company
- Events
- TE News Center
- Careers
- Investors
- Corporate Responsibility
- Terms and Conditions of Sale

FOR PARTNERS

- Distributors
- Suppliers

CUSTOMER SUPPORT

- Email or Call Us
- Find Authorized Distributors
- Shop Online in the TE Store
- Product FAQs

CALL US

- SELECT LANGUAGE
- United States
 - Germany
 - China (中文)
 - Japan (日本語)
 - Afghanistan (EN)
 - Find Your Country/Region

Need help? ×
Our team is on stand-by and ready to help with your order.

CHAT NOW

