


Connector Location A





Connector Location B

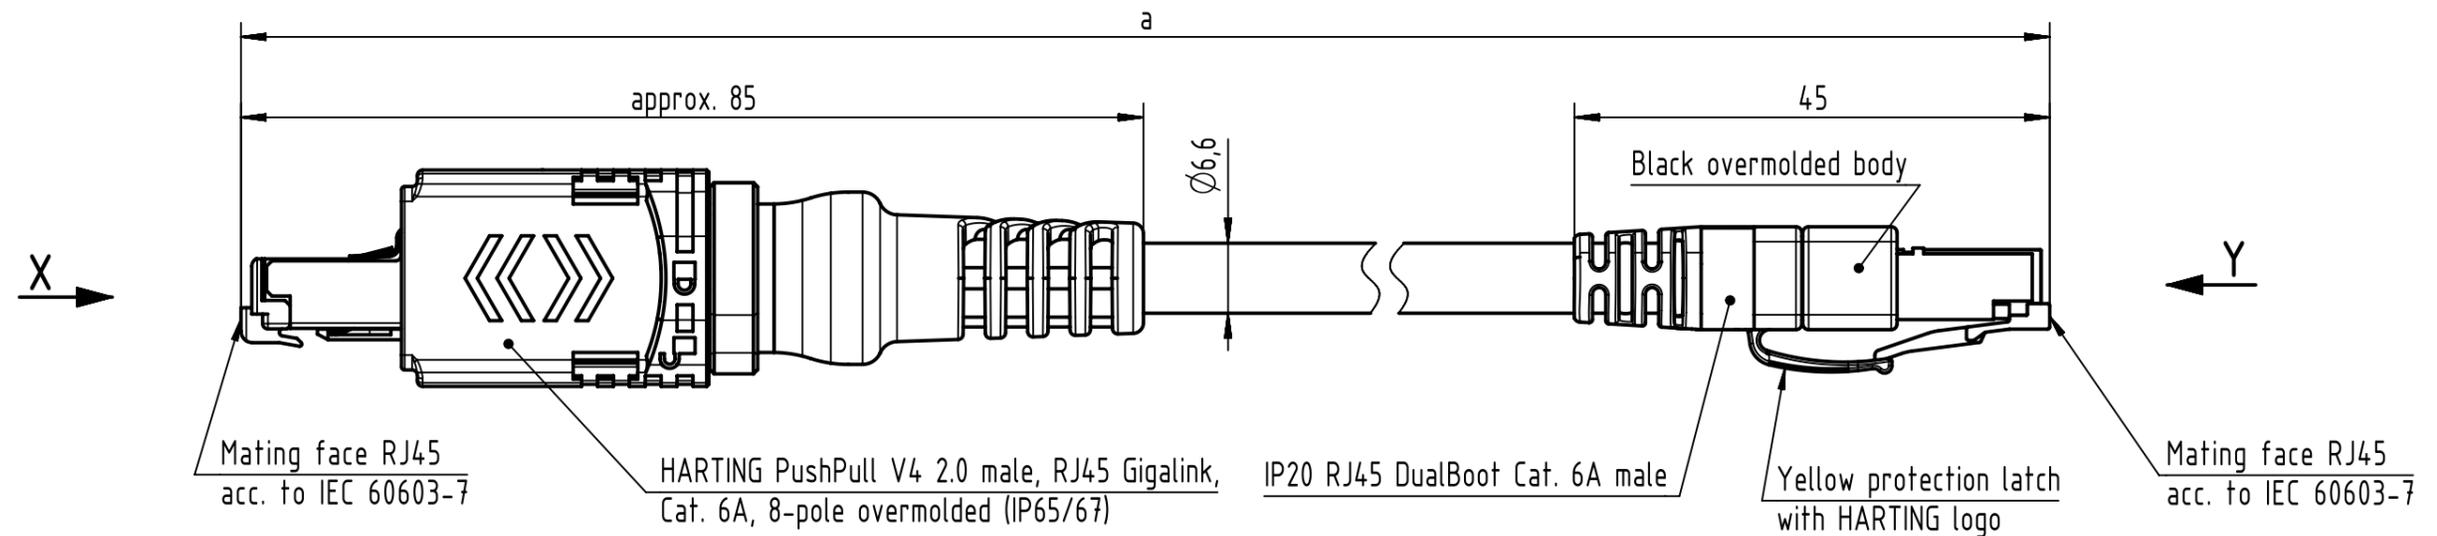

X

Loading-Plan
acc. to TIA/EIA 568B

Y

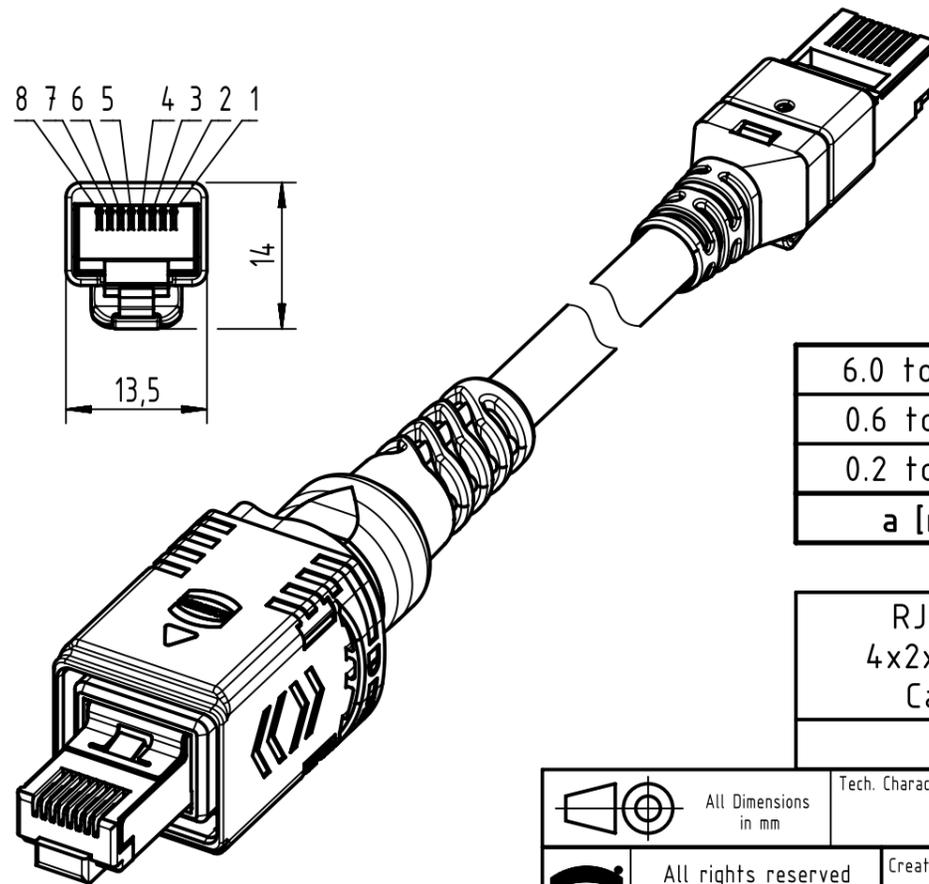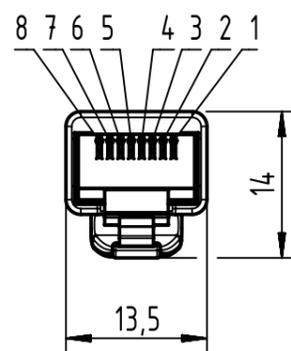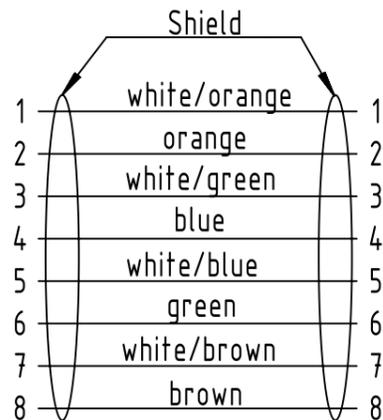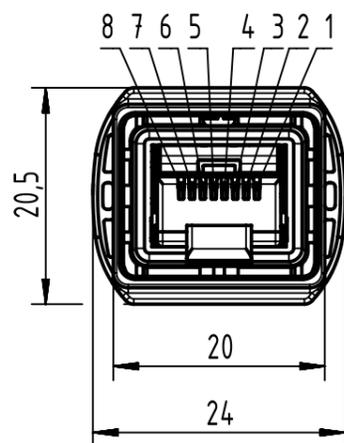

6.0 to 100	±1%
0.6 to 5.9	+0.04
0.2 to 0.5	+0.02
a [m]	Tolerance

length in "1m" step	100	XXX=000
	99	XXX=990
	.	.
	12	XXX=120
length in "0.1m" step	11	XXX=110
	10	XXX=100
	9.9	XXX=099
	9.8	XXX=098
Step	.	.
	0.5	XXX=005
	0.4	XXX=004
	0.3	XXX=003
	0.2	XXX=002
Step	a [m]	XXX

RJI stranded cable,
4x2xAWG26/7, outdoor,
Cat.6A, PVC, black

Type of cable

09482847758XXX

Part no.

Temperature range: -20°C +75°C

	All Dimensions in mm		Tech. Character.		Free size tol.		According to production drawing	
	All rights reserved		Created by	Inspected by	Standardisation	Date	State	
Department HCS - RO		COSTEA	COSTEA	MUNTEANV	2018-07-27	Final Release		
HARTING Customised Solutions		Title				Doc-Key / ECM-Nr.		Page
D-32339 Espelkamp		PPV4 2.0 RJ45 - RJ45 IP20 Cat6A out				100696543/UGD/001/C 500000138199		
		Type	Number		Rev.		1/1	
		TB	09482847758XXX		C			