

- Heatsinks f.cool
- Cases f.case
- ▼ Connectors f.con
 - Sockets
 - ▼ PCB connectors
 - Male headers
 - Female headers
 - Direct female connectors
 - Jumpers
 - IDC-connectors
 - D-Sub connectors
 - Brackets for PC
 - Optoelectronics

Male headers


MK 05 ...

MK 05 10 G

Solder and plug pins, Ø 0.5 mm Also available as single contact, SK ...

Data sheet

add to request

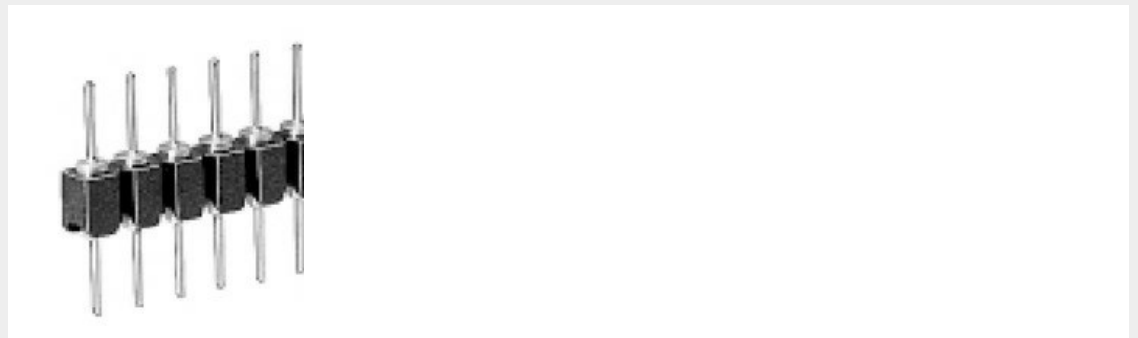

Features

Technical Drawing

Service

Accessories / related products

grid	2.54 mm
no. of contacts	10
contact material	CuZn-alloy
surface of contact	gold-plated
surface contact /	Ni+≥0.2µm Au
contact sleeve	Ni+4...6µm Sn
version	solder and plug pins, Ø0.5mm
shock resistance	50 g
volume resistance	≤10 mΩ
vibration resistance max.	15 g
capacity between two adjacent contacts	≤0,4 pF
nominal current	1.5 A
nominal voltage	60 V DC
test voltage	1000 V
insulating body material	PA 4.6. GF
temperature range	-40°C... +163°C (260°C/10 s)
class of inflammability	UL 94 V-0
specific insulation resistance	>10.0 ^{7.0} Ω·m
connection type	-
reflow solderable	yes