

Slide Switch-Standard





FOUR POLE/DOUBLE THROW (with detent)


TYPE	ELECTRICAL RATING
GF-342	3.0 A AC, 0.5 A DC at 125 V
GF-642	6.0 A AC, 0.5 A DC at 125 V
GF-842	8.0 A DC at 12 V
GF-1142	11.0 A AC, 0.5 A DC at 125 V (22 A total)
GF-1342	13.0 A AC, 0.5 A DC at 125 V (26 A total)

LISTING
 U.L. & C.S.A.*
 U.L. & C.S.A.*
 U.L. & C.S.A.*
 U.L. & C.S.A.*

*If C.S.A. listing is required, specify assembled solder shield G-29-43.




GF-342
Actual Size

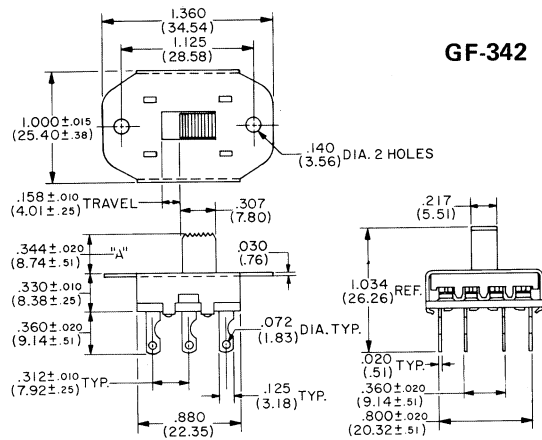

BUTTONS


HEIGHT "A"	PART NO.	REMARKS
.344" (8.74mm)	G-02-84	Standard
.188" (4.78mm)	G-02-84-4	Optional
.406" (10.31mm)	G-02-84-5	Optional
.500" (12.70mm)	G-02-84-1	Optional
.625" (15.88mm)	G-02-84-3	Optional
.750" (19.05mm)	G-02-84-2	Optional
.032" (.81mm)	G-02-109	Optional
.344" (8.74mm)	G-02-136	Optional

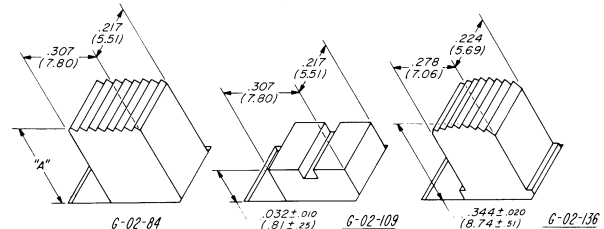


MOUNTING

STANDARD • Two .140" diameter holes on 1.125" centers. 4-40 extruded and tapped mounting holes also are available.

PRINTED CIRCUIT BOARD • Plug directly into board having hole pattern suggested.

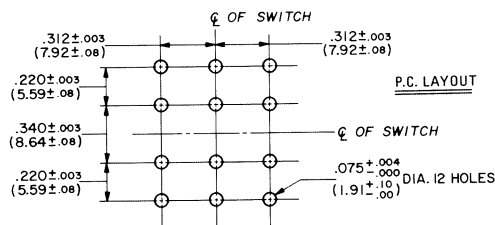

TWIST TAB • Mount to .031"-.047" thick metal chassis by specifying bracket G-10-11. See drawing. Housing ears, when twisted in chassis cutout shown, lock switch into place.

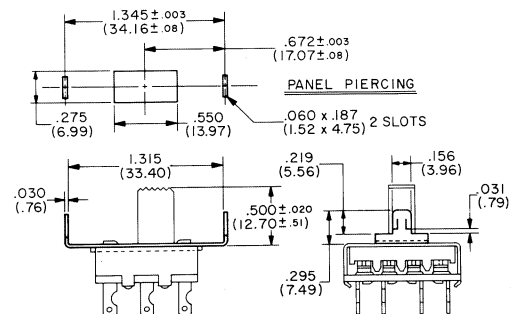

TERMINALS

Standard is G-20-30. Specify any terminal shown in drawing T-4 on page 15 that is best for your application.

TOPPERS

Control panel styling and appearance can be changed by adding an auxiliary "Topper" button, as described on page 19.

ROCKER SWITCHES

All of these switches, when combined with bracket and knob assembly, become CW rocker switches. See pages 35-37.

SOLDER SHIELD (G-29-43)

Vulcanized fiber shield .020" thick that fits over the switch terminals may be shipped assembled or separate, as you specify.