


CUSTOMER PRINT

PART NUMBER: W4281-1XSG-3ES


| ASS'Y P/N | CONTACTS | HOLE POS. CLOSED |
|----------------|----------|------------------|
| W4281-10SG-3ES | 10 - #20 | 11, 12 |
| W4281-11SG-3ES | 11 - #20 | 12 |
| W4281-12SG-3ES | 12 - #20 | NONE |
| W4281-1XSG-3ES | | |

NO. OF CONTACTS


- NOTES:**
- ALL PARTS TO BE BULK PACKED.
 - CONTACTS ASSEMBLED INTO CONNECTOR.
 - BACK WELL FILLED WITH EPOXY.
 - ALL DIMENSIONS ARE REFERENCE ONLY EXCEPT WHERE NOTED WITH A TOLERANCE. DIMENSIONS IN BRACKETS [] ARE METRIC.
 - PC TAIL LENGTH OPTIONS:
 - STANDARD (SHORT) TAIL = 0.107in [W4281-1XSG-3ES]
 - INTERMEDIATE = 0.202in [W4291-1XSG-3ES]
 - LONG = 0.267in [W4292-1XSG-3ES]

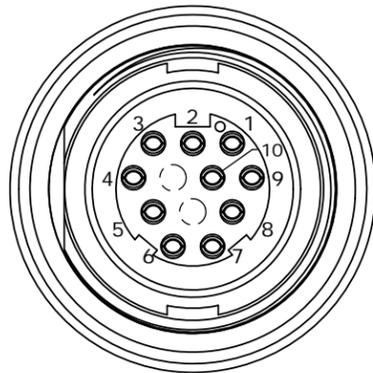




FACE VIEW
W4281-10SG-3ES
10-POS.

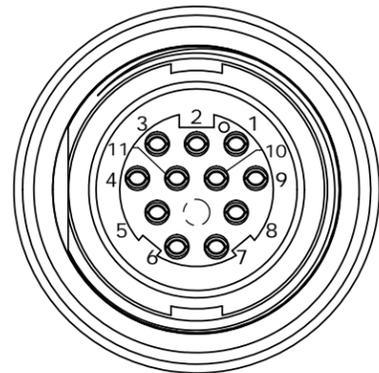



FACE VIEW
W4281-11SG-3ES
11-POS.

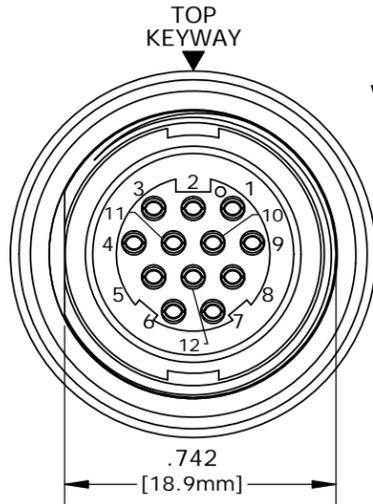


FACE VIEW
W4281-12SG-3ES
12-POS.

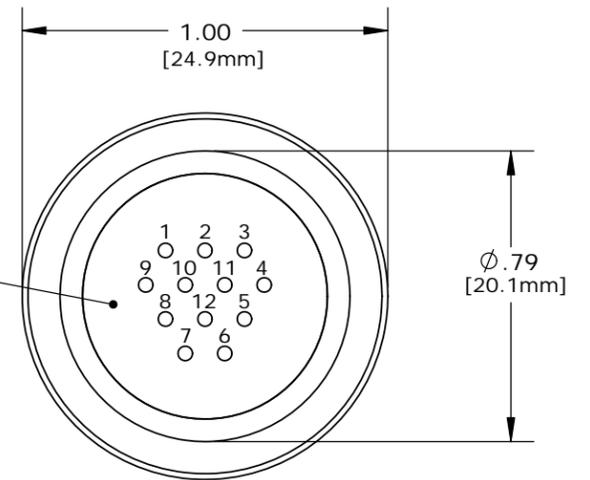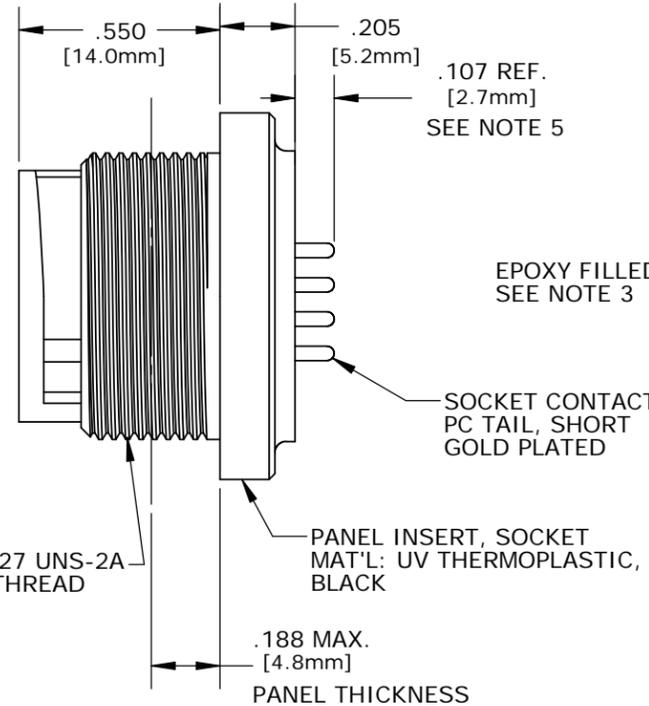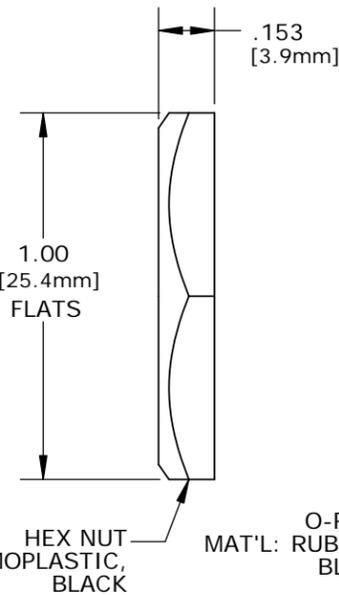

PC TAIL VIEW
W4281-10SG-3ES - 10-POS. (11&12 CLOSED)
W4281-11SG-3ES - 11-POS. (12 CLOSED)
W4281-12SG-3ES - 12-POS. (ALL OPEN)

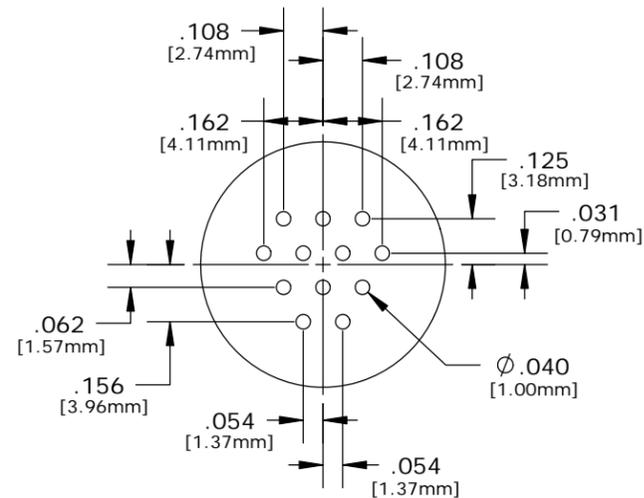

PC TAIL LAYOUT

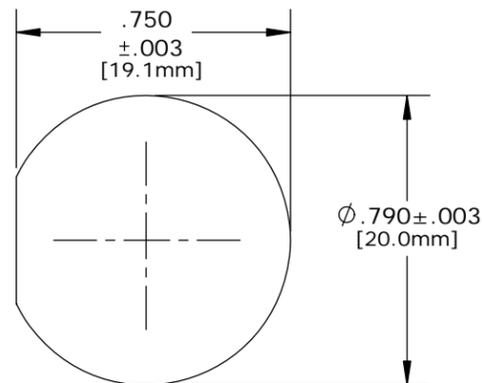

**RECOMMENDED
PANEL CUTOUT**
STANDARD MULTI-CON-X

CUSTOMER APPROVAL

THIS DOCUMENT CONTAINS CONFIDENTIAL INFORMATION PROPRIETARY TO CONXALL CORPORATION. ANY REPRODUCTION, DISCLOSURE, OR USE OF THIS DOCUMENT /INFORMATION IS EXPRESSLY PROHIBITED UNLESS AUTHORIZED IN WRITING BY CONXALL CORPORATION.

APPROVED BY: _____

DATE: _____

| REV. | INIT. | DATE | DESCRIPTION |
|------|-------|----------|---|
| A | PAK | 09/12/19 | DRAWING CREATED AND RELEASED PER DOR 10-2523JS-1 |
| | | | ORIG. DRAWN BY: PAK DATE: 10/03/14 |
| | | | CHECKED BY: _____ |
| | | | APPROVED BY: _____ |
| | | | SCALE: NTS SIZE: B SHEET: 1 OF 1 |
| | | | FILE: W4281-1XSG-3ES DIRECTORY: SLW |
| | | | TITLE: PANEL SOCKET, W/ EPOXY 12-POS., #20 PC TAIL, SHORT (STD.) MULTI-CON-X, E-KEY, WEATHER RESISTANT CUSTOMER: STANDARD PRODUCT |
| | | | PART NUMBER: W4281-1XSG-3ES |



601 E. WILDWOOD VILLA PARK, IL 60181

ALL INFORMATION ILLUSTRATED IS THE PROPERTY OF CONXALL CORPORATION. UNAUTHORIZED DUPLICATION OR DISTRIBUTION OF THIS DOCUMENT IS PROHIBITED.

UNLESS OTHERWISE SPECIFIED TOLERANCES:
3 PLACE DECIMALS ± .005
ANGLES ± 1°
FRACTIONS ± 1/16

CRITICAL CHARACTERISTIC FLAG PER SPEC. XXXX

REV A