

Receptacle families













Receptacle colors



The Eaton difference



- Extra durability heavy duty grade models available for high abuse areas
- Screw-catch feature on traditional duplex devices automatically holds the wallplate mounting screw in place
- Built-in wire looper to speed termination of both #14 and #12 AWG wire
- Slotted, Phillips and Robertson Tri-combo screw heads offer greater installation flexibility
- Tamper resistant versions provide compliance with 2014 NEC® section 406.12 and provide significantly improved protection over traditional receptacles with removable plastic safety caps



Specific receptacle solutions for today's needs



Child safety

Tamper resistant receptacles not only provide code compliance, they also deliver automatic, continual protection from electrical injury as a result of inserting foreign objects.









There are many homes that still contain aluminum wiring. Using hybrid copper & aluminum compatible (CO/ALR) receptacles can reduce the hazards of aluminum wiring.

See page B-27





Shown:



Home entertainment devices

Today's flat-screen televisions mount closely to the wall, requiring recessed receptacles to permit tight mounting clearances and leave more room for cord control.

See page B-28



Shown: TR780



Outlet branch circuit AFCI receptacles

Product description

2-pole, 3-wire grounding 15A,125V/AC 20A,125V/AC



5-15R 5-20R



- Designed to recognize an arc fault and quickly trip to stop the flow of electricity to prevent the electrical system from being an ignition source of fire
- Meets 2014 NEC® 406.4 (D)(4) requirements for replacement receptacles for dwelling units
- Meets 2014 NEC® requirements when installed as defined in Article 210.12 (A) for dwelling units
- Proven Eaton AFCI technology refined over several years to minimize unwanted tripping
- Lockout feature provides safest design by prohibiting the AFCI from resetting if the AFCI circuit is not functioning properly
- Tamper resistant receptacles provide compliance with 2014 NEC® Article 406.12 which states that all 15A and 20A, 125V/AC receptacles installed in dwelling units must be tamper resistant
- Perfect for use in dwelling units, remodel/ retrofit applications, dormitories and commercial buildings



TRAFCI15W

TRAFCI20V

Tamper resistant AFCI receptacle







Ra	ting			
Α	V/AC	Description	Color suffix	Catalog no.
15	120	Tamper resistant AFCI duplex receptacle	A, B, BK, GY, LA, V, W	☐ TRAFCI15
20	125	Tamper resistant AFCI duplex receptacle	A, B, BK, GY, LA, V, W	☐TRAFCI20

Color ordering information:

For ordering devices, include Catalog no. followed by the Color suffix: A (Almond), B (Brown), BK (Black), GY (Gray), LA (Light Almond), V (Ivory), W (White)



Dimensional information: B-69 Specification information: Please visit www.eaton.com/wiringdevices Compliances, specifications and availability are subject to change without notice.





Heavy duty grade receptacles

Product description

2-pole, 3-wire grounding 15A, 125V/AC 20A, 125V/AC

Design features

Rating V/AC

15 20 125

120


ground contacts




5-20R 5-15R



TRCR15





· Heavy duty grade receptacles are designed

all 15A and 20A, 125V/AC receptacles

installed in dwelling units must be

and built for heavier use and feature enhanced

• Tamper resistant receptacles provide compliance

with 2014 NEC® Article 406.12 which states that

- Screw-catch feature on duplex devices speeds mounting of wallplates
- Galvanized steel wrap-around mounting strap for superior assembly security
- Patented built-in wire stripper for #12 and #10 AWG wire (except TRCR models) to speed installation
- Duplex and decorator devices feature automatic grounding system that eliminates the need for bonding jumper in grounded metal enclosures and provides a redundant measure of ground continuity where a jumper is used







TR6250







	Color suffix	Catalog no.	RoHS
!	A, B, BK, GY, LA, RD, V, W	☐ TRCR15	•
!	A, B, BK, GY, LA, RD, V, W	☐ TRCR20	•

cULus Listed to UL498, file no. E15058; NOM certified

Description

Heavy duty tamper resistant single receptacles





A	V/AC	Description	Color suffix	Catalog no.	RealtS
15	125	Tamper resistant NEMA 5-15R decorator single receptacle, side wire	B, BK, V, W	□ TR6250	•
		Tamper resistant NEMA 5-15R single receptacle, side wire	A, B, BK, LA, V, W	□ TR817	•
20	125	Tamper resistant NEMA 5-20R decorator single receptacle, side wire	LA, V, W	□ TR6350	•
		Tamper resistant NEMA 5-20R single receptacle, side wire	A, B, BK, LA, V, W	□ TR1877	•

cULus Listed to UL498, file no. E15058; NOM certified

Heavy duty single receptacles



Tamper resistant NEMA 5-15R duplex receptacle, side wire

Tamper resistant NEMA 5-20R duplex receptacle, side wire



Ra	iting				
Α	V/AC	Description	Color suffix	Catalog no.	♣ 🕙
15	125	5-15R Single receptacle, side wire	B, BK, LA, V, W	□817	• •
20	125	5-20R Single receptacle, side wire	A, B, BK, LA, V, W	□ 1877	• •

Listed to UL498, file no. E15058; CSA certified to C22.2, no. 42; NOM certified

Color ordering information:

For ordering devices, include Catalog no. followed by the Color suffix: A (Almond), B (Brown), BK (Black), GY (Gray), LA (Light Almond), RD (Red), V (Ivory), W (White)



Dimensional information: B-68, B-69 Specification information: Please visit www.eaton.com/wiringdevices Compliances, specifications and availability are subject to change without notice.









Decorator standard grade receptacles

Product description

2-pole, 3-wire grounding 15A & 20A,125V/AC



5-20R 5-15R



TR1107-9





1107

Design features

- Tamper resistant receptacles provide compliance with 2014 NEC® Article 406.12 which states that all 15A and 20A, 125V/AC receptacles installed in dwelling units must be tamper resistant
- Longer, wider strap provides 40% more contact area to wall board, virtually eliminating floating installations
- Patented built-in wire stripper for #14 and #12 AWG wire to speed installation
- Push-in terminals accept #14 AWG solid wire for quick installation
- Patented built-in wire looper for pre-looping

- High impact-resistant thermoplastic face and back body eliminates breakage
- Double-wipe ground contacts ensure long-term ground retention
- Easy access split circuit break-off tab
- Tri-combo screws accept Slotted, Phillips, and Robertson-head tools for installation flexibility
- · Terminal screws backed out and ready for wiring
- Side wire terminals accept up to #10 AWG solid wire

Decorator tamper resistant duplex receptacles







Rat A	ting V/AC	Description	Color suffix	Catalog no.	\$
15	125	Tamper resistant NEMA 5-15R decorator duplex receptacle, side & push wire	A, B, BK, GY, LA, V, W	☐ TR1107	• •
		Auto grounding tamper resistant NEMA 5-15R decorator duplex receptacle, side & push wire	A, B, BK, LA, V, W	☐ TR1107-9	• •
20	125	NEMA 5-20 tamper resistant decorator duplex receptacle, side wire only	A, B, BK, GY, LA, V, W	□ TR1307	• •

cULus Listed to UL498, file no. E15058; NOM certified

Decorator duplex receptacles







Ra A	ting V/AC	Description	Color suffix	Catalog no.	
15	125	NEMA 5-15R decorator duplex receptacle, side & push wire	A, B, BK, GY, LA, V, W	□ 1107 <u></u>	• •
		Auto grounding NEMA 5-15R decorator duplex receptacle, side & push wire	A, BK, LA, V, W	□ 1107-9	• •

Listed to UL498, file no. E15058; CSA certified to C22.2, no. 42; NOM certified

Color ordering information:

For ordering devices, include Catalog no. followed by the Color suffix: A (Almond), B (Brown), BK (Black), GY (Gray), LA (Light Almond), V (Ivory), W (White)



Dimensional information: B-68, B-69 Specification information: Please visit www.eaton.com/wiringdevices Compliances, specifications and availability are subject to change without notice.



Indicates NAFTA compliant - Page G-21









Standard grade receptacles

Product description

2-pole, 3-wire grounding 15A & 20A, 125V/AC

Design features






5-15R 5-20R




TR270



• Tamper resistant receptacles provide compliance with 2014 NEC® Article 406.12 which states that

all 15A and 20A, 125V/AC receptacles

installed in dwelling units must be



• Patented built-in wire stripper for #14 and #12 AWG wire to speed installation

- Push-in terminals accept #14 AWG solid wire for quick installation
- Patented built-in wire looper for pre-looping
- High impact-resistant thermoplastic face and back body eliminates breakage
- Double-wipe ground contacts ensure long-term ground retention
- Easy access split circuit break-off tab
- · Tri-combo screws accept Slotted, Phillips, and Robertson-head tools for installation flexibility
- · Terminal screws backed out and ready for wiring
- Side wire terminals accept up to #10 AWG solid wire



TWR270



270

Tamper resistant duplex receptacles





TD
IΚ
TAMPER RESISTAN

A A	ting V/AC	Description	Color suffix	Catalog no.	4 3
15	125	Tamper resistant NEMA 5-15R duplex receptacle, side & push wire	A, B, BK, LA, V, W	□ TR270	• •
		Auto grounding tamper resistant NEMA 5-15R, duplex receptacle, side & push wire	A, B, LA, V, W	☐ TR270-9	• •
20	125	NEMA 5-20 tamper resistant duplex receptacle, 2-pole, 3-wire, side wire	A, B, BK, GY, LA, V, W	□ TR370	•

cULus Listed to UL498, file no. E15058; NOM certified

Tamper & weather resistant duplex receptacles





Color suffix	Catalog no.	all Rais
GY, LA, V, W	□ TWR270	• •

	duplex receptacle, side & push v	
cULus Listed to UL49	B, file no. E15058; NOM certified	

Description

Duplex receptacles

Rating

15 125







Tamper & weather resistant NEMA 5-15R

Ra A	ting V/AC	Description	Color suffix	Catalog no.	
15	125	NEMA 5-15R duplex receptacle, side & push wire	A, B, BLK, LA, V, W	□ 270 <u></u>	• •
		Auto grounding NEMA 5-15R duplex receptacle, side & push wire	A, B, LA, V, W	□ 270-9	• •
		NEMA 5-15R duplex receptacle, less ears, side & push wire	A, B, BK, LA, V, W	□ 4270 <u></u>	• •

Listed to UL498, file no. E15058; CSA certified to C22.2, no. 42; NOM certified

Color ordering information:

For ordering devices, include Catalog no. followed by the Color suffix: A (Almond), B (Brown), BK (Black), GY (Gray), LA (Light Almond), V (Ivory), W (White)



Dimensional information: B-68, B-69 Specification information: Please visit www.eaton.com/wiringdevices Compliances, specifications and availability are subject to change without notice.













298

Receptacles

Standard grade receptacles

Product description

2-pole, 3-wire grounding 2-pole, 2-wire non-grounding 15A, 125V/AC













Ra	ting				
Α	V/AC	Description	Color suffix	Catalog no.	September 1
15	125	NEMA 1-15R duplex receptacle, non-grounding, side wire	B, V, W	□ 736	• •

Listed to UL498, file no. E15058; NOM certified

Duplex receptacles







Rat A	ting V/AC	Description	Color suffix	Catalog no.	*	√ RoH5
15	125	NEMA 5-15R duplex receptacle, 8 quick wire ports, push wire	V, W	□ 298	•	•

Listed to UL498, file no. E15058; CSA certified to C22.2, no. 42; NOM certified

Color ordering information:

For ordering devices, include Catalog no. followed by the Color suffix: B (Brown), V (Ivory), W (White)



Dimensional information: B-68 Specification information: Please visit www.eaton.com/wiringdevices Compliances, specifications and availability are subject to change without notice.







CO/ALR standard grade receptacles

Product description

2-pole, 3-wire grounding 15A, 125V/AC



5-15R



5270

Design features

- For direct connection to aluminum or copper wire
- Double-wipe ground contacts ensure long-term ground retention
- Combination Slotted/Phillips head mounting and terminal screws for installation flexibility
- Easy access split circuit break-off tab
- · Terminal screws backed out and ready for wiring
- Side wire terminals accept up to #10 solid copper wire or solid aluminum wire

CO/ALR duplex receptacles







Rat	ting				= (
A	V/AC	Description	Color suffix	Catalog no.	**
15	125	NEMA 5-15R duplex receptacle, grounding, side wire	V, W	□ 5270 <u></u>	• •
	1. III.400 CI	E45050 004 005 1, 000 0 40 NOM 005 1			

Listed to UL498, file no. E15058; CSA certified to C22.2, no. 42; NOM certified

Color ordering information:

For ordering devices, include Catalog no. followed by the Color suffix: V (Ivory), W (White)



Dimensional information: B-68 Specification information: Please visit www.eaton.com/wiringdevices Compliances, specifications and availability are subject to change without notice.



Indicates NAFTA compliant - Page G-21



RoHS compliant - Page G-21



Specialty standard grade receptacles

Product description

2-pole, 3-wire grounding 15A, 125V/AC 15A, 250V/AC





5-15R

6-15R



TR780





TR5797

Design features

- Tamper resistant receptacles provide compliance with 2014 NEC® Article 406.12 which states that all 15A and 20A, 125V/AC receptacles installed in dwelling units must be tamper resistant
- Surface receptacles for use with surface mounted wiring to expand convenience receptacles on solid plaster, brick or concrete walls
- Floor box assembly includes heavy-duty single receptacle on recessed mounting strap, 18 cu. in. steel back box, solid brass cover, gasket and threaded brass closure cap with watertight neoprene rubber "O" ring
- High impact-resistant thermoplastic face and back body eliminates breakage
- Double-wipe ground contacts ensure long-term ground retention
- Tri-combo screws accept Slotted, Phillips, and Robertson-head tools for installation flexibility
- Side wire terminals accept up to #10 AWG solid wire

Red







oer
ЭЄ

Rating

15 125

V/AC

cessea	receptacies	շ(ՎՐ)ոջ	426	TAMP RESES
ting				

Ra	ting				<i>∞</i> =
Α	V/AC	Description	Color	Catalog no.	_
15	125	Tamper resistant NEMA 5-15R single receptacle, with clock hanger, side wire	W	☐ TR775W	•
15	125	Tamper resistant NEMA 5-15R duplex receptacle, push wire side wire	W	☐ TR780W	

cULus Listed to UL498, file no. E15058; NOM certified

Description

Surface receptacle NEMA 5-15R





Color suffix	Catalog no.	A Radis
B, V	□ 78	• •

Listed to UL498, file no. E15058; CSA certified to C22.2, no. 42; NOM certified

NEMA 5-15R duplex surface receptacle

Surface receptacle NEMA 6-15R





Ra	ting				<i>∞</i> =
Α	V/AC	Description	Color	Catalog no.	
15	250	NEMA 6-15R duplex surface receptacle	V	□74V	•

Listed to UL498, file no. E15058; NOM certified

Floor box receptacles





Rat	Rating				
Α	V/AC	Description	Color	Catalog no.	
15	125	Tamper resistant NEMA 5-15R single receptacle brass floor box assembly, back $\&$ side wire	BR	□ TR5797	

cULus Listed to UL498, file no. E15058

Color ordering information:

For ordering devices, include Catalog no. followed by the Color suffix: B (Black), BR (Brass), V (Ivory), W (White)









Dimensional information: B-68, B-69 Specification information: Please visit www.eaton.com/wiringdevices Compliances, specifications and availability are subject to change without notice.



Indicates NAFTA compliant - Page G-21







Academy series standard grade outlets

Product description

2-pole, 2-wire non-grounding 10A, 125V/AC



1-15R



2607



2609

Design features

- High impact resistant thermoplastic housing is virtually indestructible
- Outlets quickly add a receptacle to ordinary household wire
- Insulation piercing terminals eliminate the need for tools—just snap in unstripped wire and device is ready for use

Academy series outlets





g				
//AC	Description	Color suffix	Catalog no.	RoHS
25	NEMA 1-15R polarized cord outlet, for 18-2 SPT-1, SPT-2 or HPN cord	B, W	□ 2607	•
1	,	, to a second se	,	,

Listed to UL498, file no. E15012; NOM certified

Academy series outlets

Ra	ting				
Α	V/AC	Description	Color suffix	Catalog no.	RoHS
10	125	NEMA 1-15R in-line outlet, for 18-2 SPT-1 cord	B, BK, W	□ 2609	•


Color ordering information:

For ordering devices, include Catalog no. followed by the Color suffix: B (Brown), BK (Black), W (White)



Dimensional information: B-69 Specification information: Please visit www.eaton.com/wiringdevices Compliances, specifications and availability are subject to change without notice.




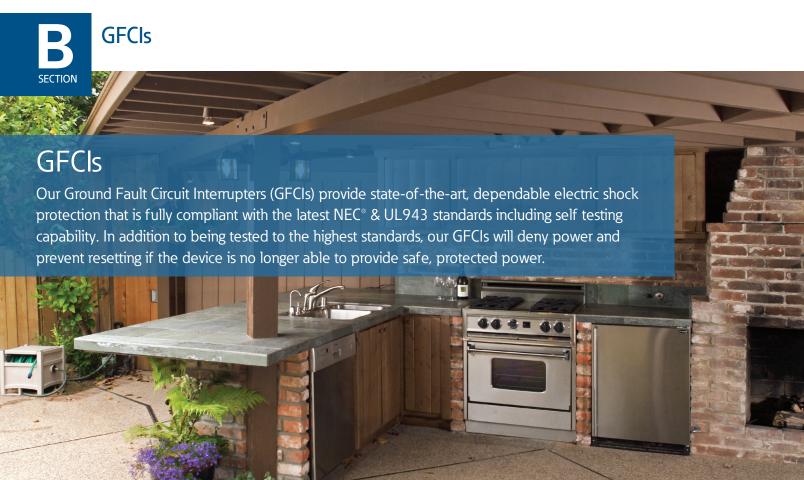

GFCI families







GFCI colors



The Eaton difference



- Large visual indicator light gives quick notification of a tripped or "end-of-life" condition
- Unbreakable nylon construction provides unsurpassed chemical and impact resistance
- Ground termination with backwire clamp provides secure wiring and reduces installation time
- Horizontal Test/Reset button alignment provides larger unobstructed area; buttons color matched for superior aesthetics
- Line-load mis-wiring protection, will not provide power downstream when wired incorrectly
- Tamper Resistant versions provide compliance with 2014 NEC® section 406.12 and provide significantly improved protection over traditional receptacles with removable plastic safety caps



Specific GFCI solutions for today's needs



Tamper resistance

Tamper resistant GFCIs provide shock protection, code compliance, and also deliver automatic, continual protection from electrical injury as a result of inserting foreign objects.

See page B-32







Weather resistance

Weather resistant GFCIs are constructed with enhanced nylon and corrosion resistant metal components for use in outdoor applications with appropriate weatherproof enclosures.

See page B-32



Shown: WRSGF15



Motor load GFCIs

Our line includes specialty GFCIs for specific needs, like hot tubs requiring installed dead-front GFCI protection, or tight bathroom spaces that need a combination switch and GFCI.

See page B-35



Shown: SGFD20



Heavy duty grade GFCIs

Product description

2-pole, 3-wire grounding 15A,125V/AC 20A,125V/AC





5-15R





TWRSGF15



Design features

- Tamper resistant receptacles provide compliance with 2014 NEC® Article 406.12 which states that all 15A and 20A, 125V/AC receptacles installed in dwelling units must be tamper resistant
- Weather resistant receptacles comply with 2014 NEC® Article 406.9 that states that all receptacles installed in wet or damp locations must be weather resistant
- · UL Listed, fully compliant with all latest UL943 (4th edition) Class A GFCI requirements
- Nightlight is controlled by a light sensor that turns the light on in the dark and off in the light (TRSGFNL15 and TRSGFNL20 only)
- 20A feed-through rating

Rating

- Nightlight LEDs produce color temperature of 3000-3500k for a warm "incandescent-like" glow (TRSGFNL15 and TRSGFNL20 only)
- 10 kA short circuit current rating per Supplement SA of UL943
- · Lock-out function protects from miswired lineload connections and GFCI circuitry damage
- · Visual indicator light provides quick visual reference of a tripped or "end-of-life" condition
- Matching standard size thermoplastic wallplate included unless mid-size noted
- Performs periodic self tests to ensure integrity of GFCI protection
- Automatic grounding system included as standard

Tamper resistant ground fault circuit interrupters





4	
vi .	
-	TAMPE
	RESEST

Α	V/AC	Description	Color suffix	Catalog no.
15	125	Tamper resistant duplex GFCI with nightlight, back & side wire	A, BK, LA, V, W	☐TRSGFNL15
20	125	Tamper resistant duplex GFCI with nightlight, back & side wire	A, BK, LA, V, W	☐ TRSGFNL20
15	125	Tamper resistant NEMA 5-15R duplex GFCl, back & side wire	A, B, BK, GY, LA, V, W	□ TRSGF15
15	125	Tamper resistant NEMA 5-15R duplex GFCI, with mid-size wallplate, back & side wire	A, LA, V, W	□TRSGF15M
20	125	Tamper resistant NEMA 5-20R duplex GFCI, back & side wire	A, B, BK, GY, LA, RD, V, W	□TRSGF20

cULus Listed to UL498 & UL943, file no. E60120; NOM certified

Tamper & weather resistant ground fault circuit interrupters







Rat	ing			
Α	V/AC	Description	Color suffix	Catalog no.
15	125	Tamper & weather resistant NEMA 5-15R duplex GFCI, back & side wire	B, GY, LA, V, W	□TWRSGF15
20	125	Tamper & weather resistant NEMA 5-20R duplex GFCI, back & side wire	A, B, GY, LA, V, W	□TWRSGF20

cULus Listed to UL498 & UL943, file no. E60120; NOM certified

Weather resistant ground fault circuit interrupters







Rating				
Α	V/AC	Description	Color suffix	Catalog no.
15	125	Weather resistant NEMA 5-15R duplex GFCI, back & side wire	B, GY, V, W	□ WRSGF15
20	125	Weather resistant NEMA 5-20R duplex GFCI, back & side wire	B, BK, GY, V, W	□WRSGF20

cULus Listed to UL498 & UL943, file no. E60120; NOM certified

Color ordering information:

For ordering devices, include Catalog no. followed by the Color suffix: A (Almond), B (Brown), BK (Black), GY (Gray), LA (Light Almond), R (Red), V (Ivory), W (White)



Dimensional information: B-69 Specification information: Please visit www.eaton.com/wiringdevices Compliances, specifications and availability are subject to change without notice.



Tamper resistant



Tamper & weather resistant



Weather resistant



Heavy duty grade GFCIs

Product description

2-pole, 3-wire grounding 15A, 125V/AC 20A, 125V/AC









SGF20

Design features

- UL Listed, fully compliant with all latest UL943 (4th edition) Class A GFCI requirements
- 10 kA short circuit current rating per supplement SA of UL943
- Lock-out function protects from miswired line-load connections and GFCI circuitry damage
- Visual indicator light provides quick visual reference of a tripped or "end-of-life" condition
- 20A feed-through rating
- Matching standard size thermoplastic wallplate included unless mid-size noted
- Automatic grounding system included as standard

Ground fault circuit interrupters





Ra	ıting			
Α	V/AC	Description	Color suffix	Catalog no.
15	125	NEMA 5-15R duplex GFCI, back & side wire	A, B, BK, GY, LA, V, W	□ SGF15
15	125	NEMA 5-15R duplex GFCI, with mid-size wallplate, back & side wire	A, LA, V, W	□ SGF15M
20	125	NEMA 5-20R duplex GFCI, back & side wire	A, B, BK, GY, LA, RD, V, W	□ SGF20

cULus Listed to UL498 & UL943, file no. E60120; NOM certified

Color ordering information:

For ordering devices, include Catalog no. followed by the Color suffix: A (Almond), B (Brown), BK (Black), GY (Gray), LA (Light Almond), R (Red), V (Ivory), W (White)



Dimensional information: B-69 Specification information: Please visit www.eaton.com/wiringdevices Compliances, specifications and availability are subject to change without notice.



Heavy duty grade GFCIs

Product description

2-pole, 3-wire grounding 15A, 125V/AC 20A, 125V/AC



5-15R 5-20R



SGF20F

Design features

- Tamper resistant receptacles provide compliance with 2014 NEC® Article 406.12 which states that all 15A and 20A, 125V/AC receptacles installed in dwelling units must be tamper resistant
- UL Listed, fully compliant with all latest UL943 (4th edition) Class A GFCI requirements
- 10 kA short circuit current rating per Supplement
- · Performs periodic self tests to ensure integrity of GFCI protection

- Large visual indicator light provides quick visual reference of a tripped or "end-of-life" condition
- 20A feed-through rating
- Longer, wider "bridged" strap provides 40% more contact area with wallboard, virtually eliminating floating installations
- Matching standard size thermoplastic wallplate included unless mid-size noted

NAFTA compliant tamper resistant ground fault circuit interrupters







Ra A	ting V/AC	Description	Color suffix	Catalog no.			
15	125	Tamper Resistant NEMA 5-15R duplex GFCI, back & side wire	B, BK, GY, LA, RD, V, W	☐ TRSGF15F	• •		
20	125	Tamper Resistant NEMA 5-20R duplex GFCI, back & side wire	B, BK, GY, LA, RD, V, W	□TRSGF20F	• •		
cUL	cULus Listed to UL498 & UL943, file no. E60120; NOM certified						

NAFTA compliant tamper & weather resistant resistant ground fault circuit interrupters







Rating					
Α	V/AC	Description	Color suffix	Catalog no.	
15	125	Tamper & Weather Resistant NEMA 5-15 duplex GFCI, back & side wire	B, GY, LA, V, W	☐TWRSGF15F	• •
20	125	Tamper & Weather Resistant NEMA 5-15 duplex GFCI, back & side wire	B, GY, LA, V, W	☐TWRSGF20F	• •
cULus Listed to UL498 & UL943, file no. E60120; NOM certified					

NAFTA compliant weather resistant ground fault circuit interrupters








Rating					
A	V/AC	Description	Color suffix	Catalog no.	♣ 🗸
15	125	Weather Resistant NEMA 5-15 duplex GFCI, back & side wire	B, GY, V, W	□WRSGF15F	• •
20	125	Weather Resistant NEMA 5-15 duplex GFCI, back & side wire	B, GY, V, W	□WRSGF20F	• •

cULus Listed to UL498 & UL943, file no. E60120; NOM certified

NAFTA compliant ground fault circuit interrupters





Color ordering information:

For ordering devices, include Catalog no. followed by the Color suffix: A (Almond), B (Brown), BK (Black), GY (Gray), LA (Light Almond), R (Red), V (Ivory), W (White)



Dimensional information: B-69 Specification information: Please visit www.eaton.com/wiringdevices Compliances, specifications and availability are subject to change without notice.



Indicates NAFTA compliant - Page G-21



Weather resistant

RoHS compliant - Page G-21



Tamper & weather resistant



Specialty heavy duty grade GFCIs

Combination ground fault circuit interrupter & switch

Product description

2-pole, 3-wire grounding 15A, 125V/AC 20A, 125V/AC

Rating

125

15 125



Color suffix

A, LA, V, W

A, BK, LA, V, W



Catalog no.

Catalog no.

□ SGFD20

☐ SGFS15__-MSP





SGFD20

De	Dead front ground fault circuit interrupter								
Ra	iting			_					
Α	V/AC	Description		(Color suffix	Catalog no.			

Combination NEMA 5-15R GFCI with feed-through single-pole switch, rated 1800W @ 120V/AC, 60Hz, with mid-size wallplate, back & side wire

Blank face dead front GFCI, rated as 1.5 HP motor control switch,

back & side wire cULus Listed to UL498 & UL943, file no. E60120; NOM certified

cULus Listed to UL498 & UL943, file no. E60120; NOM certified

Color ordering information:


For ordering devices, include Catalog no. followed by the Color suffix: A (Almond), B (Brown), BK (Black), GY (Gray), LA (Light Almond), R (Red), V (Ivory), W (White)



Dimensional information: B-69 Specification information: Please visit www.eaton.com/wiringdevices Compliances, specifications and availability are subject to change without notice.



Today's homes feature sophisticated appliances requiring power devices that are more durable and reliable than ever, and our power devices are specifically designed to meet those challenges. They can also deliver reliable connection points for generators, welders, other heavy workshop tools along with recreational vehicles.

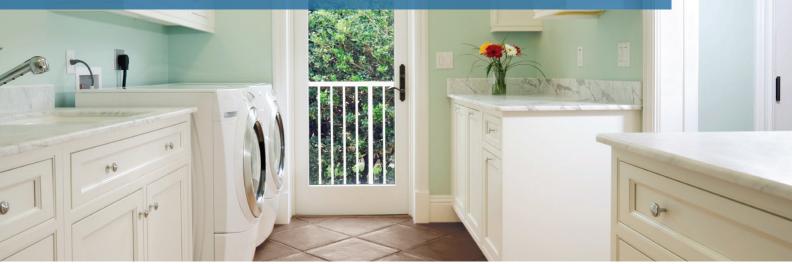

Power device families









Power device colors



The Eaton difference



- Receptacles will accept copper or aluminum wire
- Surface mount receptacles feature patented lay-in terminals that accept up to #4 AWG wire
- Surface mount receptacles allow wiring from back or bottom and feature concentric back knockouts plus an adjustable cord clamp
- Flush mount receptacles feature a heavy gauge galvanized steel mounting strap for corrosion resistance and fit in either 1- or 2-Gang enclosures
- "Universal" model plugs include blades for both 30A & 50A configurations of the
- Plug terminals feature pressure plates to protect wires



Specific power device solutions for today's needs



Remodel/retrofit solutions

Homes built prior to 1996 that haven't been re-wired will typically use 3-wire non-grounding connection points for ranges and dryers, which we support with a complete line of power devices.

See page B-38







Current code requires range & dryer applications to use 4-wire grounding connections. Homes built after 1996 usually have 4-wire grounding connection points for dryers & ranges.

See page B-40



Shown: S21



Solutions for welders, generators and RVs

Power devices are also used by other equipment. Our broad offering includes 30A, 50A & 60A devices for specialty connection point needs.









Range & dryer power receptacles

Product description

3-pole, 3-wire non-grounding 30A, 125/250V/AC 50A, 125/250V/AC









10-30R

10-50R

14-30R

14-50R



Design features

- For replacement use in older homes with 3-wire range and dryer connection points
- Heavy gauge galvanized steel mounting strap for corrosion resistance
- Flush receptacles fit one-gang or two-gang enclosures
- For use with copper or aluminum wire
- Surface receptacles have patented lay-in terminals that accept up to #4 AWG wire
- Surface receptacle backs feature concentric knockouts and an adjustable cord clamp to allow wiring from back or bottom

Flush power receptacles





Rating						*
Α	V/AC	NEMA	Description	Color	Catalog no.	♣ (₹)
30	125/250	10-30R	Flush mount dryer power receptacle, matching plug S80	В	□ 38B	• •
50	125/250	10-50R	Flush mount range power receptacle, matching plug S80	В	□ 32B	• •

Listed to UL498 & UL943, file no. E60120; NOM certified

Surface power receptacles





Rating						* ^
Α	V/AC	NEMA	Description	Color	Catalog no.	♣ (♣)
30	125/250	10-30R	Flush mount dryer power receptacle, matching plug S80	BK	□ 125	• •
50	125/250	10-50R	Flush mount range power receptacle, matching plug S80	BK	□112	• •

Listed to UL498, file no. E15058; NOM certified

Flush power receptacles







Ra A	ting V/AC	NEMA	Description	Color	Catalog no.	Profits
30	125/250	14-30R	Flush mount dryer power receptacle, matching plug S21	BK	□ 1257	• •
50	125/250	14-50R	Flush mount range power, matching plug S21	BK	□ 1258	• •

Listed to UL498, file no. E15058; CSA certified to C22.2, no. 42; NOM certified



1258

Color ordering information:

B (Brown), BK (Black)





(Black)

Dimensional information: B-70 Specification information: Please visit www.eaton.com/wiringdevices Compliances, specifications and availability are subject to change without notice.







Range & dryer power receptacles

Product description

3-pole, 4-wire grounding 30A, 125/250V/AC 50A, 125/250V/AC





14-30R



1212



Surface power receptacles

1





Rating							7
<u>A</u>	V/AC	NEMA	Description	Color	Catalog no.	<u> </u>	RoHS
30	125/250	14-30R	Surface mount dryer power receptacle, matching plug S21	BK	□ 1225	•	•
50	125/250	14-50R	Surface mount range power receptacle, matching plug S21	BK	□ 1212	•	•
Liste	Listed to UL498, file no. E15058; CSA certified to C22.2, no. 42; NOM certified						

Panel power receptacles

125/250 14-50R

NEMA

Rating





3 3 120			
Description	Color	Catalog no.	
Panel mount range power receptacle, matching plug S21	BK	□ 58	• •

Listed to UL498, file no. E15058; CSA certified to C22.2, no. 42; NOM certified

Compatible wallplates / standard size for flush power receptacles	c 🖫 us		
Description	Color suffix	Catalog no.	
Thermoset 1-Gang wallplate for one power receptacle	A, B, V, W	□ 2068	• •
Thermoset 2-Gang wallplate for one power receptacle	A, B, LA, V, W	□ 2168	• •
Nylon 1-Gang wallplate for one power receptacle	V	□ 5068	• •
Polycarbonate 1-Gang wallplate of one power receptacle	B, BK, V, W	□ PJ724	•
Polycarbonate 2-Gang wallplate for one power receptacle	B, V, W	□ PJ703	•
Stainless steel 1-Gang wallplate for one power receptacle	Stainless Steel	□ 93221*	• •
Stainless steel 2-Gang wallplate for one power receptacle	Stainless Steel	□ 93227*	• •

Listed to UL498, file no. E15058; *CSA certified to C22.2, no. 42

Color ordering information:

For ordering devices, include Catalog no. followed by the Color suffix: A (Almond), B (Brown), BK (Black), LA (Light Almond), V (Ivory), Stainless Steel, W (White)



Dimensional information: B-70 Specification information: Please visit www.eaton.com/wiringdevices Compliances, specifications and availability are subject to change without notice.







Range & dryer power plugs

Product description

3-pole, 3-wire non-grounding 30A,125/250V/AC 50A,125/250V/AC

Universal power plugs





10-30P

10-50P

Design features

- For replacement use in older homes with 3-wire range and dryer connection points
- Universal plugs include blades for both 30A and 50A configurations of the same voltage
- Terminals have pressure plates to protect wires
- Body made of abuse-resistant thermoplastic
- Accepts #10 #8 AWG wire







Rating						* ^
Α	V/AC	NEMA	Description	Color	Catalog no.	E (V)
30	125/250	10-30P/10-50P	Universal range or dryer power plug; matching receptacles 38B, 125	BK	□ S80	• •
50	125/250	10-30P/10-50P	Angled range or dryer power plug; matching receptacles 32B, 112			

Listed to UL498, file no. E15012; NOM certified

Range & dryer power plugs

Product description

3-pole, 4-wire grounding 30A, 125/250V/AC 50A, 125/250V/AC

Design features

- For replacement use in newer homes with 4-wire range and dryer connection points
- Universal plugs include blades for both 30A and 50A configurations of the same voltage
- Terminals have pressure plates to protect wires
- Body made of durable thermoplastic
- Accepts #10 #4 AWG wire

Universal power plugs



Rating						
Α	V/AC	NEMA	Description	Color	Catalog no.	4 (2)
30	125/250	14-30P/14-50P	Universal NEMA range or dryer power plug; matching receptacles 1257, 1225	ВК	□ S21	• •
50	125/250	14-30P/14-50P	Angled NEMA range or dryer power plug; matching receptacles 1212, 1258			

Listed to UL498, file no. E15012; NOM certified

Color ordering information:

BK (Black)



Dimensional information: B-70 Specification information: Please visit www.eaton.com/wiringdevices Compliances, specifications and availability are subject to change without notice.







Heavy duty grade power receptacles

Product description

2-pole, 3-wire grounding 30A, 125V/AC 30A, 250V/AC



TT-30R





5-30R 6-30R



Design features

- Heavy gauge galvanized steel mounting strap for corrosion resistance
- For use with copper or aluminum wire
- Flush receptacles fit one-gang or two-gang enclosures
- Surface receptacles have patented lay-in terminals that accept up to #4 AWG wire
- Surface receptacle backs feature concentric knockouts and an adjustable cord clamp to allow wiring from back or bottom



1263







U1263

Flush power receptacles





Rating						
Α	V/AC	NEMA	Description	Color	Catalog no.	♣ ⊗
30	125	TT-30R	Flush mount power receptacle, matching plug 83	BK	□ 1263	• •
Liste	ed to UL49	B, file no. E	15058; CSA certified to CSA C22.2, no. 42			

Flush power receptacles







Rating								
Α	V/AC	NEMA	Description	Color	Catalog no.			
30	125	5-30R	Flush mount power receptacle, matching plug S41	BK	□1233	• •		
30	250	6-30R	Flush mount power receptacle, matching plug S42	BK	□1234	• •		
Liste	Listed to UL498, file no. E15058; CSA certified to C22.2, no. 42; NOM certified							

Surface power receptacle





Rating						
Α	V/AC	NEMA	Description	Color	Catalog no.	
30	250	6-30R	Surface mount power receptacle, matching plug S42	BK	□1232	• •
List	ed to UL49	98, file no. E	E15058; CSA certified to C22.2, no. 42; NOM certified			

Panel power receptacles





A	ting V/AC	NEMA	Description	Color	Catalog no.	
30	125	TT-30R	Panel mount power receptacle, matching plug 83	BK	□ U1263	• •

Listed to UL498, file no. E15058; CSA certified to C22.2, no. 42; NOM certified

Color ordering information:

BK (Black)



Dimensional information: B-70 Specification information: Please visit www.eaton.com/wiringdevices Compliances, specifications and availability are subject to change without notice.







Heavy duty grade power receptacles

Product description

2-pole, 3-wire grounding 50A, 125V/AC 50A, 250V/AC

Design features





5-50R

6-50R



1253

1252

for corrosion resistance

- For use with copper or aluminum wire
- Flush receptacles fit one-gang or two-gang enclosures

• Heavy gauge galvanized steel mounting strap

• Surface receptacles have patented lay-in terminals that accept up to #4 AWG wire

c 🖫 us

• Surface receptacle backs feature concentric knockouts and an adjustable cord clamp to allow wiring from back or bottom

Flush power receptacles





Rating						
Α	V/AC	NEMA	Description	Color	Catalog no.	
50	125	5-50R	Flush mount power receptacle, matching plug A41	BK	□ 1253	• •
50	250	6-50R	Flush mount power receptacle, matching plug S42	BK	□ 1254	• •

Listed to UL498, file no. E15058; CSA certified to CSA C22.2, no. 42

Surface power receptacles







Rating						
<u>A</u>	V/AC	NEMA	Description	Color	Catalog no.	
50	250	6-50R	Surface mount power receptacle, matching plug S42	BK	□ 1252	• •

Listed to UL498, file no. E15058; CSA certified to C22.2, no. 42; NOM certified

Compatible wallplates / standard size for flush power receptacles

Description	Color suffix	Catalog no.	₩ 🐇
Thermoset 1-Gang wallplate for one power receptacle	A, B, V, W	□ 2068	• •
Thermoset 2-Gang wallplate for one power receptacle	A, B, LA, V, W	□2168	• •
Nylon 1-Gang wallplate for one power receptacle	V	□ 5068	• •
Polycarbonate 1-Gang wallplate of one power receptacle	B, BK, V, W	□ PJ724	•
Polycarbonate 2-Gang wallplate for one power receptacle	B, V, W	□ PJ703	•
Stainless steel 1-Gang wallplate for one power receptacle	Stainless Steel	□ 93221*	• •
Stainless steel 2-Gang wallplate for one power receptacle	Stainless Steel	□ 93227*	• •

Listed to UL498, file no. E15058, *CSA certified to C22.2, no. 42

Color ordering information:

For ordering devices, include Catalog no. followed by the Color suffix: A (Almond), B (Brown), BK (Black), LA (Light Almond), V (Ivory), Stainless Steel, W (White)



Dimensional information: B-70 Specification information: Please visit www.eaton.com/wiringdevices Compliances, specifications and availability are subject to change without notice.







Heavy duty grade power receptacles

Product description

Design features


3-pole, 3-wire non-grounding 20A, 125/250V/AC 60A, 125/250V/AC



10-20R




805



• Accepts #14 - #10 AWG wire







S	(II)	Ø₽°	426	

A	ing V/AC	NEMA	Description	Color	Catalog no.	
20	125/250	10-20R	Flush mount power receptacle, side wire, matching plug 2836	V	□ 805V	• •

Listed to UL498, file no. E15058; CSA certified to CSA C22.2, no. 42; NOM certified



60

Heavy duty grade power receptacles

Product description

3-pole, 4-wire grounding 60A, 125/250V/AC



14-60R

Design features

• For use with copper or aluminum wire

• Accepts #4 - #10 AWG wire

Panel power receptacles





Rating						<u> </u>	
Α	V/AC	NEMA	Description	Color	Catalog no.	\$	6H5)
60	125/250	14-60R	Panel mount power receptacle, matching plug S20	BK	□ 60	•	•

Listed to UL498, file no. E15058; CSA certified to C22.2, no. 42; NOM certified

Compatible wallplates / standard size for panel mount power receptacles



Color ordering information:

For ordering devices, include Catalog no. followed by the Color suffix: BK (Black), V (Ivory), Stainless Steel, W (White)



Dimensional information: B-70 Specification information: Please visit www.eaton.com/wiringdevices Compliances, specifications and availability are subject to change without notice.



