

Dimension:

Circuits	Dim.A	Dim.B	Circuits	Dim.A	Dim.B
10	8.00	25.70	30	28.00	45.70
12	10.00	27.70	34	32.00	49.70
14	12.00	29.70	40	38.00	55.70
16	14.00	31.70	44	42.00	59.70
20	18.00	35.70	50	48.00	65.70
22	20.00	37.70	60	58.00	75.70
24	22.00	39.70			
26	24.00	41.70			

Specifications:

Current Rating:2.0A AC/DC

Voltage Rating:250V AC/DC

Contact Resistance:20m ohm. Max.

Insulation Resistance:1000M ohm. Min.

Withstanding Voltage:500V AC For One Minute

Operating Temperature Range:-40°C To +105°C


Materials:

Insulator:High Temp. Plastic(Nylon 6T UL94V-0)

Insulator Color:Black

Terminal:Copper Alloy

Plating:Gold Plated

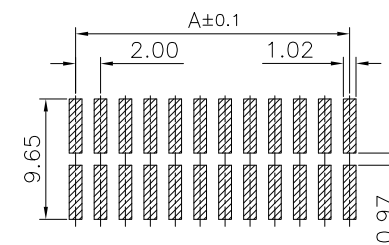

PCB Layout

RoHS Compliant

				DRAWN:	GENERAL TOLERANCE:	CnC Tech Industrial Cable and Connector Technology		SIZE A4
				CHECKED:	.X=±0.20 .XX=±0.15			
				APPROVAL:	UNIT: MM	DESCRIPTION:	2.0MM SHROUNDER HEADER SMD EJECTOR TYPE	
					SCALE:1:1			
	05-FEB-2020				SHEET: 1 / 1	PART NO:	3110-XX-003-11-00-TR	
REV	DATE	FILE	BY		PROJECTION:			