




## MIL-DTL-26482 Connectors



**SOURIAU**  
Connection Technologies

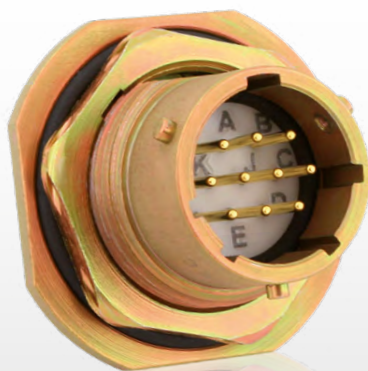



Contents

|                                         |    |                                       |    |
|-----------------------------------------|----|---------------------------------------|----|
| <b>Overview</b>                         |    | <b>Contacts &amp; Accessories</b>     |    |
| Typical applications .....              | 06 | Crimp contacts .....                  | 56 |
| Features & Benefits .....               | 07 | Caps / Ordering information .....     | 57 |
| Receptacle range overview .....         | 08 | Plastic protective caps.....          | 59 |
| Plug range overview .....               | 10 | Filler plugs .....                    | 59 |
| Ordering information.....               | 12 | Dummy receptacle .....                | 60 |
| Layouts .....                           | 14 | Gasket .....                          | 60 |
| Suffix description .....                | 16 |                                       |    |
| Cross reference list .....              | 18 |                                       |    |
| General technical characteristics ..... | 20 |                                       |    |
| <b>Connector</b>                        |    | <b>Technical Information</b>          |    |
| Environmental connectors.....           | 24 | Tooling.....                          | 64 |
| Hermetic connectors .....               | 47 | Stripping instruction .....           | 66 |
| PC Tail connectors .....                | 49 | Crimping instruction .....            | 66 |
| Panel cut out .....                     | 50 | Crimp contact insertion .....         | 67 |
| Push-pull locking plug .....            | 51 | Crimp contact extraction.....         | 67 |
| 8F51 filter connectors.....             | 53 | Drilling pattern .....                | 68 |
|                                         |    | Discrimination / Keying methods ..... | 74 |

# 851 SERIES



# Overview

|                                           |    |
|-------------------------------------------|----|
| ■ Typical applications .....              | 06 |
| ■ Features & Benefits .....               | 07 |
| ■ Receptacle range overview .....         | 08 |
| ■ Plug range overview .....               | 10 |
| ■ Ordering information .....              | 12 |
| ■ Layouts .....                           | 14 |
| ■ Suffix description .....                | 16 |
| ■ Cross reference list .....              | 18 |
| ■ General technical characteristics ..... | 20 |

## Typical applications



Off-Road - Pavers



Robotics - Machine Tools



Telecom Military



Water Measurement



Aircraft



Oil & Gas Industries

## Features & Benefits

### QUALIFIED

#### MIL-DTL-26482H

Fully in accordance with the MIL spec requirements with solder type.

### ROBUSTNESS

#### Machined shell

Equipped with a coupling ring machined from high strength aluminum. The plug provides a minimum of 500 mating unmating cycles. The receptacle is equipped with rugged stainless steel bayonet pins.

### OUTDOOR USING

#### Salt Spray 500 Hours

Designed to withstand climate ingress and exposure to salt spray or corrosive atmospheres while still maintaining mechanical, electrical functionality and RoHS compliance.

### QUICK MATING

#### 1/3 Bayonet Coupling

With only 1/3 twist of the bayonet coupling system, connectors are mated with audible "click" and tactile feel to confirm proper mating. These mating features eliminate uncertainty connection and reduce time and labor during installation.

### FLEXIBILITY

#### Customized solutions

Whether you need a different material (Stainless steel, Bronze), a specific backshell or an hermeticity, Souriau will offer the best solution for your application.

## Receptacle range

**Square flange receptacle type 00**

Front view



**Square flange receptacle with straight sealing gland backshell**

00J



Page 26

**Square flange receptacle with straight adaptor**

00A/RA



Page 24

**Square flange receptacle with straight cable clamp without grommet**

00AC



Page 24

**Square flange receptacle with straight sealing gland and cable clamp**

00JC



Page 26

**Square flange receptacle with removable straight backshell for heatshrink sleeving**

00M/RM



Page 27

**Cable in line receptacle type 01**

Front view



**Cable in line receptacle with straight sealing gland backshell**

01J



Page 31

**Cable in line receptacle with straight adaptor**

01A/RA



Page 29

**Cable in line receptacle with straight sealing gland and cable clamp**

01JC



Page 31

**Cable in line receptacle with straight cable clamp without grommet**

01AC



Page 29

**Cable in line receptacle with removable straight backshell for heatshrink sleeving**

01M/RM



Page 32

**Square flange receptacle type 02**

Front view



**Square flange receptacle not accepting backshell**

02E/02R/02H



Pages 34, 47 & 49

**Jam nut receptacle type 07**

Front view



**Jam nut receptacle with removable straight backshell for screen termination and heatshrink sleeving**

07G/RG



Page 36

**Jam nut receptacle not accepting backshell**

07A/07H



Pages 34, 47 & 49

**Jam nut receptacle with straight backshell for potting**

07P/RP



Page 36

## overview

Square flange receptacle with backnut

00E/R



Page 25

Square flange receptacle with straight cable clamp

00EC/RC



Page 24

Square flange receptacle with removable straight backshell for screen termination and heatshrink sleeving

00G/RG



Page 25

Square flange receptacle with straight backshell for potting

00P/RP



Page 27

Square flange receptacle with straight backshell for heatshrink sleeving

00T/RT



Page 28

Square flange receptacle with removable backshell and heatshrink sleeving

00T/RT..38/42



Page 28

Cable in line receptacle with backnut

01E/R



Page 30

Cable in line receptacle with straight cable clamp

01EC/RC



Page 29

Cable in line receptacle with removable straight backshell for screen termination and heatshrink sleeving

01G/RG



Page 30

Cable in line receptacle with straight backshell for potting

01P/RP



Page 32

Cable in line receptacle with straight backshell for heatshrink sleeving

01T/RT



Page 33

Cable in line receptacle with removable backshell and heatshrink sleeving

01T/RT..38/42



Page 33

Jam nut receptacle with straight cable clamp without grommet

07AC



Page 35

Jam nut receptacle with backnut

07E/R



Page 35

Jam nut receptacle with straight cable clamp

07EC/RC



Page 35

Jam nut receptacle with straight backshell for heatshrink sleeving

07T/RT



Page 37

Jam nut receptacle with removable backshell and heatshrink sleeving

07T/RT..38/42



Page 37

Solder fixing receptacle for hermetic version type IH

Front view



Solder fixing receptacle not accepting backshell

IH



Page 48

## Plug range

**Plug type 06**

Front view



**Plug with straight adaptor**

06A/RA



Page 38

**Plug with straight cable clamp without grommet**

06AC



Page 38

**Plug with straight sealing gland and cable clamp**


06JC



Page 40

**Plug with Long Metallic Adaptor and Plastic Cable Gland**

06L\*



Page 40

**Plug with removable straight backshell for heatshrink sleeving**

06M/RM



Page 41

**Plug with Short Metallic Adaptor and Plastic Cable Gland**

06S\*



Page 43

**Plug with straight backshell for heatshrink sleeving**

06T/RT



Page 43

**Plug with straight for electrical pitch access**

06Z/RZ



Page 44

**Shielded plug with straight adaptor**

36A/RA



Page 45

**Shielded plug with removable straight backshell for screen termination and heatshrink sleeving**

36G/RG



Page 46

**Shielded plug with removable straight backshell for screen termination and heatshrink sleeving**

36T/RT..38/42



Page 46

\* Available only from size 8 to 16

overview

Plug with  
backnut  
06E/R



Page 39

Plug with straight  
cable clamp  
06EC/RC



Page 38

Plug with straight sealing gland  
backshell  
06J



Page 39

Plug with short metallic adaptor  
and plastic cable gland with  
spiral protector  
06NS\*



Page 41

Plug with long metallic adaptor  
and plastic cable gland with  
spiral protector  
06NL\*



Page 42

Plug with straight backshell  
for potting  
06P/RP



Page 42

Plug with elbow cable  
clamp backshell  
08EC/RC



Page 44

Plug with elbow backshell  
for potting  
08P/RP



Page 45

Plug overmolded



Consult us



## Environmental connectors / Ordering information

|                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                            |     |    |   |   |    |   |   |    |    |
|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-----|----|---|---|----|---|---|----|----|
| Basic Series                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                               | 851 | 00 | E | 8 | 3A | P | - | 50 | -- |
| <b>Shell type:</b><br><b>00</b> square flange receptacle accepting backshells<br><b>01</b> in line receptacle<br><b>02</b> square flange receptacle not accepting backshells<br><b>07</b> jam nut receptacle accepting backshells<br><b>06</b> plug for use with straight backshells<br><b>08</b> plug for use with 90° backshells<br><b>36</b> shielded plug for use with straight backshells                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                             |     |    |   |   |    |   |   |    |    |
| <b>Backshell type:</b><br><b>Solder Crimp</b><br><b>A RA</b> straight adaptor<br><b>EC RC</b> straight cable clamp for solder contacts<br><b>EC RC</b> 90° cable clamp<br><b>AC</b> straight cable clamp without grommet<br><b>E R</b> backnut<br><b>G RG</b> straight removable backshell for screen termination and heatshrink sleeving<br><b>J</b> straight backshell with sealing gland<br><b>JC</b> straight backshell with sealing gland and cable clamp<br><b>L</b> long metallic adaptor and plastic cable gland - Shell size 08 to 16<br><b>M RM</b> square flange receptacle not accepting backshells<br><b>NL</b> long metallic adaptor and plastic cable gland with spiral protector - Shell size 08 to 16<br><b>NS</b> short metallic adaptor and plastic cable gland with spiral protector - Shell size 08 to 16<br><b>P RP</b> straight backshell for potting<br><b>P RP</b> 90° backshell for potting<br><b>S</b> short metallic adaptor and plastic cable gland - Shell size 08 to 16<br><b>T RT</b> straight backshell for heatshrink sleeving<br><b>U RU</b> short backshell for screen termination and heatshrink sleeving<br><b>Z RZ</b> straight adaptor for electrical pitch access |     |    |   |   |    |   |   |    |    |
| <b>Shell size:</b><br>8 - 10 - 12 - 14 - 16 - 18 - 20 - 22 - 24                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                            |     |    |   |   |    |   |   |    |    |
| <b>Contacts layout:</b><br>see pages 14 & 15                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                               |     |    |   |   |    |   |   |    |    |
| <b>Contact type:</b><br><b>P</b> male<br><b>S</b> female                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                   |     |    |   |   |    |   |   |    |    |
| <b>Orientation:</b><br>Normal (not included in part number). For others note: W, X, Y, Z - see table page 74                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                               |     |    |   |   |    |   |   |    |    |
| <b>Obligatory suffix</b><br><b>B</b> crimp version without clip for layouts 8-2, 8-3, 8-4, & 12-14, gold plated all over the contact<br><b>50</b> Crimp type contact: Gold plated, all sizes<br>Solder type contact:<br>- Size 20, gold plated active area, tin plated termination area, except for layouts 8-2, 8-3, 8-4, & 12-14 gold plated all over the contact<br>- Size 16 and mix layouts (size 20 & 16), gold plated all over the contact.<br><b>51</b> solder type contact (only size 20, gold plated all over the contact)<br><b>54</b> Black Zinc Nickel plating (contacts as per suffix 50)<br><b>57</b> Black Zinc Nickel plating (contacts as per suffix 51)                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                 |     |    |   |   |    |   |   |    |    |
| <b>Specification</b> (without specification: Olive Green Cadmium plating)<br><b>29</b> black anodized plating (solder type contacts)<br><b>031</b> black anodized plating (crimp type contacts)<br><b>44</b> Nickel plating<br><b>66</b> crimp version: delivered without backshell and conical ring<br>solder version: delivered without backshell, conical ring and grommet                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                              |     |    |   |   |    |   |   |    |    |

Cadmium  
plating  
without  
specification



## Hermetic connectors / Ordering information

|                                                                                                     |     |     |   |    |   |   |    |
|-----------------------------------------------------------------------------------------------------|-----|-----|---|----|---|---|----|
| Basic Series                                                                                        | 851 | 02H | 8 | 3A | P | - | 50 |
| <b>Shell type:</b>                                                                                  |     |     |   |    |   |   |    |
| 02H square flange receptacle not accepting backshells                                               |     |     |   |    |   |   |    |
| 07H jam nut receptacle not accepting backshells                                                     |     |     |   |    |   |   |    |
| IH solder fixing receptacle not accepting backshells                                                |     |     |   |    |   |   |    |
| <b>Shell size:</b>                                                                                  |     |     |   |    |   |   |    |
| 8 - 10 - 12 - 14 - 16 - 18 - 20 - 22 - 24                                                           |     |     |   |    |   |   |    |
| <b>Contacts layout:</b>                                                                             |     |     |   |    |   |   |    |
| see pages 14 & 15                                                                                   |     |     |   |    |   |   |    |
| <b>Contact type:</b>                                                                                |     |     |   |    |   |   |    |
| P male                                                                                              |     |     |   |    |   |   |    |
| <b>Orientation:</b>                                                                                 |     |     |   |    |   |   |    |
| Normal (not included in part number). For others note: W, X, Y, Z - see table page 74               |     |     |   |    |   |   |    |
| <b>Obligatory suffix</b>                                                                            |     |     |   |    |   |   |    |
| 50 Gold plating for contacts #20 & #16                                                              |     |     |   |    |   |   |    |
| <b>Specification</b> (without specification: 02H and 07H yellow Cadmium plating, IH Nickel plating) |     |     |   |    |   |   |    |
| 44 02H and 07H Nickel plating                                                                       |     |     |   |    |   |   |    |

## PC Tail connectors / Ordering information

|                                                                                                                   |     |     |   |    |   |   |      |
|-------------------------------------------------------------------------------------------------------------------|-----|-----|---|----|---|---|------|
| Basic Series                                                                                                      | 851 | 02E | 8 | 3A | P | - | 5016 |
| <b>Shell type:</b>                                                                                                |     |     |   |    |   |   |      |
| 02E square flange receptacle not accepting backshells                                                             |     |     |   |    |   |   |      |
| 07A jam nut receptacle not accepting backshells                                                                   |     |     |   |    |   |   |      |
| <b>Shell size:</b>                                                                                                |     |     |   |    |   |   |      |
| 8 - 10 - 12 - 14 - 16 - 18 - 20 - 22 - 24                                                                         |     |     |   |    |   |   |      |
| <b>Contacts layout:</b>                                                                                           |     |     |   |    |   |   |      |
| see pages 14 & 15                                                                                                 |     |     |   |    |   |   |      |
| <b>Contact type:</b>                                                                                              |     |     |   |    |   |   |      |
| P male S female                                                                                                   |     |     |   |    |   |   |      |
| <b>Orientation:</b>                                                                                               |     |     |   |    |   |   |      |
| Normal (not included in part number). For others note: W, X, Y, Z - see table page 74                             |     |     |   |    |   |   |      |
| <b>Specification</b>                                                                                              |     |     |   |    |   |   |      |
| 5016 olive drab Cadmium plating, shouldered PC tail type contact*                                                 |     |     |   |    |   |   |      |
| 5116 olive drab Cadmium plating, shouldered PC tail type contact (only size 20, gold plated all over the contact) |     |     |   |    |   |   |      |
| 5416 Black Zinc Nickel plating*                                                                                   |     |     |   |    |   |   |      |
| 5716 Black Zinc Nickel plating (only size 20, gold plated all over the contact)                                   |     |     |   |    |   |   |      |
| 5045 Nickel plating, shouldered PC tail type contact*                                                             |     |     |   |    |   |   |      |
| 5145 Nickel plating, shouldered PC tail type contact (only size 20, gold plated all over the contact)             |     |     |   |    |   |   |      |
| 50F9 black anodized plating, shouldered PC tail type contact*                                                     |     |     |   |    |   |   |      |
| 51F9 black anodized plating, shouldered PC tail type contact (only size 20, gold plated all over the contact)     |     |     |   |    |   |   |      |
| 50A7 olive drab Cadmium plating, not shouldered PC tail type contact (gold plated all over the contact)           |     |     |   |    |   |   |      |
| 50G9 Nickel plating, not shouldered PC tail type contact (gold plated all over the contact)                       |     |     |   |    |   |   |      |

\*- Size 20, gold plated active area, tin plated termination area, except for layouts 8-2, 8-3, 8-4, & 12-14 gold plated all over the contact  
 - Size 16, gold plated all over the contact, same for mix layouts (size 20 & 16)
















## Layouts

| Shell size | Contact #16 (Ø 1.6 mm)                                                                                                                          | Contact #20 (Ø 1.0 mm)                                                                                                                                                                                                        | Mixed power                                                                                                                    |
|------------|-------------------------------------------------------------------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|--------------------------------------------------------------------------------------------------------------------------------|
| 8          |                                                                                                                                                 | <p>8-2<br/>2 contacts<br/>2xØ1.0 (#20)</p> <p>8-3<br/>3 contacts<br/>3xØ1.0 (#20)</p> <p>8-3A/8-98<br/>3 contacts<br/>3xØ1.0 (#20)</p> <p>8-33<br/>3 contacts<br/>3xØ1.0 (#20)</p> <p>8-4<br/>4 contacts<br/>4xØ1.0 (#20)</p> |                                                                                                                                |
| 10         |                                                                                                                                                 | <p>10-6<br/>6 contacts<br/>6xØ1.0 (#20)</p> <p>10-7<br/>7 contacts<br/>7xØ1.0 (#20)</p> <p>10-98<br/>6 contacts<br/>6xØ1.0 (#20)</p>                                                                                          |                                                                                                                                |
| 12         | <p>12-2<br/>2 contacts<br/>2xØ1.6 (#16)</p> <p>12-3<br/>3 contacts<br/>3xØ1.6 (#16)</p> <p>12-4<br/>3 contacts<br/>+ground<br/>4xØ1.6 (#16)</p> | <p>12-8<br/>8 contacts<br/>8xØ1.0 (#20)</p> <p>12-10<br/>10 contacts<br/>10xØ1.0 (#20)</p> <p>12-14<br/>14 contacts<br/>14xØ1.0 (#20)</p>                                                                                     |                                                                                                                                |
| 14         | <p>14-5<br/>5 contacts<br/>5xØ1.6 (#16)</p> <p>14-7<br/>6 contacts<br/>+ground<br/>7xØ1.6 (#16)</p>                                             | <p>14-18<br/>18 contacts<br/>18xØ1.0 (#20)</p> <p>14-19<br/>19 contacts<br/>19xØ1.0 (#20)</p>                                                                                                                                 | <p>14-12<br/>12 contacts<br/>8xØ1.0 (#20)<br/>4xØ1.6 (#16)</p> <p>14-15<br/>15 contacts<br/>14xØ1.0 (#20)<br/>1xØ1.6 (#16)</p> |
| 16         | <p>16-8<br/>8 contacts<br/>8xØ1.6 (#16)</p>                                                                                                     | <p>16-26<br/>26 contacts<br/>26xØ1.0 (#20)</p>                                                                                                                                                                                | <p>16-23<br/>23 contacts<br/>22xØ1.0 (#20)<br/>1xØ1.6 (#16)</p>                                                                |

- Solder contact layouts (QPL)
- Solder contact layouts
- + Solder contact layouts without grommet
- ▲ Crimp contact layouts
- Hermetic version contact layouts
- ◆ PC tail contact layouts

Other layouts, please consult us

## Layouts

| Shell size | Contact #16 (Ø 1.6 mm)                                                                                                             | Contact #20 (Ø 1.0 mm)                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                          | Mixed power                                                                                                                                         |
|------------|------------------------------------------------------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------|
| 18         | <p>18-11<br/>11 contacts<br/>11xØ1.6 (#16)</p>    | <p>18-32<br/>32 contacts<br/>32xØ1.0 (#20)</p>                                                                                                                                                                                                                                                                                                                                                                                                                | <p>18-30<br/>30 contacts<br/>29xØ1.0 (#20)<br/>1xØ1.6 (#16)</p>  |
| 20         | <p>20-16<br/>16 contacts<br/>16xØ1.6 (#16)</p>    | <p>20-24<br/>24 contacts<br/>24xØ1.0 (#20)</p>  <p>20-25<br/>25 contacts<br/>25xØ1.0 (#20)</p>  <p>20-27<br/>27 contacts<br/>27xØ1.0 (#20)</p>  <p>20-41<br/>41 contacts<br/>41xØ1.0 (#20)</p>        | <p>20-39<br/>39 contacts<br/>37xØ1.0 (#20)<br/>2xØ1.6 (#16)</p>  |
| 22         | <p>22-21<br/>21 contacts<br/>21xØ1.6 (#16)</p>  | <p>22-32<br/>32 contacts<br/>32xØ1.0 (#20)</p>  <p>22-34<br/>34 contacts<br/>34xØ1.0 (#20)</p>  <p>22-36<br/>36 contacts<br/>36xØ1.0 (#20)</p>  <p>22-55<br/>55 contacts<br/>55xØ1.0 (#20)</p>  |                                                                                                                                                     |
| 24         |                                                                                                                                    | <p>24-61<br/>61 contacts<br/>61xØ1.0 (#20)</p>                                                                                                                                                                                                                                                                                                                                                                                                              |                                                                                                                                                     |

## Suffix description

| Solder or crimp contacts |                                                                                                                                                                                                         |                   |                 |                                                                        |                                                                          |                                  |            |
|--------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-------------------|-----------------|------------------------------------------------------------------------|--------------------------------------------------------------------------|----------------------------------|------------|
| Suffix                   | Description                                                                                                                                                                                             | Shell plating     | Contact type    | Active area contact plating                                            | Termination area contact plating                                         | RoHS                             | Salt spray |
| <b>50</b>                | Cadmium version                                                                                                                                                                                         | Cadmium           | Solder or Crimp | Crimp: Gold<br>Solder:<br>- # 20: Gold<br>- # 16 & Mixed layouts: Gold | Crimp: Gold<br>Solder:<br>- # 20: Tin (1)<br>- # 16 & Mixed layout: Gold | No                               | 48 h       |
| <b>51</b>                | Cadmium version with full gold contacts (only for # 20 contacts)                                                                                                                                        | Cadmium           | Solder          | # 20 only: Gold                                                        | # 20 only: Gold                                                          | No                               | 48 h       |
| <b>54</b>                | Black Zinc Nickel version                                                                                                                                                                               | Black Zinc Nickel | Solder or Crimp | Crimp: Gold<br>Solder:<br>- # 20: Gold<br>- # 16 & Mixed layouts: Gold | Crimp: Gold<br>Solder:<br>- # 20: Tin (1)<br>- # 16 & Mixed layout: Gold | Yes except for contacts with tin | 500 h      |
| <b>57</b>                | Black Zinc Nickel version with full gold contacts (only for # 20 contacts)                                                                                                                              | Black Zinc Nickel | Solder or Crimp | Crimp: Gold<br>Solder: Gold                                            | Crimp: Gold<br>Solder: Gold                                              | Yes                              | 500 h      |
| <b>5044</b>              | Nickel version                                                                                                                                                                                          | Nickel            | Solder or Crimp | Crimp: Gold<br>Solder:<br>- # 20: Gold<br>- # 16 & Mixed layouts: Gold | Crimp: Gold<br>Solder:<br>- # 20: Tin (1)<br>- # 16 & Mixed layout: Gold | Yes except for contacts with tin | 48 h       |
| <b>5029</b>              | Black Anodized version for solder contacts (Non conductive shell)                                                                                                                                       | Black Anodized    | Solder or Crimp | - Size 20: Gold<br>- Size 16 & Mixed layouts: Gold                     | - # 20: Tin (1)<br>- # 16 & Mixed layout: Gold                           | Yes except for contacts with tin | 48 h       |
| <b>5031</b>              | Black Anodized version for crimp contacts (Non conductive shell)                                                                                                                                        | Black Anodized    | Solder          | # 20 only: Gold                                                        | # 20 only: Gold                                                          | Yes                              | 48 h       |
| <b>5066</b>              | Cadmium without accessories<br>Crimp: Without Backshell and conical ring<br>Solder versions: Without Backshell, Conical ring and grommet                                                                | Cadmium           | Solder or Crimp | Crimp: Gold<br>Solder:<br>- # 20: Gold<br>- # 16 & Mixed layouts: Gold | Crimp: Gold<br>Solder:<br>- # 20: Tin (1)<br>- # 16 & Mixed layout: Gold | No                               | 48 h       |
| <b>5466</b>              | Black Zinc Nickel without accessories<br>Crimp: Without Backshell and conical ring<br>Solder versions: Without Backshell, Conical ring and grommet                                                      | Black Zinc Nickel | Solder or Crimp | Crimp: Gold<br>Solder:<br>- # 20: Gold<br>- # 16 & Mixed layouts: Gold | Crimp: Gold<br>Solder:<br>- # 20: Tin (1)<br>- # 16 & Mixed layout: Gold | Yes except for contacts with tin | 500 h      |
| <b>5766</b>              | Black Zinc Nickel with full gold contacts (only for # 20 contacts) and without accessories<br>Crimp: Without Backshell and conical ring<br>Solder versions: Without Backshell, Conical ring and grommet | Black Zinc Nickel | Solder or Crimp | # 20 only: Gold                                                        | # 20 only: Gold                                                          | Yes                              | 500 h      |


(1): Exception: Gold on layouts 8-2, 8-3, 8-4 &amp; 12-4

## Suffix description


### PC tail contacts

| Suffix      | Description                                                                                    | Shell plating     | Contact type           | Active area contact plating                  | Termination area contact plating               | RoHS                             | Salt spray |
|-------------|------------------------------------------------------------------------------------------------|-------------------|------------------------|----------------------------------------------|------------------------------------------------|----------------------------------|------------|
| <b>5016</b> | Cadmium version                                                                                | Cadmium           | Shouldered PC tail     | - # 20: Gold<br>- # 16 & Mixed layouts: Gold | - # 20: Tin (1)<br>- # 16 & Mixed layout: Gold | No                               | 48 h       |
| <b>5116</b> | Cadmium version with full gold contacts (only for # 20 contacts)                               | Cadmium           | Shouldered PC tail     | Gold                                         | Gold                                           | No                               | 48 h       |
| <b>5416</b> | Black Zinc Nickel version                                                                      | Black Zinc Nickel | Shouldered PC tail     | - # 20: Gold<br>- # 16 & Mixed layouts: Gold | - # 20: Tin (1)<br>- # 16 & Mixed layout: Gold | Yes except for contacts with tin | 500 h      |
| <b>5716</b> | Black Zinc Nickel version with full gold contacts (only for # 20 contacts)                     | Black Zinc Nickel | Shouldered PC tail     | Gold                                         | Gold                                           | Yes                              | 500 h      |
| <b>5045</b> | Nickel version                                                                                 | Nickel            | Shouldered PC tail     | - # 20: Gold<br>- # 16 & Mixed layouts: Gold | - # 20: Tin (1)<br>- # 16 & Mixed layout: Gold | Yes except for contacts with tin | 48 h       |
| <b>5145</b> | Nickel version with full gold contacts (only for # 20 contacts)                                | Nickel            | Shouldered PC tail     | Gold                                         | Gold                                           | Yes                              | 48 h       |
| <b>50F9</b> | Black Anodized version (Non conductive shell)                                                  | Black Anodized    | Shouldered PC tail     | - # 20: Gold<br>- # 16 & Mixed layouts: Gold | - # 20: Tin (1)<br>- # 16 & Mixed layout: Gold | Yes except for contacts with tin | 48 h       |
| <b>51F9</b> | Black Anodized version with full gold contacts (only for # 20 contacts) (Non conductive shell) | Black Anodized    | Shouldered PC tail     | Gold                                         | Gold                                           | Yes                              | 48 h       |
| <b>50A7</b> | Cadmium version Not shouldered PC tail                                                         | Cadmium           | Not shouldered PC tail | - # 20: Gold<br>- # 16 & Mixed layouts: Gold | - # 20: Tin (1)<br>- # 16 & Mixed layout: Gold | No                               | 48 h       |
| <b>50G9</b> | Nickel version Not shouldered PC tail                                                          | Nickel            | Not shouldered PC tail | - # 20: Gold<br>- # 16 & Mixed layouts: Gold | - # 20: Tin (1)<br>- # 16 & Mixed layout: Gold | Yes                              | 48 h       |

Shouldered PC tail contacts

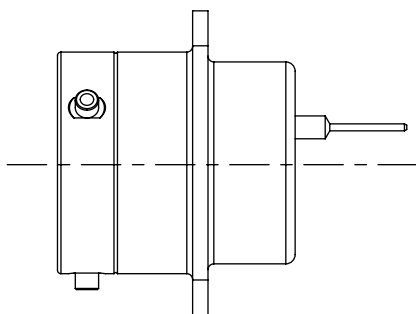

Not shouldered PC tail contacts

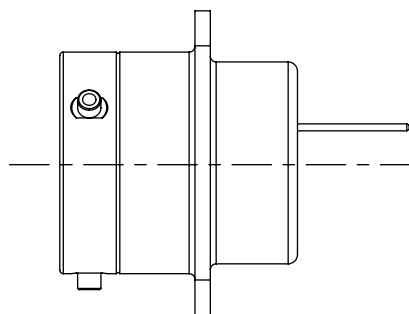

(1): Exception: Gold on layouts 8-2, 8-3, 8-4 &amp; 12-4

## Cross reference list

## 851 version with crimp contacts (Olive Green Cadmium plating)

## Connector with backshells

| SOURIAU                 | NCF 93422<br>(modèle HE 301B) | MIL-DTL-26482G série 1 | VG 95328           |
|-------------------------|-------------------------------|------------------------|--------------------|
| 851 00 R .. .. . 50 ..  | HE 301 B 00 R .. .. . 1A      | * MS 3120 E .. .. .    | VG 95328 A .. .. . |
| 851 00 RC .. .. . 50 .. | HE 301 B 00 RC .. .. . 1A     | * MS 3120 F .. .. .    | VG 95328 B .. .. . |
| 851 00 RP .. .. . 50 .. | HE 301 B 00 RP .. .. . 1A     | * MS 3120 P .. .. .    |                    |
| 851 00 RG .. .. . 50 .. | -                             | -                      | VG 95328 R .. .. . |
| 851 00 RA .. .. . 50 .. | HE 301 B 00 RA .. .. . 1A     | -                      | -                  |
| 851 01 R .. .. . 50 ..  | HE 301 B 01 R .. .. . 1A      | * MS 3121 E .. .. .    | -                  |
| 851 01 RC .. .. . 50 .. | HE 301 B 01 RC .. .. . 1A     | * MS 3121 F .. .. .    | -                  |
| 851 01 RP .. .. . 50 .. | HE 301 B 01 RP .. .. . 1A     | * MS 3121 P .. .. .    | -                  |
| 851 01 RA .. .. . 50 .. | HE 301 B 01 RA .. .. . 1A     | -                      | -                  |
| 851 02 R .. .. . 50 ..  | HE 301 B 02 R .. .. . 1A      | * MS 3122 E .. .. .    | VG 95328 C .. .. . |
| 851 06 R .. .. . 50 ..  | HE 301 B 06 R .. .. . 1A      | * MS 3126 E .. .. .    | -                  |
| 851 06 RC .. .. . 50 .. | HE 301 B 06 RC .. .. . 1A     | * MS 3126 F .. .. .    | VG 95328 K .. .. . |
| 851 06 RP .. .. . 50 .. | HE 301 B 06 RP .. .. . 1A     | * MS 3126 P .. .. .    | -                  |
| 851 06 RT .. .. . 50 .. | -                             | -                      | VG 95328 J .. .. . |
| 851 06 RA .. .. . 50 .. | HE 301 B 06 RA .. .. . 1A     | -                      | -                  |
| 851 36 RG .. .. . 50 .. | -                             | -                      | VG 95328 M .. .. . |
| 851 36 RA .. .. . 50 .. | -                             | -                      | -                  |
| 851 07 R .. .. . 50 ..  | HE 301 B 07 R .. .. . 1A      | * MS 3124 E .. .. .    | VG 95328 D .. .. . |
| 851 07 RC .. .. . 50 .. | HE 301 B 07 RC .. .. . 1A     | * MS 3124 F .. .. .    | VG 95328 E .. .. . |
| 851 07 RP .. .. . 50 .. | HE 301 B 07 RP .. .. . 1A     | * MS 3124 P .. .. .    | -                  |
| 851 07 RT .. .. . 50 .. | -                             | -                      | VG 95328 S .. .. . |
| 851 07 RG .. .. . 50 .. | -                             | -                      | VG 95328 T .. .. . |
| 851 08 RC .. .. . 50 .. | HE 301 B 08 RC .. .. . 1A     | -                      | -                  |

\* Not QPL

## 851 version with crimp contacts (other plating)

| Plating        | SOURIAU          |                   | NCF 93422<br>(modèle HE 301B) |
|----------------|------------------|-------------------|-------------------------------|
|                | Solder version   | Crimp version     |                               |
| Black Anodised | 851 .. .. . 5029 | 851 .. .. . 50031 | HE 301B .. .. . 4A            |
| Nickel         | 851 .. .. . 5044 | 851 .. .. . 5044  | HE 301B .. .. . 5A            |

## Cross reference list

## 851 version with solder contacts (Olive Green Cadmium plating)

## Connector with backshells

| SOURIAU                 | NCF 93422<br>(modèle HE 301B) | MIL-DTL-26482G série 1 | VG 95328           |
|-------------------------|-------------------------------|------------------------|--------------------|
| 851 00 E .. .. . 50 ..  | HE 301 B 00 E .. .. . 1A      | MS 3110 E .. .. .      | -                  |
| 851 00 EC .. .. . 50 .. | HE 301 B 00 EC .. .. . 1A     | MS 3110 F .. .. .      | -                  |
| 851 00 AC .. .. . 50 .. | HE 301 B 00 AC .. .. . 1A     | -                      | -                  |
| 851 00 P .. .. . 50 ..  | HE 301 B 00 P .. .. . 1A      | MS 3110 P .. .. .      | -                  |
| 851 00 A .. .. . 50 ..  | HE 301 B 00 A .. .. . 1A      | -                      | -                  |
| 851 00 J .. .. . 50 ..  | HE 301 B 00 J .. .. . 1A      | -                      | -                  |
| 851 00 JC .. .. . 50 .. | -                             | MS 3110 J .. .. .      | -                  |
| 851 01 E .. .. . 50 ..  | HE 301 B 01 E .. .. . 1A      | MS 3111 E .. .. .      | -                  |
| 851 01 EC .. .. . 50 .. | HE 301 B 01 EC .. .. . 1A     | MS 3111 F .. .. .      | -                  |
| 851 01 AC .. .. . 50 .. | HE 301 B 01 AC .. .. . 1A     | -                      | -                  |
| 851 01 P .. .. . 50 ..  | HE 301 B 01 P .. .. . 1A      | MS 3111 P .. .. .      | -                  |
| 851 01 A .. .. . 50 ..  | HE 301 B 01 A .. .. . 1A      | -                      | -                  |
| 851 01 J .. .. . 50 ..  | HE 301 B 01 J .. .. . 1A      | -                      | -                  |
| 851 01 JC .. .. . 50 .. | -                             | MS 3111 J .. .. .      | -                  |
| 851 02 E .. .. . 50 ..  | HE 301 B 02 E .. .. . 1A      | MS 3112 E .. .. .      | VG 95328 H .. .. . |
| 851 06 E .. .. . 50 ..  | HE 301 B 06 E .. .. . 1A      | MS 3116 E .. .. .      | -                  |
| 851 06 EC .. .. . 50 .. | HE 301 B 06 EC .. .. . 1A     | MS 3116 F .. .. .      | -                  |
| 851 06 AC .. .. . 50 .. | HE 301 B 06 AC .. .. . 1A     | -                      | -                  |
| 851 06 P .. .. . 50 ..  | HE 301 B 06 P .. .. . 1A      | MS 3116 P .. .. .      | -                  |
| 851 06 A .. .. . 50 ..  | HE 301 B 06 A .. .. . 1A      | -                      | -                  |
| 851 06 J .. .. . 50 ..  | HE 301 B 06 J .. .. . 1A      | -                      | -                  |
| 851 06 JC .. .. . 50 .. | -                             | MS 3116 J .. .. .      | -                  |
| 851 08 EC .. .. . 50 .. | HE 301 B 08 EC .. .. . 1A     | -                      | -                  |
| 851 08 P .. .. . 50 ..  | HE 301 B 08 P .. .. . 1A      | -                      | -                  |
| 851 07 E .. .. . 50 ..  | HE 301 B 07 E .. .. . 1A      | MS 3114 E .. .. .      | -                  |
| 851 07 EC .. .. . 50 .. | HE 301 B 07 EC .. .. . 1A     | MS 3114 F .. .. .      | -                  |
| 851 07 AC .. .. . 50 .. | HE 301 B 07 AC .. .. . 1A     | -                      | -                  |
| 851 07 P .. .. . 50 ..  | HE 301 B 07 P .. .. . 1A      | MS 3114 P .. .. .      | -                  |

## 851 Hermetic version

| SOURIAU            | NFC 93422<br>(modèle HE 301B) | MIL-DTL-26482G série 1 | VG 95328          |
|--------------------|-------------------------------|------------------------|-------------------|
| 851 02 H .. . P.50 | HE 301 B 02 H .. . P.3A       |                        |                   |
| 851 07 H .. . P.50 | HE 301 B 07 H .. . P.3A       | * MS 3114 H .. . P.    | VG 95328 F .. . . |
| 851 I H .. . P.50  | HE 301 B 1 H .. . P.3A        | * MS 3113 H .. . P.    | VG 95328 G .. . . |

\* Not QPL

## Environmental versions



## Technical features

### Materials

- **Shell:**  
Environmental version: aluminium alloy  
- Plating:  
- Olive Green Cadmium  
- Black Anodised  
- Black Zinc Nickel  
- Nickel
- **Backshells:** Aluminum alloy
- **Cable glands:** Thermoplastic
- **Coupling ring:** Aluminum alloy
- **Spring washer:** Spring stainless steel
- **Insert:** Elastomeric soft neoprene
- **RoHS compliant & conforms to the Chinese standard SJ/T1166-2006 (Chinese RoHS equivalent)**



### Electrical

- **Dielectric withstanding voltage:**  
- At standard pressure: mated and unmated connectors  
- 1500 Vrms between size 20 contacts (service 1)  
- 2300 Vrms between size 16 contacts (service 2)  
- 1500 Vrms between mixed size 20 and 16 contacts (service 1)

- At reduced pressure 10 mbar:  
connectors mated and unmated
- 200 Vrms between size 20 contacts (service 1)
- 300 Vrms between size 16 contacts (service 2)
- **Insulation resistance**  
≥ 5000 MΩ under 500 Vcc
- **Current rating per contact**  
- Standard version:  
Size 20 = 7.5 A / Size 16 = 13 A  
- Hermetic version:  
Size 20 = 5 A / Size 16 = 10 A
- **Contact resistance**  
- Environmental version:  
Size 20 ≤ 4 mΩ / Size 16 ≤ 3 mΩ  
- Hermetic version:  
Size 20 ≤ 30 mΩ / Size 16 ≤ 14 mΩ
- **Shielding effectiveness:**  
70 dB to 5 MHz - 40 dB to 100 MHz

### Environmental

- **Operating temperature:**  
from -55°C to +125°C
- **Flammability rating:**  
UL94 HB
- **Dynamic salt spray:**  
per EIA-364-26  
- 48 h Cadmium, Nickel, Zinc Cobalt  
- 500 h Black anodized  
- 500 h Black Zinc Nickel


- **Sealing:**  
- Globally IP65 (unmated conditions)  
- With J or JC backshell IP67 (mated conditions)  
- With cable gland IP68 (mated conditions)  
Under 10 meter of water during 48 hours  
- Crimp contact version, 1 bar differential pressure, leakage ≤ 8 cm³/hr  
- Solder contact version, 2 bar differential pressure, leakage ≤ 16 cm³/hr
- **Fluid resistance:**  
- to MIL-DTL-26482G series 1 and NFC 93422 - HE 301 B code A  
- Hydraulic fluids  
- Lubricating oil

### Mechanical

- **Durability:**  
500 matings and unmatings per MIL-DTL-26482H
- **Mechanical shock:**  
50 g, 11 ms period per EIA-364-27



## Hermetic versions

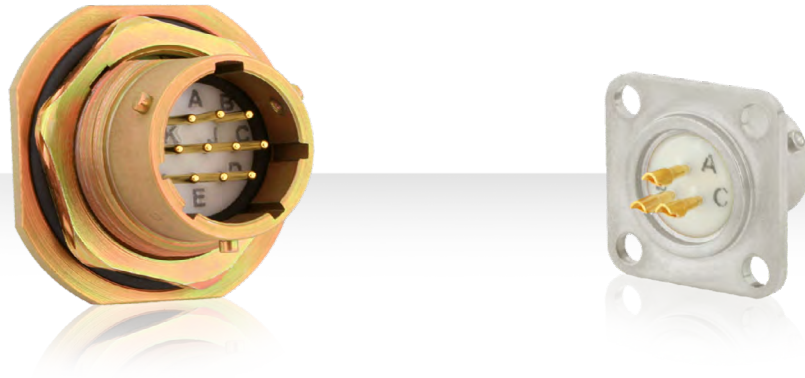

## Technical features

### Materials

- **Shell:**  
Steel
- **Plating:**  
Iridescent yellow Cadmium  
Nickel
- **Contact:**  
Gold plated ferrous alloy
- **Seal:**  
Fluorocarbon elastomer

### Electrical

- **Max current rating per contact:**

| Contact size | 20 | 16 |
|--------------|----|----|
| Rating (A)   | 5  | 10 |

- **Dielectric withstanding voltage:**

| Service | Standard pressure | 10 mbar pressure |
|---------|-------------------|------------------|
| I       | 1 500 Vrms        | 200 Vrms         |
| II      | 2 300 Vrms        | 300 Vrms         |

- **Contact resistance:**

Size 20  $\leq$  30 m $\Omega$   
Size 16  $\leq$  14 m $\Omega$

- **Shielding:**

70 dB to 5 MHz  
40 dB to 100 MHz

### Environmental

- **Operating temperature:**  
-55°C to +125°C
- **Hermeticity:**  
1 bar differential pressure,  
leakage  $\leq$  2.8 mm<sup>3</sup>/hr
- **Salt spray:**  
48 hours min
- **Chemical resistance:**  
To MIL-DTL-26482G Series I
- **Damp heat:** 21 days

# 851 SERIES

851 Series

# Connector


|                                  |    |
|----------------------------------|----|
| ■ Environmental connectors ..... | 24 |
| ■ Hermetic connectors .....      | 47 |
| ■ PC Tail connectors .....       | 49 |
| ■ Panel cut out .....            | 50 |
| ■ Push-pull locking plug .....   | 51 |
| ■ 8F51 filter connectors .....   | 53 |

## Environmental connectors

## Square flange receptacle with straight adaptor

## Cross reference

|       |                |
|-------|----------------|
| 00 A  | HE 301 B 00 A  |
| 00 RA | HE 301 B 00 RA |

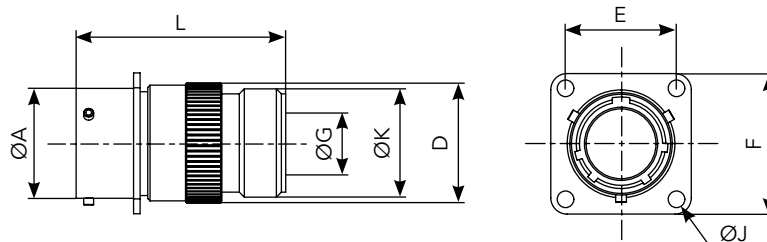


| Shell size | Part numbers                       |                                     | L max  |       | A     | B max | C max | D max | E     | F max | G max | J    | K<br>threading<br>UNEF 2A |
|------------|------------------------------------|-------------------------------------|--------|-------|-------|-------|-------|-------|-------|-------|-------|------|---------------------------|
|            | solder contacts                    | crimp contacts                      | solder | crimp |       |       |       |       |       |       |       |      |                           |
| 8          | 851 00 A 8.. $\frac{P}{S}$ . 50..  | 851 00 RA 8.. $\frac{P}{S}$ . 50..  | 41.00  |       | 12.03 | 11.70 | 1.32  | 14.50 | 15.09 | 20.99 | 9.10  | 3.13 | 1/2 18                    |
| 10         | 851 00 A 10.. $\frac{P}{S}$ . 50.. | 851 00 RA 10.. $\frac{P}{S}$ . 50.. | 41.00  |       | 15.01 | 11.70 | 1.32  | 18.70 | 18.26 | 24.19 | 12.08 | 3.13 | 5/8 24                    |
| 12         | 851 00 A 12.. $\frac{P}{S}$ . 50.. | 851 00 RA 12.. $\frac{P}{S}$ . 50.. | 41.00  |       | 19.07 | 11.70 | 1.32  | 21.70 | 20.62 | 26.54 | 15.25 | 3.13 | 3/4 20                    |
| 14         | 851 00 A 14.. $\frac{P}{S}$ . 50.. | 851 00 RA 14.. $\frac{P}{S}$ . 50.. | 41.00  |       | 22.25 | 11.70 | 1.32  | 25.10 | 23.00 | 28.89 | 18.15 | 3.13 | 7/8 20                    |
| 16         | 851 00 A 16.. $\frac{P}{S}$ . 50.. | 851 00 RA 16.. $\frac{P}{S}$ . 50.. | 41.00  |       | 25.42 | 11.70 | 1.32  | 28.13 | 24.61 | 31.29 | 21.32 | 3.13 | 1-20                      |
| 18         | 851 00 A 18.. $\frac{P}{S}$ . 50.. | 851 00 RA 18.. $\frac{P}{S}$ . 50.. | 41.00  |       | 28.60 | 11.70 | 1.32  | 31.38 | 26.97 | 33.69 | 24.32 | 3.13 | 1-3/16 18                 |
| 20         | 851 00 A 20.. $\frac{P}{S}$ . 50.. | 851 00 RA 20.. $\frac{P}{S}$ . 50.. | 44.00  |       | 31.77 | 14.35 | 2.15  | 34.30 | 29.36 | 36.89 | 26.73 | 3.13 | 1-3/16 18                 |
| 22         | 851 00 A 22.. $\frac{P}{S}$ . 50.. | 851 00 RA 22.. $\frac{P}{S}$ . 50.. | 44.00  |       | 34.95 | 14.35 | 2.15  | 37.60 | 31.75 | 39.99 | 30.67 | 3.13 | 1-7/16 18                 |
| 24         | 851 00 A 24.. $\frac{P}{S}$ . 50.. | 851 00 RA 24.. $\frac{P}{S}$ . 50.. | 44.00  |       | 38.12 | 15.20 | 2.15  | 40.70 | 34.92 | 43.15 | 33.08 | 3.81 | 1-7/16 18                 |

## Square flange receptacle with straight cable clamp

## Cross reference

|       |                |
|-------|----------------|
| 00 EC | HE 301 B 00 EC |
|       | MS 3110 F      |
| 00 AC | HE 301 B 00 AC |
| 00 RC | HE 301 B 00 RC |
|       | MS 3120 F      |
|       | VG 95328 B     |

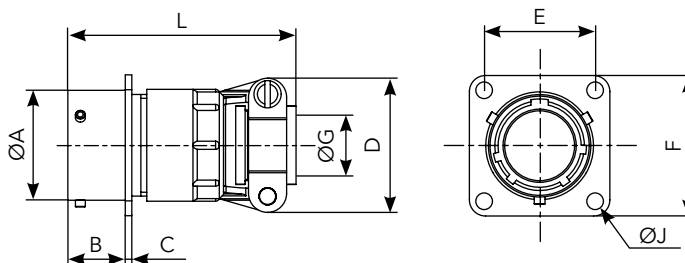

| Shell size | Part numbers                                     |                                     | L max  |       | A     | B max | C max | D max | E     | F max | J    |
|------------|--------------------------------------------------|-------------------------------------|--------|-------|-------|-------|-------|-------|-------|-------|------|
|            | solder contacts                                  | crimp contacts                      | solder | crimp |       |       |       |       |       |       |      |
| 8          | 851 00 $\frac{EC}{AC}$ 8.. $\frac{P}{S}$ . 50..  | 851 00 RC 8.. $\frac{P}{S}$ . 50..  | 48.00  | 47.30 | 12.03 | 11.70 | 1.32  | 13.50 | 15.09 | 20.99 | 3.13 |
| 10         | 851 00 $\frac{EC}{AC}$ 10.. $\frac{P}{S}$ . 50.. | 851 00 RC 10.. $\frac{P}{S}$ . 50.. | 48.00  | 47.30 | 15.01 | 11.70 | 1.32  | 16.70 | 18.26 | 24.19 | 3.13 |
| 12         | 851 00 $\frac{EC}{AC}$ 12.. $\frac{P}{S}$ . 50.. | 851 00 RC 12.. $\frac{P}{S}$ . 50.. | 48.00  | 47.30 | 19.07 | 11.70 | 1.32  | 19.90 | 20.62 | 26.54 | 3.13 |
| 14         | 851 00 $\frac{EC}{AC}$ 14.. $\frac{P}{S}$ . 50.. | 851 00 RC 14.. $\frac{P}{S}$ . 50.. | 48.00  | 47.30 | 22.25 | 11.70 | 1.32  | 23.40 | 23.00 | 28.89 | 3.13 |
| 16         | 851 00 $\frac{EC}{AC}$ 16.. $\frac{P}{S}$ . 50.. | 851 00 RC 16.. $\frac{P}{S}$ . 50.. | 51.00  | 50.50 | 25.42 | 11.70 | 1.32  | 26.60 | 24.61 | 31.29 | 3.13 |
| 18         | 851 00 $\frac{EC}{AC}$ 18.. $\frac{P}{S}$ . 50.. | 851 00 RC 18.. $\frac{P}{S}$ . 50.. | 51.00  | 50.50 | 28.60 | 11.70 | 1.32  | 29.50 | 26.97 | 33.69 | 3.13 |
| 20         | 851 00 $\frac{EC}{AC}$ 20.. $\frac{P}{S}$ . 50.. | 851 00 RC 20.. $\frac{P}{S}$ . 50.. | 53.00  | 51.50 | 31.77 | 14.35 | 2.15  | 32.70 | 29.36 | 36.89 | 3.13 |
| 22         | 851 00 $\frac{EC}{AC}$ 22.. $\frac{P}{S}$ . 50.. | 851 00 RC 22.. $\frac{P}{S}$ . 50.. | 53.00  | 51.50 | 34.95 | 14.35 | 2.15  | 36.00 | 31.75 | 39.99 | 3.13 |
| 24         | 851 00 $\frac{EC}{AC}$ 24.. $\frac{P}{S}$ . 50.. | 851 00 RC 24.. $\frac{P}{S}$ . 50.. | 53.00  | 51.50 | 38.12 | 15.20 | 2.15  | 39.10 | 34.92 | 43.15 | 3.81 |



Note: all dimensions are in mm

## Environmental connectors

## Square flange receptacle with backnut

## Cross reference

|      |               |
|------|---------------|
| 00 E | HE 301 B 00 E |
|      | MS 3110 E     |
| 00 R | HE 301 B 00 R |
|      | MS 3120 E     |
|      | VG 95328 A    |





| Shell size | Part numbers                       |                                    | L max  |       | A     | B max | C max | D max | E     | F max | J    |
|------------|------------------------------------|------------------------------------|--------|-------|-------|-------|-------|-------|-------|-------|------|
|            | solder contacts                    | crimp contacts                     | solder | crimp |       |       |       |       |       |       |      |
| 8          | 851 00 E 8.. $\frac{P}{S}$ . 50..  | 851 00 R 8.. $\frac{P}{S}$ . 50..  | 32.70  | 32.00 | 12.03 | 11.70 | 1.32  | 13.50 | 15.09 | 20.99 | 3.13 |
| 10         | 851 00 E 10.. $\frac{P}{S}$ . 50.. | 851 00 R 10.. $\frac{P}{S}$ . 50.. | 32.70  | 32.00 | 15.01 | 11.70 | 1.32  | 16.70 | 18.26 | 24.19 | 3.13 |
| 12         | 851 00 E 12.. $\frac{P}{S}$ . 50.. | 851 00 R 12.. $\frac{P}{S}$ . 50.. | 32.70  | 32.00 | 19.07 | 11.70 | 1.32  | 19.90 | 20.62 | 26.54 | 3.13 |
| 14         | 851 00 E 14.. $\frac{P}{S}$ . 50.. | 851 00 R 14.. $\frac{P}{S}$ . 50.. | 32.70  | 32.00 | 22.25 | 11.70 | 1.32  | 23.40 | 23.00 | 28.89 | 3.13 |
| 16         | 851 00 E 16.. $\frac{P}{S}$ . 50.. | 851 00 R 16.. $\frac{P}{S}$ . 50.. | 32.70  | 32.00 | 25.42 | 11.70 | 1.32  | 26.60 | 24.61 | 31.29 | 3.13 |
| 18         | 851 00 E 18.. $\frac{P}{S}$ . 50.. | 851 00 R 18.. $\frac{P}{S}$ . 50.. | 32.70  | 32.00 | 28.60 | 11.70 | 1.32  | 29.50 | 26.97 | 33.69 | 3.13 |
| 20         | 851 00 E 20.. $\frac{P}{S}$ . 50.. | 851 00 R 20.. $\frac{P}{S}$ . 50.. | 34.50  | 33.40 | 31.77 | 14.35 | 2.15  | 32.70 | 29.36 | 36.89 | 3.13 |
| 22         | 851 00 E 22.. $\frac{P}{S}$ . 50.. | 851 00 R 22.. $\frac{P}{S}$ . 50.. | 34.50  | 33.40 | 34.95 | 14.35 | 2.15  | 36.00 | 31.75 | 39.99 | 3.13 |
| 24         | 851 00 E 24.. $\frac{P}{S}$ . 50.. | 851 00 R 24.. $\frac{P}{S}$ . 50.. | 34.50  | 33.40 | 38.12 | 15.20 | 2.15  | 39.10 | 34.92 | 43.15 | 3.81 |

## Square flange receptacle with removable straight backshell for screen termination and heatshrink sleeving

## Cross reference

|       |            |
|-------|------------|
| 00 G  |            |
| 00 RG | VG 95328 R |

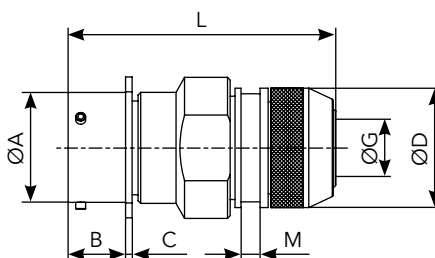

| Shell size | Part numbers                       |                                     | L max  |       | A     | B max | C max | D max | E     | F max | G max | J    | M max |
|------------|------------------------------------|-------------------------------------|--------|-------|-------|-------|-------|-------|-------|-------|-------|------|-------|
|            | solder contacts                    | crimp contacts                      | solder | crimp |       |       |       |       |       |       |       |      |       |
| 8          | 851 00 G 8.. $\frac{P}{S}$ . 50..  | 851 00 RG 8.. $\frac{P}{S}$ . 50..  | 54.00  |       | 12.03 | 11.70 | 1.32  | 16.30 | 15.09 | 20.99 | 7.45  | 3.13 | 3.60  |
| 10         | 851 00 G 10.. $\frac{P}{S}$ . 50.. | 851 00 RG 10.. $\frac{P}{S}$ . 50.. | 54.00  |       | 15.01 | 11.70 | 1.32  | 18.30 | 18.26 | 24.19 | 10.30 | 3.13 | 3.60  |
| 12         | 851 00 G 12.. $\frac{P}{S}$ . 50.. | 851 00 RG 12.. $\frac{P}{S}$ . 50.. | 54.00  |       | 19.07 | 11.70 | 1.32  | 22.30 | 20.62 | 26.54 | 13.20 | 3.13 | 3.60  |
| 14         | 851 00 G 14.. $\frac{P}{S}$ . 50.. | 851 00 RG 14.. $\frac{P}{S}$ . 50.. | 54.00  |       | 22.25 | 11.70 | 1.32  | 25.30 | 23.00 | 28.89 | 16.50 | 3.13 | 3.60  |
| 16         | 851 00 G 16.. $\frac{P}{S}$ . 50.. | 851 00 RG 16.. $\frac{P}{S}$ . 50.. | 54.00  |       | 25.42 | 11.70 | 1.32  | 28.30 | 24.61 | 31.29 | 19.35 | 3.13 | 3.60  |
| 18         | 851 00 G 18.. $\frac{P}{S}$ . 50.. | 851 00 RG 18.. $\frac{P}{S}$ . 50.. | 54.00  |       | 28.60 | 11.70 | 1.32  | 32.30 | 26.97 | 33.69 | 21.60 | 3.13 | 3.60  |
| 20         | 851 00 G 20.. $\frac{P}{S}$ . 50.. | 851 00 RG 20.. $\frac{P}{S}$ . 50.. | 59.30  |       | 31.77 | 14.35 | 2.15  | 34.30 | 29.36 | 36.89 | 24.80 | 3.13 | 3.60  |
| 22         | 851 00 G 22.. $\frac{P}{S}$ . 50.. | 851 00 RG 22.. $\frac{P}{S}$ . 50.. | 59.30  |       | 34.95 | 14.35 | 2.15  | 38.30 | 31.75 | 39.99 | 27.90 | 3.13 | 3.60  |
| 24         | 851 00 G 24.. $\frac{P}{S}$ . 50.. | 851 00 RG 24.. $\frac{P}{S}$ . 50.. | 59.30  |       | 38.12 | 15.20 | 2.15  | 41.30 | 34.92 | 43.15 | 31.00 | 3.81 | 3.60  |

Note: all dimensions are in mm


## Environmental connectors

## Square flange receptacle with straight sealing gland backshell

## Cross reference

00 J

HE 301 B 00J

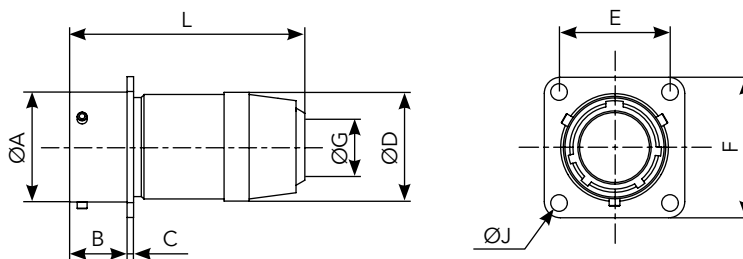


| Shell size | Part numbers                       |                | L max  |       | A     | B max | C max | D max | E     | F max | G max |       | J    |
|------------|------------------------------------|----------------|--------|-------|-------|-------|-------|-------|-------|-------|-------|-------|------|
|            | solder contacts                    | crimp contacts | solder | crimp |       |       |       |       |       |       | min   | max   |      |
| 8          | 851 00 J 8.. $\frac{P}{S}$ . 50..  | -              | 47.60  | -     | 12.03 | 11.70 | 1.32  | 14.40 | 15.09 | 20.99 | 5.02  | 5.84  | 3.13 |
| 10         | 851 00 J 10.. $\frac{P}{S}$ . 50.. | -              | 47.60  | -     | 15.01 | 11.70 | 1.32  | 17.60 | 18.26 | 24.19 | 5.94  | 6.76  | 3.13 |
| 12         | 851 00 J 12.. $\frac{P}{S}$ . 50.. | -              | 48.70  | -     | 19.07 | 11.70 | 1.32  | 21.10 | 20.62 | 26.54 | 9.34  | 10.16 | 3.13 |
| 14         | 851 00 J 14.. $\frac{P}{S}$ . 50.. | -              | 53.50  | -     | 22.25 | 11.70 | 1.32  | 24.40 | 23.00 | 28.89 | 11.32 | 12.14 | 3.13 |
| 16         | 851 00 J 16.. $\frac{P}{S}$ . 50.. | -              | 59.00  | -     | 25.42 | 11.70 | 1.32  | 27.60 | 24.61 | 31.29 | 14.73 | 15.55 | 3.13 |
| 18         | 851 00 J 18.. $\frac{P}{S}$ . 50.. | -              | 65.00  | -     | 28.60 | 11.70 | 1.32  | 30.80 | 26.97 | 33.69 | 16.00 | 16.82 | 3.13 |
| 20         | 851 00 J 20.. $\frac{P}{S}$ . 50.. | -              | 79.10  | -     | 31.77 | 14.35 | 2.15  | 34.10 | 29.36 | 36.89 | 16.89 | 17.70 | 3.13 |
| 22         | 851 00 J 22.. $\frac{P}{S}$ . 50.. | -              | 80.00  | -     | 34.95 | 14.35 | 2.15  | 37.30 | 31.75 | 39.99 | 17.78 | 18.60 | 3.13 |
| 24         | 851 00 J 24.. $\frac{P}{S}$ . 50.. | -              | 90.00  | -     | 38.12 | 15.20 | 2.15  | 40.50 | 34.92 | 43.15 | 20.34 | 21.16 | 3.81 |

## Square flange receptacle with straight sealing gland and cable clamp

## Cross reference

00 JC

MS 3110 J

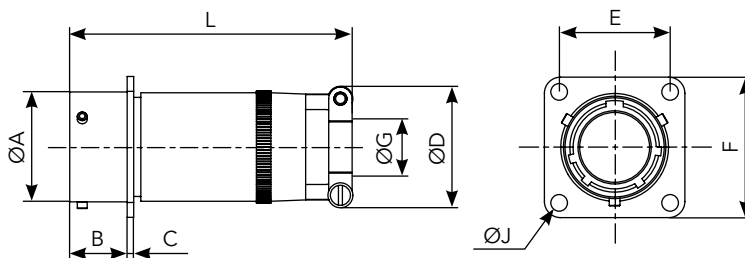


| Shell size | Part numbers                        |                | L max  |       | A     | B max | C max | D max | E     | F max | G max |       | J    |
|------------|-------------------------------------|----------------|--------|-------|-------|-------|-------|-------|-------|-------|-------|-------|------|
|            | solder contacts                     | crimp contacts | solder | crimp |       |       |       |       |       |       | min   | max   |      |
| 8          | 851 00 JC 8.. $\frac{P}{S}$ . 50..  | -              | 57.68  | -     | 12.03 | 11.70 | 1.32  | 19.90 | 15.09 | 20.99 | 5.02  | 5.84  | 3.13 |
| 10         | 851 00 JC 10.. $\frac{P}{S}$ . 50.. | -              | 57.68  | -     | 15.01 | 11.70 | 1.32  | 21.50 | 18.26 | 24.19 | 5.94  | 6.76  | 3.13 |
| 12         | 851 00 JC 12.. $\frac{P}{S}$ . 50.. | -              | 61.24  | -     | 19.07 | 11.70 | 1.32  | 25.00 | 20.62 | 26.54 | 9.34  | 10.16 | 3.13 |
| 14         | 851 00 JC 14.. $\frac{P}{S}$ . 50.. | -              | 66.01  | -     | 22.25 | 11.70 | 1.32  | 27.80 | 23.00 | 28.89 | 11.32 | 12.14 | 3.13 |
| 16         | 851 00 JC 16.. $\frac{P}{S}$ . 50.. | -              | 74.75  | -     | 25.42 | 11.70 | 1.32  | 29.40 | 24.61 | 31.29 | 14.73 | 15.55 | 3.13 |
| 18         | 851 00 JC 18.. $\frac{P}{S}$ . 50.. | -              | 80.57  | -     | 28.60 | 11.70 | 1.32  | 35.30 | 26.97 | 33.69 | 16.00 | 16.82 | 3.13 |
| 20         | 851 00 JC 20.. $\frac{P}{S}$ . 50.. | -              | 91.69  | -     | 31.77 | 14.35 | 2.15  | 35.30 | 29.36 | 36.89 | 16.89 | 17.70 | 3.13 |
| 22         | 851 00 JC 22.. $\frac{P}{S}$ . 50.. | -              | 95.66  | -     | 34.95 | 14.35 | 2.15  | 41.10 | 31.75 | 39.99 | 17.78 | 18.60 | 3.13 |
| 24         | 851 00 JC 24.. $\frac{P}{S}$ . 50.. | -              | 101.22 | -     | 38.12 | 15.20 | 2.15  | 42.40 | 34.92 | 43.15 | 20.34 | 21.16 | 3.81 |

Note: all dimensions are in mm

## Environmental connectors

## Square flange receptacle with removable straight backshell for heatshrink sleeving

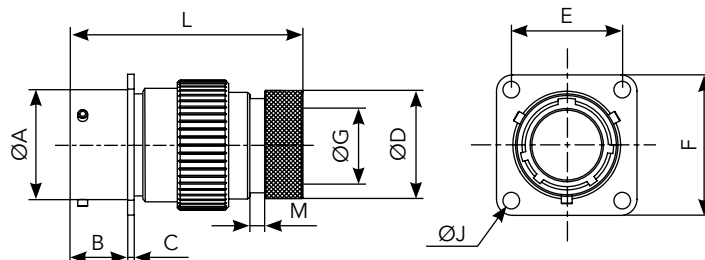


| Shell size | Part numbers                       |                                     | L max  |       | A     | B max | C max | D max | E     | F max | G max | J    | M max |
|------------|------------------------------------|-------------------------------------|--------|-------|-------|-------|-------|-------|-------|-------|-------|------|-------|
|            | solder contacts                    | crimp contacts                      | solder | crimp |       |       |       |       |       |       |       |      |       |
| 8          | 851 00 M 8.. $\frac{P}{S}$ . 50..  | 851 00 RM 8.. $\frac{P}{S}$ . 50..  | 50.00  |       | 12.03 | 11.70 | 1.32  | 13.55 | 15.09 | 20.99 | 7.05  | 3.13 | 3.50  |
| 10         | 851 00 M 10.. $\frac{P}{S}$ . 50.. | 851 00 RM 10.. $\frac{P}{S}$ . 50.. | 50.00  |       | 15.01 | 11.70 | 1.32  | 15.35 | 18.26 | 24.19 | 9.90  | 3.13 | 3.50  |
| 12         | 851 00 M 12.. $\frac{P}{S}$ . 50.. | 851 00 RM 12.. $\frac{P}{S}$ . 50.. | 50.00  |       | 19.07 | 11.70 | 1.32  | 19.48 | 20.62 | 26.54 | 12.60 | 3.13 | 3.50  |
| 14         | 851 00 M 14.. $\frac{P}{S}$ . 50.. | 851 00 RM 14.. $\frac{P}{S}$ . 50.. | 50.00  |       | 22.25 | 11.70 | 1.32  | 21.30 | 23.00 | 28.89 | 15.90 | 3.13 | 3.50  |
| 16         | 851 00 M 16.. $\frac{P}{S}$ . 50.. | 851 00 RM 16.. $\frac{P}{S}$ . 50.. | 50.00  |       | 25.42 | 11.70 | 1.32  | 24.50 | 24.61 | 31.29 | 18.95 | 3.13 | 3.50  |
| 18         | 851 00 M 18.. $\frac{P}{S}$ . 50.. | 851 00 RM 18.. $\frac{P}{S}$ . 50.. | 50.00  |       | 28.60 | 11.70 | 1.32  | 26.45 | 26.97 | 33.69 | 20.90 | 3.13 | 3.50  |
| 20         | 851 00 M 20.. $\frac{P}{S}$ . 50.. | 851 00 RM 20.. $\frac{P}{S}$ . 50.. | 53.30  |       | 31.77 | 14.35 | 2.15  | 30.73 | 29.36 | 36.89 | 23.70 | 3.13 | 3.50  |
| 22         | 851 00 M 22.. $\frac{P}{S}$ . 50.. | 851 00 RM 22.. $\frac{P}{S}$ . 50.. | 53.30  |       | 34.95 | 14.35 | 2.15  | 34.24 | 31.75 | 39.99 | 26.60 | 3.13 | 3.50  |
| 24         | 851 00 M 24.. $\frac{P}{S}$ . 50.. | 851 00 RM 24.. $\frac{P}{S}$ . 50.. | 53.30  |       | 38.12 | 15.20 | 2.15  | 36.47 | 34.92 | 43.15 | 29.30 | 3.81 | 3.50  |

## Square flange receptacle with straight backshell for potting

## Cross reference

|       |                |
|-------|----------------|
| 00 P  | HE 301 B 00 P  |
|       | MS 3110 P      |
| 00 RP | HE 301 B 00 RP |
|       | MS 3120 P      |

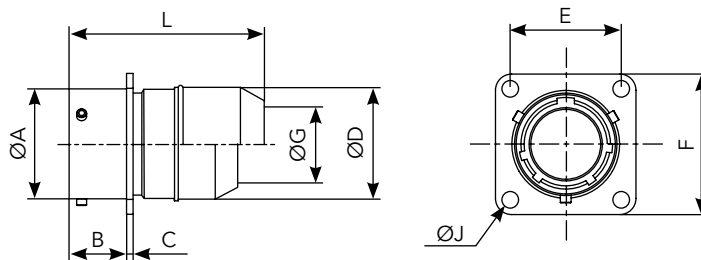


| Shell size | Part numbers                       |                                     | L max  |       | A     | B max | C max | D max | E     | F max | G max | J    |
|------------|------------------------------------|-------------------------------------|--------|-------|-------|-------|-------|-------|-------|-------|-------|------|
|            | solder contacts                    | crimp contacts                      | solder | crimp |       |       |       |       |       |       |       |      |
| 8          | 851 00 P 8.. $\frac{P}{S}$ . 50..  | 851 00 RP 8.. $\frac{P}{S}$ . 50..  | 36.20  | 41.70 | 12.03 | 11.70 | 1.32  | 15.34 | 15.09 | 20.99 | 10.46 | 3.13 |
| 10         | 851 00 P 10.. $\frac{P}{S}$ . 50.. | 851 00 RP 10.. $\frac{P}{S}$ . 50.. | 36.20  | 41.70 | 15.01 | 11.70 | 1.32  | 17.70 | 18.26 | 24.19 | 13.55 | 3.13 |
| 12         | 851 00 P 12.. $\frac{P}{S}$ . 50.. | 851 00 RP 12.. $\frac{P}{S}$ . 50.. | 36.20  | 41.70 | 19.07 | 11.70 | 1.32  | 21.69 | 20.62 | 26.54 | 13.96 | 3.13 |
| 14         | 851 00 P 14.. $\frac{P}{S}$ . 50.. | 851 00 RP 14.. $\frac{P}{S}$ . 50.. | 36.20  | 41.70 | 22.25 | 11.70 | 1.32  | 23.90 | 23.00 | 28.89 | 17.42 | 3.13 |
| 16         | 851 00 P 16.. $\frac{P}{S}$ . 50.. | 851 00 RP 16.. $\frac{P}{S}$ . 50.. | 36.20  | 41.70 | 25.42 | 11.70 | 1.32  | 27.00 | 24.61 | 31.29 | 20.56 | 3.13 |
| 18         | 851 00 P 18.. $\frac{P}{S}$ . 50.. | 851 00 RP 18.. $\frac{P}{S}$ . 50.. | 36.91  | 44.46 | 28.60 | 11.70 | 1.32  | 30.50 | 26.97 | 33.69 | 23.66 | 3.13 |
| 20         | 851 00 P 20.. $\frac{P}{S}$ . 50.. | 851 00 RP 20.. $\frac{P}{S}$ . 50.. | 43.80  | 50.93 | 31.77 | 14.35 | 2.15  | 33.65 | 29.36 | 36.89 | 23.92 | 3.13 |
| 22         | 851 00 P 22.. $\frac{P}{S}$ . 50.. | 851 00 RP 22.. $\frac{P}{S}$ . 50.. | 43.80  | 50.93 | 34.95 | 14.35 | 2.15  | 37.10 | 31.75 | 39.99 | 25.52 | 3.13 |
| 24         | 851 00 P 24.. $\frac{P}{S}$ . 50.. | 851 00 RP 24.. $\frac{P}{S}$ . 50.. | 43.80  | 51.40 | 38.12 | 15.20 | 2.15  | 40.00 | 34.92 | 43.15 | 32.00 | 3.81 |

Note: all dimensions are in mm


## Environmental connectors

## Square flange receptacle with straight backshell for heatshrink sleeving

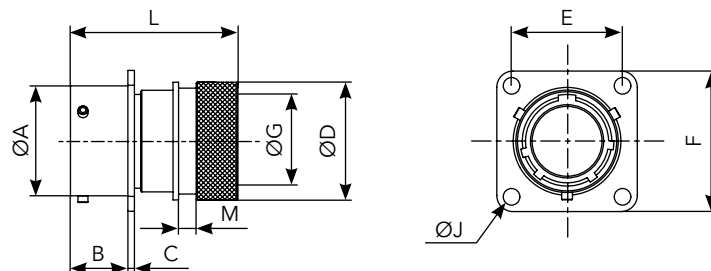

| Shell size | Part numbers                        |                                      | L max  |       | A     | B max | C max | D max | E     | F max | G max  |       | J    | M max |
|------------|-------------------------------------|--------------------------------------|--------|-------|-------|-------|-------|-------|-------|-------|--------|-------|------|-------|
|            | solder contacts                     | crimp contacts                       | solder | crimp |       |       |       |       |       |       | Solder | Crimp |      |       |
| 8          | 851 00 T 8.. P <sub>S</sub> . 50..  | 851 00 RT 8.. P <sub>S</sub> . 50 .. | 36.70  | 36.00 | 12.03 | 11.70 | 1.32  | 15.35 | 15.09 | 20.99 | 7.20   | 6.70  | 3.13 | 3.70  |
| 10         | 851 00 T 10.. P <sub>S</sub> . 50.. | 851 00 RT 10.. P <sub>S</sub> . 50.. | 36.70  | 36.00 | 15.01 | 11.70 | 1.32  | 18.15 | 18.26 | 24.19 | 10.20  | 9.40  | 3.13 | 3.70  |
| 12         | 851 00 T 12.. P <sub>S</sub> . 50.. | 851 00 RT 12.. P <sub>S</sub> . 50.. | 36.70  | 36.00 | 19.07 | 11.70 | 1.32  | 23.45 | 20.62 | 26.54 | 13.20  | 11.95 | 3.13 | 3.70  |
| 14         | 851 00 T 14.. P <sub>S</sub> . 50.. | 851 00 RT 14.. P <sub>S</sub> . 50.. | 36.70  | 36.00 | 22.25 | 11.70 | 1.32  | 24.25 | 23.00 | 28.89 | 16.10  | 15.15 | 3.13 | 3.70  |
| 16         | 851 00 T 16.. P <sub>S</sub> . 50.. | 851 00 RT 16.. P <sub>S</sub> . 50.. | 39.00  | 38.30 | 25.42 | 11.70 | 1.32  | 29.55 | 24.61 | 31.29 | 19.25  | 18.05 | 3.13 | 3.70  |
| 18         | 851 00 T 18.. P <sub>S</sub> . 50.. | 851 00 RT 18.. P <sub>S</sub> . 50.. | 39.00  | 38.30 | 28.60 | 11.70 | 1.32  | 31.75 | 26.97 | 33.69 | 21.30  | 19.95 | 3.13 | 3.70  |
| 20         | 851 00 T 20.. P <sub>S</sub> . 50.. | 851 00 RT 20.. P <sub>S</sub> . 50.. | 45.30  | 44.20 | 31.77 | 14.35 | 2.15  | 35.85 | 29.36 | 36.89 | 24.40  | 23.05 | 3.13 | 3.70  |
| 22         | 851 00 T 22.. P <sub>S</sub> . 50.. | 851 00 RT 22.. P <sub>S</sub> . 50.. | 45.30  | 44.20 | 34.95 | 14.35 | 2.15  | 38.20 | 31.75 | 39.99 | 27.50  | 25.55 | 3.13 | 3.70  |
| 24         | 851 00 T 24.. P <sub>S</sub> . 50.. | 851 00 RT 24.. P <sub>S</sub> . 50.. | 44.00  | 42.60 | 38.12 | 15.20 | 2.15  | 41.30 | 34.92 | 43.15 | 30.60  | 28.65 | 3.81 | 3.70  |

## Square flange receptacle with removable backshell for screen termination and heatshrink sleeving (38 &amp; 42 suffix)

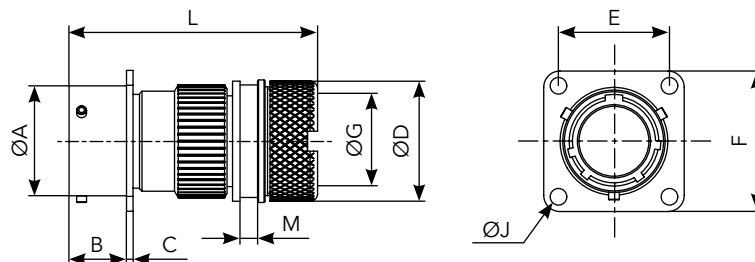

| Shell size | Part numbers                                                    |                                                                  | L max  |       | A     | B max | C max | D max | E     | F max | G max | J    | M max |
|------------|-----------------------------------------------------------------|------------------------------------------------------------------|--------|-------|-------|-------|-------|-------|-------|-------|-------|------|-------|
|            | solder contacts                                                 | crimp contacts                                                   | solder | crimp |       |       |       |       |       |       |       |      |       |
| 8          | 851 00 T 8.. P <sub>S</sub> . 50 <sup>38</sup> / <sub>42</sub>  | 851 00 RT 8.. P <sub>S</sub> . 50 <sup>38</sup> / <sub>42</sub>  | 51.60  |       | 12.03 | 11.70 | 1.32  | 18.25 | 15.09 | 20.99 | 7.45  | 3.13 | 3.70  |
| 10         | 851 00 T 10.. P <sub>S</sub> . 50 <sup>38</sup> / <sub>42</sub> | 851 00 RT 10.. P <sub>S</sub> . 50 <sup>38</sup> / <sub>42</sub> | 51.60  |       | 15.01 | 11.70 | 1.32  | 20.25 | 18.26 | 24.19 | 9.00  | 3.13 | 3.70  |
| 12         | 851 00 T 12.. P <sub>S</sub> . 50 <sup>38</sup> / <sub>42</sub> | 851 00 RT 12.. P <sub>S</sub> . 50 <sup>38</sup> / <sub>42</sub> | 51.60  |       | 19.07 | 11.70 | 1.32  | 24.75 | 20.62 | 26.54 | 13.30 | 3.13 | 3.70  |
| 14         | 851 00 T 14.. P <sub>S</sub> . 50 <sup>38</sup> / <sub>42</sub> | 851 00 RT 14.. P <sub>S</sub> . 50 <sup>38</sup> / <sub>42</sub> | 51.60  |       | 22.25 | 11.70 | 1.32  | 27.75 | 23.00 | 28.89 | 16.50 | 3.13 | 3.70  |
| 16         | 851 00 T 16.. P <sub>S</sub> . 50 <sup>38</sup> / <sub>42</sub> | 851 00 RT 16.. P <sub>S</sub> . 50 <sup>38</sup> / <sub>42</sub> | 51.60  |       | 25.42 | 11.70 | 1.32  | 30.05 | 24.61 | 31.29 | 18.50 | 3.13 | 3.70  |
| 18         | 851 00 T 18.. P <sub>S</sub> . 50 <sup>38</sup> / <sub>42</sub> | 851 00 RT 18.. P <sub>S</sub> . 50 <sup>38</sup> / <sub>42</sub> | 52.00  |       | 28.60 | 11.70 | 1.32  | 34.15 | 26.97 | 33.69 | 21.90 | 3.13 | 3.70  |
| 20         | 851 00 T 20.. P <sub>S</sub> . 50 <sup>38</sup> / <sub>42</sub> | 851 00 RT 20.. P <sub>S</sub> . 50 <sup>38</sup> / <sub>42</sub> | 55.10  |       | 31.77 | 14.35 | 2.15  | 37.25 | 29.36 | 36.89 | 25.10 | 3.13 | 3.70  |
| 22         | 851 00 T 22.. P <sub>S</sub> . 50 <sup>38</sup> / <sub>42</sub> | 851 00 RT 22.. P <sub>S</sub> . 50 <sup>38</sup> / <sub>42</sub> | 55.10  |       | 34.95 | 14.35 | 2.15  | 40.45 | 31.75 | 39.99 | 28.20 | 3.13 | 3.70  |
| 24         | 851 00 T 24.. P <sub>S</sub> . 50 <sup>38</sup> / <sub>42</sub> | 851 00 RT 24.. P <sub>S</sub> . 50 <sup>38</sup> / <sub>42</sub> | 55.10  |       | 38.12 | 15.20 | 2.15  | 43.65 | 34.92 | 43.15 | 31.40 | 3.81 | 3.70  |

Note: all dimensions are in mm




## Environmental connectors

## Cable in line receptacle with straight adaptor

## Cross reference

|       |                |
|-------|----------------|
| 01 A  | HE 301 B 01 A  |
| 01 RA | HE 301 B 01 RA |

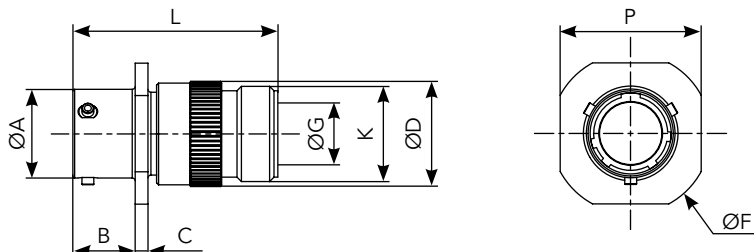


| Shell size | Part numbers                      |                                    | L max  |       | A     | B max | C max | D max | F max | G max | K<br>threading<br>UNE F 2A | P max |
|------------|-----------------------------------|------------------------------------|--------|-------|-------|-------|-------|-------|-------|-------|----------------------------|-------|
|            | solder contacts                   | crimp contacts                     | solder | crimp |       |       |       |       |       |       |                            |       |
| 8          | 851 01 A 8.. <sub>S</sub> . 50..  | 851 01 RA 8.. <sub>S</sub> . 50..  | 41.00  |       | 12.03 | 10.60 | 2.10  | 14.50 | 24.24 | 9.10  | 1/2 28                     | 20.99 |
| 10         | 851 01 A 10.. <sub>S</sub> . 50.. | 851 01 RA 10.. <sub>S</sub> . 50.. | 41.00  |       | 15.01 | 10.60 | 2.10  | 18.70 | 27.44 | 12.08 | 5/8 24                     | 24.19 |
| 12         | 851 01 A 12.. <sub>S</sub> . 50.. | 851 01 RA 12.. <sub>S</sub> . 50.. | 41.00  |       | 19.07 | 10.60 | 2.10  | 21.70 | 29.79 | 15.25 | 3/4 20                     | 26.54 |
| 14         | 851 01 A 14.. <sub>S</sub> . 50.. | 851 01 RA 14.. <sub>S</sub> . 50.. | 41.00  |       | 22.25 | 10.60 | 2.10  | 25.10 | 32.10 | 18.15 | 7/8 20                     | 28.89 |
| 16         | 851 01 A 16.. <sub>S</sub> . 50.. | 851 01 RA 16.. <sub>S</sub> . 50.. | 41.00  |       | 25.42 | 10.60 | 2.10  | 28.13 | 34.59 | 21.32 | 1-20                       | 31.29 |
| 18         | 851 01 A 18.. <sub>S</sub> . 50.. | 851 01 RA 18.. <sub>S</sub> . 50.. | 41.00  |       | 28.60 | 10.60 | 2.10  | 31.38 | 36.94 | 24.32 | 1-3/16 18                  | 33.69 |
| 20         | 851 01 A 20.. <sub>S</sub> . 50.. | 851 01 RA 20.. <sub>S</sub> . 50.. | 44.00  |       | 31.77 | 13.85 | 2.65  | 34.30 | 40.15 | 26.73 | 1-3/16 18                  | 36.89 |
| 22         | 851 01 A 22.. <sub>S</sub> . 50.. | 851 01 RA 22.. <sub>S</sub> . 50.. | 44.00  |       | 34.95 | 13.85 | 2.65  | 37.60 | 42.24 | 30.67 | 1-7/16 18                  | 40.00 |
| 24         | 851 01 A 24.. <sub>S</sub> . 50.. | 851 01 RA 24.. <sub>S</sub> . 50.. | 44.00  |       | 38.12 | 14.70 | 2.65  | 40.70 | 46.44 | 33.08 | 1-7/16 18                  | 43.29 |

## Cable in line receptacle with straight cable clamp

## Cross reference

|       |                |
|-------|----------------|
| 01 EC | HE 301 B 01 EC |
|       | MS 3111 F      |
| 01 AC | HE 301 B 01 AC |
| 01 RC | HE 301 B 01 RC |
|       | MS 3121 F      |

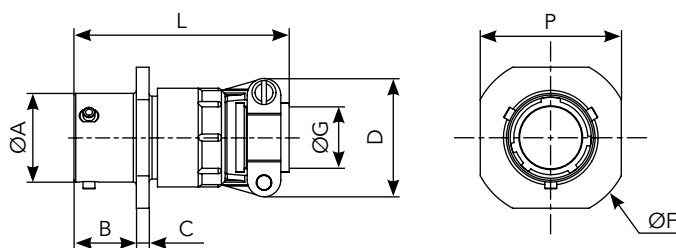

| Shell size | Part numbers                          |                                    | L max  |       | A     | B max | C max | D max | F max | G     | P max |
|------------|---------------------------------------|------------------------------------|--------|-------|-------|-------|-------|-------|-------|-------|-------|
|            | solder contacts                       | crimp contacts                     | solder | crimp |       |       |       |       |       |       |       |
| 8          | 851 01 EC AC 8.. <sub>S</sub> . 50..  | 851 01 RC 8.. <sub>S</sub> . 50..  | 48.00  | 47.30 | 12.03 | 10.60 | 2.10  | 19.90 | 24.24 | 3.50  | 20.99 |
| 10         | 851 01 EC AC 10.. <sub>S</sub> . 50.. | 851 01 RC 10.. <sub>S</sub> . 50.. | 48.00  | 47.30 | 15.01 | 10.60 | 2.10  | 21.50 | 27.44 | 5.00  | 24.19 |
| 12         | 851 01 EC AC 12.. <sub>S</sub> . 50.. | 851 01 RC 12.. <sub>S</sub> . 50.. | 48.00  | 47.30 | 19.07 | 10.60 | 2.10  | 25.00 | 29.79 | 8.20  | 26.54 |
| 14         | 851 01 EC AC 14.. <sub>S</sub> . 50.. | 851 01 RC 14.. <sub>S</sub> . 50.. | 48.00  | 47.30 | 22.25 | 10.60 | 2.10  | 27.80 | 32.10 | 10.00 | 28.89 |
| 16         | 851 01 EC AC 16.. <sub>S</sub> . 50.. | 851 01 RC 16.. <sub>S</sub> . 50.. | 51.00  | 50.50 | 25.42 | 10.60 | 2.10  | 29.40 | 34.59 | 13.00 | 31.29 |
| 18         | 851 01 EC AC 18.. <sub>S</sub> . 50.. | 851 01 RC 18.. <sub>S</sub> . 50.. | 51.00  | 50.50 | 28.60 | 10.60 | 2.10  | 35.30 | 36.94 | 16.00 | 33.69 |
| 20         | 851 01 EC AC 20.. <sub>S</sub> . 50.. | 851 01 RC 20.. <sub>S</sub> . 50.. | 53.00  | 51.50 | 31.77 | 13.85 | 2.65  | 35.30 | 40.14 | 16.00 | 36.89 |
| 22         | 851 01 EC AC 22.. <sub>S</sub> . 50.. | 851 01 RC 22.. <sub>S</sub> . 50.. | 53.00  | 51.50 | 34.95 | 13.85 | 2.65  | 41.10 | 43.24 | 19.30 | 40.00 |
| 24         | 851 01 EC AC 24.. <sub>S</sub> . 50.. | 851 01 RC 24.. <sub>S</sub> . 50.. | 53.00  | 51.50 | 38.12 | 14.70 | 2.65  | 42.40 | 46.44 | 20.60 | 43.29 |



Note: all dimensions are in mm

## Environmental connectors

## Cable in line receptacle with backnut



## Cross reference

|      |               |
|------|---------------|
| 01 E | HE 301 B 01 E |
|      | MS 3111 E     |
| 01 R | HE 301 B 01 R |
|      | MS 3121 E     |



| Shell size | Part numbers                           |                                        | L max  |       | A     | B max | C max | D max | F max | P max |
|------------|----------------------------------------|----------------------------------------|--------|-------|-------|-------|-------|-------|-------|-------|
|            | solder contacts                        | crimp contacts                         | solder | crimp |       |       |       |       |       |       |
| 8          | 851 01 E 8.. $\frac{P}{S} \cdot 50..$  | 851 01 R 8.. $\frac{P}{S} \cdot 50..$  | 32.70  | 32.00 | 12.03 | 10.60 | 2.10  | 13.50 | 24.24 | 20.99 |
| 10         | 851 01 E 10.. $\frac{P}{S} \cdot 50..$ | 851 01 R 10.. $\frac{P}{S} \cdot 50..$ | 32.70  | 32.00 | 15.01 | 10.60 | 2.10  | 16.70 | 27.44 | 24.19 |
| 12         | 851 01 E 12.. $\frac{P}{S} \cdot 50..$ | 851 01 R 12.. $\frac{P}{S} \cdot 50..$ | 32.70  | 32.00 | 19.07 | 10.60 | 2.10  | 19.90 | 29.79 | 26.54 |
| 14         | 851 01 E 14.. $\frac{P}{S} \cdot 50..$ | 851 01 R 14.. $\frac{P}{S} \cdot 50..$ | 32.70  | 32.00 | 22.25 | 10.60 | 2.10  | 23.40 | 32.10 | 28.89 |
| 16         | 851 01 E 16.. $\frac{P}{S} \cdot 50..$ | 851 01 R 16.. $\frac{P}{S} \cdot 50..$ | 32.70  | 32.00 | 25.42 | 10.60 | 2.10  | 26.60 | 34.59 | 31.29 |
| 18         | 851 01 E 18.. $\frac{P}{S} \cdot 50..$ | 851 01 R 18.. $\frac{P}{S} \cdot 50..$ | 32.70  | 32.00 | 28.60 | 10.60 | 2.10  | 29.50 | 36.94 | 33.69 |
| 20         | 851 01 E 20.. $\frac{P}{S} \cdot 50..$ | 851 01 R 20.. $\frac{P}{S} \cdot 50..$ | 34.50  | 33.40 | 31.77 | 13.85 | 2.65  | 32.70 | 40.14 | 36.89 |
| 22         | 851 01 E 22.. $\frac{P}{S} \cdot 50..$ | 851 01 R 22.. $\frac{P}{S} \cdot 50..$ | 34.50  | 33.40 | 34.95 | 13.85 | 2.65  | 36.00 | 43.24 | 40.00 |
| 24         | 851 01 E 24.. $\frac{P}{S} \cdot 50..$ | 851 01 R 24.. $\frac{P}{S} \cdot 50..$ | 34.50  | 33.40 | 38.12 | 14.70 | 2.65  | 39.10 | 46.44 | 43.29 |

## Cable in line receptacle with removable straight backshell for screen termination and heatshrink sleeving

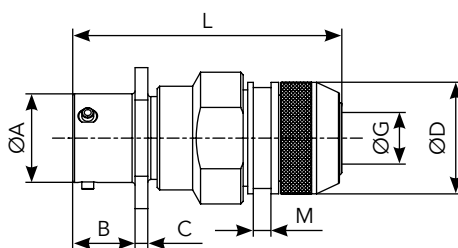

| Shell size | Part numbers                           |                                         | L max  |       | A     | B max | C max | D max | F max | G max | M max | P max |
|------------|----------------------------------------|-----------------------------------------|--------|-------|-------|-------|-------|-------|-------|-------|-------|-------|
|            | solder contacts                        | crimp contacts                          | solder | crimp |       |       |       |       |       |       |       |       |
| 8          | 851 01 G 8.. $\frac{P}{S} \cdot 50..$  | 851 01 RG 8.. $\frac{P}{S} \cdot 50..$  | 54.00  |       | 12.03 | 10.60 | 2.10  | 16.30 | 24.24 | 7.45  | 3.60  | 20.99 |
| 10         | 851 01 G 10.. $\frac{P}{S} \cdot 50..$ | 851 01 RG 10.. $\frac{P}{S} \cdot 50..$ | 54.00  |       | 15.01 | 10.60 | 2.10  | 18.30 | 27.44 | 10.30 | 3.60  | 24.19 |
| 12         | 851 01 G 12.. $\frac{P}{S} \cdot 50..$ | 851 01 RG 12.. $\frac{P}{S} \cdot 50..$ | 54.00  |       | 19.07 | 10.60 | 2.10  | 22.30 | 29.79 | 13.20 | 3.60  | 26.54 |
| 14         | 851 01 G 14.. $\frac{P}{S} \cdot 50..$ | 851 01 RG 14.. $\frac{P}{S} \cdot 50..$ | 54.00  |       | 22.25 | 10.60 | 2.10  | 25.30 | 32.10 | 16.50 | 3.60  | 28.89 |
| 16         | 851 01 G 16.. $\frac{P}{S} \cdot 50..$ | 851 01 RG 16.. $\frac{P}{S} \cdot 50..$ | 54.00  |       | 25.42 | 10.60 | 2.10  | 28.30 | 34.59 | 19.35 | 3.60  | 31.29 |
| 18         | 851 01 G 18.. $\frac{P}{S} \cdot 50..$ | 851 01 RG 18.. $\frac{P}{S} \cdot 50..$ | 54.00  |       | 28.60 | 10.60 | 2.10  | 32.30 | 36.94 | 21.60 | 3.60  | 33.69 |
| 20         | 851 01 G 20.. $\frac{P}{S} \cdot 50..$ | 851 01 RG 20.. $\frac{P}{S} \cdot 50..$ | 59.30  |       | 31.77 | 13.85 | 2.65  | 34.30 | 40.15 | 24.80 | 3.60  | 36.89 |
| 22         | 851 01 G 22.. $\frac{P}{S} \cdot 50..$ | 851 01 RG 22.. $\frac{P}{S} \cdot 50..$ | 59.30  |       | 34.95 | 13.85 | 2.65  | 38.30 | 42.24 | 27.90 | 3.60  | 40.00 |
| 24         | 851 01 G 24.. $\frac{P}{S} \cdot 50..$ | 851 01 RG 24.. $\frac{P}{S} \cdot 50..$ | 59.30  |       | 38.12 | 14.70 | 2.65  | 41.30 | 46.44 | 31.00 | 3.60  | 43.29 |

Note: all dimensions are in mm



## Environmental connectors

## Cable in line receptacle with straight sealing gland backshell

## Cross reference

01 J

HE 301 B 01 J

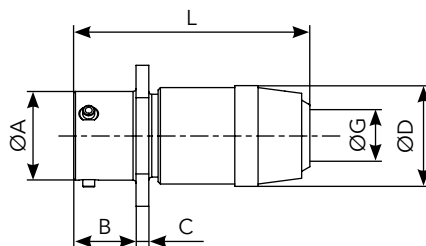



| Shell size | Part numbers                        |                | L max  |       | A     | B max | C max | D max | F max | G max |       | P max |
|------------|-------------------------------------|----------------|--------|-------|-------|-------|-------|-------|-------|-------|-------|-------|
|            | solder contacts                     | crimp contacts | solder | crimp |       |       |       |       |       | min   | max   |       |
| 8          | 851 01 J 8.. P <sub>S</sub> . 50..  | -              | 47.60  | -     | 12.03 | 10.60 | 2.10  | 14.40 | 24.24 | 5.02  | 5.84  | 20.99 |
| 10         | 851 01 J 10.. P <sub>S</sub> . 50.. | -              | 47.60  | -     | 15.01 | 10.60 | 2.10  | 17.60 | 27.44 | 5.94  | 6.76  | 24.19 |
| 12         | 851 01 J 12.. P <sub>S</sub> . 50.. | -              | 48.70  | -     | 19.07 | 10.60 | 2.10  | 21.10 | 29.79 | 9.34  | 10.16 | 26.54 |
| 14         | 851 01 J 14.. P <sub>S</sub> . 50.. | -              | 53.50  | -     | 22.25 | 10.60 | 2.10  | 24.40 | 32.10 | 11.32 | 12.14 | 28.89 |
| 16         | 851 01 J 16.. P <sub>S</sub> . 50.. | -              | 59.00  | -     | 25.42 | 10.60 | 2.10  | 27.60 | 34.59 | 14.73 | 15.55 | 31.29 |
| 18         | 851 01 J 18.. P <sub>S</sub> . 50.. | -              | 65.00  | -     | 28.60 | 10.60 | 2.10  | 30.80 | 36.94 | 16.00 | 16.82 | 33.69 |
| 20         | 851 01 J 20.. P <sub>S</sub> . 50.. | -              | 79.10  | -     | 31.77 | 13.85 | 2.65  | 34.10 | 40.15 | 16.89 | 17.71 | 36.89 |
| 22         | 851 01 J 22.. P <sub>S</sub> . 50.. | -              | 80.00  | -     | 34.95 | 13.85 | 2.65  | 37.30 | 42.24 | 17.78 | 18.60 | 40.00 |
| 24         | 851 01 J 24.. P <sub>S</sub> . 50.. | -              | 90.00  | -     | 38.12 | 14.70 | 2.65  | 40.50 | 46.44 | 20.34 | 21.16 | 43.29 |

## Cable in line receptacle with straight sealing gland and cable clamp backshell

## Cross reference

01 JC

HE 301 B 01 J

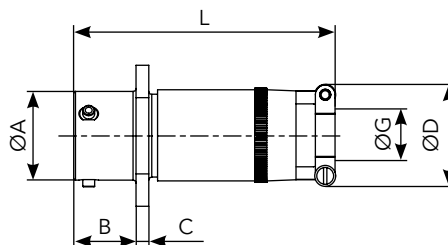


| Shell size | Part numbers                         |                | L max  |       | A     | B max | C max | D max | F max | G     |       | P max |
|------------|--------------------------------------|----------------|--------|-------|-------|-------|-------|-------|-------|-------|-------|-------|
|            | solder contacts                      | crimp contacts | solder | crimp |       |       |       |       |       | min   | max   |       |
| 8          | 851 01 JC 8.. P <sub>S</sub> . 50..  | -              | 57.68  | -     | 12.03 | 10.60 | 2.10  | 19.90 | 24.24 | 5.02  | 5.84  | 20.99 |
| 10         | 851 01 JC 10.. P <sub>S</sub> . 50.. | -              | 57.68  | -     | 15.01 | 10.60 | 2.10  | 21.50 | 27.44 | 5.94  | 6.76  | 24.19 |
| 12         | 851 01 JC 12.. P <sub>S</sub> . 50.. | -              | 61.24  | -     | 19.07 | 10.60 | 2.10  | 25.00 | 29.79 | 9.34  | 10.16 | 26.54 |
| 14         | 851 01 JC 14.. P <sub>S</sub> . 50.. | -              | 66.01  | -     | 22.25 | 10.60 | 2.10  | 27.80 | 32.10 | 11.32 | 12.14 | 28.89 |
| 16         | 851 01 JC 16.. P <sub>S</sub> . 50.. | -              | 74.75  | -     | 25.42 | 10.60 | 2.10  | 29.40 | 34.59 | 14.73 | 15.50 | 31.29 |
| 18         | 851 01 JC 18.. P <sub>S</sub> . 50.. | -              | 80.57  | -     | 28.60 | 10.60 | 2.10  | 35.30 | 36.94 | 16.00 | 16.82 | 33.69 |
| 20         | 851 01 JC 20.. P <sub>S</sub> . 50.. | -              | 91.69  | -     | 31.77 | 13.85 | 2.65  | 35.30 | 40.15 | 16.89 | 17.71 | 36.89 |
| 22         | 851 01 JC 22.. P <sub>S</sub> . 50.. | -              | 95.66  | -     | 34.95 | 13.85 | 2.65  | 41.10 | 42.24 | 17.78 | 18.60 | 40.00 |
| 24         | 851 01 JC 24.. P <sub>S</sub> . 50.. | -              | 101.22 | -     | 38.12 | 14.70 | 2.65  | 42.40 | 46.44 | 20.34 | 21.16 | 43.29 |

Note: all dimensions are in mm

## Environmental connectors

## Cable connecting receptacle with removable straight backshell for heatshrink sleeving

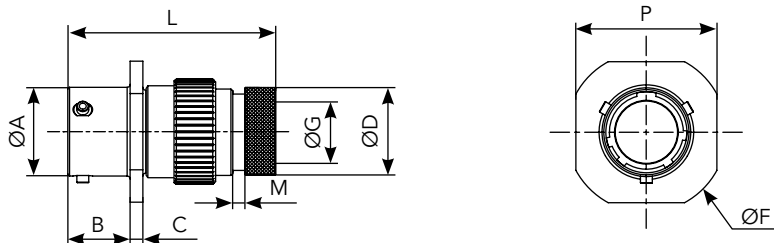


| Shell size | Part numbers                      |                                    | L max  |       | A     | B max | C max | D max | F max | G max | P max | M max |
|------------|-----------------------------------|------------------------------------|--------|-------|-------|-------|-------|-------|-------|-------|-------|-------|
|            | solder contacts                   | crimp contacts                     | solder | crimp |       |       |       |       |       |       |       |       |
| 8          | 851 01 M 8.. $\frac{P}{S}$ .50..  | 851 01 RM 8.. $\frac{P}{S}$ .50 .. | 50.00  |       | 12.03 | 10.60 | 2.10  | 13.55 | 24.24 | 7.05  | 20.99 | 3.50  |
| 10         | 851 01 M 10.. $\frac{P}{S}$ .50.. | 851 01 RM 10.. $\frac{P}{S}$ .50.. | 50.00  |       | 15.01 | 10.60 | 2.10  | 15.35 | 27.44 | 9.90  | 24.19 | 3.50  |
| 12         | 851 01 M 12.. $\frac{P}{S}$ .50.. | 851 01 RM 12.. $\frac{P}{S}$ .50.. | 50.00  |       | 19.07 | 10.60 | 2.10  | 19.48 | 29.79 | 12.60 | 26.54 | 3.50  |
| 14         | 851 01 M 14.. $\frac{P}{S}$ .50.. | 851 01 RM 14.. $\frac{P}{S}$ .50.. | 50.00  |       | 22.25 | 10.60 | 2.10  | 21.30 | 32.10 | 15.90 | 28.89 | 3.50  |
| 16         | 851 01 M 16.. $\frac{P}{S}$ .50.. | 851 01 RM 16.. $\frac{P}{S}$ .50.. | 50.00  |       | 25.42 | 10.60 | 2.10  | 24.50 | 34.59 | 18.95 | 31.29 | 3.50  |
| 18         | 851 01 M 18.. $\frac{P}{S}$ .50.. | 851 01 RM 18.. $\frac{P}{S}$ .50.. | 50.00  |       | 28.60 | 10.60 | 2.10  | 26.45 | 36.94 | 20.90 | 33.69 | 3.50  |
| 20         | 851 01 M 20.. $\frac{P}{S}$ .50.. | 851 01 RM 20.. $\frac{P}{S}$ .50.. | 53.30  |       | 31.77 | 13.85 | 2.65  | 30.75 | 40.15 | 23.70 | 36.89 | 3.50  |
| 22         | 851 01 M 22.. $\frac{P}{S}$ .50.. | 851 01 RM 22.. $\frac{P}{S}$ .50.. | 53.30  |       | 34.95 | 13.85 | 2.65  | 34.24 | 42.24 | 26.60 | 40.00 | 3.50  |
| 24         | 851 01 M 24.. $\frac{P}{S}$ .50.. | 851 01 RM 24.. $\frac{P}{S}$ .50.. | 53.30  |       | 38.12 | 14.70 | 2.65  | 36.47 | 46.44 | 29.30 | 43.29 | 3.50  |

## Cable connecting receptacle with straight backshell for potting

## Cross reference

|       |                |
|-------|----------------|
| 01 P  | HE 301 B 01 P  |
|       | MS 3111 P      |
| 01 RP | HE 301 B 01 RP |
|       | MS 3121 P      |

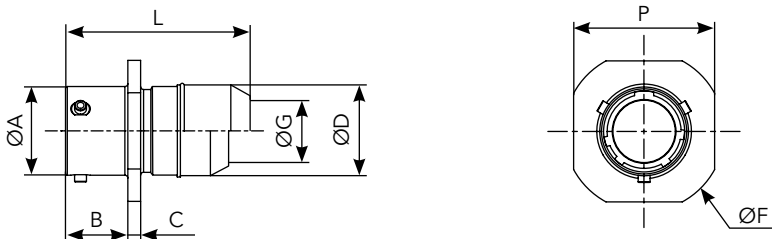


| Shell size | Part numbers                      |                                    | L max  |       | A     | B max | C max | D max | F max | G max | P max |
|------------|-----------------------------------|------------------------------------|--------|-------|-------|-------|-------|-------|-------|-------|-------|
|            | solder contacts                   | crimp contacts                     | solder | crimp |       |       |       |       |       |       |       |
| 8          | 851 01 P 8.. $\frac{P}{S}$ .50..  | 851 01 RP 8.. $\frac{P}{S}$ .50 .. | 36.20  | 41.70 | 12.03 | 10.60 | 2.10  | 15.34 | 24.24 | 10.46 | 20.99 |
| 10         | 851 01 P 10.. $\frac{P}{S}$ .50.. | 851 01 RP 10.. $\frac{P}{S}$ .50.. | 36.20  | 41.70 | 15.01 | 10.60 | 2.10  | 17.70 | 27.44 | 13.55 | 24.19 |
| 12         | 851 01 P 12.. $\frac{P}{S}$ .50.. | 851 01 RP 12.. $\frac{P}{S}$ .50.. | 36.20  | 41.70 | 19.07 | 10.60 | 2.10  | 21.69 | 29.79 | 13.96 | 26.54 |
| 14         | 851 01 P 14.. $\frac{P}{S}$ .50.. | 851 01 RP 14.. $\frac{P}{S}$ .50.. | 36.20  | 41.70 | 22.25 | 10.60 | 2.10  | 23.90 | 32.10 | 17.42 | 28.89 |
| 16         | 851 01 P 16.. $\frac{P}{S}$ .50.. | 851 01 RP 16.. $\frac{P}{S}$ .50.. | 36.20  | 41.70 | 25.42 | 10.60 | 2.10  | 27.00 | 34.59 | 20.56 | 31.29 |
| 18         | 851 01 P 18.. $\frac{P}{S}$ .50.. | 851 01 RP 18.. $\frac{P}{S}$ .50.. | 36.91  | 44.46 | 28.60 | 10.60 | 2.10  | 30.50 | 36.94 | 23.66 | 33.69 |
| 20         | 851 01 P 20.. $\frac{P}{S}$ .50.. | 851 01 RP 20.. $\frac{P}{S}$ .50.. | 43.80  | 50.93 | 31.77 | 13.85 | 2.65  | 33.65 | 40.15 | 23.92 | 36.89 |
| 22         | 851 01 P 22.. $\frac{P}{S}$ .50.. | 851 01 RP 22.. $\frac{P}{S}$ .50.. | 43.80  | 50.93 | 34.95 | 13.85 | 2.65  | 37.10 | 42.24 | 25.52 | 40.00 |
| 24         | 851 01 P 24.. $\frac{P}{S}$ .50.. | 851 01 RP 24.. $\frac{P}{S}$ .50.. | 43.80  | 50.93 | 38.12 | 14.70 | 2.65  | 40.00 | 46.44 | 32.00 | 43.29 |

Note: all dimensions are in mm


## Environmental connectors

## Cable in line receptacle with straight backshell for heatshrink sleeving

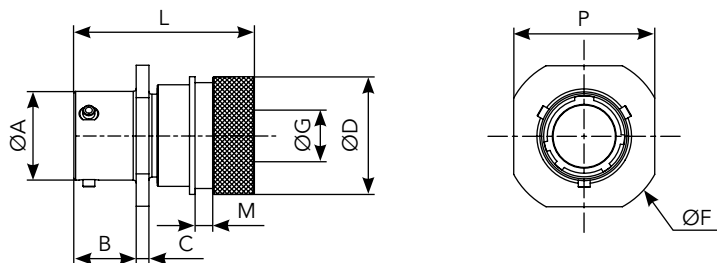

| Shell size | Part numbers                       |                                     | L max  |       | A     | B max | C max | D max | F max | G max  |       | P max | M max |
|------------|------------------------------------|-------------------------------------|--------|-------|-------|-------|-------|-------|-------|--------|-------|-------|-------|
|            | solder contacts                    | crimp contacts                      | solder | crimp |       |       |       |       |       | solder | crimp |       |       |
| 8          | 851 01 T 8.. <sub>P S</sub> .50..  | 851 01 RT 8.. <sub>P S</sub> .50..  | 36.70  | 36.00 | 12.03 | 10.60 | 2.10  | 15.35 | 24.24 | 7.20   | 6.70  | 20.99 | 3.70  |
| 10         | 851 01 T 10.. <sub>P S</sub> .50.. | 851 01 RT 10.. <sub>P S</sub> .50.. | 36.70  | 36.00 | 15.01 | 10.60 | 2.10  | 18.15 | 27.44 | 10.20  | 9.40  | 24.19 | 3.70  |
| 12         | 851 01 T 12.. <sub>P S</sub> .50.. | 851 01 RT 12.. <sub>P S</sub> .50.. | 36.70  | 36.00 | 19.07 | 10.60 | 2.10  | 23.45 | 29.70 | 13.20  | 11.95 | 26.54 | 3.70  |
| 14         | 851 01 T 14.. <sub>P S</sub> .50.. | 851 01 RT 14.. <sub>P S</sub> .50.. | 36.70  | 36.00 | 22.25 | 10.60 | 2.10  | 24.25 | 32.10 | 16.10  | 15.15 | 28.89 | 3.70  |
| 16         | 851 01 T 16.. <sub>P S</sub> .50.. | 851 01 RT 16.. <sub>P S</sub> .50.. | 39.00  | 38.30 | 25.42 | 10.60 | 2.10  | 29.55 | 34.59 | 19.25  | 18.05 | 31.29 | 3.70  |
| 18         | 851 01 T 18.. <sub>P S</sub> .50.. | 851 01 RT 18.. <sub>P S</sub> .50.. | 39.00  | 38.30 | 28.60 | 10.60 | 2.10  | 31.75 | 36.94 | 21.30  | 19.95 | 33.69 | 3.70  |
| 20         | 851 01 T 20.. <sub>P S</sub> .50.. | 851 01 RT 20.. <sub>P S</sub> .50.. | 45.30  | 44.20 | 31.77 | 13.85 | 2.65  | 35.85 | 40.15 | 24.40  | 23.05 | 36.89 | 3.70  |
| 22         | 851 01 T 22.. <sub>P S</sub> .50.. | 851 01 RT 22.. <sub>P S</sub> .50.. | 45.30  | 44.20 | 34.95 | 13.85 | 2.65  | 38.20 | 42.24 | 27.50  | 25.55 | 40.00 | 3.70  |
| 24         | 851 01 T 24.. <sub>P S</sub> .50.. | 851 01 RT 24.. <sub>P S</sub> .50.. | 44.00  | 42.60 | 38.12 | 14.70 | 2.65  | 41.30 | 46.44 | 30.60  | 28.65 | 43.29 | 3.70  |

## Cable connecting receptacle with removable straight backshell for screen termination and heatshrink sleeving (38 &amp; 42 suffix)

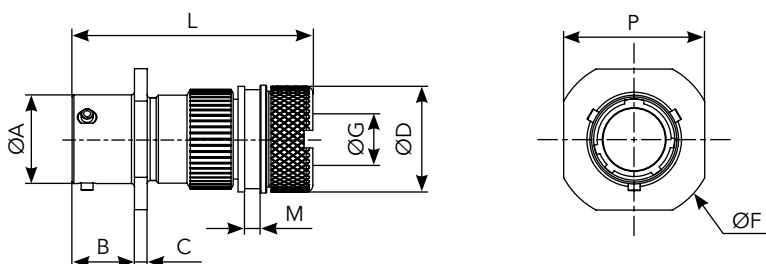

| Shell size | Part numbers                                                 |                                                               | L max  |       | A     | B max | C max | D max | F max | G max | M max | P max |
|------------|--------------------------------------------------------------|---------------------------------------------------------------|--------|-------|-------|-------|-------|-------|-------|-------|-------|-------|
|            | solder contacts                                              | crimp contacts                                                | solder | crimp |       |       |       |       |       |       |       |       |
| 8          | 851 01 T 8.. <sub>P S</sub> .50 <sup>38</sup> <sub>42</sub>  | 851 01 RT 8.. <sub>P S</sub> .50 <sup>38</sup> <sub>42</sub>  | 51.60  |       | 12.03 | 10.60 | 2.10  | 18.25 | 24.24 | 7.45  | 3.70  | 20.99 |
| 10         | 851 01 T 10.. <sub>P S</sub> .50 <sup>38</sup> <sub>42</sub> | 851 01 RT 10.. <sub>P S</sub> .50 <sup>38</sup> <sub>42</sub> | 51.60  |       | 15.01 | 10.60 | 2.10  | 20.25 | 27.44 | 9.00  | 3.70  | 24.19 |
| 12         | 851 01 T 12.. <sub>P S</sub> .50 <sup>38</sup> <sub>42</sub> | 851 01 RT 12.. <sub>P S</sub> .50 <sup>38</sup> <sub>42</sub> | 51.60  |       | 19.07 | 10.60 | 2.10  | 24.75 | 29.79 | 13.30 | 3.70  | 26.54 |
| 14         | 851 01 T 14.. <sub>P S</sub> .50 <sup>38</sup> <sub>42</sub> | 851 01 RT 14.. <sub>P S</sub> .50 <sup>38</sup> <sub>42</sub> | 51.60  |       | 22.25 | 10.60 | 2.10  | 27.75 | 32.10 | 16.50 | 3.70  | 28.89 |
| 16         | 851 01 T 16.. <sub>P S</sub> .50 <sup>38</sup> <sub>42</sub> | 851 01 RT 16.. <sub>P S</sub> .50 <sup>38</sup> <sub>42</sub> | 51.60  |       | 25.42 | 10.60 | 2.10  | 30.05 | 34.59 | 18.50 | 3.70  | 31.29 |
| 18         | 851 01 T 18.. <sub>P S</sub> .50 <sup>38</sup> <sub>42</sub> | 851 01 RT 18.. <sub>P S</sub> .50 <sup>38</sup> <sub>42</sub> | 52.00  |       | 28.60 | 10.60 | 2.10  | 34.15 | 36.94 | 21.90 | 3.70  | 33.69 |
| 20         | 851 01 T 20.. <sub>P S</sub> .50 <sup>38</sup> <sub>42</sub> | 851 01 RT 20.. <sub>P S</sub> .50 <sup>38</sup> <sub>42</sub> | 55.10  |       | 31.77 | 13.85 | 2.65  | 37.25 | 40.15 | 25.10 | 3.70  | 36.89 |
| 22         | 851 01 T 22.. <sub>P S</sub> .50 <sup>38</sup> <sub>42</sub> | 851 01 RT 22.. <sub>P S</sub> .50 <sup>38</sup> <sub>42</sub> | 55.10  |       | 34.95 | 13.85 | 2.65  | 40.45 | 42.24 | 28.20 | 3.70  | 40.00 |
| 24         | 851 01 T 24.. <sub>P S</sub> .50 <sup>38</sup> <sub>42</sub> | 851 01 RT 24.. <sub>P S</sub> .50 <sup>38</sup> <sub>42</sub> | 55.10  |       | 38.12 | 14.70 | 2.65  | 43.65 | 46.44 | 31.40 | 3.70  | 43.29 |



Note: all dimensions are in mm

## Environmental connectors

## Square flange receptacle not accepting backshell

## Cross reference

|      |               |
|------|---------------|
| 02 E | HE 301 B 02 E |
|      | MS 3112 E     |
|      | VG 95328 H    |
| 02 R | HE 301 B 02 R |
|      | MS 3122 E     |
|      | VG 95328 C    |





| Shell size | Part numbers                       |                                    | L max  |       | A     | B max | C max | D max | E     | F max | J    |
|------------|------------------------------------|------------------------------------|--------|-------|-------|-------|-------|-------|-------|-------|------|
|            | solder contacts                    | crimp contacts                     | solder | crimp |       |       |       |       |       |       |      |
| 8          | 851 02 E 8.. $\frac{P}{S}$ . 50..  | 851 02 R 8.. $\frac{P}{S}$ . 50..  | 25.18  | 32.35 | 12.03 | 11.70 | 1.32  | 10.84 | 15.09 | 20.99 | 3.13 |
| 10         | 851 02 E 10.. $\frac{P}{S}$ . 50.. | 851 02 R 10.. $\frac{P}{S}$ . 50.. | 25.10  | 32.35 | 15.01 | 11.70 | 1.32  | 13.99 | 18.26 | 24.19 | 3.13 |
| 12         | 851 02 E 12.. $\frac{P}{S}$ . 50.. | 851 02 R 12.. $\frac{P}{S}$ . 50.. | 25.10  | 32.35 | 19.07 | 11.70 | 1.32  | 17.37 | 20.62 | 26.54 | 3.13 |
| 14         | 851 02 E 14.. $\frac{P}{S}$ . 50.. | 851 02 R 14.. $\frac{P}{S}$ . 50.. | 25.10  | 32.35 | 22.25 | 11.70 | 1.32  | 20.57 | 23.00 | 28.89 | 3.13 |
| 16         | 851 02 E 16.. $\frac{P}{S}$ . 50.. | 851 02 R 16.. $\frac{P}{S}$ . 50.. | 25.10  | 32.35 | 25.42 | 11.70 | 1.32  | 23.72 | 24.61 | 31.29 | 3.13 |
| 18         | 851 02 E 18.. $\frac{P}{S}$ . 50.. | 851 02 R 18.. $\frac{P}{S}$ . 50.. | 25.10  | 32.35 | 28.60 | 11.70 | 1.32  | 26.69 | 26.97 | 33.69 | 3.13 |
| 20         | 851 02 E 20.. $\frac{P}{S}$ . 50.. | 851 02 R 20.. $\frac{P}{S}$ . 50.. | 26.67  | 33.95 | 31.77 | 14.35 | 2.15  | 29.89 | 29.36 | 36.89 | 3.13 |
| 22         | 851 02 E 22.. $\frac{P}{S}$ . 50.. | 851 02 R 22.. $\frac{P}{S}$ . 50.. | 26.67  | 33.95 | 34.95 | 14.35 | 2.15  | 33.04 | 31.75 | 39.99 | 3.13 |
| 24         | 851 02 E 24.. $\frac{P}{S}$ . 50.. | 851 02 R 24.. $\frac{P}{S}$ . 50.. | 26.67  | 33.95 | 38.12 | 15.20 | 2.15  | 36.24 | 34.92 | 43.15 | 3.81 |

## Jam nut receptacle not accepting backshell

## Cross reference

|      |               |
|------|---------------|
| 07 A | HE 301 B 07 A |
|------|---------------|



| Shell size | Part numbers                       |                | L max  |       | A     | B max | C max | F max | P max | S max |
|------------|------------------------------------|----------------|--------|-------|-------|-------|-------|-------|-------|-------|
|            | solder contacts                    | crimp contacts | solder | crimp |       |       |       |       |       |       |
| 8          | 851 07 A 8.. $\frac{P}{S}$ . 50..  | -              | 25.18  | -     | 12.03 | 17.90 | 2.64  | 26.94 | 19.29 | 23.94 |
| 10         | 851 07 A 10.. $\frac{P}{S}$ . 50.. | -              | 25.10  | -     | 15.01 | 17.90 | 2.64  | 30.14 | 22.38 | 26.94 |
| 12         | 851 07 A 12.. $\frac{P}{S}$ . 50.. | -              | 25.10  | -     | 19.07 | 17.90 | 2.64  | 34.94 | 27.13 | 31.74 |
| 14         | 851 07 A 14.. $\frac{P}{S}$ . 50.. | -              | 25.10  | -     | 22.25 | 17.90 | 2.64  | 38.04 | 30.33 | 34.94 |
| 16         | 851 07 A 16.. $\frac{P}{S}$ . 50.. | -              | 25.10  | -     | 25.42 | 17.90 | 2.64  | 41.24 | 33.48 | 38.24 |
| 18         | 851 07 A 18.. $\frac{P}{S}$ . 50.. | -              | 25.10  | -     | 28.60 | 17.90 | 2.64  | 44.44 | 36.68 | 41.34 |
| 20         | 851 07 A 20.. $\frac{P}{S}$ . 50.. | -              | 26.67  | -     | 31.77 | 22.45 | 3.44  | 49.14 | 39.83 | 46.04 |
| 22         | 851 07 A 22.. $\frac{P}{S}$ . 50.. | -              | 26.67  | -     | 34.95 | 22.45 | 3.44  | 52.24 | 43.03 | 49.24 |
| 24         | 851 07 A 24.. $\frac{P}{S}$ . 50.. | -              | 26.67  | -     | 38.12 | 23.30 | 3.44  | 55.54 | 46.18 | 52.74 |


Note: all dimensions are in mm

## Environmental connectors

## Jam nut receptacle with straight cable clamp

## Cross reference

|       |                |
|-------|----------------|
| 07 EC | HE 301 B 07 EC |
|       | MS 3114 F      |
| 07 AC | HE 301 B 07 AC |
| 07 RC | HE 301 B 07 RC |
|       | MS 3124 F      |
|       | VG 95328 E     |

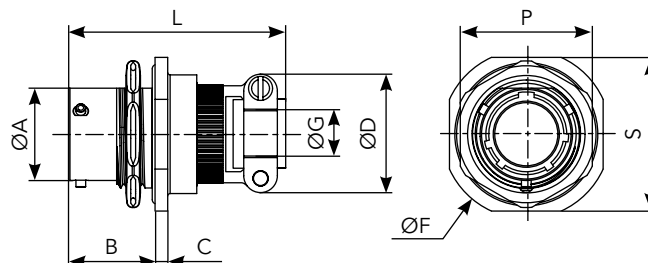


| Shell size | Part numbers                       |                                    | L max  |       | A     | B max | C max | D max | F max | G     | P max | S max |
|------------|------------------------------------|------------------------------------|--------|-------|-------|-------|-------|-------|-------|-------|-------|-------|
|            | solder contacts                    | crimp contacts                     | solder | crimp |       |       |       |       |       |       |       |       |
| 8          | 851 07 EC 8.. P <sub>S</sub> 50..  | 851 07 RC 8.. P <sub>S</sub> 50..  | 49.31  | 49.10 | 12.03 | 17.90 | 2.64  | 19.90 | 26.94 | 3.50  | 19.29 | 23.94 |
| 10         | 851 07 EC 10.. P <sub>S</sub> 50.. | 851 07 RC 10.. P <sub>S</sub> 50.. | 49.31  | 49.10 | 15.01 | 17.90 | 2.64  | 21.50 | 30.14 | 5.00  | 22.38 | 26.94 |
| 12         | 851 07 EC 12.. P <sub>S</sub> 50.. | 851 07 RC 12.. P <sub>S</sub> 50.. | 49.17  | 49.10 | 19.07 | 17.90 | 2.64  | 25.00 | 34.94 | 8.20  | 27.13 | 31.74 |
| 14         | 851 07 EC 14.. P <sub>S</sub> 50.. | 851 07 RC 14.. P <sub>S</sub> 50.. | 49.17  | 49.10 | 22.25 | 17.90 | 2.64  | 27.80 | 38.04 | 10.00 | 30.33 | 34.94 |
| 16         | 851 07 EC 16.. P <sub>S</sub> 50.. | 851 07 RC 16.. P <sub>S</sub> 50.. | 52.34  | 52.20 | 25.42 | 17.90 | 2.64  | 29.40 | 41.24 | 13.00 | 33.48 | 38.24 |
| 18         | 851 07 EC 18.. P <sub>S</sub> 50.. | 851 07 RC 18.. P <sub>S</sub> 50.. | 53.22  | 53.10 | 28.60 | 17.90 | 2.64  | 35.30 | 44.44 | 16.00 | 36.68 | 41.34 |
| 20         | 851 07 EC 20.. P <sub>S</sub> 50.. | 851 07 RC 20.. P <sub>S</sub> 50.. | 58.10  | 58.00 | 31.77 | 22.45 | 3.44  | 35.30 | 49.14 | 16.00 | 39.83 | 46.04 |
| 22         | 851 07 EC 22.. P <sub>S</sub> 50.. | 851 07 RC 22.. P <sub>S</sub> 50.. | 58.10  | 58.00 | 34.95 | 22.45 | 3.44  | 41.10 | 52.24 | 19.30 | 43.03 | 49.24 |
| 24         | 851 07 EC 24.. P <sub>S</sub> 50.. | 851 07 RC 24.. P <sub>S</sub> 50.. | 58.10  | 58.00 | 38.12 | 23.30 | 3.44  | 42.40 | 55.54 | 20.60 | 46.18 | 52.74 |

## Jam nut receptacle with backnut

## Cross reference

|      |               |
|------|---------------|
| 07 E | HE 301 B 07 E |
|      | MS 3114 E     |
| 07 R | HE 301 B 07 R |
|      | MS 3124 E     |
|      | VG 95328 D    |

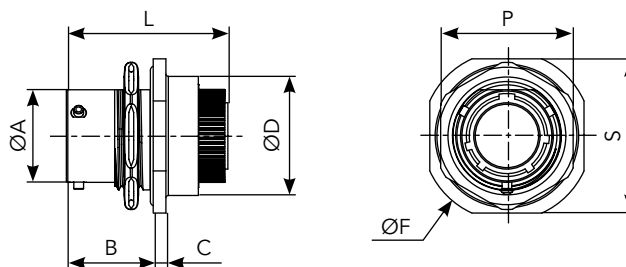

| Shell size | Part numbers                      |                                   | L max  |       | A     | B max | C max | D max | F max | P max | S max |
|------------|-----------------------------------|-----------------------------------|--------|-------|-------|-------|-------|-------|-------|-------|-------|
|            | solder contacts                   | crimp contacts                    | solder | crimp |       |       |       |       |       |       |       |
| 8          | 851 07 E 8.. P <sub>S</sub> 50..  | 851 07 R 8.. P <sub>S</sub> 50..  | 34.10  | 33.50 | 12.03 | 17.90 | 2.64  | 18.50 | 26.94 | 19.29 | 23.94 |
| 10         | 851 07 E 10.. P <sub>S</sub> 50.. | 851 07 R 10.. P <sub>S</sub> 50.. | 34.10  | 33.50 | 15.01 | 17.90 | 2.64  | 21.70 | 30.14 | 22.38 | 26.94 |
| 12         | 851 07 E 12.. P <sub>S</sub> 50.. | 851 07 R 12.. P <sub>S</sub> 50.. | 34.10  | 33.50 | 19.07 | 17.90 | 2.64  | 24.90 | 34.94 | 27.13 | 31.74 |
| 14         | 851 07 E 14.. P <sub>S</sub> 50.. | 851 07 R 14.. P <sub>S</sub> 50.. | 34.10  | 33.50 | 22.25 | 17.90 | 2.64  | 28.10 | 38.04 | 30.33 | 34.94 |
| 16         | 851 07 E 16.. P <sub>S</sub> 50.. | 851 07 R 16.. P <sub>S</sub> 50.. | 34.10  | 33.50 | 25.42 | 17.90 | 2.64  | 31.20 | 41.24 | 33.48 | 38.24 |
| 18         | 851 07 E 18.. P <sub>S</sub> 50.. | 851 07 R 18.. P <sub>S</sub> 50.. | 34.10  | 33.50 | 28.60 | 17.90 | 2.64  | 34.40 | 44.44 | 36.68 | 41.34 |
| 20         | 851 07 E 20.. P <sub>S</sub> 50.. | 851 07 R 20.. P <sub>S</sub> 50.. | 39.30  | 37.90 | 31.77 | 22.45 | 3.44  | 38.30 | 49.14 | 39.83 | 46.04 |
| 22         | 851 07 E 22.. P <sub>S</sub> 50.. | 851 07 R 22.. P <sub>S</sub> 50.. | 39.30  | 37.90 | 34.95 | 22.45 | 3.44  | 41.50 | 52.24 | 43.03 | 49.24 |
| 24         | 851 07 E 24.. P <sub>S</sub> 50.. | 851 07 R 24.. P <sub>S</sub> 50.. | 39.30  | 37.90 | 38.12 | 22.30 | 3.44  | 44.70 | 55.54 | 46.18 | 52.74 |


Note: all dimensions are in mm

## Environmental connectors

## Jam nut receptacle with removable straight backshell for screen termination and heatshrink sleeving

## Cross reference

|       |            |
|-------|------------|
| 07 G  |            |
| 07 RG | VG 95328 T |

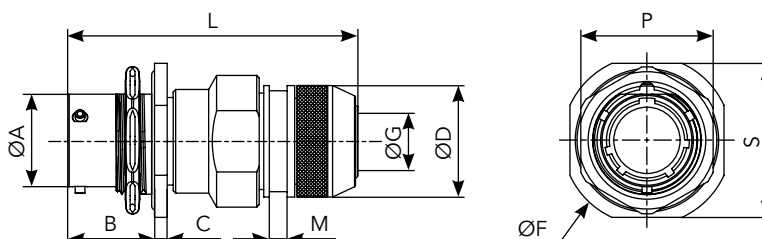


| Shell size | Part numbers                         |                                       | L max  |       | A     | B max | C max | D max | F max | G max | M max | P max | S max |
|------------|--------------------------------------|---------------------------------------|--------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|
|            | solder contacts                      | crimp contacts                        | solder | crimp |       |       |       |       |       |       |       |       |       |
| 8          | 851 07 G 8.. $\frac{P}{S} \cdot 50$  | 851 07 RG 8.. $\frac{P}{S} \cdot 50$  | 62.20  |       | 12.03 | 17.90 | 2.64  | 16.30 | 26.94 | 7.45  | 3.60  | 19.29 | 23.94 |
| 10         | 851 07 G 10.. $\frac{P}{S} \cdot 50$ | 851 07 RG 10.. $\frac{P}{S} \cdot 50$ | 62.20  |       | 15.01 | 17.90 | 2.64  | 18.30 | 30.14 | 10.30 | 3.60  | 22.38 | 26.94 |
| 12         | 851 07 G 12.. $\frac{P}{S} \cdot 50$ | 851 07 RG 12.. $\frac{P}{S} \cdot 50$ | 62.20  |       | 19.07 | 17.90 | 2.64  | 22.30 | 34.94 | 13.20 | 3.60  | 27.13 | 31.74 |
| 14         | 851 07 G 14.. $\frac{P}{S} \cdot 50$ | 851 07 RG 14.. $\frac{P}{S} \cdot 50$ | 62.40  |       | 22.25 | 17.90 | 2.64  | 25.30 | 38.04 | 16.50 | 3.60  | 30.33 | 34.94 |
| 16         | 851 07 G 16.. $\frac{P}{S} \cdot 50$ | 851 07 RG 16.. $\frac{P}{S} \cdot 50$ | 62.40  |       | 25.42 | 17.90 | 2.64  | 28.30 | 41.24 | 19.35 | 3.60  | 33.48 | 38.24 |
| 18         | 851 07 G 18.. $\frac{P}{S} \cdot 50$ | 851 07 RG 18.. $\frac{P}{S} \cdot 50$ | 62.40  |       | 28.60 | 17.90 | 2.64  | 32.30 | 44.44 | 21.60 | 3.60  | 36.68 | 41.34 |
| 20         | 851 07 G 20.. $\frac{P}{S} \cdot 50$ | 851 07 RG 20.. $\frac{P}{S} \cdot 50$ | 67.50  |       | 31.77 | 22.45 | 3.44  | 34.30 | 49.14 | 24.80 | 3.60  | 39.83 | 46.04 |
| 22         | 851 07 G 22.. $\frac{P}{S} \cdot 50$ | 851 07 RG 22.. $\frac{P}{S} \cdot 50$ | 67.50  |       | 34.95 | 22.45 | 3.44  | 38.30 | 52.24 | 27.90 | 3.60  | 43.03 | 49.24 |
| 24         | 851 07 G 24.. $\frac{P}{S} \cdot 50$ | 851 07 RG 24.. $\frac{P}{S} \cdot 50$ | 67.50  |       | 38.12 | 23.30 | 3.44  | 41.30 | 55.54 | 31.00 | 3.60  | 46.18 | 52.74 |

## Jam nut receptacle with straight backshell for potting

## Cross reference

|       |                |
|-------|----------------|
| 07 P  | HE 301 B 07 P  |
|       | MS 3114 P      |
| 07 RP | HE 301 B 07 RP |
|       | MS 3124 P      |

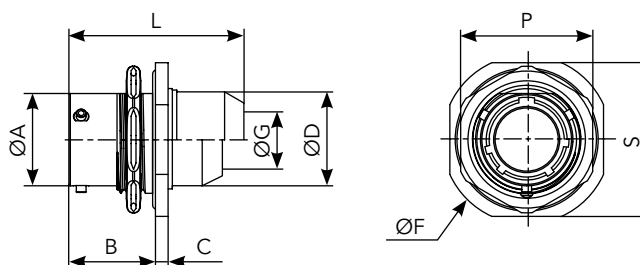

| Shell size | Part numbers                         |                                       | L max  |       | A     | B max | C max | D max | F max | G max | P max | S max |
|------------|--------------------------------------|---------------------------------------|--------|-------|-------|-------|-------|-------|-------|-------|-------|-------|
|            | solder contacts                      | crimp contacts                        | solder | crimp |       |       |       |       |       |       |       |       |
| 8          | 851 07 P 8.. $\frac{P}{S} \cdot 50$  | 851 07 RP 8.. $\frac{P}{S} \cdot 50$  | 34.30  | 39.80 | 12.03 | 17.90 | 2.64  | 15.34 | 26.94 | 10.46 | 19.29 | 23.94 |
| 10         | 851 07 P 10.. $\frac{P}{S} \cdot 50$ | 851 07 RP 10.. $\frac{P}{S} \cdot 50$ | 34.30  | 39.80 | 15.01 | 17.90 | 2.64  | 17.70 | 30.14 | 13.55 | 22.38 | 26.94 |
| 12         | 851 07 P 12.. $\frac{P}{S} \cdot 50$ | 851 07 RP 12.. $\frac{P}{S} \cdot 50$ | 34.30  | 39.80 | 19.07 | 17.90 | 2.64  | 21.69 | 34.94 | 13.96 | 27.13 | 31.74 |
| 14         | 851 07 P 14.. $\frac{P}{S} \cdot 50$ | 851 07 RP 14.. $\frac{P}{S} \cdot 50$ | 34.30  | 39.80 | 22.25 | 17.90 | 2.64  | 23.90 | 38.04 | 17.42 | 30.33 | 34.94 |
| 16         | 851 07 P 16.. $\frac{P}{S} \cdot 50$ | 851 07 RP 16.. $\frac{P}{S} \cdot 50$ | 34.30  | 39.80 | 25.42 | 17.90 | 2.64  | 27.00 | 41.24 | 20.56 | 33.48 | 38.24 |
| 18         | 851 07 P 18.. $\frac{P}{S} \cdot 50$ | 851 07 RP 18.. $\frac{P}{S} \cdot 50$ | 34.10  | 41.80 | 28.60 | 17.90 | 2.64  | 30.50 | 44.44 | 23.66 | 36.68 | 41.34 |
| 20         | 851 07 P 20.. $\frac{P}{S} \cdot 50$ | 851 07 RP 20.. $\frac{P}{S} \cdot 50$ | 42.25  | 49.92 | 31.77 | 22.45 | 3.44  | 33.65 | 49.14 | 23.92 | 39.83 | 46.04 |
| 22         | 851 07 P 22.. $\frac{P}{S} \cdot 50$ | 851 07 RP 22.. $\frac{P}{S} \cdot 50$ | 42.25  | 49.92 | 34.95 | 22.45 | 3.44  | 37.10 | 52.24 | 25.52 | 43.03 | 49.24 |
| 24         | 851 07 P 24.. $\frac{P}{S} \cdot 50$ | 851 07 RP 24.. $\frac{P}{S} \cdot 50$ | 43.26  | 51.30 | 38.12 | 23.30 | 3.44  | 40.00 | 55.54 | 32.00 | 46.18 | 52.74 |

Note: all dimensions are in mm




## Environmental connectors

## Jam nut receptacle with straight backshell for heatshrink sleeving


## Cross reference

|       |            |
|-------|------------|
| 07 T  |            |
| 07 RT | VG 95328 S |

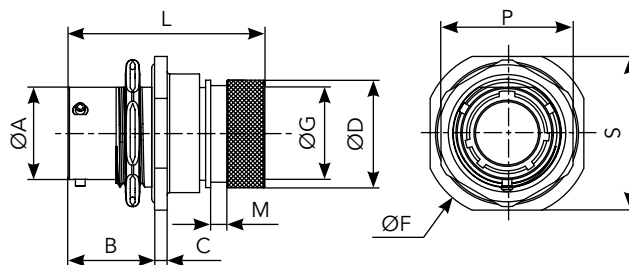

| Shell size | Part numbers                        |                                      | L max  |       | A     | B max | C max | D max | F max | G max  |       | M max | P max | S max |
|------------|-------------------------------------|--------------------------------------|--------|-------|-------|-------|-------|-------|-------|--------|-------|-------|-------|-------|
|            | solder contacts                     | crimp contacts                       | solder | crimp |       |       |       |       |       | Solder | Crimp |       |       |       |
| 8          | 851 07 T 8.. P <sub>S</sub> . 50..  | 851 07 RT 8.. P <sub>S</sub> . 50..  | 42.60  | 41.50 | 12.03 | 17.90 | 2.64  | 15.35 | 26.94 | 7.20   | 6.70  | 3.70  | 19.29 | 23.94 |
| 10         | 851 07 T 10.. P <sub>S</sub> . 50.. | 851 07 RT 10.. P <sub>S</sub> . 50.. | 42.60  | 41.50 | 15.01 | 17.90 | 2.64  | 18.15 | 30.14 | 10.20  | 9.40  | 3.70  | 22.38 | 26.94 |
| 12         | 851 07 T 12.. P <sub>S</sub> . 50.. | 851 07 RT 12.. P <sub>S</sub> . 50.. | 42.60  | 41.50 | 19.07 | 17.90 | 2.64  | 23.45 | 34.94 | 13.20  | 11.95 | 3.70  | 27.13 | 31.74 |
| 14         | 851 07 T 14.. P <sub>S</sub> . 50.. | 851 07 RT 14.. P <sub>S</sub> . 50.. | 42.60  | 41.50 | 22.25 | 17.90 | 2.64  | 24.25 | 38.04 | 16.10  | 15.15 | 3.70  | 30.33 | 34.94 |
| 16         | 851 07 T 16.. P <sub>S</sub> . 50.. | 851 07 RT 16.. P <sub>S</sub> . 50.. | 44.40  | 43.80 | 25.42 | 17.90 | 2.64  | 29.55 | 41.24 | 19.25  | 18.05 | 3.70  | 33.48 | 38.24 |
| 18         | 851 07 T 18.. P <sub>S</sub> . 50.. | 851 07 RT 18.. P <sub>S</sub> . 50.. | 44.40  | 43.80 | 28.60 | 17.90 | 2.64  | 31.75 | 44.44 | 21.30  | 19.95 | 3.70  | 36.68 | 41.24 |
| 20         | 851 07 T 20.. P <sub>S</sub> . 50.. | 851 07 RT 20.. P <sub>S</sub> . 50.. | 50.90  | 49.80 | 31.77 | 22.45 | 3.44  | 35.85 | 49.14 | 24.40  | 23.05 | 3.70  | 39.83 | 46.04 |
| 22         | 851 07 T 22.. P <sub>S</sub> . 50.. | 851 07 RT 22.. P <sub>S</sub> . 50.. | 50.90  | 49.80 | 34.95 | 22.45 | 3.44  | 38.20 | 52.24 | 27.50  | 25.55 | 3.70  | 43.03 | 49.24 |
| 24         | 851 07 T 24.. P <sub>S</sub> . 50.. | 851 07 RT 24.. P <sub>S</sub> . 50.. | 49.90  | 48.50 | 38.12 | 23.30 | 3.44  | 41.30 | 55.54 | 30.60  | 28.65 | 3.70  | 46.18 | 52.74 |

## Jam nut receptacle with removable straight backshell for screen termination and heatshrink sleeving (38 &amp; 42 suffix)

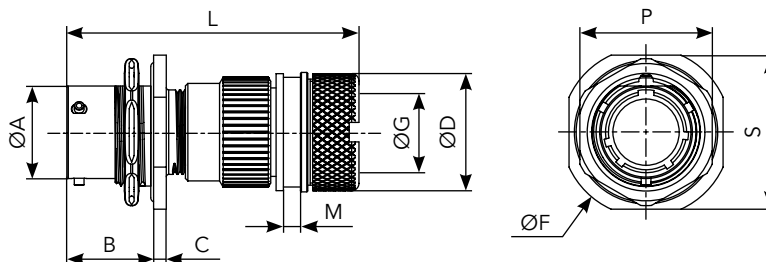

| Shell size | Part numbers                                                  |                                                                | L max  |       | A     | B max | C max | D max | F max | G max | M max | P max | S max |
|------------|---------------------------------------------------------------|----------------------------------------------------------------|--------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|
|            | solder contacts                                               | crimp contacts                                                 | solder | crimp |       |       |       |       |       |       |       |       |       |
| 8          | 851 07 T 8.. P <sub>S</sub> . 50 <sup>38</sup> <sub>42</sub>  | 851 07 RT 8.. P <sub>S</sub> . 50 <sup>38</sup> <sub>42</sub>  | 60.00  |       | 12.03 | 17.90 | 2.64  | 18.25 | 26.94 | 7.45  | 3.70  | 19.29 | 23.94 |
| 10         | 851 07 T 10.. P <sub>S</sub> . 50 <sup>38</sup> <sub>42</sub> | 851 07 RT 10.. P <sub>S</sub> . 50 <sup>38</sup> <sub>42</sub> | 60.00  |       | 15.01 | 17.90 | 2.64  | 20.25 | 30.14 | 9.00  | 3.70  | 22.38 | 26.94 |
| 12         | 851 07 T 12.. P <sub>S</sub> . 50 <sup>38</sup> <sub>42</sub> | 851 07 RT 12.. P <sub>S</sub> . 50 <sup>38</sup> <sub>42</sub> | 60.00  |       | 19.07 | 17.90 | 2.64  | 24.75 | 34.94 | 13.30 | 3.70  | 27.13 | 31.74 |
| 14         | 851 07 T 14.. P <sub>S</sub> . 50 <sup>38</sup> <sub>42</sub> | 851 07 RT 14.. P <sub>S</sub> . 50 <sup>38</sup> <sub>42</sub> | 60.00  |       | 22.25 | 17.90 | 2.64  | 27.75 | 38.04 | 16.50 | 3.70  | 30.33 | 34.94 |
| 16         | 851 07 T 16.. P <sub>S</sub> . 50 <sup>38</sup> <sub>42</sub> | 851 07 RT 16.. P <sub>S</sub> . 50 <sup>38</sup> <sub>42</sub> | 60.00  |       | 25.42 | 17.90 | 2.64  | 30.05 | 41.24 | 18.50 | 3.70  | 33.48 | 38.24 |
| 18         | 851 07 T 18.. P <sub>S</sub> . 50 <sup>38</sup> <sub>42</sub> | 851 07 RT 18.. P <sub>S</sub> . 50 <sup>38</sup> <sub>42</sub> | 60.40  |       | 28.60 | 17.90 | 2.64  | 34.15 | 44.44 | 21.90 | 3.70  | 36.68 | 41.34 |
| 20         | 851 07 T 20.. P <sub>S</sub> . 50 <sup>38</sup> <sub>42</sub> | 851 07 RT 20.. P <sub>S</sub> . 50 <sup>38</sup> <sub>42</sub> | 63.40  |       | 31.77 | 22.45 | 3.44  | 37.25 | 49.14 | 25.10 | 3.70  | 39.83 | 46.04 |
| 22         | 851 07 T 22.. P <sub>S</sub> . 50 <sup>38</sup> <sub>42</sub> | 851 07 RT 22.. P <sub>S</sub> . 50 <sup>38</sup> <sub>42</sub> | 63.40  |       | 34.95 | 22.45 | 3.44  | 40.45 | 52.24 | 28.20 | 3.70  | 43.03 | 49.24 |
| 24         | 851 07 T 24.. P <sub>S</sub> . 50 <sup>38</sup> <sub>42</sub> | 851 07 RT 24.. P <sub>S</sub> . 50 <sup>38</sup> <sub>42</sub> | 63.40  |       | 38.12 | 23.30 | 3.44  | 43.65 | 55.54 | 31.40 | 3.70  | 46.18 | 52.74 |


Note: all dimensions are in mm

## Environmental connectors

## Plug with straight adaptor

## Cross reference

|       |                |
|-------|----------------|
| 06 A  | HE 301 B 06 A  |
| 06 RA | HE 301 B 06 RA |

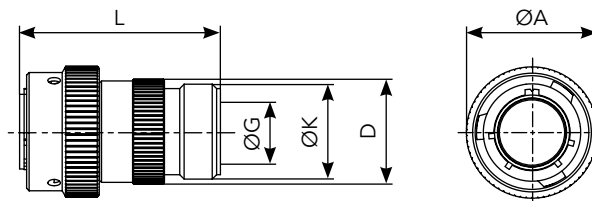


| Shell size | Part numbers                         |                                       | L max  |       | A max | D max | G max | F threading<br>UNEF 2A |
|------------|--------------------------------------|---------------------------------------|--------|-------|-------|-------|-------|------------------------|
|            | solder contacts                      | crimp contacts                        | solder | crimp |       |       |       |                        |
| 8          | 851 06 A 8 .. P <sub>S</sub> . 50..  | 851 06 RA 8 .. P <sub>S</sub> . 50 .. | 41.00  | 41.00 | 19.05 | 14.50 | 9.10  | 1/2 28                 |
| 10         | 851 06 A 10 .. P <sub>S</sub> . 50.. | 851 06 RA 10 .. P <sub>S</sub> . 50.. | 41.00  | 41.00 | 21.80 | 18.70 | 12.08 | 5/8 24                 |
| 12         | 851 06 A 12 .. P <sub>S</sub> . 50.. | 851 06 RA 12 .. P <sub>S</sub> . 50.. | 41.00  | 41.00 | 26.15 | 21.70 | 15.25 | 3/4 20                 |
| 14         | 851 06 A 14 .. P <sub>S</sub> . 50.. | 851 06 RA 14 .. P <sub>S</sub> . 50.. | 41.00  | 41.00 | 29.35 | 25.10 | 18.15 | 7/8 20                 |
| 16         | 851 06 A 16 .. P <sub>S</sub> . 50.. | 851 06 RA 16 .. P <sub>S</sub> . 50.. | 41.00  | 41.00 | 32.50 | 28.13 | 21.32 | 1-20                   |
| 18         | 851 06 A 18 .. P <sub>S</sub> . 50.. | 851 06 RA 18 .. P <sub>S</sub> . 50.. | 41.00  | 41.00 | 35.30 | 31.38 | 24.32 | 1-3/16 18              |
| 20         | 851 06 A 20 .. P <sub>S</sub> . 50.. | 851 06 RA 20 .. P <sub>S</sub> . 50.. | 44.00  | 43.30 | 38.85 | 34.30 | 26.73 | 1-3/16 18              |
| 22         | 851 06 A 22 .. P <sub>S</sub> . 50.. | 851 06 RA 22 .. P <sub>S</sub> . 50.. | 44.00  | 43.30 | 42.05 | 37.60 | 30.67 | 1-7/16 18              |
| 24         | 851 06 A 24 .. P <sub>S</sub> . 50.. | 851 06 RA 24 .. P <sub>S</sub> . 50.. | 44.00  | 43.50 | 45.10 | 40.70 | 33.08 | 1-7/16 18              |

## Plug with straight cable clamp

## Cross reference

|       |                |
|-------|----------------|
| 06 EC | HE 301 B 06 EC |
|       | MS 3116 F      |
| 06 AC | HE 301 B 06 AC |
| 06 RC | HE 301 B 06 RC |
|       | MS 3126 F      |
|       | VG 95328 K     |

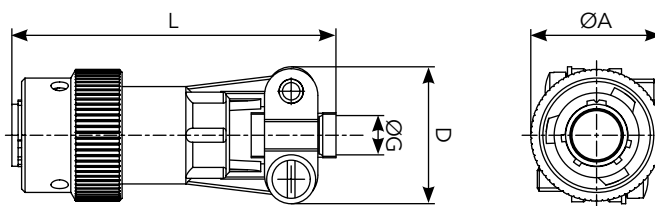

| Shell size | Part numbers                             |                                       | L max  |       | A max | D max | G     |
|------------|------------------------------------------|---------------------------------------|--------|-------|-------|-------|-------|
|            | solder contacts                          | crimp contacts                        | solder | crimp |       |       |       |
| 8          | 851 06 EC AC 8 .. P <sub>S</sub> . 50..  | 851 06 RC 8 .. P <sub>S</sub> . 50 .. | 48.00  | 47.30 | 19.05 | 19.90 | 3.50  |
| 10         | 851 06 EC AC 10 .. P <sub>S</sub> . 50.. | 851 06 RC 10 .. P <sub>S</sub> . 50.. | 48.00  | 47.30 | 21.80 | 21.50 | 5.00  |
| 12         | 851 06 EC AC 12 .. P <sub>S</sub> . 50.. | 851 06 RC 12 .. P <sub>S</sub> . 50.. | 48.00  | 47.30 | 26.15 | 25.00 | 8.20  |
| 14         | 851 06 EC AC 14 .. P <sub>S</sub> . 50.. | 851 06 RC 14 .. P <sub>S</sub> . 50.. | 48.00  | 47.30 | 29.35 | 27.80 | 10.00 |
| 16         | 851 06 EC AC 16 .. P <sub>S</sub> . 50.. | 851 06 RC 16 .. P <sub>S</sub> . 50.. | 51.00  | 50.50 | 32.50 | 29.40 | 13.00 |
| 18         | 851 06 EC AC 18 .. P <sub>S</sub> . 50.. | 851 06 RC 18 .. P <sub>S</sub> . 50.. | 51.00  | 50.50 | 35.30 | 35.30 | 16.00 |
| 20         | 851 06 EC AC 20 .. P <sub>S</sub> . 50.. | 851 06 RC 20 .. P <sub>S</sub> . 50.. | 52.00  | 50.20 | 38.85 | 35.30 | 16.00 |
| 22         | 851 06 EC AC 22 .. P <sub>S</sub> . 50.. | 851 06 RC 22 .. P <sub>S</sub> . 50.. | 52.00  | 50.20 | 42.05 | 41.10 | 19.30 |
| 24         | 851 06 EC AC 24 .. P <sub>S</sub> . 50.. | 851 06 RC 24 .. P <sub>S</sub> . 50.. | 52.00  | 50.20 | 45.10 | 42.40 | 20.60 |



Note: all dimensions are in mm

## Environmental connectors

## Plug with backnut

## Cross reference

|      |               |
|------|---------------|
| 06 E | HE 301 B 06 E |
|      | MS 3116 E     |
| 06 R | HE 301 B 06 R |
|      | MS 3126 E     |





| Shell size | Part numbers                        |                                     | L max  |       | A max | D max |
|------------|-------------------------------------|-------------------------------------|--------|-------|-------|-------|
|            | solder contacts                     | crimp contacts                      | solder | crimp |       |       |
| 8          | 851 06 E 8 .. $\frac{P}{S}$ . 50..  | 851 06 R 8 .. $\frac{P}{S}$ . 50 .. | 32.54  | 32.00 | 19.05 | 13.50 |
| 10         | 851 06 E 10 .. $\frac{P}{S}$ . 50.. | 851 06 R 10 .. $\frac{P}{S}$ . 50.. | 32.54  | 32.00 | 21.80 | 16.70 |
| 12         | 851 06 E 12 .. $\frac{P}{S}$ . 50.. | 851 06 R 12 .. $\frac{P}{S}$ . 50.. | 32.54  | 32.00 | 26.15 | 19.90 |
| 14         | 851 06 E 14 .. $\frac{P}{S}$ . 50.. | 851 06 R 14 .. $\frac{P}{S}$ . 50.. | 32.54  | 32.00 | 29.35 | 23.40 |
| 16         | 851 06 E 16 .. $\frac{P}{S}$ . 50.. | 851 06 R 16 .. $\frac{P}{S}$ . 50.. | 32.54  | 32.00 | 32.50 | 26.60 |
| 18         | 851 06 E 18 .. $\frac{P}{S}$ . 50.. | 851 06 R 18 .. $\frac{P}{S}$ . 50.. | 32.54  | 32.00 | 35.30 | 29.60 |
| 20         | 851 06 E 20 .. $\frac{P}{S}$ . 50.. | 851 06 R 20 .. $\frac{P}{S}$ . 50.. | 33.30  | 32.10 | 38.85 | 32.70 |
| 22         | 851 06 E 22 .. $\frac{P}{S}$ . 50.. | 851 06 R 22 .. $\frac{P}{S}$ . 50.. | 33.30  | 32.10 | 42.05 | 36.00 |
| 24         | 851 06 E 24 .. $\frac{P}{S}$ . 50.. | 851 06 R 24 .. $\frac{P}{S}$ . 50.. | 33.30  | 32.10 | 45.10 | 39.10 |

## Plug with straight sealing gland backshell

## Cross reference

|      |               |
|------|---------------|
| 06 J | HE 301 B 06 J |
|------|---------------|

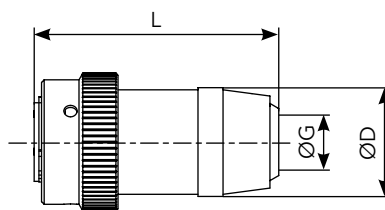

| Shell size | Part numbers                        |                | L max  |       | A max | D max | G max |       |
|------------|-------------------------------------|----------------|--------|-------|-------|-------|-------|-------|
|            | solder contacts                     | crimp contacts | solder | crimp |       |       | min   | max   |
| 8          | 851 06 J 8 .. $\frac{P}{S}$ . 50..  | -              | 47.60  | -     | 19.05 | 14.40 | 5.02  | 5.84  |
| 10         | 851 06 J 10 .. $\frac{P}{S}$ . 50.. | -              | 47.60  | -     | 21.80 | 17.60 | 5.94  | 6.76  |
| 12         | 851 06 J 12 .. $\frac{P}{S}$ . 50.. | -              | 49.20  | -     | 26.15 | 21.10 | 9.34  | 10.16 |
| 14         | 851 06 J 14 .. $\frac{P}{S}$ . 50.. | -              | 54.00  | -     | 29.35 | 24.40 | 11.32 | 12.14 |
| 16         | 851 06 J 16 .. $\frac{P}{S}$ . 50.. | -              | 59.60  | -     | 32.50 | 27.60 | 14.73 | 15.55 |
| 18         | 851 06 J 18 .. $\frac{P}{S}$ . 50.. | -              | 65.60  | -     | 35.30 | 30.80 | 16.00 | 16.80 |
| 20         | 851 06 J 20 .. $\frac{P}{S}$ . 50.. | -              | 78.00  | -     | 38.85 | 34.10 | 16.89 | 17.71 |
| 22         | 851 06 J 22 .. $\frac{P}{S}$ . 50.. | -              | 79.50  | -     | 42.05 | 37.30 | 17.78 | 18.60 |
| 24         | 851 06 J 24 .. $\frac{P}{S}$ . 50.. | -              | 90.00  | -     | 45.10 | 40.50 | 20.34 | 21.16 |


Note: all dimensions are in mm

## Environmental connectors

## Plug with straight sealing gland and cable clamp backshells


## Cross reference

|       |           |
|-------|-----------|
| 06 JC | MS 3116 J |
|-------|-----------|

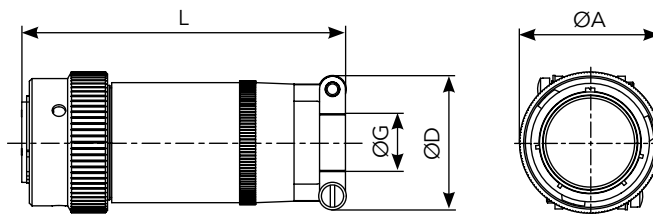

| Shell size | Part numbers                         |                | L max  |       | A max | D max | G max |       |
|------------|--------------------------------------|----------------|--------|-------|-------|-------|-------|-------|
|            | solder contacts                      | crimp contacts | solder | crimp |       |       | min   | max   |
| 8          | 851 06 JC 8 .. $\frac{P}{S}$ . 50..  | -              | 57.68  | -     | 19.05 | 19.90 | 5.02  | 5.84  |
| 10         | 851 06 JC 10 .. $\frac{P}{S}$ . 50.. | -              | 57.68  | -     | 21.80 | 21.50 | 5.94  | 6.76  |
| 12         | 851 06 JC 12 .. $\frac{P}{S}$ . 50.. | -              | 61.24  | -     | 26.15 | 25.00 | 9.34  | 10.16 |
| 14         | 851 06 JC 14 .. $\frac{P}{S}$ . 50.. | -              | 66.01  | -     | 29.35 | 27.80 | 11.32 | 12.14 |
| 16         | 851 06 JC 16 .. $\frac{P}{S}$ . 50.. | -              | 74.75  | -     | 32.50 | 29.40 | 14.73 | 15.50 |
| 18         | 851 06 JC 18 .. $\frac{P}{S}$ . 50.. | -              | 80.57  | -     | 35.30 | 35.30 | 16.00 | 16.82 |
| 20         | 851 06 JC 20 .. $\frac{P}{S}$ . 50.. | -              | 91.69  | -     | 38.85 | 35.30 | 16.89 | 17.71 |
| 22         | 851 06 JC 22 .. $\frac{P}{S}$ . 50.. | -              | 95.66  | -     | 42.05 | 41.10 | 17.78 | 18.60 |
| 24         | 851 06 JC 24 .. $\frac{P}{S}$ . 50.. | -              | 101.22 | -     | 45.10 | 42.40 | 20.34 | 21.16 |

## Plug with long metallic adaptor and plastic cable gland

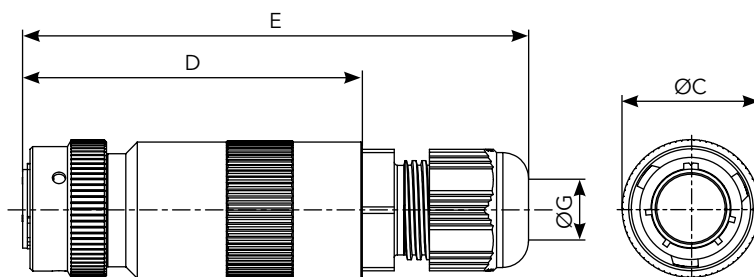


| Shell size | Part numbers<br>solder contacts | D maxi | E maxi | ØC maxi | ØG   |       |
|------------|---------------------------------|--------|--------|---------|------|-------|
|            |                                 |        |        |         | mini | maxi  |
| 8          | 851 06L 8 $\frac{P}{S}$ *       | 57.00  | 81.00  | 19.30   | 4.00 | 5.00  |
| 10         | 851 06L 10 $\frac{P}{S}$ *      | 57.00  | 84.00  | 22.00   | 4.00 | 6.00  |
| 12         | 851 06L 12 $\frac{P}{S}$ *      | 57.00  | 86.00  | 26.30   | 4.00 | 7.00  |
| 14         | 851 06L 14 $\frac{P}{S}$ *      | 57.00  | 87.00  | 29.50   | 4.00 | 9.00  |
| 16         | 851 06L 16 $\frac{P}{S}$ *      | 57.00  | 90.00  | 32.70   | 6.00 | 12.00 |

Black anodized\* See page 12 "obligatory specification". Example: 85106L123P54

Note: all dimensions are in mm


## Environmental connectors

## Plug with removable straight backshell for heatshrink sleeving

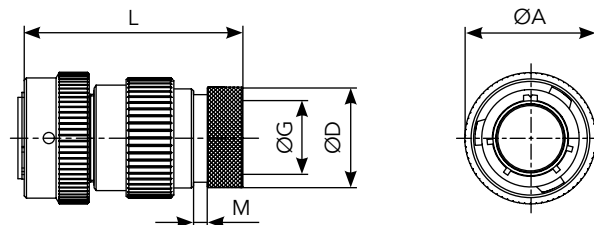

| Shell size | Part numbers                        |                                      | L max  |       | A max | D max | G max | M max |
|------------|-------------------------------------|--------------------------------------|--------|-------|-------|-------|-------|-------|
|            | solder contacts                     | crimp contacts                       | solder | crimp |       |       |       |       |
| 8          | 851 06 M 8 .. $\frac{P}{S}$ . 50..  | 851 06 RM 8 .. $\frac{P}{S}$ . 50 .. | 50.00  |       | 19.05 | 13.55 | 7.05  | 3.50  |
| 10         | 851 06 M 10 .. $\frac{P}{S}$ . 50.. | 851 06 RM 10 .. $\frac{P}{S}$ . 50.. | 50.00  |       | 21.80 | 15.35 | 9.90  | 3.50  |
| 12         | 851 06 M 12 .. $\frac{P}{S}$ . 50.. | 851 06 RM 12 .. $\frac{P}{S}$ . 50.. | 50.00  |       | 26.15 | 19.48 | 12.60 | 3.50  |
| 14         | 851 06 M 14 .. $\frac{P}{S}$ . 50.. | 851 06 RM 14 .. $\frac{P}{S}$ . 50.. | 50.00  |       | 29.35 | 21.30 | 15.90 | 3.50  |
| 16         | 851 06 M 16 .. $\frac{P}{S}$ . 50.. | 851 06 RM 16 .. $\frac{P}{S}$ . 50.. | 50.00  |       | 32.50 | 24.50 | 18.95 | 3.50  |
| 18         | 851 06 M 18 .. $\frac{P}{S}$ . 50.. | 851 06 RM 18 .. $\frac{P}{S}$ . 50.. | 50.00  |       | 35.30 | 26.45 | 20.90 | 3.50  |
| 20         | 851 06 M 20 .. $\frac{P}{S}$ . 50.. | 851 06 RM 20 .. $\frac{P}{S}$ . 50.. | 52.00  |       | 38.85 | 30.73 | 23.70 | 3.50  |
| 22         | 851 06 M 22 .. $\frac{P}{S}$ . 50.. | 851 06 RM 22 .. $\frac{P}{S}$ . 50.. | 52.00  |       | 42.05 | 34.24 | 26.60 | 3.50  |
| 24         | 851 06 M 24 .. $\frac{P}{S}$ . 50.. | 851 06 RM 24 .. $\frac{P}{S}$ . 50.. | 52.00  |       | 45.10 | 36.47 | 29.30 | 3.50  |

## Plug with short metallic adaptor and plastic cable gland with spiral protector

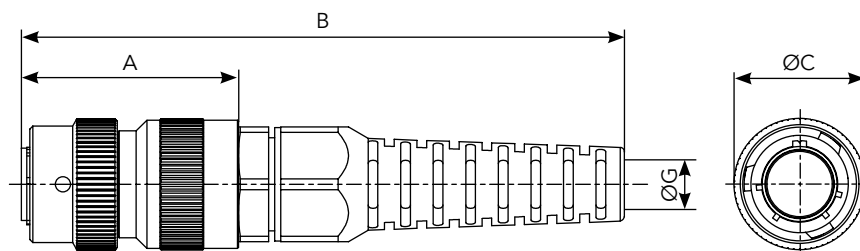


| Shell size | Part numbers<br>solder contacts | A<br>maxi | B<br>maxi | ØC<br>maxi | ØG   |      |
|------------|---------------------------------|-----------|-----------|------------|------|------|
|            |                                 |           |           |            | mini | maxi |
| 8          | 851 06NS 8 $\frac{P}{S}$ *      | 37.00     | 91.00     | 19.30      | 4.00 | 6.50 |
| 10         | 851 06NS 10 $\frac{P}{S}$ *     | 37.00     | 101.00    | 22.00      | 4.00 | 7.00 |
| 12         | 851 06NS 12 $\frac{P}{S}$ *     | 37.00     | 114.00    | 26.30      | 4.00 | 7.00 |
| 14         | 851 06NS 14 $\frac{P}{S}$ *     | 37.00     | 125.00    | 29.50      | 4.00 | 7.00 |
| 16         | 851 06NS 16 $\frac{P}{S}$ *     | 42.00     | 144.00    | 32.70      | 6.00 | 11.0 |

Black anodized\* See page 12 "obligatory specification". Example: 85106NS123P54

Note: all dimensions are in mm

## Environmental connectors

## Plug with long metallic adaptor and plastic cable gland with spiral protector

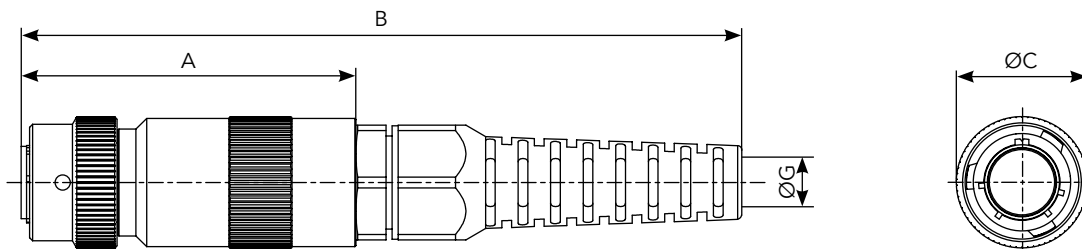


| Shell size | Part numbers solder contacts              | D maxi | E maxi | ØC maxi | ØG   |      |
|------------|-------------------------------------------|--------|--------|---------|------|------|
|            |                                           |        |        |         | mini | maxi |
| 8          | 851 06NL 8 <sup>P</sup> / <sub>S</sub> *  | 57.00  | 111.00 | 19.30   | 4.00 | 6.50 |
| 10         | 851 06NL 10 <sup>P</sup> / <sub>S</sub> * | 57.00  | 121.00 | 22.00   | 4.00 | 7.00 |
| 12         | 851 06NL 12 <sup>P</sup> / <sub>S</sub> * | 57.00  | 134.00 | 26.30   | 4.00 | 7.00 |
| 14         | 851 06NL 14 <sup>P</sup> / <sub>S</sub> * | 57.00  | 145.00 | 29.50   | 4.00 | 7.00 |
| 16         | 851 06NL 16 <sup>P</sup> / <sub>S</sub> * | 57.00  | 159.00 | 32.70   | 6.00 | 11.0 |

Black anodized\* See page 12 "obligatory specification". Example: 85106NL123P54

## Plug with straight backshell for potting

## Cross reference

|       |                |
|-------|----------------|
| 06 P  | HE 301 B 06 P  |
|       | MS 3116 P      |
| 06 RP | HE 301 B 06 RP |
|       | MS 3126 P      |

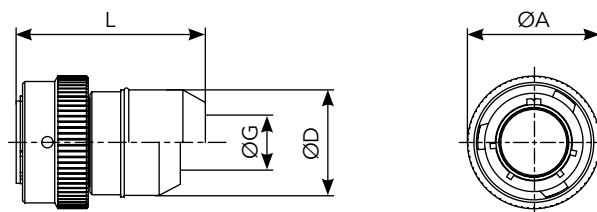


| Shell size | Part numbers                                      |                                                    | L max  |       | A max | D max | G     |
|------------|---------------------------------------------------|----------------------------------------------------|--------|-------|-------|-------|-------|
|            | solder contacts                                   | crimp contacts                                     | solder | crimp |       |       |       |
| 8          | 851 06 P 8 .. <sup>P</sup> / <sub>S</sub> . 50..  | 851 06 RP 8 .. <sup>P</sup> / <sub>S</sub> . 50 .. | 36.20  | 42.10 | 19.05 | 15.34 | 10.46 |
| 10         | 851 06 P 10 .. <sup>P</sup> / <sub>S</sub> . 50.. | 851 06 RP 10 .. <sup>P</sup> / <sub>S</sub> . 50.. | 36.20  | 42.10 | 21.80 | 17.70 | 13.55 |
| 12         | 851 06 P 12 .. <sup>P</sup> / <sub>S</sub> . 50.. | 851 06 RP 12 .. <sup>P</sup> / <sub>S</sub> . 50.. | 36.20  | 42.10 | 26.15 | 21.69 | 13.96 |
| 14         | 851 06 P 14 .. <sup>P</sup> / <sub>S</sub> . 50.. | 851 06 RP 14 .. <sup>P</sup> / <sub>S</sub> . 50.. | 36.20  | 42.10 | 29.35 | 23.90 | 17.42 |
| 16         | 851 06 P 16 .. <sup>P</sup> / <sub>S</sub> . 50.. | 851 06 RP 16 .. <sup>P</sup> / <sub>S</sub> . 50.. | 36.20  | 42.10 | 32.50 | 27.00 | 20.56 |
| 18         | 851 06 P 18 .. <sup>P</sup> / <sub>S</sub> . 50.. | 851 06 RP 18 .. <sup>P</sup> / <sub>S</sub> . 50.. | 37.70  | 45.40 | 35.30 | 30.50 | 23.66 |
| 20         | 851 06 P 20 .. <sup>P</sup> / <sub>S</sub> . 50.. | 851 06 RP 20 .. <sup>P</sup> / <sub>S</sub> . 50.. | 42.40  | 50.00 | 38.85 | 33.65 | 23.92 |
| 22         | 851 06 P 22 .. <sup>P</sup> / <sub>S</sub> . 50.. | 851 06 RP 22 .. <sup>P</sup> / <sub>S</sub> . 50.. | 42.40  | 50.00 | 42.05 | 37.10 | 25.52 |
| 24         | 851 06 P 24 .. <sup>P</sup> / <sub>S</sub> . 50.. | 851 06 RP 24 .. <sup>P</sup> / <sub>S</sub> . 50.. | 42.85  | 50.00 | 45.10 | 40.00 | 32.00 |

Note: all dimensions are in mm

## Environmental connectors

## Plug with short metallic adaptor and plastic cable gland

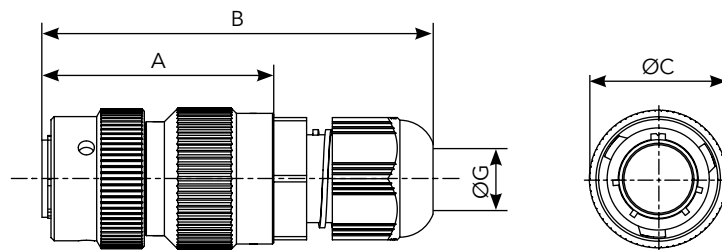


| Shell size | Part numbers solder contacts             | A maxi | B maxi | ØC maxi | ØG   |       |
|------------|------------------------------------------|--------|--------|---------|------|-------|
|            |                                          |        |        |         | mini | maxi  |
| 8          | 851 06S 8 <sup>P</sup> / <sub>S</sub> *  | 37.00  | 61.00  | 19.30   | 4.00 | 5.00  |
| 10         | 851 06S 10 <sup>P</sup> / <sub>S</sub> * | 37.00  | 64.00  | 22.00   | 4.00 | 6.00  |
| 12         | 851 06S 12 <sup>P</sup> / <sub>S</sub> * | 37.00  | 66.00  | 26.30   | 4.00 | 7.00  |
| 14         | 851 06S 14 <sup>P</sup> / <sub>S</sub> * | 37.00  | 67.00  | 29.50   | 4.00 | 9.00  |
| 16         | 851 06S 16 <sup>P</sup> / <sub>S</sub> * | 42.00  | 75.00  | 32.70   | 6.00 | 12.00 |

Black anodized\* See page 12 "obligatory specification". Example: 85106S123P54

## Plug with straight backshell for heatshrink sleeving

## Cross reference

|       |            |
|-------|------------|
| 06 T  |            |
| 06 RT | VG 95328 J |

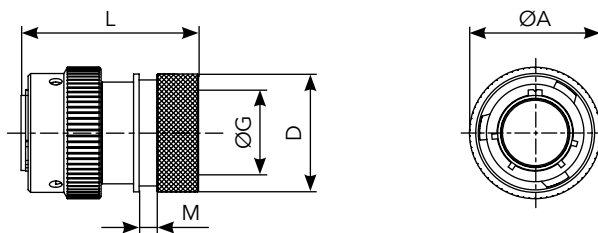

| Shell size | Part numbers                                     |                                                   | L max  |       | A max | D max | G max  |       | M max |
|------------|--------------------------------------------------|---------------------------------------------------|--------|-------|-------|-------|--------|-------|-------|
|            | solder contacts                                  | crimp contacts                                    | solder | crimp |       |       | Solder | Crimp |       |
| 8          | 851 06 T 8.. <sup>P</sup> / <sub>S</sub> . 50..  | 851 06 RT 8.. <sup>P</sup> / <sub>S</sub> . 50 .. | 36.70  | 36.00 | 19.05 | 15.35 | 7.20   | 6.70  | 3.70  |
| 10         | 851 06 T 10.. <sup>P</sup> / <sub>S</sub> . 50.. | 851 06 RT 10.. <sup>P</sup> / <sub>S</sub> . 50.. | 36.70  | 36.00 | 21.80 | 18.15 | 10.20  | 9.40  | 3.70  |
| 12         | 851 06 T 12.. <sup>P</sup> / <sub>S</sub> . 50.. | 851 06 RT 12.. <sup>P</sup> / <sub>S</sub> . 50.. | 36.70  | 36.00 | 26.15 | 23.45 | 13.20  | 11.95 | 3.70  |
| 14         | 851 06 T 14.. <sup>P</sup> / <sub>S</sub> . 50.. | 851 06 RT 14.. <sup>P</sup> / <sub>S</sub> . 50.. | 36.70  | 36.00 | 29.35 | 24.25 | 16.10  | 15.15 | 3.70  |
| 16         | 851 06 T 16.. <sup>P</sup> / <sub>S</sub> . 50.. | 851 06 RT 16.. <sup>P</sup> / <sub>S</sub> . 50.. | 39.00  | 38.30 | 32.50 | 29.55 | 19.25  | 18.05 | 3.70  |
| 18         | 851 06 T 18.. <sup>P</sup> / <sub>S</sub> . 50.. | 851 06 RT 18.. <sup>P</sup> / <sub>S</sub> . 50.. | 39.00  | 38.30 | 35.30 | 31.75 | 21.30  | 19.95 | 3.70  |
| 20         | 851 06 T 20.. <sup>P</sup> / <sub>S</sub> . 50.. | 851 06 RT 20.. <sup>P</sup> / <sub>S</sub> . 50.. | 44.00  | 42.90 | 38.85 | 35.85 | 24.40  | 23.05 | 3.70  |
| 22         | 851 06 T 22.. <sup>P</sup> / <sub>S</sub> . 50.. | 851 06 RT 22.. <sup>P</sup> / <sub>S</sub> . 50.. | 44.00  | 42.90 | 42.05 | 38.20 | 27.50  | 25.55 | 3.70  |
| 24         | 851 06 T 24.. <sup>P</sup> / <sub>S</sub> . 50.. | 851 06 RT 24.. <sup>P</sup> / <sub>S</sub> . 50.. | 42.70  | 41.60 | 45.10 | 41.30 | 30.60  | 28.65 | 3.70  |


Note: all dimensions are in mm

## Environmental connectors

## Plug with straight adaptor for electrical pitch access

The Z type special adaptor which equips crimp plug 851 06 RZ fits following accessories.

- Packing gland collet backshell
- Backshell for polyflex sleeving
- Backshell for C.N.O.M.O. tube

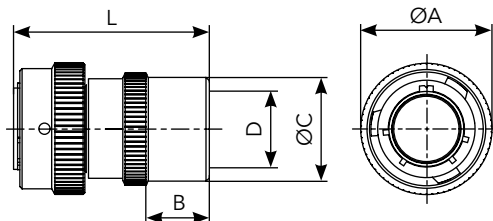


| Shell size | Part numbers                         |                                       | L max  |       | A max | B max | C max | D threading PE |
|------------|--------------------------------------|---------------------------------------|--------|-------|-------|-------|-------|----------------|
|            | solder contacts                      | crimp contacts                        | solder | crimp |       |       |       |                |
| 8          | -                                    | -                                     | -      | -     | -     | -     | -     | -              |
| 10         | -                                    | -                                     | -      | -     | -     | -     | -     | -              |
| 12         | 851 06 Z 12 .. P <sub>S</sub> . 50.. | 851 06 RZ 12 .. P <sub>S</sub> . 50.. | 43.00  |       | 26.15 | 9.10  | 24.80 | 11             |
| 14         | 851 06 Z14 .. P <sub>S</sub> . 50..  | 851 06 RZ 14 .. P <sub>S</sub> . 50.. | 45.00  |       | 29.35 | 11.00 | 28.80 | 16             |
| 16         | 851 06 Z 16 .. P <sub>S</sub> . 50.. | 851 06 RZ 16 .. P <sub>S</sub> . 50.. | 45.00  |       | 32.50 | 11.00 | 30.80 | 16             |
| 18         | 851 06 Z 18 .. P <sub>S</sub> . 50.. | 851 06 RZ 18 .. P <sub>S</sub> . 50.. | 46.00  |       | 35.30 | 12.00 | 40.80 | 21             |
| 20         | 851 06 Z 20 .. P <sub>S</sub> . 50.. | 851 06 RZ 20 .. P <sub>S</sub> . 50.. | 46.50  |       | 38.85 | 12.00 | 40.80 | 21             |
| 22         | 851 06 Z 22 .. P <sub>S</sub> . 50.. | 851 06 RZ 22 .. P <sub>S</sub> . 50.. | 46.50  |       | 42.05 | 12.00 | 40.80 | 21             |
| 24         | 851 06 Z24 .. P <sub>S</sub> . 50..  | 851 06 RZ 24 .. P <sub>S</sub> . 50.. | 65.50  |       | 45.10 | 31.40 | 45.00 | 29             |

## Plug with elbow cable clamp backshell

## Cross reference

|       |                |
|-------|----------------|
| 08 EC | HE 301 B 08 EC |
| 08 RC | HE 301 B 08 RC |

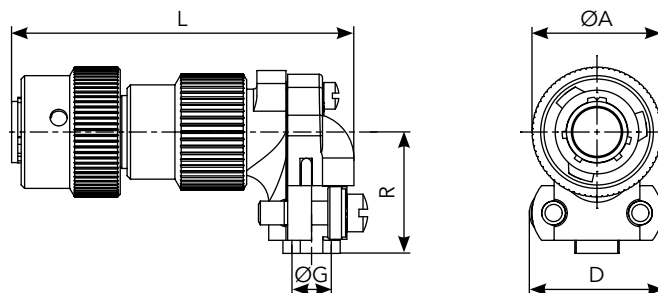

| Shell size | Part numbers                          |                                       | L max  |       | A max | D max | G     | R max |
|------------|---------------------------------------|---------------------------------------|--------|-------|-------|-------|-------|-------|
|            | solder contacts                       | crimp contacts                        | solder | crimp |       |       |       |       |
| 8          | 851 08 EC 8 .. P <sub>S</sub> . 50..  | 851 08 RC 8 .. P <sub>S</sub> . 50..  | 50.10  |       | 19.05 | 19.70 | 3.50  | 16.00 |
| 10         | 851 08 EC 10 .. P <sub>S</sub> . 50.. | 851 08 RC 10 .. P <sub>S</sub> . 50.. | 52.60  |       | 21.80 | 21.20 | 5.00  | 18.00 |
| 12         | 851 08 EC 12 .. P <sub>S</sub> . 50.. | 851 08 RC 12 .. P <sub>S</sub> . 50.. | 54.90  |       | 26.15 | 24.20 | 8.20  | 19.50 |
| 14         | 851 08 EC 14 .. P <sub>S</sub> . 50.. | 851 08 RC 14 .. P <sub>S</sub> . 50.. | 58.50  |       | 29.35 | 27.50 | 10.00 | 22.00 |
| 16         | 851 08 EC 16 .. P <sub>S</sub> . 50.. | 851 08 RC 16 .. P <sub>S</sub> . 50.. | 60.80  |       | 32.50 | 29.10 | 13.00 | 23.50 |
| 18         | 851 08 EC 18 .. P <sub>S</sub> . 50.. | 851 08 RC 18 .. P <sub>S</sub> . 50.. | 65.00  |       | 35.30 | 35.70 | 16.00 | 25.00 |
| 20         | 851 08 EC 20 .. P <sub>S</sub> . 50.. | 851 08 RC 20 .. P <sub>S</sub> . 50.. | 69.10  |       | 38.85 | 35.70 | 16.00 | 26.50 |
| 22         | 851 08 EC 22 .. P <sub>S</sub> . 50.. | 851 08 RC 22 .. P <sub>S</sub> . 50.. | 71.00  |       | 42.05 | 39.70 | 19.30 | 28.00 |
| 24         | 851 08 EC 24 .. P <sub>S</sub> . 50.. | 851 08 EC 24 .. P <sub>S</sub> . 50.. | 75.50  |       | 45.10 | 43.50 | 20.60 | 31.00 |

Note: all dimensions are in mm





## Environmental connectors

## Plug with elbow backshell for potting

## Cross reference

|       |                |
|-------|----------------|
| 08 P  | HE 301 B 08 P  |
| 08 RP | HE 301 B 08 RP |





| Shell size | Part numbers                            |                                          | L max  |       | A max | G max | R max | S max |
|------------|-----------------------------------------|------------------------------------------|--------|-------|-------|-------|-------|-------|
|            | solder contacts                         | crimp contacts                           | solder | crimp |       |       |       |       |
| 8          | 851 08 P 8 .. $\frac{P}{S} \cdot 50..$  | 851 08 RP 8 .. $\frac{P}{S} \cdot 50..$  | 40.70  |       | 19.05 | 8.10  | 11.70 | 11.30 |
| 10         | 851 08 P 10 .. $\frac{P}{S} \cdot 50..$ | 851 08 RP 10 .. $\frac{P}{S} \cdot 50..$ | 44.90  |       | 21.80 | 11.30 | 14.35 | 14.50 |
| 12         | 851 08 P 12 .. $\frac{P}{S} \cdot 50..$ | 851 08 RP 12 .. $\frac{P}{S} \cdot 50..$ | 46.90  |       | 26.15 | 13.30 | 15.90 | 17.70 |
| 14         | 851 08 P 14 .. $\frac{P}{S} \cdot 50..$ | 851 08 RP 14 .. $\frac{P}{S} \cdot 50..$ | 49.20  |       | 29.35 | 16.10 | 16.30 | 20.10 |
| 16         | 851 08 P 16 .. $\frac{P}{S} \cdot 50..$ | 851 08 RP 16 .. $\frac{P}{S} \cdot 50..$ | 50.60  |       | 32.50 | 16.90 | 19.30 | 22.80 |
| 18         | 851 08 P 18 .. $\frac{P}{S} \cdot 50..$ | 851 08 RP 18 .. $\frac{P}{S} \cdot 50..$ | 51.80  |       | 35.30 | 18.10 | 20.60 | 25.60 |
| 20         | 851 08 P 20 .. $\frac{P}{S} \cdot 50..$ | 851 08 RP 20 .. $\frac{P}{S} \cdot 50..$ | 53.70  |       | 38.85 | 19.70 | 21.90 | 28.80 |
| 22         | 851 08 P 22 .. $\frac{P}{S} \cdot 50..$ | 851 08 RP 22 .. $\frac{P}{S} \cdot 50..$ | 54.80  |       | 42.05 | 20.80 | 23.50 | 31.60 |
| 24         | 851 08 P 24 .. $\frac{P}{S} \cdot 50..$ | 851 08 RP 24 .. $\frac{P}{S} \cdot 50..$ | 58.20  |       | 45.10 | 24.20 | 30.15 | 35.20 |

## Shielded plug with straight adaptor

## Cross reference

|       |            |
|-------|------------|
| 36 A  |            |
| 36 RA | VG 95328 N |

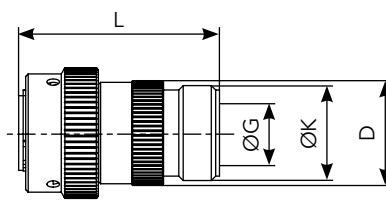

| Shell size | Part numbers                            |                                          | L max  |       | A max | D max | G max | F<br>threading<br>UNEF 2A |
|------------|-----------------------------------------|------------------------------------------|--------|-------|-------|-------|-------|---------------------------|
|            | solder contacts                         | crimp contacts                           | solder | crimp |       |       |       |                           |
| 8          | 851 36 A 8 .. $\frac{P}{S} \cdot 50..$  | 851 36 RA 8 .. $\frac{P}{S} \cdot 50..$  | 41.00  |       | 19.05 | 14.50 | 9.10  | 1/2 28                    |
| 10         | 851 36 A 10 .. $\frac{P}{S} \cdot 50..$ | 851 36 RA 10 .. $\frac{P}{S} \cdot 50..$ | 41.00  |       | 21.80 | 18.70 | 12.08 | 5/8 24                    |
| 12         | 851 36 A 12 .. $\frac{P}{S} \cdot 50..$ | 851 36 RA 12 .. $\frac{P}{S} \cdot 50..$ | 41.00  |       | 26.15 | 21.70 | 15.25 | 3/4 20                    |
| 14         | 851 36 A 14 .. $\frac{P}{S} \cdot 50..$ | 851 36 RA 14 .. $\frac{P}{S} \cdot 50..$ | 41.00  |       | 29.35 | 25.10 | 18.15 | 7/8 20                    |
| 16         | 851 36 A 16 .. $\frac{P}{S} \cdot 50..$ | 851 36 RA 16 .. $\frac{P}{S} \cdot 50..$ | 41.00  |       | 32.50 | 28.13 | 21.32 | 1-20                      |
| 18         | 851 36 A 18 .. $\frac{P}{S} \cdot 50..$ | 851 36 RA 18 .. $\frac{P}{S} \cdot 50..$ | 41.00  |       | 35.30 | 31.38 | 24.32 | 1-3/16 18                 |
| 20         | 851 36 A 20 .. $\frac{P}{S} \cdot 50..$ | 851 36 RA 20 .. $\frac{P}{S} \cdot 50..$ | 43.30  |       | 38.85 | 34.30 | 26.73 | 1-3/16 18                 |
| 22         | 851 36 A 22 .. $\frac{P}{S} \cdot 50..$ | 851 36 RA 22 .. $\frac{P}{S} \cdot 50..$ | 43.30  |       | 42.05 | 37.60 | 30.67 | 1-7/16 18                 |
| 24         | 851 36 A 24 .. $\frac{P}{S} \cdot 50..$ | 851 36 RA 24 .. $\frac{P}{S} \cdot 50..$ | 43.50  |       | 45.10 | 40.70 | 33.08 | 1-7/16 18                 |


Note: all dimensions are in mm

## Environmental connectors

## Shielded plug with removable straight backshell for screen termination and heatshrink sleeving


## Cross reference

|       |            |
|-------|------------|
| 36 G  |            |
| 36 RG | VG 95328 M |

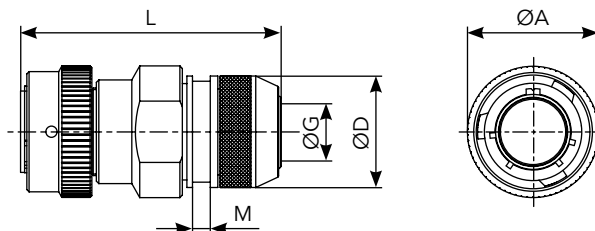

| Shell size | Part numbers                         |                                       | L max  |       | A max | D max | G max | M max |
|------------|--------------------------------------|---------------------------------------|--------|-------|-------|-------|-------|-------|
|            | solder contacts                      | crimp contacts                        | solder | crimp |       |       |       |       |
| 8          | 851 36 G 8 .. P <sub>S</sub> . 50..  | 851 36 RG 8 .. P <sub>S</sub> . 50..  | 54.00  |       | 19.05 | 16.30 | 7.45  | 3.60  |
| 10         | 851 36 G 10 .. P <sub>S</sub> . 50.. | 851 36 RG 10 .. P <sub>S</sub> . 50.. | 54.00  |       | 21.80 | 18.30 | 10.30 | 3.60  |
| 12         | 851 36 G 12 .. P <sub>S</sub> . 50.. | 851 36 RG 12 .. P <sub>S</sub> . 50.. | 54.00  |       | 26.15 | 22.30 | 13.20 | 3.60  |
| 14         | 851 36 G 14 .. P <sub>S</sub> . 50.. | 851 36 RG 14 .. P <sub>S</sub> . 50.. | 54.00  |       | 29.35 | 25.30 | 16.50 | 3.60  |
| 16         | 851 36 G 16 .. P <sub>S</sub> . 50.. | 851 36 RG 16 .. P <sub>S</sub> . 50.. | 54.00  |       | 32.50 | 28.30 | 19.35 | 3.60  |
| 18         | 851 36 G 18 .. P <sub>S</sub> . 50.. | 851 36 RG 18 .. P <sub>S</sub> . 50.. | 54.00  |       | 35.30 | 32.30 | 21.60 | 3.60  |
| 20         | 851 36 G 20 .. P <sub>S</sub> . 50.. | 851 36 RG 20 .. P <sub>S</sub> . 50.. | 58.00  |       | 38.85 | 34.30 | 24.80 | 3.60  |
| 22         | 851 36 G 22 .. P <sub>S</sub> . 50.. | 851 36 RG 22 .. P <sub>S</sub> . 50.. | 58.00  |       | 42.05 | 38.30 | 27.90 | 3.60  |
| 24         | 851 36 G 24 .. P <sub>S</sub> . 50.. | 851 36 RG 24 .. P <sub>S</sub> . 50.. | 58.00  |       | 45.10 | 41.30 | 31.00 | 3.60  |

## Shielded plug with removable straight backshell for screen termination and heatshrink sleeving (38 &amp; 42 suffix)

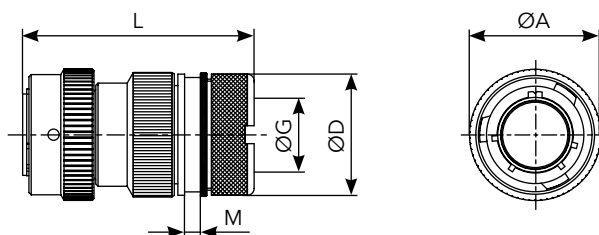

| Shell size | Part numbers                               |                                       | L max  |       | A max | D max | G max | M max |
|------------|--------------------------------------------|---------------------------------------|--------|-------|-------|-------|-------|-------|
|            | solder contacts                            | crimp contacts                        | solder | crimp |       |       |       |       |
| 8          | 851 36 T 8 .. P <sub>S</sub> . 50.. 38 42  | 851 36 RT 8 .. P <sub>S</sub> . 50..  | 51.60  |       | 19.05 | 18.25 | 7.45  | 3.70  |
| 10         | 851 36 T 10 .. P <sub>S</sub> . 50.. 38 42 | 851 36 RT 10 .. P <sub>S</sub> . 50.. | 51.60  |       | 21.80 | 20.25 | 9.00  | 3.70  |
| 12         | 851 36 T 12 .. P <sub>S</sub> . 50.. 38 42 | 851 36 RT 12 .. P <sub>S</sub> . 50.. | 51.60  |       | 26.15 | 24.75 | 13.30 | 3.70  |
| 14         | 851 36 T 14 .. P <sub>S</sub> . 50.. 38 42 | 851 36 RT 14 .. P <sub>S</sub> . 50.. | 51.60  |       | 29.35 | 27.75 | 16.50 | 3.70  |
| 16         | 851 36 T 16 .. P <sub>S</sub> . 50.. 38 42 | 851 36 RT 16 .. P <sub>S</sub> . 50.. | 51.60  |       | 32.50 | 30.05 | 18.50 | 3.70  |
| 18         | 851 36 T 18 .. P <sub>S</sub> . 50.. 38 42 | 851 36 RT 18 .. P <sub>S</sub> . 50.. | 52.00  |       | 35.30 | 34.15 | 21.90 | 3.70  |
| 20         | 851 36 T 20 .. P <sub>S</sub> . 50.. 38 42 | 851 36 RT 20 .. P <sub>S</sub> . 50.. | 53.90  |       | 38.85 | 37.25 | 25.10 | 3.70  |
| 22         | 851 36 T 22 .. P <sub>S</sub> . 50.. 38 42 | 851 36 RT 22 .. P <sub>S</sub> . 50.. | 53.90  |       | 42.05 | 40.45 | 28.20 | 3.70  |
| 24         | 851 36 T 24 .. P <sub>S</sub> . 50.. 38 42 | 851 36 RT 24 .. P <sub>S</sub> . 50.. | 53.90  |       | 45.10 | 43.65 | 31.40 | 3.70  |



Note: all dimensions are in mm

## Hermetic connectors

## Square flange receptacle

## Cross reference

|      |               |
|------|---------------|
| 02 H | HE 301 B 02 H |
|------|---------------|





| Shell size | Part numbers                         | A max | B     | C     | D    | E     | F max | H max | J     | L    |
|------------|--------------------------------------|-------|-------|-------|------|-------|-------|-------|-------|------|
| 8          | 851 02 H 8 .. <sub>S</sub> .. 50..   | 12.03 | 13.84 | 11.24 | 1.55 | 14.27 | 7.5   | 21.03 | 15.09 | 3.15 |
| 10         | 851 02 H 10 .. <sub>S</sub> .. 50..  | 15.01 | 13.84 | 11.24 | 1.55 | 17.07 | 7.5   | 24.23 | 18.26 | 3.15 |
| 12         | 851 02 H 12 .. <sub>S</sub> .. 50..  | 19.07 | 13.84 | 11.24 | 1.55 | 19.84 | 7.5   | 26.59 | 20.62 | 3.15 |
| 14         | 851 02 H 14 .. <sub>S</sub> .. 50..  | 22.25 | 13.84 | 11.24 | 1.55 | 23.01 | 7.5   | 28.98 | 23.00 | 3.15 |
| 16         | 851 02 H 16 .. <sub>S</sub> .. 50..  | 25.42 | 13.84 | 11.24 | 1.55 | 26.19 | 7.5   | 31.34 | 24.61 | 3.15 |
| 18         | 851 02 H 18 .. <sub>S</sub> .. 50..  | 28.60 | 13.84 | 11.24 | 1.55 | 29.36 | 7.5   | 33.73 | 26.97 | 3.15 |
| 20         | 851 02 H 20 .. <sub>S</sub> .. 50..  | 31.77 | 15.42 | 12.00 | 2.36 | 31.75 | 7.5   | 36.91 | 29.36 | 3.15 |
| 22         | 8851 02 H 22 .. <sub>S</sub> .. 50.. | 34.95 | 16.23 | 12.00 | 2.36 | 34.92 | 7.5   | 40.10 | 31.75 | 3.15 |
| 24         | 851 02 H 24 .. <sub>S</sub> .. 50..  | 38.12 | 17.04 | 12.81 | 2.36 | 38.10 | 6.7   | 43.27 | 34.92 | 3.82 |

## Jam nut receptacle

## Cross reference

|      |               |
|------|---------------|
| 07 H | HE 301 B 07 H |
|      | MS 3114 H     |
|      | VG 95328 F    |



| Shell size | Part numbers                         | A max | B max | C     | D max | E max | F     | G max |
|------------|--------------------------------------|-------|-------|-------|-------|-------|-------|-------|
| 8          | 851 07 H 8 .. <sub>S</sub> .. 50..   | 12.03 | 20.60 | 17.93 | 27.37 | 24.07 | 13.33 | 14.26 |
| 10         | 851 07 H 10 .. <sub>S</sub> .. 50..  | 15.01 | 20.60 | 17.93 | 30.57 | 27.22 | 16.51 | 17.43 |
| 12         | 851 07 H 12 .. <sub>S</sub> .. 50..  | 19.07 | 20.60 | 17.93 | 35.32 | 32.00 | 20.63 | 22.19 |
| 14         | 851 07 H 14 .. <sub>S</sub> .. 50..  | 22.25 | 20.60 | 17.93 | 38.50 | 35.17 | 23.78 | 25.36 |
| 16         | 851 07 H 16 .. <sub>S</sub> .. 50..  | 25.42 | 20.60 | 17.93 | 41.67 | 38.35 | 26.93 | 28.54 |
| 18         | 851 07 H 18 .. <sub>S</sub> .. 50..  | 28.60 | 20.60 | 17.93 | 44.85 | 41.52 | 30.10 | 31.71 |
| 20         | 851 07 H 20 .. <sub>S</sub> .. 50..  | 31.77 | 26.15 | 22.70 | 49.62 | 46.27 | 33.28 | 34.89 |
| 22         | 8851 07 H 22 .. <sub>S</sub> .. 50.. | 34.95 | 26.15 | 22.70 | 52.77 | 49.47 | 36.45 | 38.06 |
| 24         | 851 07 H 24 .. <sub>S</sub> .. 50..  | 38.12 | 26.98 | 23.54 | 55.97 | 52.62 | 39.63 | 41.24 |


Note: all dimensions are in mm

## Hermetic connectors

## Solder fixing receptacle

## Cross reference


|    |             |
|----|-------------|
| IH | HE 301 B 1H |
|    | MS 3113 H   |
|    | VG 95328 G  |

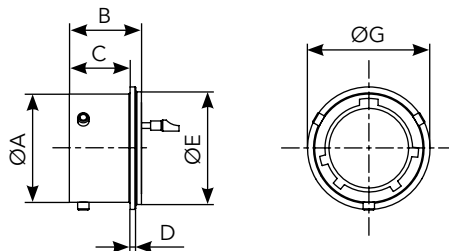

| Shell size | Part numbers                                   | A max | B     | C     | D    | E     | F max | G max |
|------------|------------------------------------------------|-------|-------|-------|------|-------|-------|-------|
| 8          | 851 IH 8 .. <sub>S</sub> <sup>P</sup> . 50..   | 12.03 | 13.84 | 10.70 | 0.80 | 14.27 | 8.60  | 16.40 |
| 10         | 851 IH 10 .. <sub>S</sub> <sup>P</sup> . 50..  | 15.01 | 13.84 | 10.70 | 0.80 | 17.07 | 8.60  | 19.40 |
| 12         | 851 IH 12 .. <sub>S</sub> <sup>P</sup> . 50..  | 19.07 | 13.84 | 10.70 | 0.80 | 19.84 | 8.60  | 21.80 |
| 14         | 851 IH 14 .. <sub>S</sub> <sup>P</sup> . 50..  | 22.25 | 13.84 | 10.70 | 0.80 | 23.01 | 8.60  | 25.00 |
| 16         | 851 IH 16 .. <sub>S</sub> <sup>P</sup> . 50..  | 25.42 | 13.84 | 10.70 | 0.80 | 26.19 | 8.60  | 28.10 |
| 18         | 851 IH 18 .. <sub>S</sub> <sup>P</sup> . 50..  | 28.60 | 13.84 | 10.70 | 0.80 | 29.36 | 8.60  | 31.30 |
| 20         | 851 IH 20 .. <sub>S</sub> <sup>P</sup> . 50..  | 31.77 | 15.42 | 12.70 | 0.80 | 31.75 | 8.60  | 33.70 |
| 22         | 8851 IH 22 .. <sub>S</sub> <sup>P</sup> . 50.. | 34.95 | 16.23 | 12.70 | 0.80 | 34.92 | 8.60  | 36.90 |
| 24         | 851 IH 24 .. <sub>S</sub> <sup>P</sup> . 50..  | 38.12 | 17.04 | 13.10 | 0.80 | 38.10 | 7.80  | 40.10 |


## PC Tail connectors

## Square flange receptacle

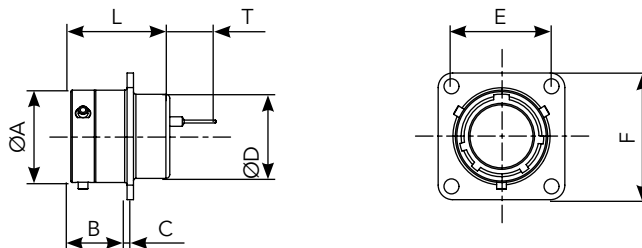

| Shell size | Part numbers                                                              | A     | B max | C max | Ø D max | E     | F max | J    | L max | T +1.25<br>0 |
|------------|---------------------------------------------------------------------------|-------|-------|-------|---------|-------|-------|------|-------|--------------|
| 8          | 851 02 E 8.. <sub>S</sub> <sup>P</sup> .50.. <sub>40</sub> <sup>16</sup>  | 12.03 | 11.70 | 1.32  | 10.84   | 15.09 | 20.99 | 3.13 | 20.50 | 9.46         |
| 10         | 851 02 E 10.. <sub>S</sub> <sup>P</sup> .50.. <sub>40</sub> <sup>16</sup> | 15.01 | 11.70 | 1.32  | 13.99   | 18.26 | 24.19 | 3.13 | 20.50 | 9.46         |
| 12         | 851 02 E 12.. <sub>S</sub> <sup>P</sup> .50.. <sub>40</sub> <sup>16</sup> | 19.07 | 11.70 | 1.32  | 17.37   | 20.62 | 26.54 | 3.13 | 20.50 | 9.46         |
| 14         | 851 02 E 14.. <sub>S</sub> <sup>P</sup> .50.. <sub>40</sub> <sup>16</sup> | 22.25 | 11.70 | 1.32  | 20.57   | 23.00 | 28.89 | 3.13 | 20.50 | 9.46         |
| 16         | 851 02 E 16.. <sub>S</sub> <sup>P</sup> .50.. <sub>40</sub> <sup>16</sup> | 25.42 | 11.70 | 1.32  | 23.62   | 24.61 | 31.29 | 3.13 | 20.50 | 9.46         |
| 18         | 851 02 E 18.. <sub>S</sub> <sup>P</sup> .50.. <sub>40</sub> <sup>16</sup> | 28.60 | 11.70 | 1.32  | 26.69   | 26.97 | 33.69 | 3.13 | 20.50 | 9.46         |
| 20         | 851 02 E 20.. <sub>S</sub> <sup>P</sup> .50.. <sub>40</sub> <sup>16</sup> | 31.77 | 14.35 | 2.15  | 29.89   | 29.36 | 36.89 | 3.13 | 23.80 | 7.76         |
| 22         | 851 02 E 22.. <sub>S</sub> <sup>P</sup> .50.. <sub>40</sub> <sup>16</sup> | 34.95 | 14.35 | 2.15  | 33.04   | 31.75 | 39.99 | 3.13 | 23.80 | 7.76         |
| 24         | 851 02 E 24.. <sub>S</sub> <sup>P</sup> .50.. <sub>40</sub> <sup>16</sup> | 38.12 | 15.20 | 2.15  | 36.24   | 34.92 | 43.15 | 3.81 | 23.80 | 7.76         |

## Jam nut receptacle

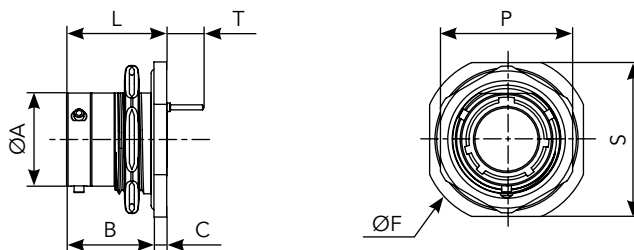


| Shell size | Part numbers                                                              | A     | B max | C max | F max | L max | P max | S max | T +1.25<br>0 |
|------------|---------------------------------------------------------------------------|-------|-------|-------|-------|-------|-------|-------|--------------|
| 8          | 851 07 A 8.. <sub>S</sub> <sup>P</sup> .50.. <sub>40</sub> <sup>16</sup>  | 12.03 | 17.90 | 2.64  | 26.94 | 20.64 | 19.29 | 23.94 | 9.46         |
| 10         | 851 07 A 10.. <sub>S</sub> <sup>P</sup> .50.. <sub>40</sub> <sup>16</sup> | 15.01 | 17.90 | 2.64  | 30.14 | 20.64 | 22.38 | 26.95 | 9.46         |
| 12         | 851 07 A 12.. <sub>S</sub> <sup>P</sup> .50.. <sub>40</sub> <sup>16</sup> | 19.07 | 17.90 | 2.64  | 34.94 | 20.64 | 27.13 | 31.74 | 9.46         |
| 14         | 851 07 A 14.. <sub>S</sub> <sup>P</sup> .50.. <sub>40</sub> <sup>16</sup> | 22.25 | 17.90 | 2.64  | 38.04 | 20.64 | 30.33 | 34.94 | 9.46         |
| 16         | 851 07 A 16.. <sub>S</sub> <sup>P</sup> .50.. <sub>40</sub> <sup>16</sup> | 25.42 | 17.90 | 2.64  | 41.26 | 20.64 | 33.48 | 38.24 | 9.46         |
| 18         | 851 07 A 18.. <sub>S</sub> <sup>P</sup> .50.. <sub>40</sub> <sup>16</sup> | 28.60 | 17.90 | 2.64  | 44.44 | 20.64 | 36.68 | 41.34 | 9.46         |
| 20         | 851 07 A 20.. <sub>S</sub> <sup>P</sup> .50.. <sub>40</sub> <sup>16</sup> | 31.77 | 22.45 | 3.44  | 49.14 | 25.99 | 39.83 | 46.04 | 8.49         |
| 22         | 851 07 A 22.. <sub>S</sub> <sup>P</sup> .50.. <sub>40</sub> <sup>16</sup> | 34.95 | 22.45 | 3.44  | 52.24 | 25.99 | 43.03 | 49.24 | 8.49         |
| 24         | 851 07 A 24.. <sub>S</sub> <sup>P</sup> .50.. <sub>40</sub> <sup>16</sup> | 38.12 | 23.30 | 3.44  | 55.54 | 26.84 | 46.18 | 52.74 | 7.79         |

Note: all dimensions are in mm


## Panel cut out

### Receptacle


Square flange receptacle



Jam nut receptacle



Solder fixing receptacle



| Shell size | A $\pm 0.1$ | B $\pm 0.1$ | C $\pm 0.1$ | E $\pm 0.15$ | J $\pm 0.15$ | N    |      | P $\pm 0.1$ | X min |
|------------|-------------|-------------|-------------|--------------|--------------|------|------|-------------|-------|
|            |             |             |             |              |              | min  | max  |             |       |
| 8          | 15.55       | 14.60       | 14.70       | 15.10        | 3.15         | 1.57 | 3.17 | 13.75       | 2.90  |
| 10         | 18.80       | 17.75       | 17.50       | 18.26        | 3.15         | 1.57 | 3.17 | 16.95       | 2.90  |
| 12         | 22.15       | 22.50       | 20.20       | 20.62        | 3.15         | 1.57 | 3.17 | 21.50       | 2.90  |
| 14         | 25.30       | 25.70       | 23.40       | 23.00        | 3.15         | 1.57 | 3.17 | 24.20       | 2.90  |
| 16         | 28.45       | 28.85       | 26.60       | 24.60        | 3.15         | 1.57 | 3.17 | 27.35       | 2.90  |
| 18         | 31.65       | 32.05       | 29.80       | 26.97        | 3.15         | 1.57 | 3.17 | 30.55       | 2.90  |
| 20         | 34.80       | 35.20       | 32.10       | 29.36        | 3.15         | 1.57 | 6.35 | 33.70       | 5.50  |
| 22         | 38.00       | 38.40       | 35.30       | 31.75        | 3.15         | 1.57 | 6.35 | 36.90       | 5.50  |
| 24         | 41.20       | 41.55       | 38.40       | 34.92        | 3.82         | 1.57 | 6.35 | 40.05       | 5.50  |

## Push-pull locking plug


### General characteristics

- Locking: by pushing on the coupling nut
- Unlocking: by pulling a lanyard
- Mounted: on all 851 receptacles
- Layouts and crimp solder contacts: (see pages 14 & 15)
- Black nylon cord with total length of 106 mm (for other length, please consult us)

## Ordering information

|                                                                                       |                                                  |                                                      |    |   |   |    |   |   |    |    |
|---------------------------------------------------------------------------------------|--------------------------------------------------|------------------------------------------------------|----|---|---|----|---|---|----|----|
| Basic Series                                                                          |                                                  | 856                                                  | 06 | E | 8 | 3A | P | - | 50 | -- |
| Shell type:                                                                           |                                                  |                                                      |    |   |   |    |   |   |    |    |
| 06                                                                                    | plug for use with straight backshell             |                                                      |    |   |   |    |   |   |    |    |
| 08                                                                                    | plug for use with 90° backshell                  |                                                      |    |   |   |    |   |   |    |    |
| Backshell type:                                                                       |                                                  |                                                      |    |   |   |    |   |   |    |    |
| Solder                                                                                | Crimp                                            |                                                      |    |   |   |    |   |   |    |    |
| E                                                                                     | R                                                | backnut                                              |    |   |   |    |   |   |    |    |
| EC                                                                                    | RC                                               | straight cable clamp                                 |    |   |   |    |   |   |    |    |
| A                                                                                     | RA                                               | straight adaptor                                     |    |   |   |    |   |   |    |    |
| P                                                                                     | RP                                               | straight backshell for potting                       |    |   |   |    |   |   |    |    |
| T                                                                                     | RT                                               | straight backshell for heatshrink sleeving           |    |   |   |    |   |   |    |    |
| M                                                                                     | RM                                               | straight removable backshell for heatshrink sleeving |    |   |   |    |   |   |    |    |
| EC                                                                                    | RC                                               | 90° cable clamp                                      |    |   |   |    |   |   |    |    |
| Shell size:                                                                           |                                                  |                                                      |    |   |   |    |   |   |    |    |
| 8 - 10 - 12 - 14 - 16 - 18 - 20 - 22 - 24                                             |                                                  |                                                      |    |   |   |    |   |   |    |    |
| Contacts layout:                                                                      |                                                  |                                                      |    |   |   |    |   |   |    |    |
| see pages 14 & 15                                                                     |                                                  |                                                      |    |   |   |    |   |   |    |    |
| Contact type:                                                                         |                                                  |                                                      |    |   |   |    |   |   |    |    |
| P                                                                                     | male                                             |                                                      |    |   |   |    |   |   |    |    |
| S                                                                                     | female                                           |                                                      |    |   |   |    |   |   |    |    |
| Orientation:                                                                          |                                                  |                                                      |    |   |   |    |   |   |    |    |
| Normal (not included in part number). For others note: W, X, Y, Z - see table page 74 |                                                  |                                                      |    |   |   |    |   |   |    |    |
| Obligatory suffix                                                                     |                                                  |                                                      |    |   |   |    |   |   |    |    |
| 50                                                                                    |                                                  |                                                      |    |   |   |    |   |   |    |    |
| Specification                                                                         |                                                  |                                                      |    |   |   |    |   |   |    |    |
| 07                                                                                    | olive-green Cadmium plating (solder version)     |                                                      |    |   |   |    |   |   |    |    |
| 08                                                                                    | Olive Green Cadmium plating (crimp version)      |                                                      |    |   |   |    |   |   |    |    |
| 09                                                                                    | white Cadmium plating (crimp and solder version) |                                                      |    |   |   |    |   |   |    |    |

## Push-pull locking plug

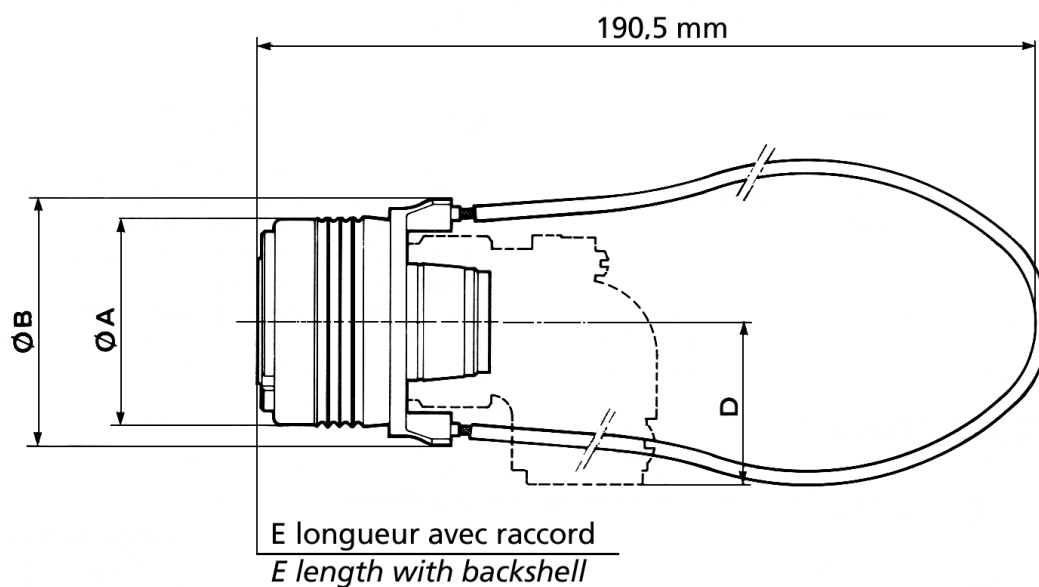

| Backshell type                      | Dimension | Shell size |       |       |       |       |       |       |       |       |
|-------------------------------------|-----------|------------|-------|-------|-------|-------|-------|-------|-------|-------|
|                                     |           | 8          | 10    | 12    | 14    | 16    | 18    | 20    | 22    | 24    |
| All                                 | A         | 19.50      | 22.80 | 27.30 | 30.80 | 34.00 | 37.00 | 41.00 | 44.50 | 49.20 |
| All                                 | B         | 24.95      | 28.25 | 32.55 | 36.05 | 39.05 | 42.05 | 45.80 | 49.20 | 53.45 |
| 06 R                                | E         | 32.00      | 32.00 | 32.00 | 32.00 | 32.00 | 32.00 | 31.80 | 31.80 | 31.80 |
| 06 RC                               | E         | 47.30      | 47.30 | 47.30 | 47.30 | 50.50 | 50.50 | 49.90 | 49.90 | 49.90 |
| 06 RP                               | E         | 42.10      | 42.10 | 42.10 | 42.10 | 42.10 | 45.40 | 49.80 | 49.80 | 49.80 |
| 06 RA                               | E         | 41.00      | 41.00 | 41.00 | 41.00 | 41.00 | 41.00 | 43.00 | 43.00 | 43.20 |
| 06 RM                               | E         | 50.00      | 50.00 | 50.00 | 50.00 | 50.00 | 50.00 | 51.70 | 51.70 | 51.70 |
| 06 RT<br>spécifications<br>38 or 42 | E         | 50.00      | 50.00 | 50.00 | 50.00 | 50.00 | 50.00 | 51.70 | 51.70 | 51.70 |
| 08RC                                | E         | 50.10      | 52.60 | 54.90 | 58.50 | 60.80 | 65.00 | 68.80 | 71.20 | 76.20 |
|                                     | D<br>max  | 16.00      | 18.00 | 19.50 | 22.00 | 23.50 | 25.00 | 26.50 | 28.00 | 31.00 |

Note: For backshells dimensioning, refer to values given in preceding pages



## 8F51 filter connectors

### General information

These connectors are derived from standard specifications

MIL-DTL-26482 G series 1 - NFC 93422 (HE 301 B) - VG 95328.

They are intermountable and intermateable with standard connectors.

Different types of filters may be fitted in these connectors to eliminate RFI/EMI in different frequency ranges.

Using built-in High Performance EMI filters offers the following advantages:

- Efficient filtering on interferences at electronic equipment input or output,

- Case screen-shielding efficiency is maintained,
- Cost and volume saving as compared with the use of discrete filters wired down the line,
- 4 types of standard filters are available - Please consult us for other capacitance and filter types,
- Combinations of mixed filter in the same layout: filtered, non-filtered and grounded contacts available.

An adaptor version is also a simple technique to equip existing systems which do not incorporate filters.

### Electrical characteristics

- Max. current rating per contact: 7.5 A (#20), 13 A (#16)
- Max. operating voltage: 200 Vdc, 120 Vac
- Standard filter types: C, Pi
- Capacitance range: typically 500 pF - 200 nF
- Filter performance: up to -60dB / -80dB

For this product, consult our FILTER CONNECTOR department.



# 851 SERIES

# Contacts & Accessories

|                                     |    |
|-------------------------------------|----|
| ■ Crimp contacts .....              | 56 |
| ■ Caps / Ordering information ..... | 57 |
| ■ Plastic protective caps .....     | 59 |
| ■ Filler plugs .....                | 59 |
| ■ Dummy receptacle .....            | 60 |
| ■ Gaskets .....                     | 60 |






## Crimp contacts

### Standard version

| Contact size   | Specification                     | Wire size |           | Part number                                                                                                |                                                                                                              | insulator Ø |      |
|----------------|-----------------------------------|-----------|-----------|------------------------------------------------------------------------------------------------------------|--------------------------------------------------------------------------------------------------------------|-------------|------|
|                |                                   | AWG       | mm²       | Male                                                                                                       | Female                                                                                                       | min.        | max. |
| #20<br>Ø1 mm   | For layouts 8-2, 8-3, 8-4 & 12-14 | 24-18     | 0.21-0.93 | <b>8500-9573*</b><br>     | <b>8500-9213 900*</b><br> | 1.20        | 2.11 |
|                | For further contact layout        | 24-18     | 0.21-0.93 | <b>8500-697</b><br>       | <b>8500-1758A 900</b><br> | 1.20        | 2.11 |
|                | Reducing sleeve                   | 30-24     | 0.06-0.21 | <b>8500-781 B1</b><br>   |                                                                                                              | -           | -    |
| #16<br>Ø1.6 mm | -                                 | 18-14     | 0.93-1.91 | <b>8500-1300</b><br>      | <b>8500-9331 900</b><br>  | 1.60        | 2.80 |
|                | Reducing sleeve                   | 20        | 0.60      | <b>8500-1985 B1</b><br> |                                                                                                              | -           | -    |

\* : Not to be used with reducing sleeve

### Thermocouple version

| Contact size   | Specification | Wire size |           | Part number                                                                                              |                                                                                                               | insulator Ø |      |
|----------------|---------------|-----------|-----------|----------------------------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------------------------------|-------------|------|
|                |               | AWG       | mm²       | Male                                                                                                     | Female                                                                                                        | min.        | max. |
| #20<br>Ø1 mm   | Chromel       | 24-18     | 0.21-0.93 | <b>8500-809 A</b><br> | <b>8500-2054 900</b><br> | 1.20        | 2.11 |
|                | Alumel        | 24-18     | 0.21-0.93 | <b>8500-812 A</b><br> | <b>8500-2055 900</b><br> | 1.20        | 2.11 |
| #16<br>Ø1.6 mm | Chromel       | 18-14     | 0.93-1.91 | <b>8500-1053</b><br>  | <b>8500-1054 900</b><br> | 1.60        | 2.80 |
|                | Alumel        | 18-14     | 0.93-1.91 | <b>8500-1058</b><br>  | <b>8500-1059 900</b><br> | 1.60        | 2.80 |

Note: all dimensions are in mm


## Caps / Ordering information

|                                                       |    |    |    |    |    |    |    |    |      |    |    |
|-------------------------------------------------------|----|----|----|----|----|----|----|----|------|----|----|
| Basic Series                                          |    |    |    |    |    |    |    |    | 8500 | 05 | -- |
| Shell type:                                           | 8  | 10 | 12 | 14 | 16 | 18 | 20 | 22 | 24   |    |    |
| Part numbers for receptacle                           | 02 | 03 | 04 | 05 | 27 | 06 | 07 | 08 | 09   |    |    |
| Part numbers for plug                                 | 10 | 11 | 12 | 13 | 28 | 14 | 15 | 16 | 17   |    |    |
| Specifications:<br>For cap & plating, see table below |    |    |    |    |    |    |    |    |      |    |    |

## Type and plating

| Cap type                                                   | Receptacle cap      |               |                |        | Plug cap            |               |                |        |
|------------------------------------------------------------|---------------------|---------------|----------------|--------|---------------------|---------------|----------------|--------|
|                                                            | Olive Green Cadmium | White Cadmium | Black Anodised | Nickel | Olive Green Cadmium | White Cadmium | Black Anodised | Nickel |
| Cap with chain and ring                                    | D                   | 02 D          | 29 D           | 44 D   | D                   | 02 D          | 29 D           | 44 D   |
| Cap with nylon cord and ring                               | B                   | 02 B          | 29 B           | 44 B   | B                   | 02 B          | 29 B           | 44 B   |
| Cap with nylon cord and washer (shell 10, 12, 14, 16 & 18) | -                   | -             | -              | -      | E                   | -             | -              | -      |
| Cap with nylon cord and washer                             | H                   | -             | -              | 44 H   | -                   | -             | -              | -      |
| Cap with chain and washer                                  | J                   | -             | -              | -      | -                   | -             | -              | -      |
| Cap 500hr salt spray                                       | JQ7                 | -             | -              | -      | -                   | -             | -              | -      |
| Cap without chain                                          | M                   | -             | -              | -      | M                   | -             | -              | -      |

## Caps for plugs




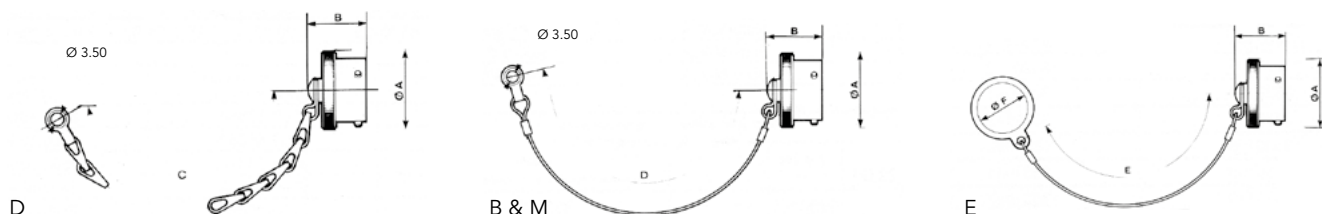


| Shell size | Ø A max | B max | C <sup>+6</sup> <sub>-0</sub> | D <sup>+2</sup> <sub>-0</sub> | E          | Ø F        |
|------------|---------|-------|-------------------------------|-------------------------------|------------|------------|
| 8          | 16.80   | 19.84 | 132                           | 128                           | consult us | consult us |
| 10         | 19.80   | 19.84 | 132                           | 128                           | 132        | 14.00      |
| 12         | 23.90   | 19.84 | 148                           | 140                           | 148        | 17.60      |
| 14         | 27.00   | 19.84 | 148                           | 140                           | 148        | 20.80      |
| 16         | 30.20   | 19.84 | 148                           | 140                           | 148        | 25.60      |
| 18         | 33.40   | 19.84 | 148                           | 140                           | 148        | 28.70      |
| 20         | 36.50   | 21.44 | 168                           | 153                           | consult us | consult us |
| 22         | 39.80   | 21.44 | 168                           | 153                           | consult us | consult us |
| 24         | 42.90   | 22.22 | 168                           | 153                           | consult us | consult us |

Note: all dimensions are in mm

# Caps

## Caps for receptacles

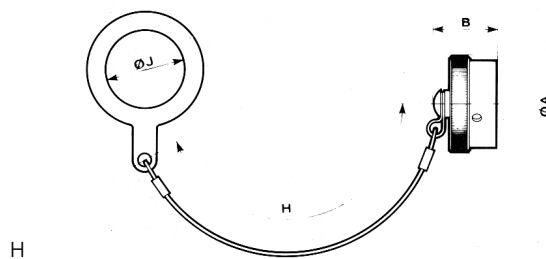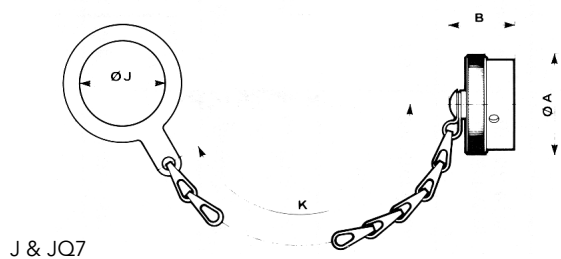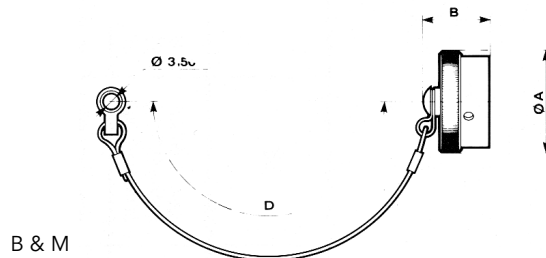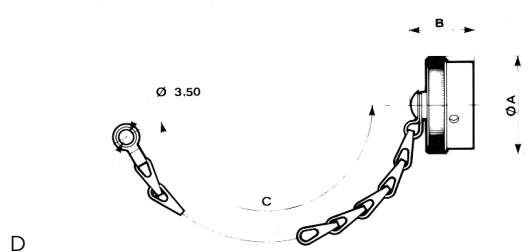

| Shell size | Ø A<br>max | B<br>max | C <sup>+6</sup> <sub>0</sub> | D <sup>+2</sup> <sub>0</sub> | J<br>max | H <sup>+2</sup> <sub>0</sub> | K <sup>+6</sup> <sub>0</sub> |
|------------|------------|----------|------------------------------|------------------------------|----------|------------------------------|------------------------------|
| 8          | 19.00      | 21.44    | 84                           | 77                           | 14.80    | 80                           | 84                           |
| 10         | 21.80      | 21.44    | 84                           | 77                           | 17.90    | 80                           | 84                           |
| 12         | 26.10      | 21.44    | 100                          | 89                           | 22.70    | 90                           | 100                          |
| 14         | 29.30      | 21.44    | 100                          | 89                           | 25.90    | 90                           | 100                          |
| 16         | 32.50      | 21.44    | 100                          | 89                           | 29.00    | 90                           | 100                          |
| 18         | 35.30      | 21.44    | 100                          | 89                           | 32.20    | 90                           | 100                          |
| 20         | 38.80      | 21.44    | 116                          | 102                          | 35.40    | 110                          | 116                          |
| 22         | 42.00      | 21.44    | 116                          | 102                          | 38.60    | 110                          | 116                          |
| 24         | 45.10      | 22.22    | 116                          | 102                          | 41.70    | 110                          | 116                          |



## Accessories

### Plastic protective caps for receptacles and plugs



| Shell size | Caps for receptacles | Caps for plugs |
|------------|----------------------|----------------|
| 8          | 8500-5585 A          | 8500-5594      |
| 10         | 8500-5586 A          | 8500-5595      |
| 12         | 8500-5587 A          | 8500-5596      |
| 14         | 8500-5588 A          | 8500-5597      |
| 16         | 8500-5589 A          | 8500-5598      |
| 18         | 8500-5590 A          | 8500-5599      |
| 20         | 8500-5591 A          | 8500-5600      |
| 22         | 8500-5592 A          | 8500-5601      |
| 24         | 8500-5593 A          | 8500-5602      |


### Filler plugs

| Contact size   | Part number                                                                                                              | Color |
|----------------|--------------------------------------------------------------------------------------------------------------------------|-------|
| #20<br>Ø1 mm   | <b>8500-4144</b><br>                  | grey  |
|                | <b>8500-4144 A (MS 3187 A 20)</b><br> | red   |
| #16<br>Ø1.6 mm | <b>8500-479</b><br>                   | blue  |
|                | <b>8500-4267 (MS 3187-16)</b><br>     |       |

Note: all dimensions are in mm

## Accessories

### Dummy receptacles

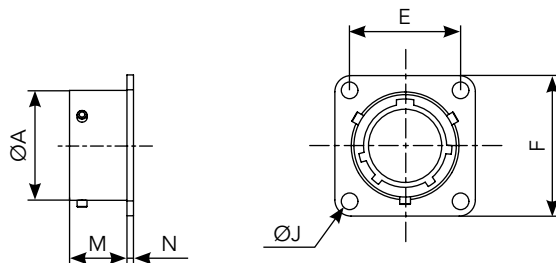

| Shell size | Part numbers | A     | C<br>max | E     | J    | M<br>max | N<br>max |
|------------|--------------|-------|----------|-------|------|----------|----------|
| 8          | 8500-18      | 12.03 | 20.99    | 15.09 | 3.13 | 11.70    | 1.32     |
| 10         | 8500-19      | 15.01 | 24.19    | 18.26 | 3.13 | 11.70    | 1.32     |
| 12         | 8500-20      | 19.07 | 26.54    | 20.62 | 3.13 | 11.70    | 1.32     |
| 14         | 8500-21      | 22.25 | 28.89    | 23.00 | 3.13 | 11.70    | 1.32     |
| 16         | 8500-26      | 25.42 | 31.29    | 24.61 | 3.13 | 11.70    | 1.32     |
| 18         | 8500-22      | 28.60 | 33.69    | 26.97 | 3.13 | 11.70    | 1.32     |
| 20         | 8500-23      | 31.77 | 36.89    | 29.36 | 3.13 | 14.35    | 2.15     |
| 22         | 8500-24      | 34.95 | 39.99    | 31.75 | 3.13 | 14.35    | 2.15     |
| 24         | 8500-25      | 38.12 | 43.15    | 34.92 | 3.81 | 15.20    | 2.15     |

### Gaskets

| Shell size | Gaskets for square flange receptacle |           | Gaskets for jam nut receptacle |         |
|------------|--------------------------------------|-----------|--------------------------------|---------|
|            | Néoprène                             | Fairprène | Néoprène                       | Vitton  |
| 8          | 8500-275                             | 8500-4164 | 3330102                        | 3330675 |
| 10         | 8500-276                             | 8500-4165 | 3330103                        | 3330670 |
| 12         | 8500-277                             | 8500-4166 | 3330104                        | 3330671 |
| 14         | 8500-278                             | 8500-4167 | 3330105                        | 3330672 |
| 16         | 8500-283                             | 8500-4168 | 3330106                        | 3331048 |
| 18         | 8500-279                             | 8500-4169 | 3330107                        | 3331049 |
| 20         | 8500-280                             | 8500-4170 | 3330108                        | 3331050 |
| 22         | 8500-281                             | 8500-4171 | 3330109                        | 3331051 |
| 24         | 8500-282                             | 8500-4172 | 3330110                        | 3331052 |

Note: all dimensions are in mm



## Notes


# 851 SERIES

# Technical Information

|                                         |    |
|-----------------------------------------|----|
| ■ Tooling .....                         | 64 |
| ■ Stripping instruction .....           | 66 |
| ■ Crimping instruction .....            | 66 |
| ■ Crimp contact insertion .....         | 67 |
| ■ Crimp contact extraction .....        | 67 |
| ■ Drilling pattern .....                | 68 |
| ■ Discrimination / Keying methods ..... | 74 |
| ■ .....                                 |    |

## Tooling

### Crimp tooling - Contact #20 & 16

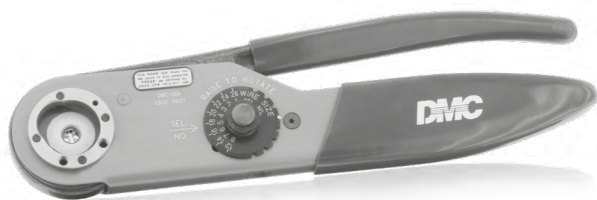

Part number

**8365**  
(M 22520/1-01)


### Locator - Contact #20 & 16



Part number

**8365-02**  
(M 22520/1-02)

### Crimp tooling - Contact #20

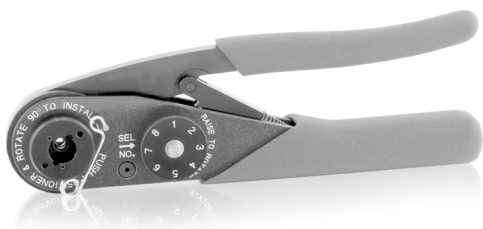

Part number

**8476-01**  
(M 22520/2-01)

### Locator - Contact #20



Part number

**8476-02**  
(M 22520/2-02)

### Insertion tools - Crimp contact




Part number

**8500-29B\***

\* Except 8-2, 8-3, 8-4, 12-14 contact layouts: insertion tool 8500-93B

Tooling

Extraction tools - Crimp contact

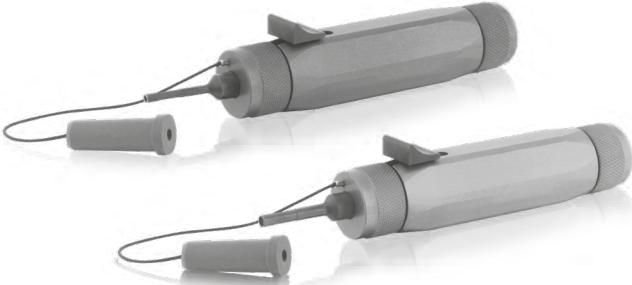

|                 |                 |
|-----------------|-----------------|
| Part number #20 | Part number #16 |
| 8500-36A        | 8500-38A        |

Strap backshell




|             |
|-------------|
| Part number |
| 8498-04     |

## Stripping instructions

- This operation should be carried out with great care. Use stripping pliers which are in good condition and which are designed for use with the size of wire being stripped.
- In order to maintain the connector's excellent sealing characteristics and, at the same time, meet the highest cabling standards the wires should have the following external sheath dimensions:

| Contacts size | Ø over sheath |      |
|---------------|---------------|------|
|               | min.          | max. |
| 20            | 1.20          | 2.11 |
| 16            | 1.60          | 2.80 |

- Recommended loading:
  - 050 % with max. diam. wires
  - 050 % with min. diam. wires
  - 100 % with medium size wires.
- Size 20 contacts for cables:
  - when Ø over insulation  $\leq 2$  mm strip to a 4.5 mm length
  - when Ø over insulation  $> 2$  mm strip to a 7 mm length.
- Size 16 contacts, strip the cable to a length of 6 mm.




## Cable-contact assembly

- Insert the wire into the crimp barrel and ensure that it has penetrated correctly by checking that it may be seen through the lateral hole in the barrel.



## Reducing sleeve

- If a wire with a cross sectional area of less than  $0.21 \text{ mm}^2$  is used with a size 20 contact, it will be necessary to use a reducing sleeve: ref. 8500-781.
- Wires of cross sectional area of  $0.6 \text{ mm}^2$  may be used with size 16 contacts by using a reducing sleeve, ref. 8500-1985.



## Crimping instructions

- With crimping pliers MS 22520/1-01 SOURIAU part number 8365 and turret MS 22520/1-02 8365-02:
  - «red» position for size 20 contacts
  - «blue» position for size 16 contacts.
- With crimping pliers MS 22520/2-01 SOURIAU part number 8476-01 and locator MS 22520/2-02 8476-02:
  - for size 20 contacts only.



Note: not be used with reducing sleeve.

Squeeze pliers firmly until a click is heard, the pliers should spring open when the ratched mechanism is released.

- Hold indenter side up-insert the wire-contact assembly or wire-reducing sleeve-contact assembly between the four indentors, ensuring that the contact bottoms in the locator.
- Fully close the jaws, once the contact is crimped the pliers must spring open remove wire + crimped contact, check crimp aspect.



## Crimp contact insertion

First disassemble and slide connector rear accessory over cables.

### Insertion tools

- Pliers 8500-29B.
- Except 8-2, 8-3, 8-4, 12-14 contact layouts: tool 8500-93B

### Use of insertion tools

Manually insert the contact into the desired insert cavity.

- Insert the wire between the pliers jaws, the tip of the jaws butting the contact shoulder.

Introduce contacts one by one in insert cavities pushing straight in until the contact snaps into position and the clip ensures contact retention.



### Filler plugs

Where certain contacts are unwired and where it is necessary to fully maintain the connector's sealing characteristics, a filler plug must be used. Note that the contact must be inserted before the filler plug.





## Crimp contact extraction

All contacts for use in insulators with clips are extracted using a semi-automatic tool:

- size 20 contacts: tool type 8500-36A
- size 16 contacts: tool type 8500-38A.

First disassemble and slide connector rear accessory over cables.















- Do not operate the tool slide button.
- Bring the tool tip over the male or female contact to be removed from connector front (mating face) as far as the first mark for male contacts and the second mark for female contacts.

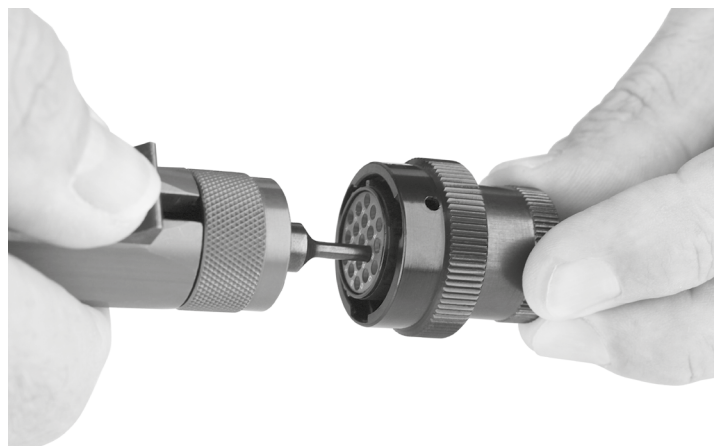

- This operation, should be carried out delicately in a direction parallel to the contact centre line with a light turning action.
- Extract contact pushing the slide button fully forward, carefully remove tool and pull wire to release the wire-contact assembly.

Note: tools have an adjustable spring system (rear knurled knob) also for automatic contact disengagement.

# Drilling pattern - Male rear face






| Shell Size | Dimension (mm)                                                                                                                     |                                                                                                                                     |                                                                                                                                              |                                                                                                                                   |                                                                                                                                |
|------------|------------------------------------------------------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------------------------------------------------------|----------------------------------------------------------------------------------------------------------------------------------------------|-----------------------------------------------------------------------------------------------------------------------------------|--------------------------------------------------------------------------------------------------------------------------------|
| 8          | <p>8-2<br/>2 contacts<br/>2xØ1.0 (#20)</p>        | <p>8-3<br/>3 contacts<br/>3xØ1.0 (#20)</p>         | <p>8-3A/8-98<br/>3 contacts<br/>3xØ1.0 (#20)</p>            | <p>8-33<br/>3 contacts<br/>3xØ1.0 (#20)</p>    | <p>8-4<br/>4 contacts<br/>4xØ1.0 (#20)</p>  |
|            |                                                                                                                                    |                                                                                                                                     |                                                                                                                                              |                                                                                                                                   |                                                                                                                                |
| 10         | <p>10-6<br/>6 contacts<br/>6xØ1.0 (#20)</p>       | <p>10-98<br/>6 contacts<br/>6xØ1.0 (#20)</p>       | <p>10-7<br/>7 contacts<br/>7xØ1.0 (#20)</p>               |                                                                                                                                   |                                                                                                                                |
|            |                                                                                                                                    |                                                                                                                                     |                                                                                                                                              |                                                                                                                                   |                                                                                                                                |
| 12         | <p>12-2<br/>2 contacts<br/>2xØ1.6 (#16)</p>     | <p>12-3<br/>3 contacts<br/>3xØ1.6 (#16)</p>      | <p>12-4<br/>3 contacts<br/>+ground<br/>4xØ1.6 (#16)</p>  | <p>12-8<br/>8 contacts<br/>8xØ1.0 (#20)</p>  |                                                                                                                                |
|            | <p>12-10<br/>10 contacts<br/>10xØ1.0 (#20)</p>  | <p>12-14<br/>14 contacts<br/>14xØ1.0 (#20)</p>  |                                                                                                                                              |                                                                                                                                   |                                                                                                                                |



## Drilling pattern - Male rear face

| Shell Size | Dimension (mm)                                                                                                         |                                                                                        |                                                                                                                        |
|------------|------------------------------------------------------------------------------------------------------------------------|----------------------------------------------------------------------------------------|------------------------------------------------------------------------------------------------------------------------|
| 14         | <p><b>14-5</b><br/>5 contacts<br/>5x<math>\varnothing 1.6</math> (#16)</p>                                             | <p><b>14-7</b><br/>6 contacts<br/>+ground<br/>7x<math>\varnothing 1.6</math> (#16)</p> | <p><b>14-12</b><br/>12 contacts<br/>8x<math>\varnothing 1.0</math> (#20)<br/>4x<math>\varnothing 1.6</math> (#16)</p>  |
|            | <p><b>14-15</b><br/>15 contacts<br/>14x<math>\varnothing 1.0</math> (#20)<br/>1x<math>\varnothing 1.6</math> (#16)</p> | <p><b>14-18</b><br/>18 contacts<br/>18x<math>\varnothing 1.0</math> (#20)</p>          | <p><b>14-19</b><br/>19 contacts<br/>19x<math>\varnothing 1.0</math> (#20)</p>                                          |
|            | <p><b>16-8</b><br/>8 contacts<br/>8x<math>\varnothing 1.6</math> (#16)</p>                                             | <p><b>16-26</b><br/>26 contacts<br/>26x<math>\varnothing 1.0</math> (#20)</p>          | <p><b>16-23</b><br/>23 contacts<br/>22x<math>\varnothing 1.0</math> (#20)<br/>1x<math>\varnothing 1.6</math> (#16)</p> |
|            |                                                                                                                        |                                                                                        |                                                                                                                        |
|            |                                                                                                                        |                                                                                        |                                                                                                                        |
| 16         |                                                                                                                        |                                                                                        |                                                                                                                        |
|            |                                                                                                                        |                                                                                        |                                                                                                                        |





## Drilling pattern - Male rear face

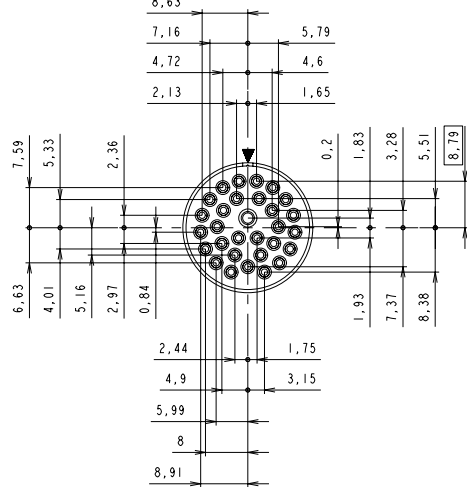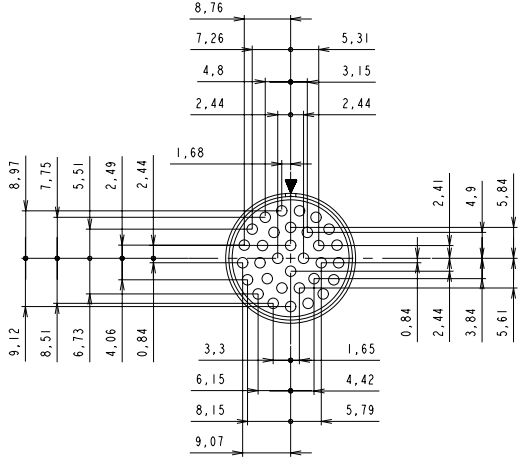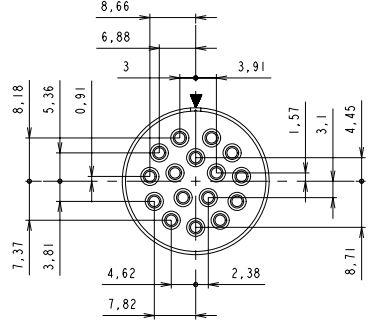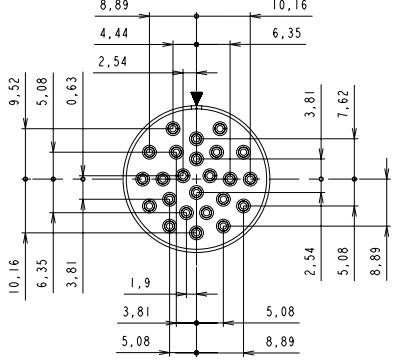
| Shell Size | Dimension (mm)                                                                                                                                            |
|------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------|
| 18         | <p><b>18-11</b><br/>11 contacts<br/>11xØ1.6 (#16)</p>                    |
|            | <p><b>18-30</b><br/>30 contacts<br/>29xØ1.0 (#20)<br/>1xØ1.6 (#16)</p>  |
|            | <p><b>18-32</b><br/>32 contacts<br/>32xØ1.0 (#20)</p>                   |
| 20         | <p><b>20-16</b><br/>16 contacts<br/>16xØ1.6 (#16)</p>                  |
|            | <p><b>20-24</b><br/>24 contacts<br/>24xØ1.0 (#20)</p>                |

## Drilling pattern - Male rear face

Shell Size

Dimension (mm)

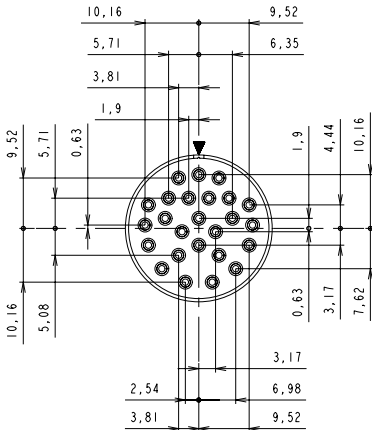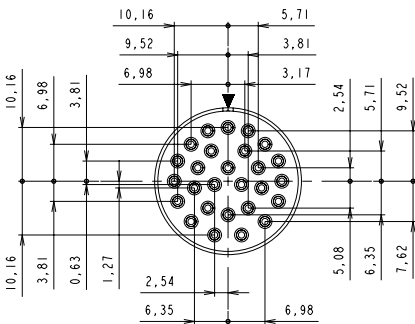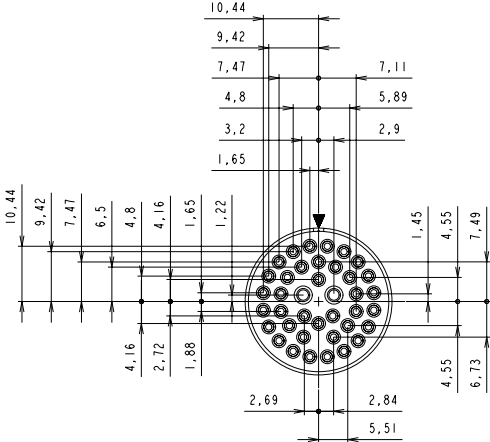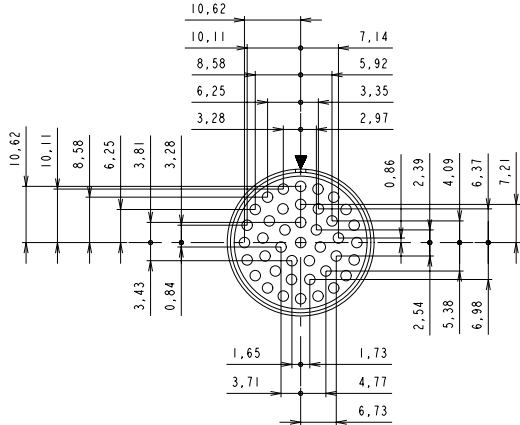
|    |                                                                                                                                                                                           |                                                                                                                                                                    |
|----|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| 20 | <div> <div>20-25</div> <div>25 contacts</div> <div>25xØ1.0 (#20)</div>  </div>                           | <div> <div>20-27</div> <div>27 contacts</div> <div>27xØ1.0 (#20)</div>  </div>  |
|    | <div> <div>20-39</div> <div>39 contacts</div> <div>37xØ1.0 (#20)</div> <div>2xØ1.6 (#16)</div>  </div> | <div> <div>20-41</div> <div>41 contacts</div> <div>41xØ1.0 (#20)</div>  </div> |
|    |                                                                                                                                                                                           |                                                                                                                                                                    |
|    |                                                                                                                                                                                           |                                                                                                                                                                    |
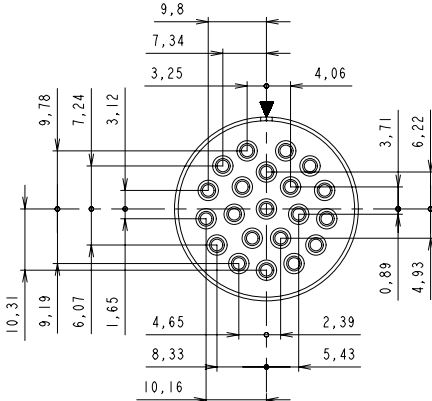
|    |                                                                                                                                                                    |
|----|--------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| 22 | <div> <div>22-21</div> <div>21 contacts</div> <div>21xØ1.6 (#16)</div>  </div> |
|----|--------------------------------------------------------------------------------------------------------------------------------------------------------------------|

## Drilling pattern - Male rear face

| Shell Size | Dimension (mm)                                        |                                                       |
|------------|-------------------------------------------------------|-------------------------------------------------------|
| 22         | <p><b>22-32</b><br/>32 contacts<br/>32xØ1.0 (#20)</p> | <p><b>22-34</b><br/>34 contacts<br/>34xØ1.0 (#20)</p> |
|            | <p><b>22-36</b><br/>36 contacts<br/>36xØ1.0 (#20)</p> | <p><b>22-55</b><br/>55 contacts<br/>55xØ1.0 (#20)</p> |


Drilling pattern - Male rear face

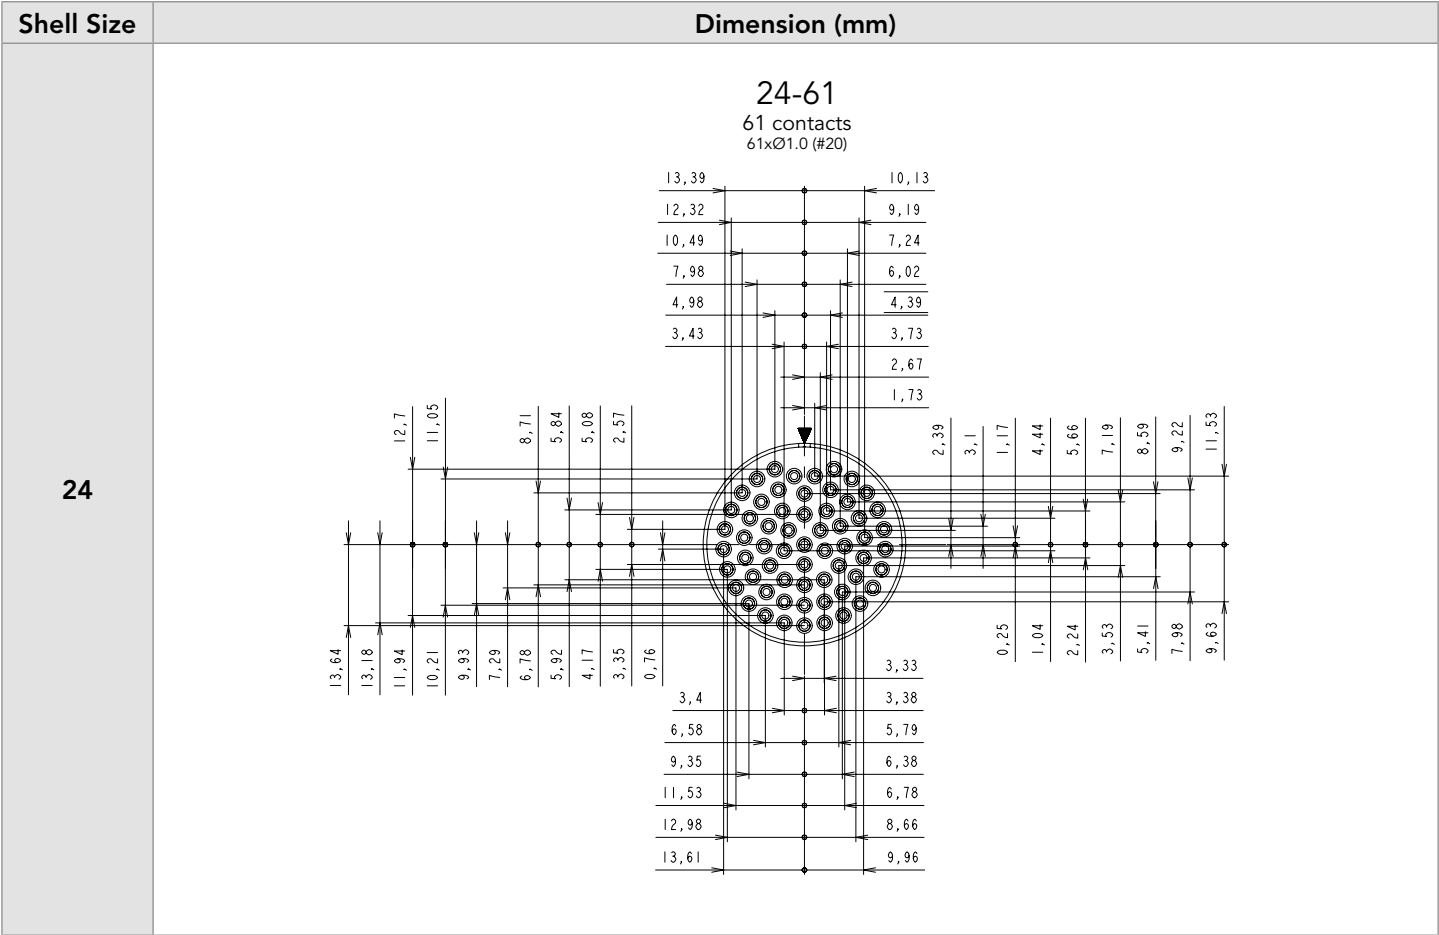

## Discrimination / Keying methods

### Insulator rotated inside metal bod

Viewed from front face of male insulator (receptacle or plug)

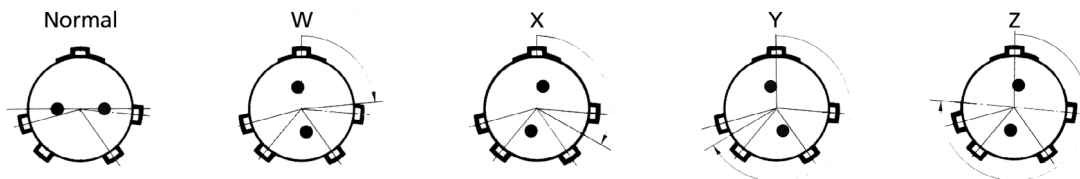


| Shells | Layouts | Angle in degrees |     |     |     | NFC 93422 HE 301B |       | MIL-DTL-26482G series 1 |       | Service1<br>1500 Vrms | Service 2<br>2300 Vrms |
|--------|---------|------------------|-----|-----|-----|-------------------|-------|-------------------------|-------|-----------------------|------------------------|
|        |         | W                | X   | Y   | Z   | Solder            | Crimp | Solder                  | Crimp |                       |                        |
| 8      | 2       | 58               | 122 | -   | -   |                   |       | •                       |       | X                     |                        |
|        | 3       | 60               | 210 | -   | -   |                   |       | •                       |       | X                     |                        |
|        | 3A(98)* | 60               | 210 | -   | -   |                   |       | •                       | •     | X                     |                        |
|        | 4       | 45               | -   | -   | -   |                   |       | •                       |       | X                     |                        |
|        | 33      | 90               | -   | -   | -   |                   | •     | •                       | •     | X                     |                        |
| 10     | 6       | 90               | -   | -   | -   | •                 | •     | •                       | •     | X                     |                        |
|        | 7*      | 90               | -   | -   | -   |                   |       |                         |       | X                     |                        |
|        | 98      | 90               | 180 | 240 | 270 |                   |       | •                       | •     | X                     |                        |
| 12     | 3       | -                | -   | 180 | -   | •                 | •     | •                       | •     |                       | X                      |
|        | 4       |                  |     |     |     |                   |       |                         |       |                       |                        |
|        | 8       | 90               | 112 | 203 | 292 |                   |       | •                       | •     | X                     |                        |
|        | 10      | 60               | 155 | 270 | 295 | •                 | •     | •                       | •     | X                     |                        |
|        | 2       | -                | -   | -   | -   |                   |       |                         |       |                       | X                      |
|        | 14*     | 45               |     |     |     |                   |       | •                       |       | X                     |                        |
| 14     | 5       | 40               | 92  | 184 | 273 | •                 | •     | •                       | •     |                       | X                      |
|        | 7       |                  |     |     |     |                   |       |                         |       |                       |                        |
|        | 12      | 43               | 90  | -   | -   | •                 | •     | •                       | •     | X                     |                        |
|        | 15      | 17               | 110 | 155 | 234 | •                 | •     | •                       | •     | X                     |                        |
|        | 18      | 15               | 90  | 180 | 270 |                   |       | •                       | •     | X                     |                        |
|        | 19      | 30               | 165 | 315 | -   | •                 | •     | •                       | •     | X                     |                        |
| 16     | 8       | 54               | 152 | 180 | 331 | •                 | •     | •                       | •     |                       | X                      |
|        | 23      | 158              | 270 | -   | -   | •                 | •     | •                       | •     | X                     |                        |
|        | 26      | 60               | -   | 275 | 338 | •                 | •     | •                       | •     | X                     |                        |
| 18     | 11      | 62               | 119 | 241 | 340 | •                 | •     | •                       | •     |                       | X                      |
|        | 32      | 85               | 138 | 222 | 265 | •                 | •     | •                       | •     | X                     |                        |
|        | 30      | 180              | 193 | 285 | 350 |                   | •     |                         | •     | X                     |                        |
| 20     | 16      | 238              | 318 | 333 | 347 | •                 | •     | •                       | •     |                       | X                      |
|        | 39      | 63               | 144 | 252 | 333 | •                 | •     | •                       | •     | X                     |                        |
|        | 41      | 45               | 126 | 225 | -   | •                 | •     | •                       | •     | X                     |                        |
|        | 24      | 70               | 145 | 215 | 290 |                   |       | •                       | •     | X                     |                        |
|        | 25      | 72               | 144 | 216 | 288 |                   |       |                         |       | X                     |                        |
|        | 27      | 72               | 144 | 216 | 288 |                   | •     |                         | •     | X                     |                        |
| 22     | 21      | 16               | 135 | 175 | 349 | •                 | •     | •                       | •     |                       | X                      |
|        | 36      | 72               | 144 | 216 | 288 |                   | •     |                         |       | X                     |                        |
|        | 55      | 30               | 142 | 226 | 314 | •                 | •     | •                       | •     | X                     |                        |
|        | 32      | 72               | 145 | 215 | 288 |                   |       |                         | •     | X                     |                        |
|        | 34      | 62               | 142 | 218 | 298 |                   |       |                         | •     | X                     |                        |
| 24     | 61      | 90               | 180 | 270 | 324 | •                 | •     | •                       | •     | X                     |                        |

\* 8-98 layout, W and X non standard orientations  
10-7 & 12-14 layouts, W non standard orientation



# Reliable People, Reliable Solutions

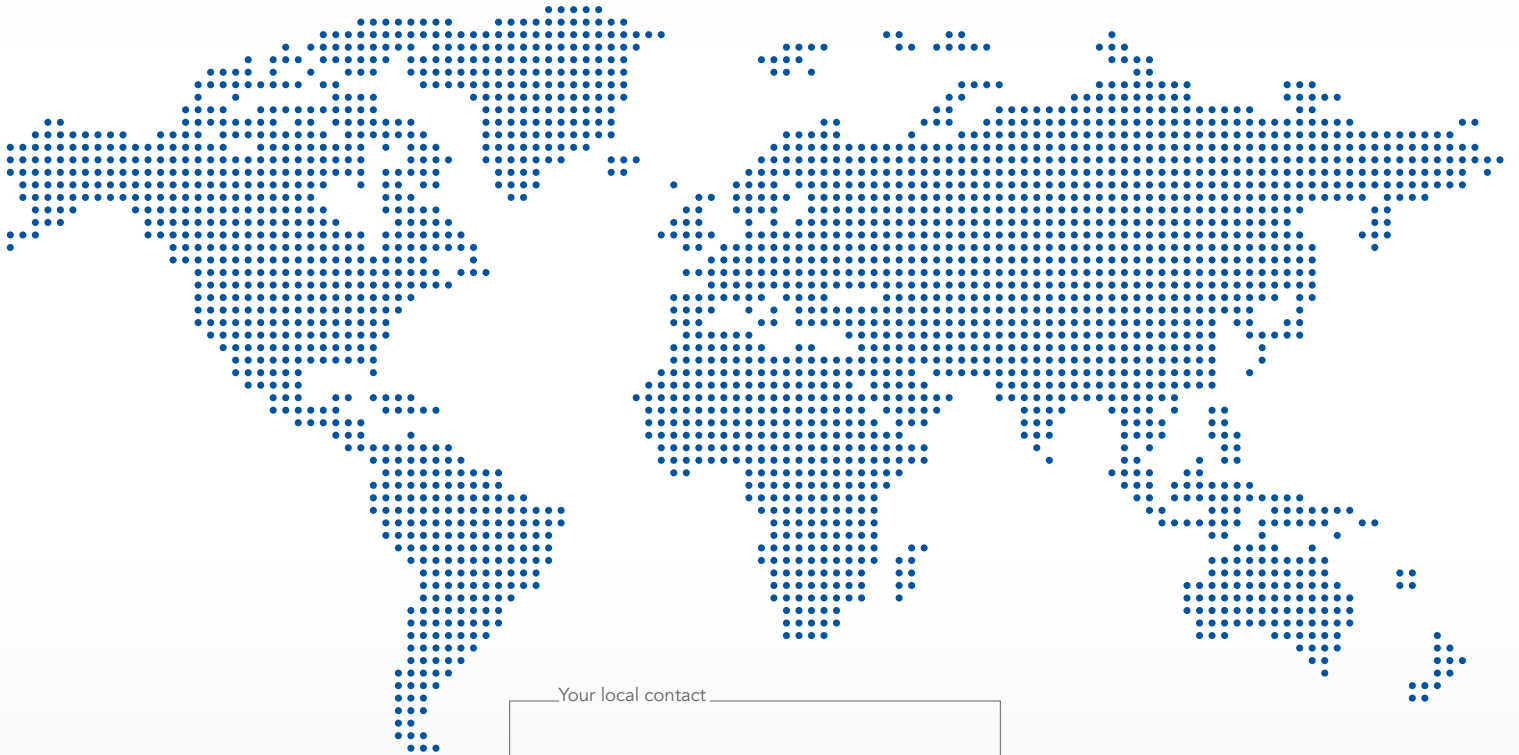

Your local contact



Our contribution to environmental protection:  
This catalog is printed on PEFC certified paper  
Advancement of sustainable wood cultivation. [www.pefc.org](http://www.pefc.org)

[www.souriau.com](http://www.souriau.com)  
[technical.emear@souriau.com](mailto:technical.emear@souriau.com) (Europe - Asia - Africa)  
[technical.americas@souriau.com](mailto:technical.americas@souriau.com) (North America)



**SOURIAU**  
Connection Technologies