


SMD male connectors - FP 1,27/ 32-MV 3,25



1714929

<https://www.phoenixcontact.com/us/products/1714929>

Please be informed that the data shown in this PDF document is generated from our Online Catalog. Please find the complete data in the user documentation. Our General Terms of Use for Downloads are valid.



SMD male connector, nominal current: 1.4 A, Test voltage: 500 V AC, number of positions: 32, pitch: 1.27 mm, color: black, contact surface: Gold, type of contact: Male connector, mounting: SMD soldering

Your advantages

- Gold-plated contacts ensure transfer quality remains stable over the long term
- Compact, high-position board-to-board or wire-to-board connectors for space-saving device designs
- Stacked, coplanar or orthogonal PCB connections enable maximum flexibility in the device
- Male and female connectors of different height can be combined – for individual PCB spacing of 8 mm ... 13.8 mm

SMD male connectors - FP 1,27/ 32-MV 3,25



1714929

<https://www.phoenixcontact.com/us/products/1714929>

Commercial Data

Item number	1714929
Packing unit	1 pc
Minimum order quantity	280 pc
Sales Key	A04
Product Key	AAXGAC
GTIN	4055626403045
Weight per Piece (including packing)	2.79 g
Weight per Piece (excluding packing)	2.79 g
Customs tariff number	85366930
Country of origin	CN

Technical Data

Product properties

Product type	SMD male connector
Number of positions	32
Pitch	1.27 mm
Number of rows	2
Number of potentials	32
Pin layout	Linear pad geometry

Electrical properties

Nominal current I_N	1.4 A IEC 60512-5-2:2002-02 (at 20°C 50-pos.)
Nominal voltage U_N	AC
Pollution degree	3
Contact resistance	25 mΩ
Test voltage	500 V AC IEC 60512-4-1:2003
Rated voltage (III/3)	500 V

Mounting

Mounting type SMD soldering	SMD soldering
Mounting type	SMD soldering

Processing notes

Process	Reflow soldering
Moisture Sensitive Level	MSL 1
Classification temperature T_c	260 °C

Material specifications

Material data - contact

Note	WEEE/RoHS-compliant, free of whiskers according to IEC 60068-2-82/JEDEC JESD 201
Contact material	Cu alloy
Surface characteristics	Selective coating
Metal surface contact area (top layer)	Gold (Au)
Metal surface contact area (middle layer)	Nickel (Ni) Palladium nickel, (PdNi)
Metal surface soldering area (top layer)	Tin (Sn)

Material data - housing

Housing color	black (9005)
Insulating material	LCP
Insulating material group	IIla
CTI according to IEC 60112	175
Flammability rating according to UL 94	V0

SMD male connectors - FP 1,27/ 32-MV 3,25



1714929

<https://www.phoenixcontact.com/us/products/1714929>

Notes

Notes on operation	The permissible voltage during operation depends on the application, taking into consideration the air clearances and creepage distances within the scope of insulation requirements in accordance with IEC 60664-1.
--------------------	--

Dimensions

Dimensional drawing	
Pitch	1.27 mm
Width [w]	25.41 mm
Height [h]	8.95 mm
Length [l]	7.2 mm
Installed height	8.25 mm

Application

Contact cover	0.9 mm
Center offset	± 0.7 mm in longitudinal and transverse direction
Stack height	9.5 mm Tolerance: +1,5 mm (in combination with Range of articles:FP 1,27/...-FV 6,25) 12.3 mm Tolerance: +1,5 mm (in combination with Range of articles:FP 1,27/...-FV 9,05)
Wipe length	1.5 mm
Angular tolerance	± 4 ° in longitudinal direction ± 2 ° in transverse direction

PCB design

Pad geometry	0.8 x 1.1 mm
Pin spacing	1.27 mm

Mechanical tests

Insertion and withdrawal forces

Result	Test passed
No. of cycles	500
Insertion strength per pos. approx.	0.5 N
Withdraw strength per pos. approx.	0.5 N

Resistance of inscriptions

Specification	IEC 60068-2-70:1995-12
Result	Test passed

Visual inspection

SMD male connectors - FP 1,27/ 32-MV 3,25



1714929

<https://www.phoenixcontact.com/us/products/1714929>

Specification	IEC 60512-1-1:2002-02
Result	Test passed

Dimension check

Specification	IEC 60512-1-2:2002-02
Result	Test passed

Electrical tests

Thermal test | Test group C

Specification	IEC 60512-5-2:2002-02
Tested number of positions	50

Insulation resistance

Specification	IEC 60512-3-1:2002-02
Insulation resistance, neighboring positions	$\geq 10 \text{ G}\Omega$

Air clearances and creepage distances |

Insulating material group	IIIa
Comparative tracking index (IEC 60112)	CTI 175
Rated insulation voltage (III/3)	500 V
Rated insulation voltage (II/2)	10 V
Rated surge voltage (II/2)	0.8 kV
minimum clearance value - non-homogenous field (II/2)	0.4 mm
minimum creepage distance (II/2)	0.4 mm
Minimum value for clearance and creepage distance	0.4 mm

Environmental and real-life conditions

Vibration test

Specification	IEC 60068-2-6:2007-12
Frequency	10 - 2000 - 10 Hz
Sweep speed	1 octave/min
Amplitude	1.5 mm (10 - 60.1 Hz)
Sweep speed	20g (60.1 - 2000 Hz)
Test duration per axis	2.5 h

Durability test

Specification	IEC 60512-9-1:2010-03 (following)
Impulse withstand voltage at sea level	0.8 kV
Contact resistance R_1	25 m Ω
Contact resistance R_2	25 m Ω
Insertion/withdrawal cycles	500
Insulation resistance, neighboring positions	$\geq 10 \text{ G}\Omega$

Climatic test

Specification	IEC 60512-11-7:2003-05
---------------	------------------------

SMD male connectors - FP 1,27/ 32-MV 3,25



1714929

<https://www.phoenixcontact.com/us/products/1714929>

Corrosive stress	Method 1, 10 days
Power-frequency withstand voltage	500 V AC


Shocks

Specification	IEC 60068-2-27:2008-02
Pulse shape	Semi-sinusoidal
Acceleration	50g
Shock duration	11 ms
Test directions	X-, Y- and Z-axis (pos. and neg.)

Ambient conditions


Ambient temperature (operation)	-55 °C ... 125 °C
Ambient temperature (storage/transport)	-40 °C ... 70 °C
Relative humidity (storage/transport)	30 % ... 70 %
Ambient temperature (assembly)	-5 °C ... 100 °C

Packaging specifications

Dimensional drawing	
Type of packaging	44 mm wide tape
[W] tape width	44 mm
[W2] coil overall dimension	50.4 mm
[A] coil diameter	330 mm
Outer packaging type	Transparent-Bag
ESD level	(D) electrostatically conductive
Specification	DIN EN 61340-5-1 (VDE 0300-5-1): 2008-07


Drawings

Diagram

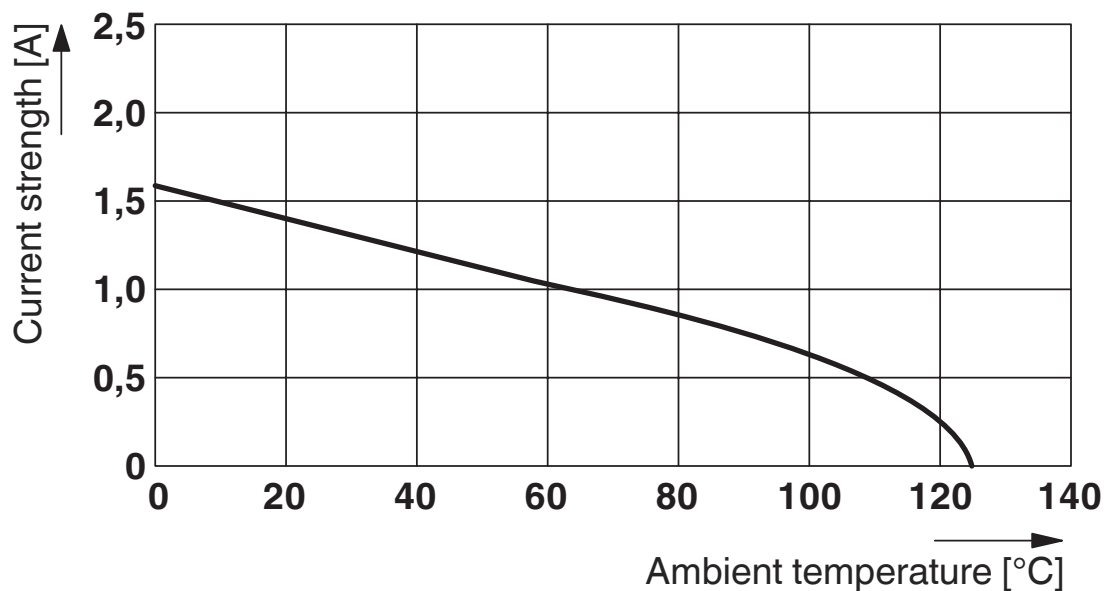

Type: FP 1,27/...-FV 6,25 with FP 1,27/...-MV 3,25

Diagram

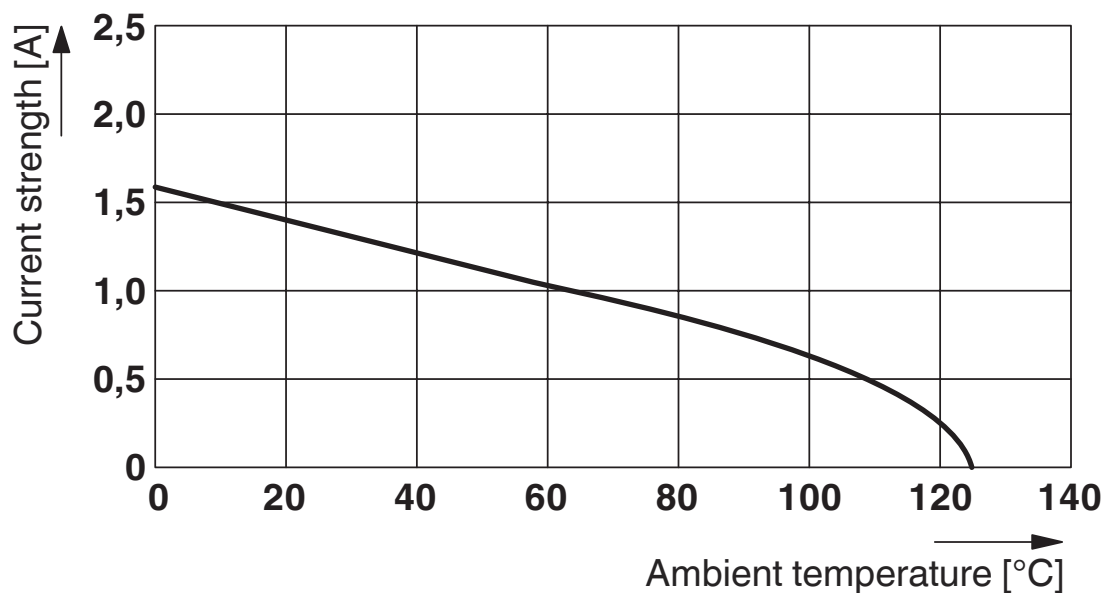

Type: FP 1,27/...-FV 9,05 with FP 1,27/...-MV 3,25


SMD male connectors - FP 1,27/ 32-MV 3,25

1714929


<https://www.phoenixcontact.com/us/products/1714929>



Schematic diagram

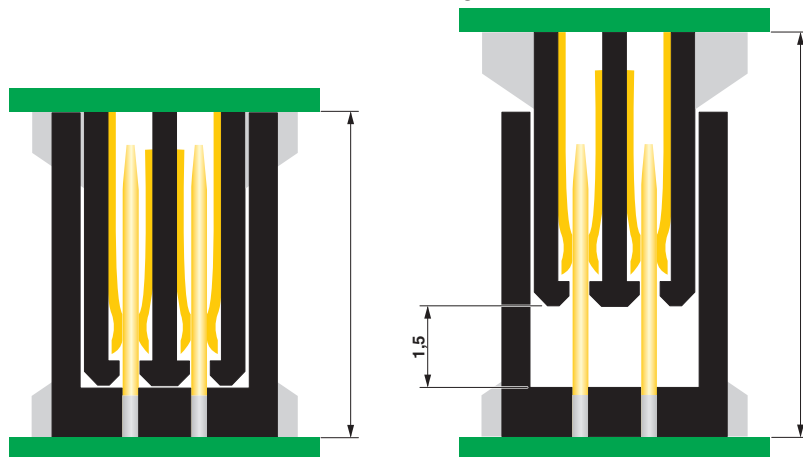

Diagram

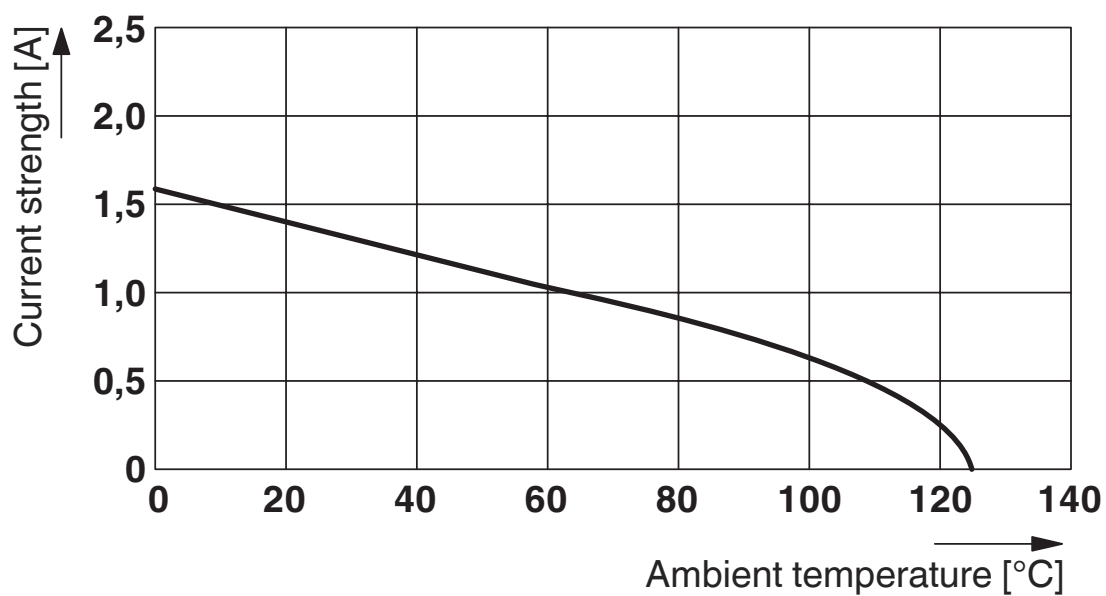

Type: FP 1,27/...-FH with FP 1,27/...-MV 3,25

SMD male connectors - FP 1,27/ 32-MV 3,25

1714929

<https://www.phoenixcontact.com/us/products/1714929>



Approvals

	cULus Recognized			
	Approval ID: E118976-20170331			
	Nominal Voltage U _N	Nominal Current I _N	Cross Section AWG	Cross Section mm ²
			-	-

	EAC
	Approval ID: B.00511/19

SMD male connectors - FP 1,27/ 32-MV 3,25



1714929

<https://www.phoenixcontact.com/us/products/1714929>

Classifications

ECLASS

ECLASS-9.0	27440402
ECLASS-10.0.1	27440402
ECLASS-11.0	27460201

ETIM

ETIM 8.0	EC002637
----------	----------

UNSPSC

UNSPSC 21.0	39121400
-------------	----------

SMD male connectors - FP 1,27/ 32-MV 3,25



1714929

<https://www.phoenixcontact.com/us/products/1714929>

Environmental Product Compliance

China RoHS	Environmentally friendly use period: unlimited = EFUP-e
	No hazardous substances above threshold values

SMD male connectors - FP 1,27/ 32-MV 3,25



1714929


<https://www.phoenixcontact.com/us/products/1714929>

Accessories

SMD female connectors

SMD female connectors - FP 1,27/ 32-FV 9,05 - 1714884

<https://www.phoenixcontact.com/us/products/1714884>




SMD female connector, nominal current: 1.4 A, Test voltage: 500 V AC, number of positions: 32, pitch: 1.27 mm, color: black, contact surface: Gold, type of contact: Female connector, mounting: SMD soldering

SMD female connectors

SMD female connectors - FP 1,27/ 32-FV 6,25 - 1714895

<https://www.phoenixcontact.com/us/products/1714895>



SMD female connector, nominal current: 1.4 A, Test voltage: 500 V AC, number of positions: 32, pitch: 1.27 mm, color: black, contact surface: Gold, type of contact: Female connector, mounting: SMD soldering

SMD male connectors - FP 1,27/ 32-MV 3,25

1714929

<https://www.phoenixcontact.com/us/products/1714929>

SMD female connectors

SMD female connectors - FP 1,27/ 32-FH - 1714875

<https://www.phoenixcontact.com/us/products/1714875>

SMD female connector, nominal current: 1.4 A, Test voltage: 500 V AC, number of positions: 32, pitch: 1.27 mm, color: black, contact surface: Gold, type of contact: Female connector, mounting: SMD soldering



IDC female connectors

IDC female connectors - FP 1,27/ 32-FWL - 1714907

<https://www.phoenixcontact.com/us/products/1714907>

IDC female connector, nominal current: 1.2 A, Test voltage: 500 V AC, number of positions: 32, pitch: 1.27 mm, number of rows: 1, color: black, contact surface: Gold, type of contact: Female connector, For pre-assembled samples, see the "Accessories" tab.



SMD male connectors - FP 1,27/ 32-MV 3,25



1714929

<https://www.phoenixcontact.com/us/products/1714929>

Preassembled IDC female connector

Preassembled IDC female connector - FP 1,27/ 32-FWL-10/.../... - 1010255

<https://www.phoenixcontact.com/us/products/1010255>



Assembled IDC female connector, rated current: 1.2 A, cable length: Free input (0.05 ... 0.95 m), Cable type: Flat-ribbon conductor, Flat-ribbon conductor. For pre-assembled samples, see the "Accessories" tab.

Preassembled IDC female connector

Preassembled IDC female connector - FP 1,27/ 32-FWL-11/.../... - 1010247

<https://www.phoenixcontact.com/us/products/1010247>



Assembled IDC female connector, rated current: 1.2 A, cable length: Free input (0.05 ... 0.95 m), Cable type: Flat-ribbon conductor, Flat-ribbon conductor. For pre-assembled samples, see the "Accessories" tab.

SMD male connectors - FP 1,27/ 32-MV 3,25



1714929

<https://www.phoenixcontact.com/us/products/1714929>

Preassembled IDC female connector

Preassembled IDC female connector - FP 1,27/ 32-FWL-12/.../... - 1010238

<https://www.phoenixcontact.com/us/products/1010238>



Assembled IDC female connector, rated current: 1.2 A, cable length: Free input (0.05 ... 0.95 m), Cable type: Flat-ribbon conductor, Flat-ribbon conductor. For pre-assembled samples, see the "Accessories" tab.

Preassembled IDC female connector

Preassembled IDC female connector - FP 1,27/ 32-FWL-20/.../... - 1010229

<https://www.phoenixcontact.com/us/products/1010229>



Assembled IDC female connector, rated current: 1.2 A, cable length: Free input (0.05 ... 0.95 m), Cable type: Flat-ribbon conductor, Flat-ribbon conductor. For pre-assembled samples, see the "Accessories" tab.

SMD male connectors - FP 1,27/ 32-MV 3,25



1714929

<https://www.phoenixcontact.com/us/products/1714929>

Preassembled IDC female connector

Preassembled IDC female connector - FP 1,27/ 32-FWL-21/.../... - 1010210

<https://www.phoenixcontact.com/us/products/1010210>



Assembled IDC female connector, rated current: 1.2 A, cable length: Free input (0.05 ... 0.95 m), Cable type: Flat-ribbon conductor, Flat-ribbon conductor. For pre-assembled samples, see the "Accessories" tab.

Phoenix Contact 2022 © - all rights reserved

<https://www.phoenixcontact.com>

Phoenix Contact USA
586 Fulling Mill Road
Middletown, PA 17057, United States
(+717) 944-1300
info@phoenixcon.com