MC12095

2.5 GHz Low Power Prescaler With Stand-By Mode

The MC12095 is a single modulus prescaler for low power frequency division of a 2.5 GHz high frequency input signal. MOSAIC V™ technology is utilized to achieve low power dissipation of 24 mW at a minimum supply voltage of 2.7 V.

On–chip output termination provides output current to drive a 2.0 pF (typical) high impedance load. If additional drive is required for the prescaler output, an external resistor can be added in parallel from the OUT pin to GND to increase the output power. Care must be taken not to exceed the maximum allowable current through the output.

Divide ratio control input (SW) selects the required divide ratio of ÷2 or ÷4. Stand–By mode is available to reduce current drain to 100 μA typical when the standby pin SB is switched LOW disabling the prescaler.

Features

- 2.5 GHz Toggle Frequency
- Supply Voltage 2.7 V to 5.5 Vdc
- Low Power 8.7 mA Typical
- Operating Temperature –40 to 85°C
- Divide by 2 or 4 Selected by the SW Pin

FUNCTIONAL TABLE

SW	Divide Ratio
H	2
L	4

1. SW: H = (V_{CC} – 0.4 V) to V_{CC}; L = OPEN
2. SB: H = 2.0 V to V_{CC}; L = GND to 0.8 V

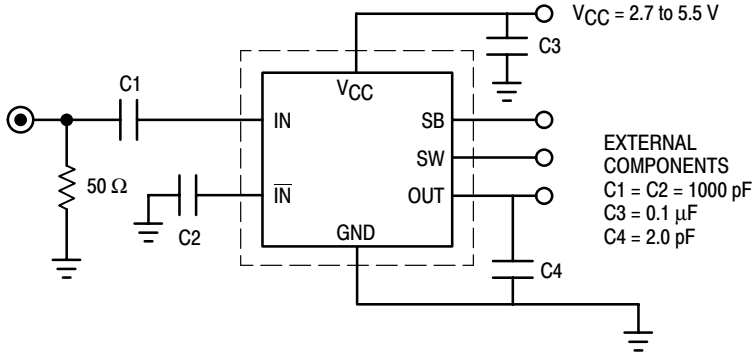

Figure 1. AC Test Circuit

ON Semiconductor™

http://onsemi.com

MARKING DIAGRAM

SO–8
D SUFFIX
CASE 751



A = Assembly Location
L = Wafer Lot
Y = Year
W = Work Week

PIN CONNECTIONS



(Top View)

ORDERING INFORMATION

Device	Package	Shipping
MC12095D	SO–8	96 Units/Rail
MC12095DR2	SO–8	2500 Tape & Reel

MAXIMUM RATINGS

Rating	Symbol	Value	Unit
Power Supply Voltage, Pin 2	V_{CC}	–0.5 to 6.0	Vdc
Operating Temperature Range	T_A	–40 to 85	°C
Storage Temperature Range	Tstg	–65 to 150	°C
Maximum Output Current, Pin 4	I_O	8.0	mA

NOTE: ESD data available upon request.

ELECTRICAL CHARACTERISTICS (V_{CC} = 2.7 to 5.5 V; T_A = –40 to 85°C, unless otherwise noted.)

Characteristic		Symbol	Min	Typ	Max	Unit
Toggle Frequency (Sine Wave)		f_t	500	3.0	2.5	GHz
Supply Current		I_{CC}	–	8.7	14	mA
Stand–By Current		ISB	–	100	200	μA
Stand–By Input HIGH (SB)		V_{IH1}	2.0	–	V_{CC} + 0.5 V	V
Stand–By Input LOW (SB)		V_{IL1}	GND	–	0.8	V
Divide Ratio Control Input HIGH (SW)		V_{IH2}	V_{CC} – 0.4	V_{CC}	V_{CC} + 0.5 V	V
Divide Ratio Control Input LOW (SW)		V_{IL2}	OPEN	OPEN	OPEN	
Output Voltage Swing (2pF Load)	500–1000 MHz Input 1000–1500 MHz Input 1500–2500 MHz Input	V_{OUT}	800 400 200	– 450 250	– – –	mVpp
Input Voltage Sensitivity		V_{IN}	200	–	1000	mVpp

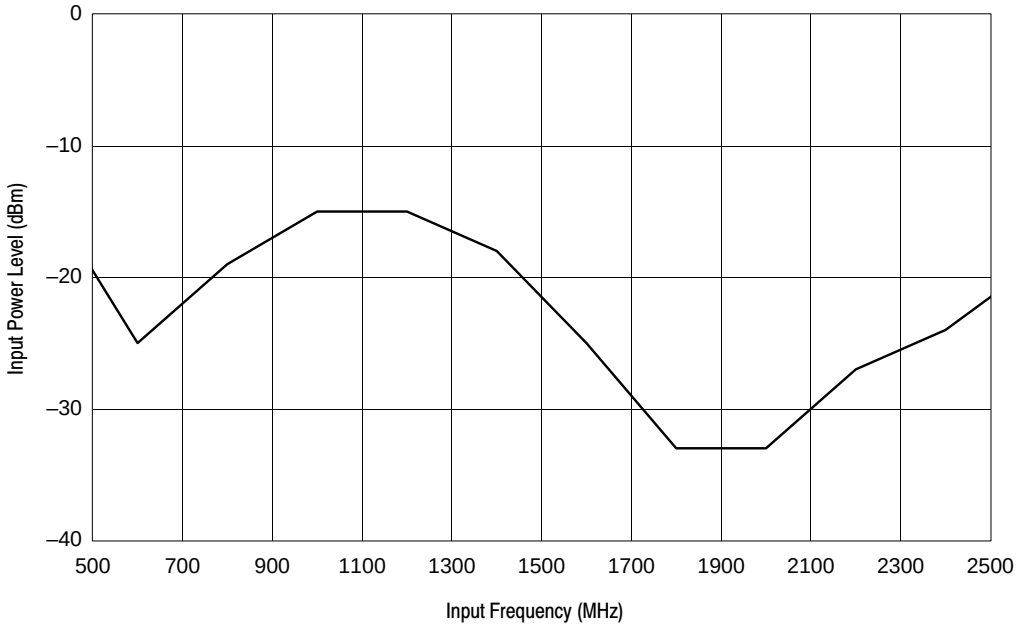

(Divide By 2 Mode, T = 25°C, V_{CC} = 2.7 V)

Figure 2. Typical Minimum Input Sensitivity versus Input Frequency

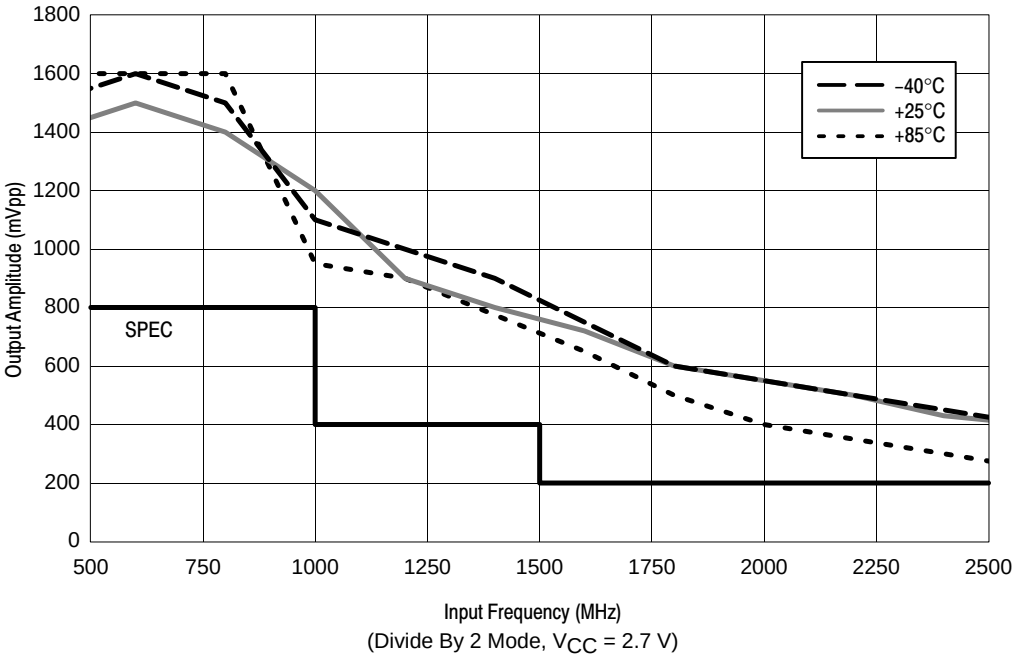

Figure 3. Typical Output Amplitude versus Frequency Over Temperature

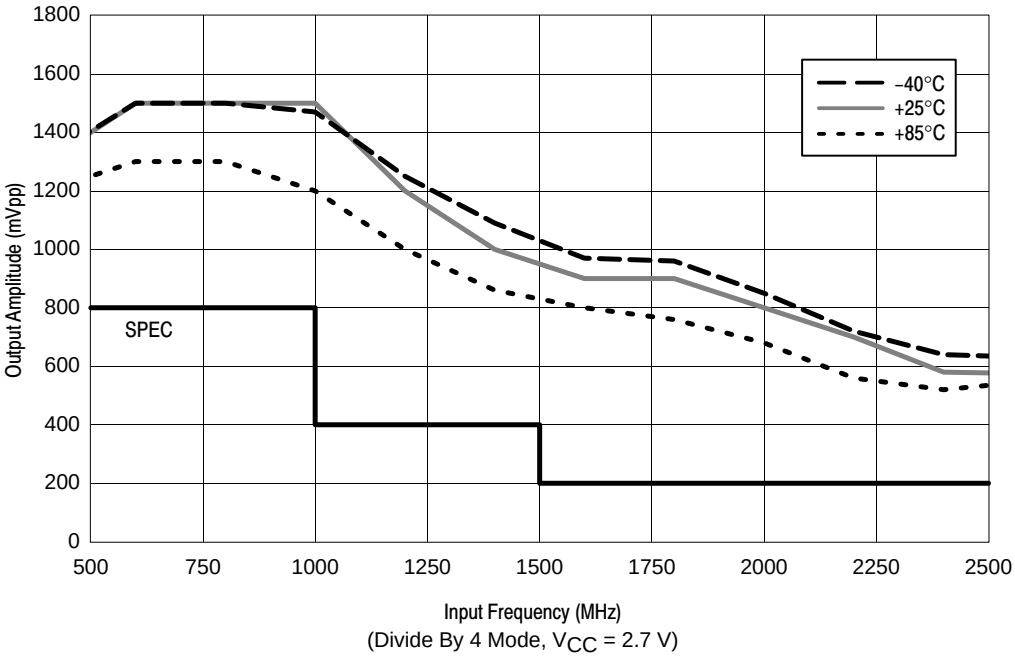

Figure 4. Typical Output Amplitude versus Frequency Over Temperature

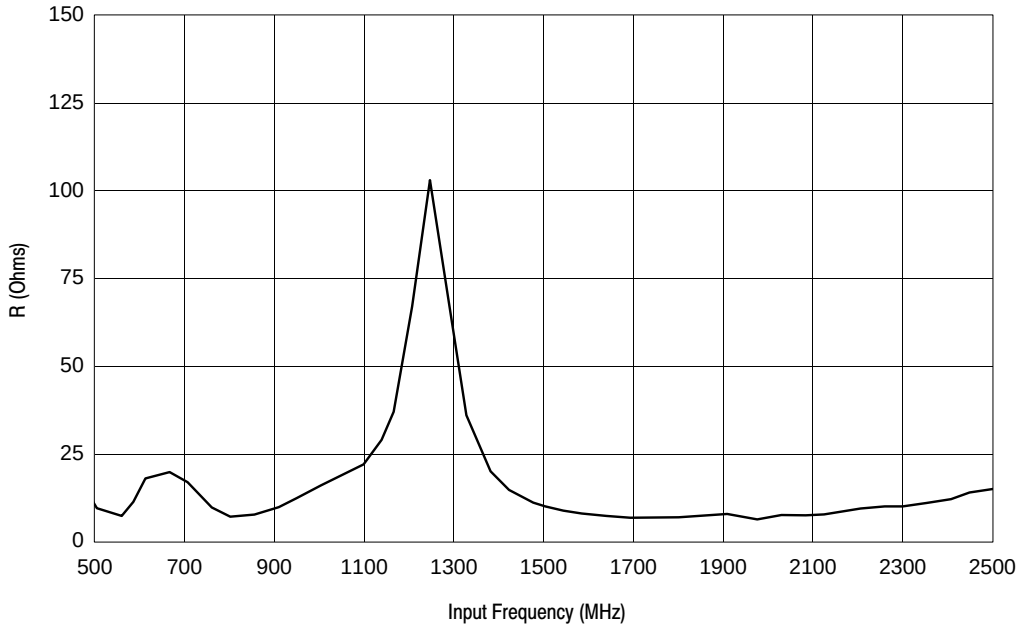

Figure 5. Input Impedance versus Frequency

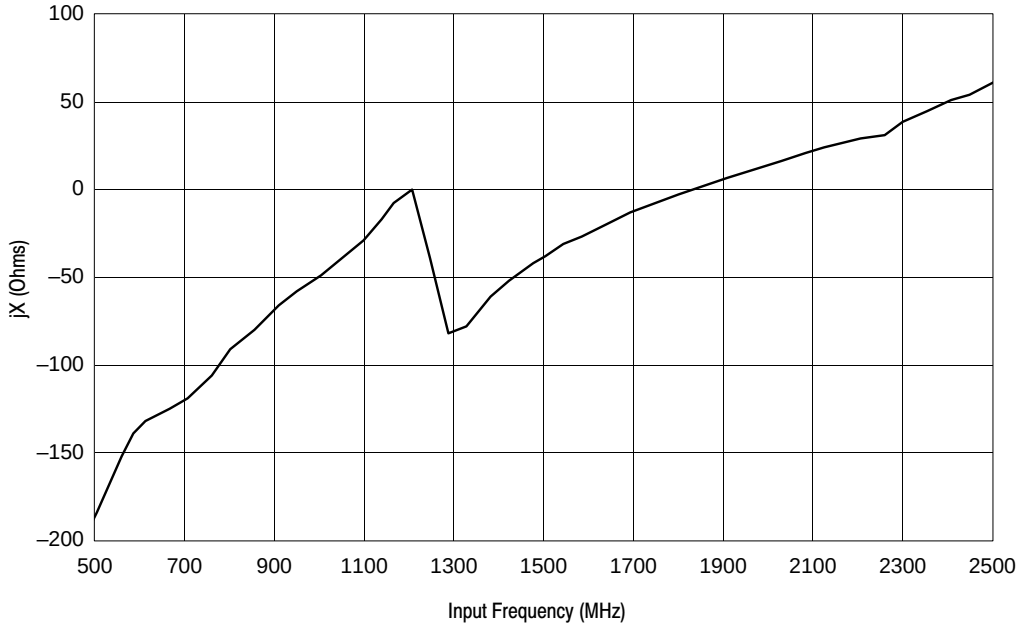

Figure 6. Input Impedance versus Frequency

PACKAGE DIMENSIONS

SO–8
D SUFFIX
CASE 751–07
ISSUE W

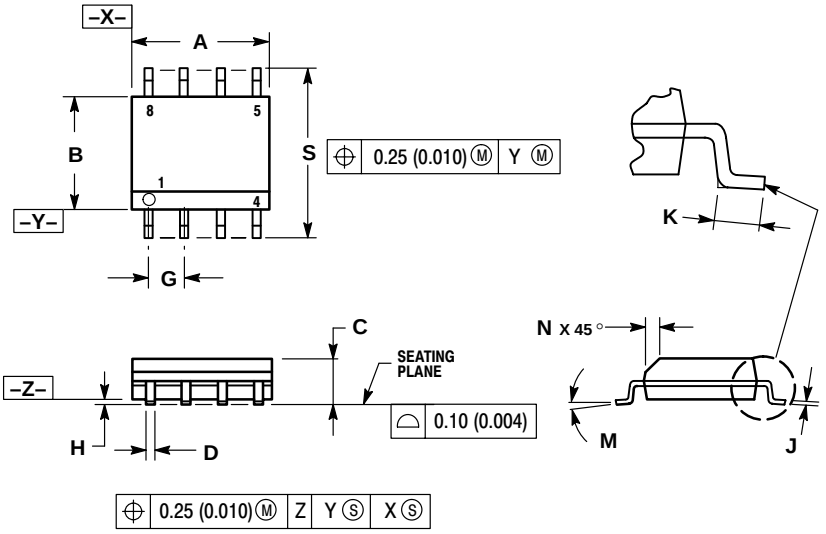

NOTES:
1. DIMENSIONING AND TOLERANCING PER ANSI Y14.5M, 1982.
2. CONTROLLING DIMENSION: MILLIMETER.
3. DIMENSION A AND B DO NOT INCLUDE MOLD PROTRUSION.
4. MAXIMUM MOLD PROTRUSION 0.15 (0.006) PER SIDE.
5. DIMENSION D DOES NOT INCLUDE DAMBAR PROTRUSION. ALLOWABLE DAMBAR PROTRUSION SHALL BE 0.127 (0.005) TOTAL IN EXCESS OF THE D DIMENSION AT MAXIMUM MATERIAL CONDITION.

	MILLIMETERS		INCHES	
DIM	MIN	MAX	MIN	MAX
A	4.80	5.00	0.189	0.197
B	3.80	4.00	0.150	0.157
C	1.35	1.75	0.053	0.069
D	0.33	0.51	0.013	0.020
G	1.27 BSC		0.050 BSC	
H	0.10	0.25	0.004	0.010
J	0.19	0.25	0.007	0.010
K	0.40	1.27	0.016	0.050
M	0 °	8 °	0 °	8 °
N	0.25	0.50	0.010	0.020
S	5.80	6.20	0.228	0.244

Notes

Notes

MOSAIC V is a trademark of Motorola, Inc.

PUBLICATION ORDERING INFORMATION

Literature Fulfillment:
Literature Distribution Center for ON Semiconductor
P.O. Box 5163, Denver, Colorado 80217 USA
Phone: 303–675–2175 or 800–344–3860 Toll Free USA/Canada
Fax: 303–675–2176 or 800–344–3867 Toll Free USA/Canada
Email: ONlit@hibbertco.com

N. American Technical Support: 800–282–9855 Toll Free USA/Canada

JAPAN: ON Semiconductor, Japan Customer Focus Center
4–32–1 Nishi–Gotanda, Shinagawa–ku, Tokyo, Japan 141–0031
Phone: 81–3–5740–2700
Email: r14525@onsemi.com

ON Semiconductor Website: http://onsemi.com

For additional information, please contact your local
Sales Representative.